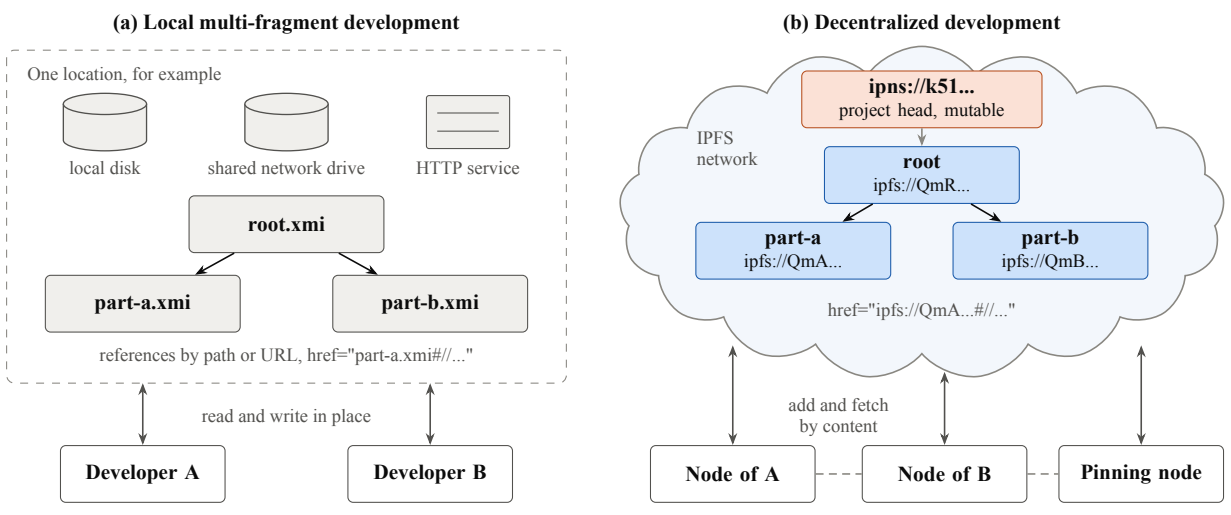

(a) Local multi-fragment development
One location, for example
local disk
shared network drive
HTTP service
root.xmi
part-a.xmi
part-b.xmi
references by path or URL, href="part-a.xmi#//..."
read and write in place
Developer A
Developer B
A path or URL names a location. An edit in place changes what every reader sees, and every reader needs that location.
(b) Decentralized development
ipns://k51...
project head, mutable
IPFS network
root
ipfs://QmR...
part-a
ipfs://QmA...
part-b
ipfs://QmB...
href="ipfs://QmA...#//..."
add and fetch by content
Node of A
Node of B
Pinning node
A content identifier names a version. The blocks live somewhere in the network, and a reader fetches a fragment from whichever node holds a copy.