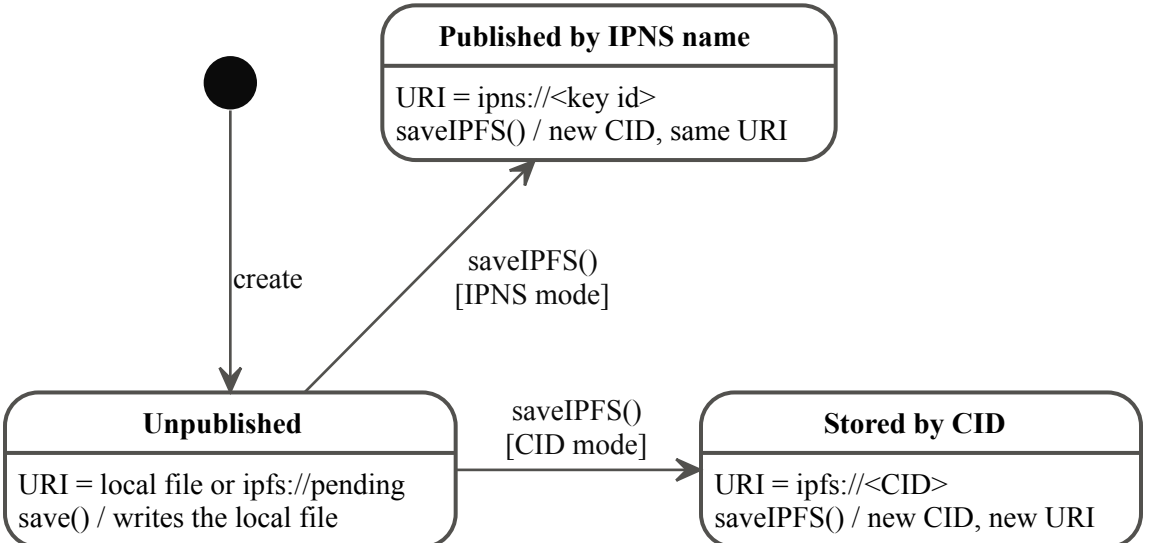
Published by IPNS name
URI = ipns://<key id>
saveIPFS() / new CID, same URI
create
saveIPFS()
[IPNS mode]
Unpublished
URI = local file or ipfs://pending
save() / writes the local file
saveIPFS()
[CID mode]
Stored by CID
URI = ipfs://<CID>
saveIPFS() / new CID, new URI