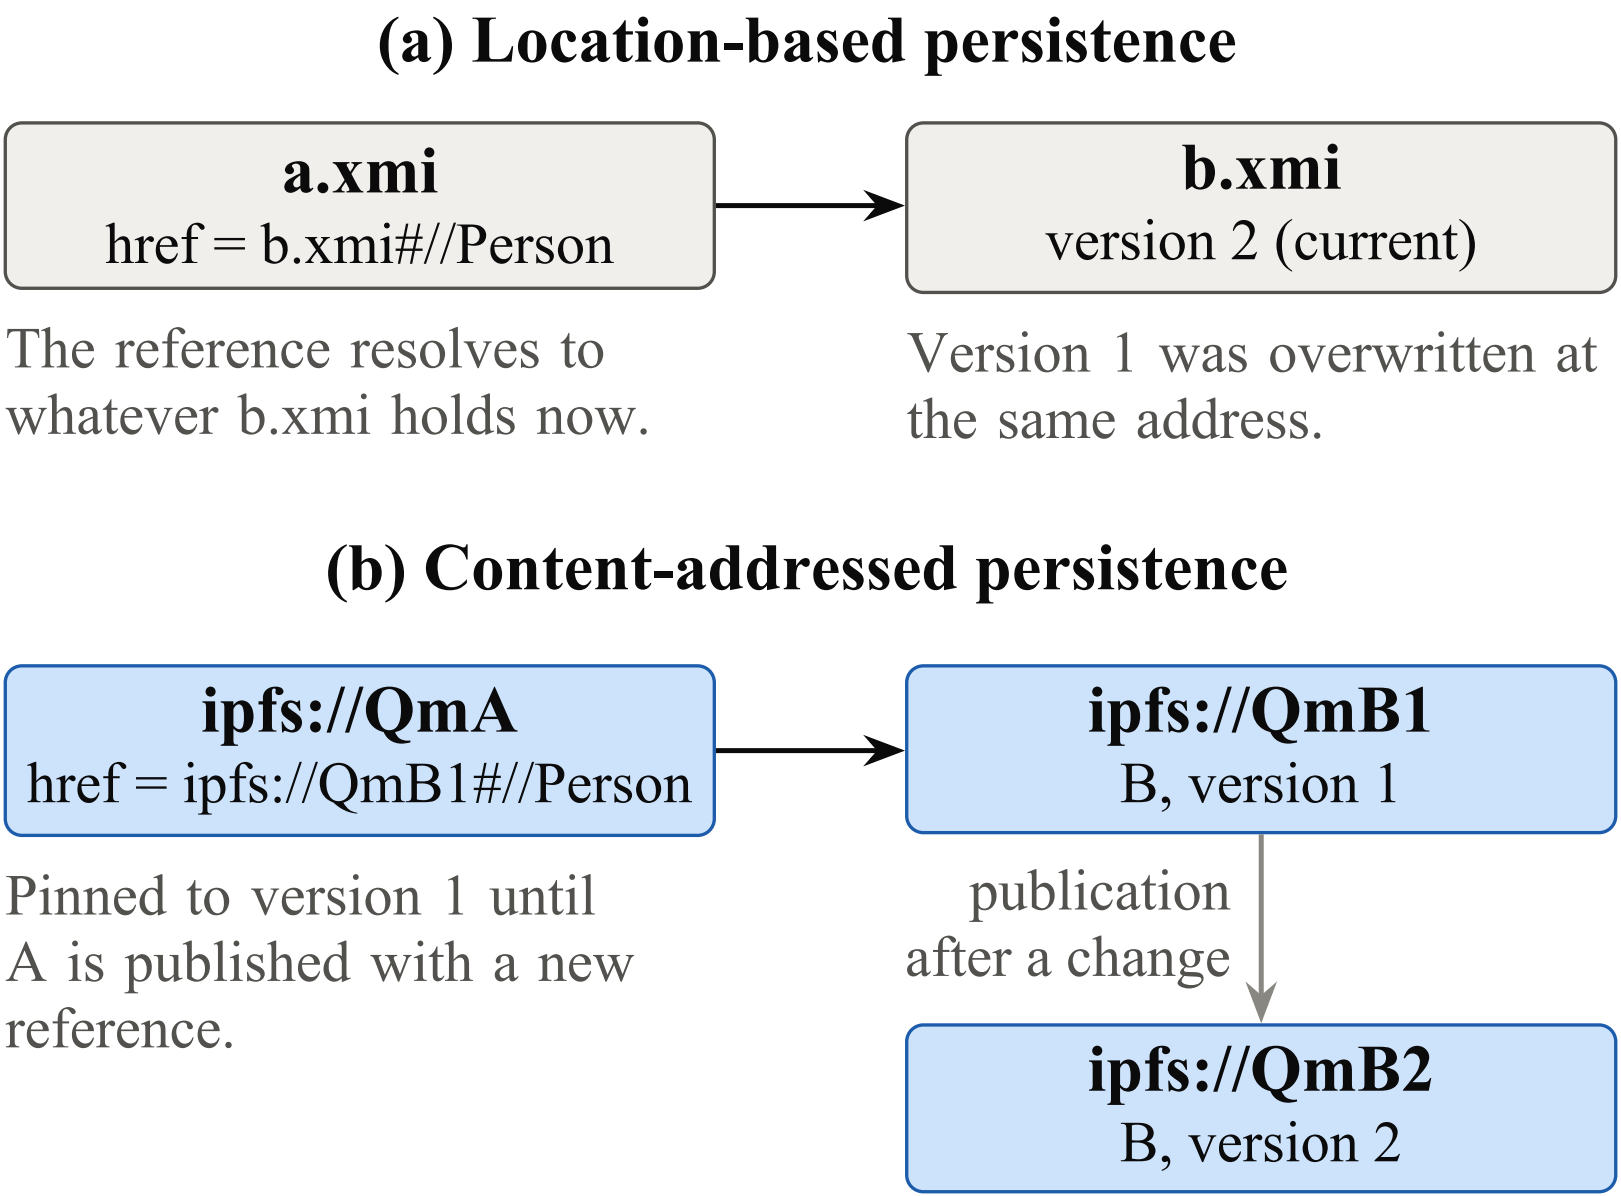
(a) Location-based persistence
a.xmi
href = b.xmi#//Person
b.xmi
version 2 (current)
The reference resolves to whatever b.xmi holds now.
Version 1 was overwritten at the same address.
(b) Content-addressed persistence
ipfs://QmA
href = ipfs://QmB1#//Person
ipfs://QmB1
B, version 1
Pinned to version 1 until A is published with a new reference.
publication after a change
ipfs://QmB2
B, version 2