

Lecture 13 6.046

Amortized Algorithms

①

Amortized Analysis

How large should a hash table be?

- As large as possible (time)
- As small as possible (space)
- ~~for~~ for n items


m must grow otherwise n depletes any O.C.C. difference.
my comment: $n = O(m) \Rightarrow \alpha = \frac{n}{m} \Rightarrow \alpha = O(1)$

Problem: what if we do not know in advance?

Solution: Dynamic tables

Idea: Whenever the table gets too full (overflows), "grow" it.

- 1) Allocate (malloc or new) a larger table
- 2) Move items from old table to new
- 3) Free old table

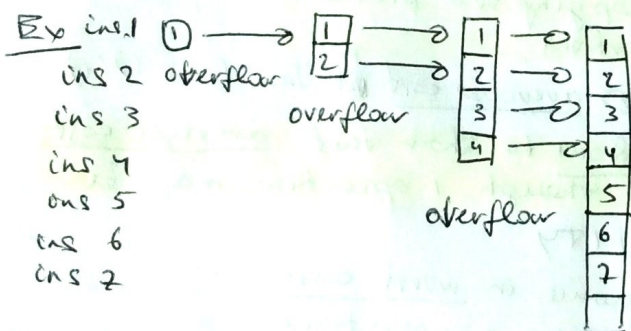

even time a table overflows
create a new table of
2x size.

Analysis (aggregate)

Sequence of Insert operations.

worst case cost of 1 Insert = $\Theta(n)$

worst case cost of n Inserts = $n \Theta(n) = \Theta(n^2)$ WRONG!

n Inserts take $\Theta(n)$ time in worst case

let c_i = cost of i th Insert

$$= \begin{cases} i & \text{if } i-1 \text{ is power of 2} \\ 1 & \text{otherwise} \end{cases}$$

i	1	2	3	4	5	6	7	8	9	10
size _i	1	2	4	4	8	8	8	8	16	16
c _i	1	2	3	1	5	1	1	1	9	1
c _i {	1	1	1	1	1	1	1	1	1	1
		1	2		4				8	
\hat{c}_i	2	3	3	3	3	3	3	3	3	3
bank _i	1	2	2	4	2	4	6	8	2	4

undercharge the first

my comment

$$\text{Cost of } n \text{ Inserts} = \sum_{i=1}^n c_i = n + \sum_{j=0}^{\lfloor \lg(n-1) \rfloor} 2^j \frac{(1 - 2^{\lg(n-1) + 1})}{1 - 2} \\ = n + 2n - 3 \leq 3n = \Theta(n)$$

insert copy

Thus, average cost of Insert

$$= \frac{\Theta(n)}{n} = \Theta(1)$$

occasional amortized the cost of copying over previous insertions,

$$= 2n - 3$$

Amortized analysis:

average cost per Insert is $\Theta(1)$

Analyze a sequence of operations to show that average cost per operation is small, even though 1 operation may be expensive. **NO PROBABILITY.**

- average performance in worst case
- cost amortized over n operations
- worst case bound but over a sequence of operations

Types of amortized arguments:

- aggregate (above)
- accounting } more precise → allocate specific amort cost to each operation
- potential

Accounting method:

- Charge ith operation a fictitious amortized cost c_i (\$1 pays for 1 unit of work)
- Fee is consumed to perform operation
- unused amount stored in "bank" for use by later operations.

- Bank balance must not go negative.


Must have $\sum_{i=1}^n c_i \leq \sum_{i=1}^n \hat{c}_i \quad \forall n$

$\underbrace{\sum_{i=1}^n c_i}_{\text{total true cost}} \leq \underbrace{\sum_{i=1}^n \hat{c}_i}_{\text{total amortized cost}}$
 whatever is paid to operate $\xrightarrow{\text{covered by}}$ whatever was charged before
 upper bound on the total true cost

Dynamic table (accounting method)

- Charge $\hat{c}_i = \$3$ for i th insert
 \$1 pays for immediate insert
 \$2 stored for table doubling
- When table doubles: \$1 moves recent item
 \$1 moves old item

ex: just doubled from 4 \rightarrow 8 \rightarrow 16



ins
 \$3 charged
 \$1 used
 \$2 stored

we
 if charge \$3
 for each insertion,
 can handle table
 doubling

$\underbrace{\$8, 8 \text{ items to copy}}$

Invariant:

Bank balance ≥ 0

$$\sum_{i=1}^n \hat{c}_i \geq \sum_{i=1}^n c_i$$

$\underbrace{3n}_{\$3 \text{ per insert}}$

different charging schemes can work:

e.g. charge first 2 and 3 all others
 charge 3 all
 charge 4 all ... \leftarrow lower bound

but charging 2 all will not work.
 \hookrightarrow balance will go negative

\rightarrow have to try / design ~~charging~~ charging to get a tight bound

Potential method

"Bank account" viewed as potential energy of dynamic set.

Framework:

- Start with data structure D_0
- Op i transforms $D_{i-1} \rightarrow D_i$
- Cost of op i is c_i
- Define potential function real val. potential is

$$\Phi: \{D_i\} \rightarrow \mathbb{R} \quad \text{associated with each data structure}$$

$$\Phi(D_0) = 0 \text{ and } \Phi(D_i) \geq 0 \quad \forall i$$

- Amortized cost \hat{c}_i with respect to Φ is:

$$\hat{c}_i = c_i + \underbrace{\Phi(D_i) - \Phi(D_{i-1})}_{\text{potential difference}}$$

If $\Delta \Phi_i > 0$, then $\hat{c}_i > c_i$ $\Delta \Phi_i$

Op i stores work in data structure for later bank account went up.

If $\Delta \Phi_i < 0$, then $\hat{c}_i < c_i$

Data structure delivers up stored work to help pay for op i bank account went down.

Accounting vs. Potential

specify amortized cost

make sure the bank account does not go negative

↳ analyze bank account

specify bank account all the time

↳ analyze amortized costs

Lecture B

6.046

(3)

Total amort cost of n ops is:

$$\sum_{i=1}^n \hat{c}_i = \sum_{i=1}^n (c_i + \Phi(D_i) - \Phi(D_{i-1}))$$

$$= \sum_{i=1}^n c_i + \underbrace{\Phi(D_n)}_{\geq 0} - \underbrace{\Phi(D_0)}_{=0}$$

$$\geq \sum_{i=1}^n c_i$$

tot. amortized cost is upper bound on tot. true cost

Table doubling:

added to account for

subtracted

at point i

Define $\Phi(D_i) = 2i - 2^{\lceil \lg i \rceil}$ so far due to doubling

Assume $2^{\lceil \lg 0 \rceil} = 0$.

Note $\Phi(D_0) = 0 \checkmark$

$$\Phi(D_i) \geq 0 \quad \forall i \quad \lceil \lg i \rceil \leq \lg(i) + 1$$

$$2^{\lg(i)+1} = 2i$$

Ex acc: 00 00 22

0	0	0	0	1	0		
---	---	---	---	---	---	--	--

$$\Phi = 2 \cdot 6 - 2^3 = 4$$

Amortized cost of i th insert:

$$\hat{c}_i = c_i + \Phi(D_i) - \Phi(D_{i-1}) \quad c_i = \begin{cases} i & \text{if } i-1 \text{ is power of 2} \\ 1 & \text{otherwise} \end{cases}$$

$$= c_i + (2i - 2^{\lceil \lg i \rceil}) - (2(i-1) - 2^{\lceil \lg(i-1) \rceil})$$

$$= \begin{cases} i & \text{if } \dots \\ 1 & \text{otherwise} \end{cases} + 2 - 2^{\lceil \lg i \rceil} + 2^{\lceil \lg(i-1) \rceil}$$

my comment
if $i-1$ is power of 2,
 $\lceil \lg i \rceil = \lceil \lg(i-1) \rceil + 1$

Case 1: $i-1$ is power of 2

$$c_i = i, \quad \hat{c}_i = i + 2 - 2^{\lceil \lg i \rceil} + 2^{\lceil \lg(i-1) \rceil} = i + 2 - 2^{-(i-1)} + (i-1) = i + 2 - 2(i-1) + (i-1) = i + 2 - i + 1 = 3$$

case 2 : $i-1$ is not exact power of 2

$$\hat{c}_i = 1 + 2 - 2^{\lceil \lg i \rceil} + 2^{\lceil \lg(i-1) \rceil} = 3$$

$\hat{c}_i = 3$ for every Insert

n Inserts cost $\Theta(n)$ in worst case, $\Theta(1)$ per Insert, on average

Conclusions :

Amortized costs provide a clean abstraction for data structure performance.

- Any method can be used, but each has situations where it is arguably simplest or most precise.
- Different potential functions or accounting costs may yield different bounds.