SB ACOUSTICS

building your sound

Catalogue

Speaker Kits

Find us on:

- SB Acoustics
- sbacoustics
- SB Acoustics
- sbacoustics.com
- sinarbajaelectric.com

92026

SB ACOUSTICS

building your sound

Built from the foundation of a company with decades of manufacturing experience and partnered with Danish audio design engineers touted for their revolutionary designs. SB Acoustics was formed to bring an alternative to the high-end transducer market.

Marrying the design talents of Danesian Audio (Denmark), a company filled with industry veterans, responsible for many well known and revolutionary designs, and manufacturing expert Sinar Baja Electric (Indonesia), a vertically integrated company with more than 45 years of transducer manufacturing experience. We feel we have been able to create an exciting line of products, without compromising acoustic performance for cost. Ultimately, we invite you to judge.

SB ELECTRIC

Sinar Baja Electric is the manufacturing company behind SB Acoustics. Established in 1981 and extensively expanded ever since to become the largest loudspeaker manufacturer in Indonesia. With a population of more than 250 million people, Indonesia is a significant contributor to global manufacturing.

To this day, Sinar Baja Electric is a privately held group of companies in Surabaya, Indonesia. We develop and manufacture our own range of brands that are offered world wide through our distribution supply chain in major markets such as Europe, Australia, Asia and the United States.

We are proud to be the preferred OEM/ODM supplier of many prestigious brands from Lifestyle Hi-Fi, High-End, Automotive to Professional Audio, and much more.

With more than 45 years of history in loudspeaker manufacturing and innovation, we continues to expand in both quality, capacity, as well as services. With in-house Research & Development through the latest technologies as well as extensive experience in quality control and mass production we are confident we can deliver what you are searching for.

Table of Contens

Raiya Tx 6

Tifa 6 8

Tifa 8 10

Sasandu Tx 12

Rinjani Tx 14

Ara Tx 16

Sasandu 18

Rinjani Be 20

Rinjani 22

Ara Be 24

Ara 26

Arya 28

Kinnara 30

Gema 32

Rima 34

Micro C 36

Micro 38

Distributors 39

SB ACOUSTICS
building your sound

Raiya Tx

Introducing Raiya Tx — the new center channel designed to work seamlessly with the TeXtreme lineup, including Ara Tx, Rinjani Tx, and Sasandu Tx. Engineered for uncompromised full-range performance and exceptional vocal clarity, Raiya Tx delivers dialogue with remarkable precision.

It's vertically aligned midrange and tweeter array eliminates the comb-filtering issues common in traditional horizontal center speakers, resulting in a cleaner, more natural presentation across the entire listening area. Purpose-built for high-end home theater systems, Raiya Tx ensures every word is heard with intent and accuracy.

With Raiya Tx, your cinematic soundscape gains a true focal point — refined, articulate, and perfectly matched to the TeXtreme family.

Frequency range	:	45-32000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	88 dB
Nominal impedance	:	8 Ω
Max SPL	:	105 dB
Recommended amplifier	:	30-120 W
Cross-over frequency	:	450 Hz & 2800 Hz
Speaker type	:	3-way center speaker
Enclosure type	:	Bass reflex (woofers), sealed (midrange)
Port tuning frequency	:	36 Hz
Driver units	:	SATORI TW29TXN-B-8, 5" SATORI MR16TX-4, & 6½" SATORI MW16TX-4 (x2)
Cabinet material	:	15 mm & 18 mm MDF
Speaker dimension (HxWxD)	:	270 x 786 x 342 mm (10.6 x 30.9 x 13.5 inch)
Net weight	:	Full assy 23.6 kg (52 lb)
Gross weight	:	27.1 kg (59.74 lb)

Finishing: White Satin, Black Satin, White High Gloss, Black High Gloss, Orange High Gloss, Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Tifa 6

Open Source Kit

The playful design of the Tifa 6 follows in the footsteps of the renowned Danish engineered SB Acoustics speakers. The sound is open and transparent, free from unwanted standing waves and reflection thanks to the elegantly slanted cabinet.

The Tifa 6 is true HiFi in a small package and fits perfectly in any living room. The sound presents as very natural, articulate and refined yet with a warm character with satisfying bass thanks to the natural fiber cone 6-inch midwoofer paired with our 26mm fine weave soft fabric dome tweeter.

Tifa 6 is an open source kit meaning the speaker is fully developed and documented by SB Acoustics and you are free to use the plans.

Frequency range	:	36-26000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	85 dB
Nominal impedance	:	4 Ω
Max SPL	:	105 dB
Recommended amplifier	:	50-150 W
Cross-over frequency	:	2600 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	37 Hz
Driver units (pr pair)	:	SB26ST-C000-5 & 6" SB16PFCR25-4

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

Tifa 8

Open Source Kit

Tifa 8 is an impressive 3 way floor-standing speaker staying true to the unique Danish design language of the Tifa family. The Tifa 8 features a dedicated 6-inch natural fiber cone midrange housed in it's own sealed midrange chamber. The highest octaves are handed off to the 26mm fine weave fabric soft dome known for it's undistorted smooth and dynamic sound.

Dual 8-inch woofer anchor the lower frequencies with deep, tight bass. The Tifa inclined cabinet design optimizes driver time alignment, offering precise imaging. Crafted with precision, the robust MDF construction and strategic bracing minimize vibrations, providing a pure, uncolored listening experience.

Tifa 8 is an open source kit meaning the speaker is fully developed and documented by SB Acoustics and you are free to use the plans.

Frequency range	:	38-26000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	87.5 dB
Nominal impedance	:	8 Ω
Max SPL	:	108 dB
Recommended amplifier	:	50-200 W
Cross-over frequency	:	400/2600 Hz
Enclosure type	:	Bass reflex (woofer), sealed (midrange)
Port tuning frequency	:	40 Hz
Driver units (pr pair)	:	SB26ST-C000-5, 5" SB13PFCR25-8 & 8" SB20PFCR30-4

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

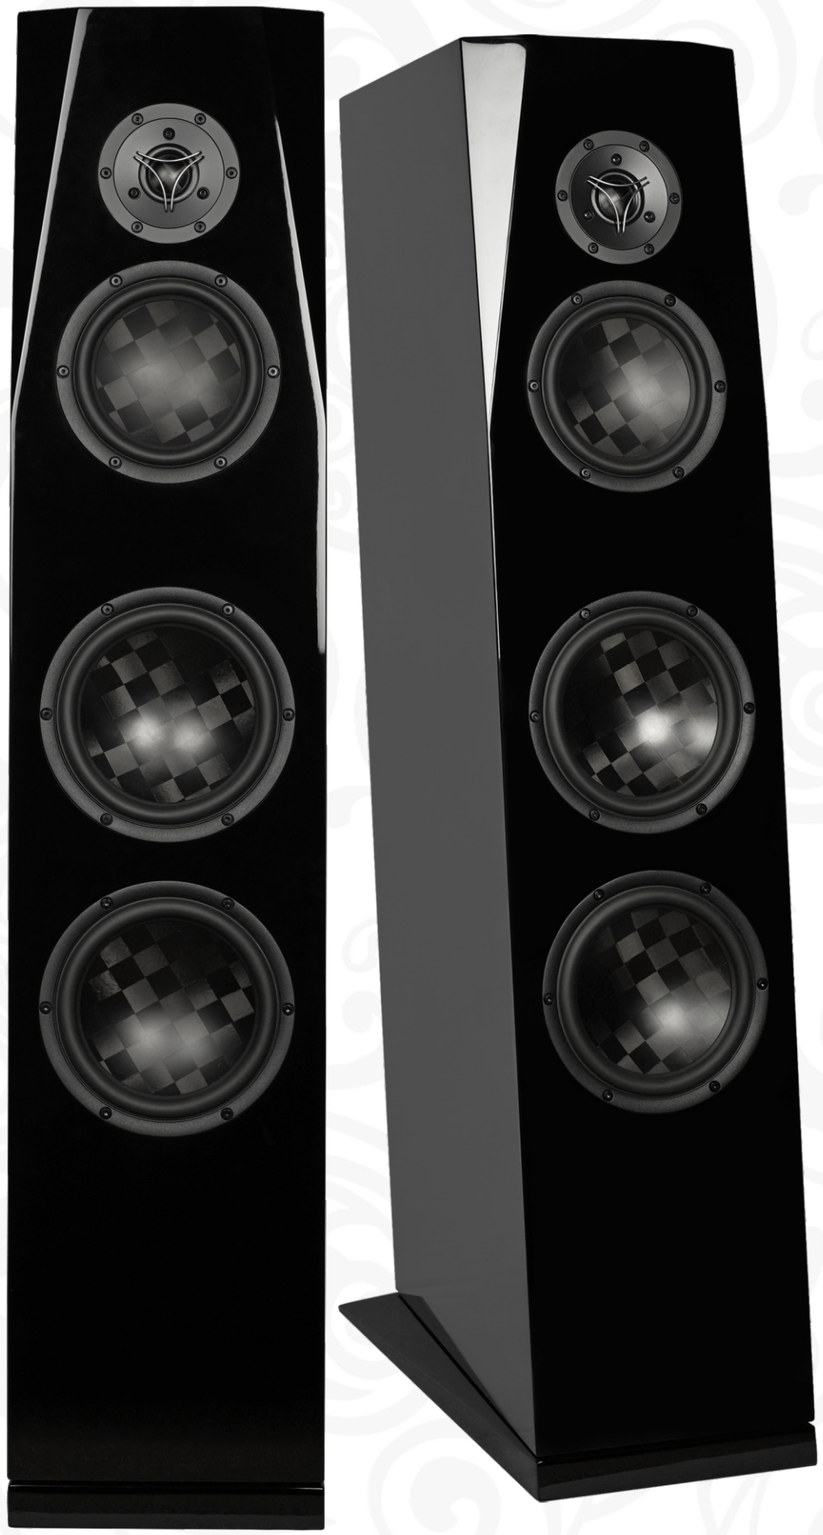

Sasandu Tx

The Sasandu Tx is a large 3-way floor standing speaker showcasing the SATORI TW29TXN-B-8 advanced TeXtreme dome tweeter known for it's extreme resolution and dynamics yet relaxed presentation. The midrange is covered by the 6½'' SATORI MW16TX-4 TeXtreme cone midwoofer housed in a dedicated large sealed midrange chamber for low compression and wonderful open midrange. Each speaker is solidly anchored in the lower octaves by two 7½'' SATORI MW19TX-8 for a deep, tight and satisfyingly musical bass.

- Large 3-way floor standing speaker
- Advanced TeXtreme High End SATORI drivers
- Elegantly inclined cabinet for time alignment
- Faceted baffle and optimized tweeter position for reduced diffraction
- Slanted internal partition for reduction of standing waves
- Stylish removable plinth for secure footing
- Strategic internal bracing and dampening
- Large low noise rear firing vent

Frequency range	:	32-32000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	89 dB
Nominal impedance	:	4 Ω
Max SPL	:	108 dB
Recommended amplifier	:	100-200 W
Cross-over frequency	:	400/ 2800 Hz
Enclosure type	:	Bass reflex (woofers), sealed (midrange)
Port tuning frequency	:	32 Hz
Driver units (pr pair)	:	SATORI TW29TXN-B-8 (x2), 6½" SATORI MW16TX-4 (x2), & 7½" SATORI MW19TX-8 (x4)
Cabinet material	:	28, 18, 15 mm MDF
Speaker dimension (HxWxD)	:	1100 x 230 x 615 mm (43.3 x 9.0 x 24.2 inch)
Net weight (each)	:	Full assy 33.5 kg (73.85 lb)
Gross weight (each)	:	42.4 kg (91.27 lb)

Finishing:
White Satin
Black Satin
White High Gloss
Black High Gloss
Orange High Gloss
Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Rinjani Tx

The Rinjani Tx takes advantage of the top of the line SATORI MW16TX-8 with two 6½" midwoofers used in each speaker for this 2½-way floor standing speaker and pairs them with the 29mm wide surround TeXtreme tweeter SATORI TW29TXN-B-8 for a visually and acoustically stunning match.

The crossover of the Rinjani Tx has been completely revised for the TeXtreme® drivers to further enhance the performance and sonic qualities. The sound is very natural and true to life with two 6½" mid-woofers delivering accurate and solid bass at even high listening levels.

The Rinjani's faceted baffle is specially designed to reduce high frequency diffraction and yields superb imaging qualities. The 7° reclined cabinet ensures good time alignment resulting in sublime staging and pin point placement of instruments. The quality crossover lives in it's own sealed chamber in the bottom of the speaker with a slanted divider to diminish standing waves.

Frequency range	:	42-32000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	88 dB
Nominal impedance	:	4 Ω
Max SPL	:	106 dB
Recommended amplifier	:	50-200 W
Cross-over frequency	:	2400 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	35.5 Hz
Driver units (pr pair)	:	SATORI TW29TXN-B-8 (x2) & 6½" SATORI MW16TX-8 (x4)
Cabinet material	:	18 mm MDF
Speaker dimension (HxWxD)	:	1010 x 190 x 464 mm (39.72 x 7.48 x 18.27 inch)
Net weight (each)	:	Full assy 22.42 kg (49.43 lb)
Gross weight (each)	:	29.2 kg (64.37 lb)

Finishing:
White Satin
Black Satin
White High Gloss
Black High Gloss
Orange High Gloss
Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

Ara Tx

The Ara Tx features the top of the line TeXtreme midwoofer SATORI MW16TX-4 and pairs it with the TeXtreme tweeter SATORI TW29TXN-B-8 for a visually and acoustically stunning match.

Compared to the Ara and Ara Be the crossover topology is realised differently on the Ara Tx. In the low frequency section there is only one single component directly in series with the signal path to the 6½" SATORI MW16TX-4. This series inductor is followed by a number of parallel LCR-networks to further shape the response and for break up control as well as perfect integration to the 29mm TeXtreme tweeter and optimised tweeter network.

The result is a very open and transparent sound that is both natural and very relaxed.
The bass is deep and very convincing for a stand mount speaker.

The Ara's faceted baffle is specially designed to reduced high frequency diffraction and yields superb imaging qualities. The 7° reclined cabinet ensures good time alignment resulting in sublime staging and pin point placement of instruments.

Frequency range	:	45-32000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	87 dB
Nominal impedance	:	4 Ω
Max SPL	:	105 dB
Recommended amplifier	:	40-150 W
Cross-over frequency	:	2500 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	36.5 Hz
Driver units (pr pair)	:	SATORI TW29TXN-B-8 (x2) & 6½" SATORI MW16TX-4 (x2)
Cabinet material	:	18 mm MDF
Speaker dimension (HxWxD)	:	391 x 190 x 388 mm (15.4 x 7.48 x 15.27 inch)
Net weight (each)	:	Full assy 9.6 kg (21.16 lb)
Gross weight (pr pair)	:	21 kg (46.29 lb)

Finishing: White Satin, Black Satin, White High Gloss, Black High Gloss, Orange High Gloss, Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Sasandu

The Sasandu is a large 3-way floor standing speaker showcasing the advanced SATORI 29mm Neodymium Beryllium tweeter. The midrange is covered by the 6½'' SATORI MR16P-4 Egyptian Papyrus cone midrange with a dedicated large sealed midrange chamber for low compression and wonderful open midrange reproduction. Each speaker is solidly anchored in the lower octaves by two 7½'' SATORI MW19P-8 for a deep, tight, and satisfyingly musical bass.

- Large 3-way floor standing speaker
- Advanced High End SATORI drivers
- Elegantly inclined cabinet for time alignment
- Faceted baffle and optimized tweeter position for reduced diffraction
- Slanted internal partition for reduction of standing waves
- Stylish removable plinth for secure footing
- Strategic internal bracing and dampening
- Large low noise rear firing vent

Frequency range	:	32-32000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	89 dB
Nominal impedance	:	4 Ω
Max SPL	:	108 dB
Recommended amplifier	:	100-200 W
Cross-over frequency	:	480/ 2800 Hz
Enclosure type	:	Bass reflex (woofers), sealed (midrange)
Port tuning frequency	:	32 Hz
Driver units (pr pair)	:	SATORI TW29BN-B-8 (x2), 6½" SATORI MR16P-4 (x2), & 7½" SATORI MW19P-8 (x4)
Cabinet material	:	28, 18, 15 mm MDF
Speaker dimension (HxWxD)	:	1100 x 230 x 615 mm (43.3 x 9.0 x 24.2 inch)
Net weight (each)	:	Full assy 33.5 kg (73.85 lb)
Gross weight (each)	:	42.4 kg (91.27 lb)

Finishing: White Satin, Black Satin, White High Gloss, Black High Gloss, Orange High Gloss, Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

Rinjani Be

The Rinjani Be is a 2½-way floor standing speaker which takes the Rinjani performance to a higher level with the SATORI TW29BN Beryllium tweeter and revised crossover.
The TW29BN has been independently announced by many as the best tweeter in the world.

Mount Rinjani is a breathtakingly beautiful active volcano on the island of Lombok, Indonesia. The volcano is known to display dramatic eruptions with plumes of lava and ash.
The Rinjani kit is designed to deliver transparent and dynamic sound reproduction.

The Rinjani's faceted baffle is specially designed to reduce high frequency diffraction and yields superb imaging qualities. A further 7° reclined cabinet ensures time alignment resulting in sublime staging and pin point placement if instruments. The quality crossover lives in it's own sealed chamber in the bottom of the speaker with a slanted divider to diminish standing waves.

Frequency range	:	42-30000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	89 dB
Nominal impedance	:	4 Ω
Max SPL	:	107 dB
Recommended amplifier	:	50-200 W
Cross-over frequency	:	2300 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	35.5 Hz
Driver units (pr pair)	:	SATORI TW29BN (x2) & 6½" SATORI MW16P-8 (x4)
Cabinet material	:	18 mm MDF
Speaker dimension (HxWxD)	:	1010 x 190 x 464 mm (39.72 x 7.48 x 18.27 inch)
Net weight (each)	:	Full assy 22.42 kg (49.43 lb)
Gross weight (each)	:	29.2 kg (64.37 lb)

Finishing: White Satin, Black Satin, White High Gloss, Black High Gloss, Orange High Gloss, Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Rinjani

The Rinjani is a 2½-way floor standing speaker kit built with top-line SATORI drivers. Each speaker is equipped with two SATORI 6½'' Papyrus cone midwoofers and the famous SATORI TW29R Ring-dome tweeter.

Mount Rinjani is a breathtakingly beautiful active volcano on the island of Lombok, Indonesia. The volcano is known to display dramatic eruptions with plumes of lava and ash. The Rinjani kit is designed to deliver transparent and dynamic sound reproduction.

The Rinjani's faceted baffle is specially designed to reduce high frequency diffraction and yields superb imaging qualities. A further 7° reclined cabinet ensures time alignment resulting in sublime staging and pin point placement if instruments. The quality crossover lives in it's own sealed chamber in the bottom of the speaker with a slanted divider to diminish standing waves.

Frequency range	:	42-25000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	89 dB
Nominal impedance	:	4 Ω
Max SPL	:	107 dB
Recommended amplifier	:	50-200 W
Cross-over frequency	:	3000 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	35.5 Hz
Driver units (pr pair)	:	SATORI TW29R (x2) & 6½" SATORI MW16P-8 (x4)
Cabinet material	:	18 mm MDF
Speaker dimension (HxWxD)	:	1010 x 190 x 464 mm (39.72 x 7.48 x 18.27 inch)
Net weight (each)	:	Full assy 22.42 kg (49.43 lb)
Gross weight (each)	:	29.2 kg (64.37 lb)

Finishing: White Satin, Black Satin, White High Gloss, Black High Gloss, Orange High Gloss, Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Ara Be

The Ara Be is a 2-way stand mount kit which takes the Ara performance to a higher level with the SATORI TW29BN Beryllium tweeter and revised crossover. The TW29BN has been independently announced by many as the best tweeter in the world.

Ara is the highest point of Komodo Island Indonesia and particularly notable as the habitat of the spectacular and mythical Komodo dragons. The Ara kit is designed to deliver top level transparent and dynamic sound reproduction.

The Ara's faceted baffle is specially designed to reduce high frequency diffraction and yields superb imaging qualities. A further 7° reclined cabinet ensures time alignment resulting in sublime staging and pin point placement of instruments.

Frequency range	:	45-30000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	87 dB
Nominal impedance	:	4 Ω
Max SPL	:	105 dB
Recommended amplifier	:	40-150 W
Cross-over frequency	:	2300 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	36.5 Hz
Driver units (pr pair)	:	SATORI TW29BN (x2) & 6½" SATORI MW16P-4 (x2)
Cabinet material	:	18 mm MDF
Speaker dimension (HxWxD)	:	391 x 190 x 388 mm (15.4 x 7.48 x 15.27 inch)
Net weight (each)	:	Full assy 9.6 kg (21.16 lb)
Gross weight (pr pair)	:	21 kg (46.29 lb)

Finishing:
White Satin · Black Satin · White High Gloss · Black High Gloss · Orange High Gloss · Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Ara

Ara, the smaller brother of Rinjani, reflecting the same design concept.
The Ara is a 2-way stand mount speaker kit based on the excellent SATORI 6½ MW16P Papyrus cone midwoofers and the famous SATORI TW29R Ring-dome tweeter.

Ara is the highest point of Komodo Island Indonesia and particularly notable as the habitat of the spectacular and mythical Komodo dragons. The Ara kit is designed to deliver top level transparent and dynamic sound reproduction.

The Ara's faceted baffle is specially designed to reduce high frequency diffraction and yields superb imaging qualities. A further 7° reclined cabinet ensures time alignment resulting in sublime staging and pin point placement of instruments.

Frequency range	:	49-25000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	87 dB
Nominal impedance	:	4 Ω
Max SPL	:	105 dB
Recommended amplifier	:	40-150 W
Cross-over frequency	:	3000 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	36.5 Hz
Driver units (pr pair)	:	SATORI TW29R-B (x2) & 6½" SATORI MW16P-4 (x2)
Cabinet material	:	18 mm MDF
Speaker dimension (HxWxD)	:	391 x 190 x 388 mm (15.4 x 7.48 x 15.27 inch)
Net weight (each)	:	Full assy 9.6 kg (21.16 lb)
Gross weight (pr pair)	:	21 kg (46.29 lb)

Finishing: White Satin, Black Satin, White High Gloss, Black High Gloss, Orange High Gloss, Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Arya

The Arya is a floor standing 2½-way speaker kit. Arya means “wise man” and we believe Arya is the wise choice if you want an elegant high performance floor standing speaker.

Each speaker uses two 6'' SB17MFC mineral filled poly cone woofers for a tight satisfying bass and clean and crisp mids. The SB Acoustics mineral filled poly cones are of a special composition and we are confident poly cones have never sounded better.

With 2 x 6'' woofers per side there is enough quality bass for room sizes of 50m²/ 500f² or more. The tweeter is the very renowned and patented Ring Dome. The large 29mm dome with centre termination and wide ultra linear suspension results in a very low distortion and a presentation that can be described by having a very “black” background.

Frequency range	:	44-28000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	87.5 dB
Nominal impedance	:	4 Ω
Max SPL	:	107 dB
Recommended amplifier	:	50-200 W
Cross-over frequency	:	3000 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	41 Hz
Driver units (pr pair)	:	SB29RDAC-C000-4 (x2) & 6" SB17MFC35-8 (x4)
Cabinet material	:	18 mm MDF
Speaker dimension (HxWxD)	:	1076 x 195 x 310 mm (42.36 x 7.68 x 12.2 inch)
Net weight (each)	:	Full assy 22.54 kg (49.69 lb)
Gross weight (each)	:	28.3 kg (62.39 lb)

Finishing:
White Satin · White High Gloss · Rosewood Veneer High Gloss
Black Satin · Black High Gloss · Orange High Gloss · Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Kinnara

Open Source Kit

Introducing the Kinnara. At its heart sits the SB20PFCS30-7 8 inch paper diaphragm woofer, designed specifically for sealed enclosures. Employing low-mass foam surround enhances midrange definition, delivering exceptional transparency and very wide bandwidth.

Kinnara demonstrates the principle of a large series capacitor to sculpt the bass response of its high-Q sealed cabinet. This capacitor tuning tames the natural resonance peak and the result is well controlled bass extension with exceptional musicality.

The well behaved and exceptionally low distortion SB26ADC-C000-4 26mm Aluminum dome tweeter handles the top frequencies and integrates seamlessly to the 8 inch woofer with great phase alignment through the crossover region.

Visually, Kinnara nods to the Snell Type E with clean lines and a restrained, timeless profile. The vertically tapered enclosure effectively terminates standing waves, still, the front and side view is strictly clean and classical with no distractions.

Kinnara complements any listening environment with its understated elegance and graceful understatement. A superbly musical and enjoyable speaker that lets you forget about the equipment and simply draws you towards the musical experience.

Kinnara is an open source kit meaning the speaker is fully developed and documented by SB Acoustics and you are free to use the plans.

Frequency range	:	45-25000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	84 dB
Nominal impedance	:	6 Ω
Max SPL	:	105 dB
Recommended amplifier	:	100-200 W
Cross-over frequency	:	2300 Hz
Enclosure type	:	Sealed
Driver units (pr pair)	:	SB26ADC-C000-4 & 8" SB20PFCS30-7

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Gema

Gema is a large 3-way speaker paying homage to the classic speaker of the 1970's. Generous enclosure proportions fitted with large bass drivers were the bee's knees at the time. And for good reason! The Gema is our take on a retro-styled speaker, and the much loved 12 inch SB34NRXL75-8 lays the foundation of a deep, well controlled and tuneful bassline.

The dedicated midrange is covered from 680Hz and all the way up to 3kHz by the 4 inch paper cone SB12MNRX2-25-4 which is characterized by good efficiency, low moving mass and great linearity resulting in excellent midrange clarity.

To perfectly match the articulate and open midrange the top end is handed over to the 1 inch soft dome SB26STAC-C000-4 equipped with die-cast aluminium faceplate, optimised rear chamber and full copper cap.

The well braced cabinet is designed with a large slot port tuned to 28 Hz opening to the front of the speaker and a generous sealed enclosure for the dedicated midrange. We highly recommend building the speakers from high quality 18mm plywood.

A good starting point for the placement of the Gema would be a spacing of 2.5-3 meters between the speakers with generous clearance to any side and rear walls and ideally on a stand or plinth elevating the speaker about 25cm from the floor and tilted back at about 6 degrees and a slight toe in. The tweeter and midrange are intended to be on the outside, but this will depend on the room – as usual, we encourage you to experiment with speaker placement to suit your taste and listening space.

Frequency range	:	36-24000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	87 dB
Nominal impedance	:	6 Ω
Max SPL	:	108 dB
Recommended amplifier	:	50-200 W
Cross-over frequency	:	680/ 3000 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	28 Hz
Driver units (pr pair)	:	SB26STAC-C000-4(x2), 4" SB12MNRX2-25-4 (x2), & 12" SB34NRXL75-8 (x2)
Cabinet material	:	18 mm Birch Plywood
Speaker dimension	:	720 x 430 x 360 mm (28.3 x 16.9 x 14.2 inch)
Net weight (each)	:	36.2 kg (79.8 lb)

Finishing: Walnut Veneer Matt

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Rima

Rima is the more compact sibling to the Gema — a 3-way loudspeaker that carries the same 1970's design cues and acoustic philosophy in a smaller, more versatile enclosure. Classic hi-fi of that era celebrated generous proportions and large bass drivers, and while Rima embraces that heritage, it delivers the same musical charm in a footprint suited to modern living spaces.

Bass duties are handled by the 10 inch SB29NRX75-8, a driver chosen for its excellent linearity, low distortion and ability to produce a surprisingly deep, controlled and tuneful low end, providing the familiar warmth and weight of vintage loudspeakers, just scaled to a more compact form.

The midrange is covered from 500 Hz up to 3 kHz by the 4 inch SB12NRX25-8, a paper-cone unit known for its smooth response, low moving mass and natural tonal character. This driver brings clarity and openness to vocals and instruments, maintaining the articulate midband performance that defines the family.

To match the midrange's clean presentation, the top end is handed over to the SB26STAC-C000-4 soft dome tweeter. With its die-cast aluminium faceplate, optimised rear chamber and full copper cap, it delivers a refined, extended treble that integrates seamlessly with the midrange for a cohesive, balanced sound.

The cabinet follows the same construction principles as the Gema: a well-braced structure with a front-firing slot port tuned to 30 Hz, and a dedicated sealed 3 L midrange. The enclosure combines 15 mm and 18 mm birch plywood, chosen for stiffness, stability and a clean, resonant-free presentation.

A good starting point for placement is 2–3.5 m between speakers, with moderate clearance to side and rear walls. A stand or plinth elevating the speaker 20–25 cm from the floor, a 5–6 degree backward tilt and a slight toe-in will typically yield the most coherent imaging. As always, room acoustics vary — experiment with orientation to suit your taste and listening space. Rima brings the spirit of classic hi-fi into a smaller, more flexible package. It's the ideal choice for listeners who appreciate the Gema's retro aesthetic and acoustic character but prefer a speaker that fits comfortably into a wider range of rooms.

Frequency range	:	33-24000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	84 dB
Nominal impedance	:	8 Ω
Max SPL	:	105 dB
Recommended amplifier	:	100-200 W
Cross-over frequency	:	500 & 3000 Hz
Enclosure type	:	Bass reflex 41.6L (Woofer)/ sealed 3L (Midrange)
Port tuning frequency	:	30 Hz
Driver units (pr pair)	:	SB26STAC-C000-4(x2), 4" SB12NRX25-8 (x2), & 10" SB29NRX75-8 (x2)
Cabinet material	:	15 mm & 18 mm Birch Plywood
Speaker dimension	:	610 x 363 x 305 mm (24 x 14.3 x 12 inch)
Net weight (each)	:	21.8 kg (48 lb)

Finishing: Walnut Veneer Matt

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Micro C

With the same external dimensions as the Micro, the Micro C features the high-end 4'' SB12CAC ceramic cone midwoofer for a truly exhilarating sound experience.
This speaker is capable of unbelievable detail and packs a real punch in the bass.
We are overjoyed when we see peoples faces light up from the surprise of the musicality of this great speaker.

- High performance compact design
- High End Ceramic midwoofer
- High quality cross-over
- Front firing slot port
- Versatile placement
- Solid single-wiring binding posts

Frequency range	:	68-28000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	84.5 dB
Nominal impedance	:	4 Ω
Max SPL	:	100 dB
Recommended amplifier	:	25-100 W
Cross-over frequency	:	4000 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	49 Hz
Driver units (pr pair)	:	SB19ST-C000-4 (x2) & 4" SB12CACS25-4 (x2)
Cabinet material	:	15 mm MDF
Speaker dimension (HxWxD)	:	262 x 132 x 170 mm (10.3 x 5.2 x 6.7 inch)
Net weight (each)	:	Full assy 3.9 kg (8.6 lb)
Gross weight (pr pair)	:	8.4 kg (18.51 lb)

Finishing: White Satin, Black Satin, White High Gloss, Black High Gloss, Orange High Gloss, Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

SB ACOUSTICS
building your sound

Micro

The Micro is a compact 2-way speaker kit with minimal footprint and ideally suited for bookshelf placement, desktop or even near field monitoring.
Treat yourself with far better sound than comparable pre-assembled consumer speakers can offer. These small but capable speakers are sure to impress and will easily fill your favorite listening space with high quality sound.

- Compact design
- Aluminum cone midwoofer
- Simple high quality cross-over network
- Front firing integrated port
- Versatile placement
- Solid single-wiring binding posts

Frequency range	:	70-28000 Hz +/- 3 dB
Sensitivity (2.83V/1m)	:	84.5 dB
Nominal impedance	:	4 Ω
Max SPL	:	100 dB
Recommended amplifier	:	25-100 W
Cross-over frequency	:	4000 Hz
Enclosure type	:	Bass reflex
Port tuning frequency	:	49 Hz
Driver units (pr pair)	:	SB19ST-C000-4 (x2) & 4" SB12PAC25-4 (x2)
Cabinet material	:	15 mm MDF
Speaker dimension (HxWxD)	:	260 x 130 x 170 mm (10.2 x 5.1 x 6.7 inch)
Net weight (each)	:	Full assy 3.7 kg (8.15 lb)
Gross weight (pr pair)	:	8.3 kg (18.29 lb)

Finishing: White Satin, Black Satin, White High Gloss, Black High Gloss, Orange High Gloss, Red High Gloss

Designed by: *Ulrik Schmidt, Danesian Audio - Denmark*

Engineered in Denmark Manufactured in Indonesia

Distributors

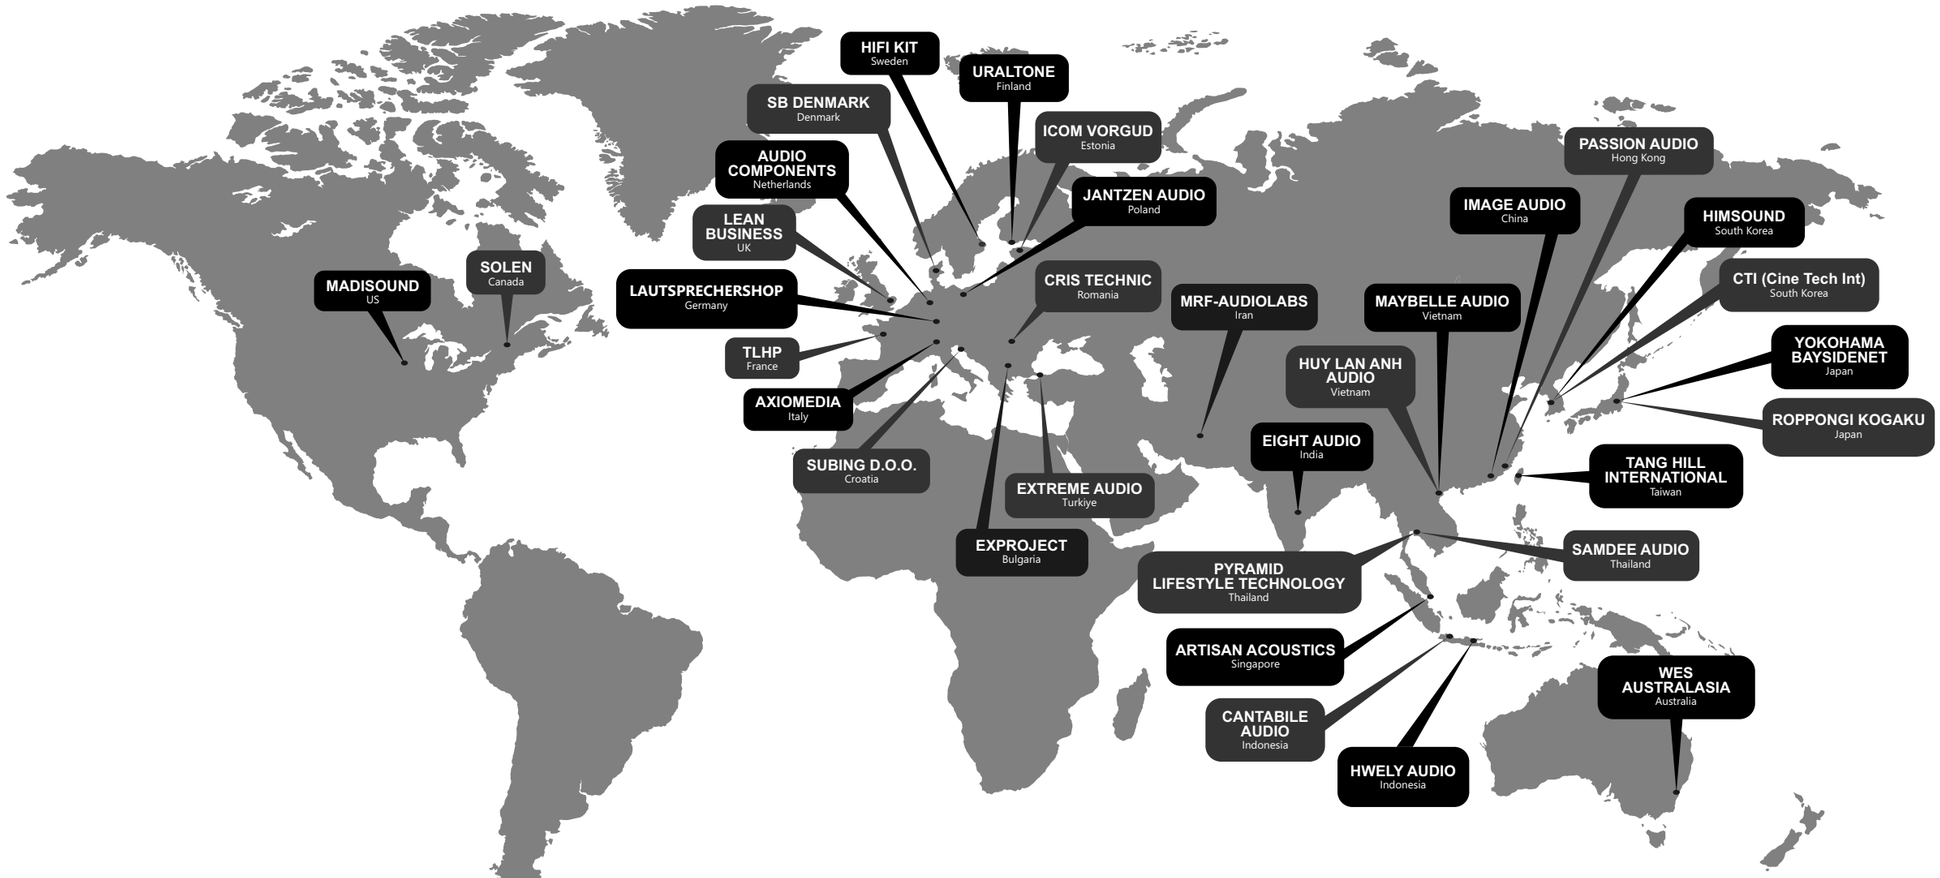

MADISOUND, US - www.madisounspeakerstore.com

SOLEN, Canada - https://solen.ca/en

SB DENMARK, Denmark - https://danesian.dk/

LEAN BUSINESS, United Kingdom - https://www.lean-business.co.uk/eshop/

TLHP, France - https://en.toutlehautparleur.com/

AXIOMEDIA, Italy - https://www.axiomedia.it/en/

SUBING D.O.O., Croatia - https://subing.hr/

HIFI KIT, Sweden - https://www.hifikit.se/

URALTONE, Finland - https://en.uraltone.com/

ICOM VORGUD, Estonia - http://www.icom.ee/en/

JANTZEN AUDIO, Poland - http://www.jantzen-audio.com/

AUDIO COMPONENTS, Netherlands - https://www.audiocomponents.info/

LAUTSPRECHERSHOP, Germany - https://www.lautsprechershop.de

EXPROJECT, Bulgaria - https://www.exproject-bg.com/

EXTREME AUDIO, Turkiye - https://www.extreme-audio.com/

CRIS TECHNIC, Romania - www.cristechnic.ro

MRF-AUDIOLABS, Iran - http://www.mrf-audiolabs.com/

EIGHT AUDIO, India - https://audiofy.in/

WES AUSTRALASIA, Australia - https://www.wes.com.au/

HWELY AUDIO, Indonesia - https://www.hwelyaudio.com/

CANTABILE AUDIO, Indonesia - https://cantabile-by-apostrophe.weebly.com/

ARTISAN ACOUSTICS, Singapore - https://www.artisanacoustics.net/

SAMDEE AUDIO, Thailand - https://www.samdee-audio.com/

PYRAMID LIFESTYLE TECHNOLOGY, Thailand - https://www.pltspeaker.com/

HUY LAN ANH AUDIO, Vietnam - https://huylananhaudio.vn/

MAYBELLE AUDIO, Vietnam - https://www.maybelle.com.vn/

IMAGEAUDIO, China - http://imageaudio.cn/

PASSION AUDIO, Hong Kong - https://www.smartordersystem.com/

YOKOHAMA BAYSIDENET, Japan - https://www.baysidenet.jp/

ROPPONGI KOGAKU Limited, Japan - https://ritlab.jp/azabu/html/

HIMSOUND, South Korea - http://himsound.com/

CTI (Cine Tech Inc), South Korea - http://ctishop.co.kr

TANGHILL INTERNATIONAL, Taiwan - http://www.thlaudio.com/indexE.htm

SB ACOUSTICS

SATORI WG29-187

- Suits all Satori TW29 models
- Die cast aluminum waveguide
- Screwless driver mounting
- Adapter ring included
- Smooth controlled directivity

Find us on: SB Acoustics, sbacoustics, SB Acoustics, sbacoustics.com

SB AUDIENCE

A great CD deserves a great horn!

XHYDE 290 perfectly matched with ROSSO-65CDN-T
Also suitable for other 1.4" exit CDs, such as ROSSO-65CD-T, BIANCO-75CD-T and ROSSO-75CDN-T

Find us on: SB Audience, sbaudience, SB Audience, sbaudience.com