

# CI Discipline Walkthrough — HexaStock

*This document explains, in full, how Continuous Integration is enforced on this repository's main branch, and walks through verified evidence that the enforcement actually works*

---

This document explains, in full, how Continuous Integration is enforced on this repository's `main` branch, and walks through verified evidence that the enforcement actually works. It complements two smaller companion repositories built for the same purpose:


- [ci-demo-python](#)
- [ci-demo-java](#)

Those two repositories show the same mechanism in isolation, on a tiny, dependency-free domain model with a sub-second test suite. This document shows the identical mechanism operating on HexaStock itself: a real, production-shaped, multi-module Hexagonal Architecture codebase with a Maven reactor, Testcontainers-backed integration tests, and a test suite that takes closer to two minutes than two seconds. The underlying idea does not change with scale; what changes is everything around it — and that difference is worth seeing directly.

Looking for a condensed, copy-paste-ready run sheet instead of the fully explained version below? See [CI\\_DEMO\\_SCRIPT.md](#).

## 1. What this walkthrough shows

1. **Automated tests** catch mistakes without a human having to notice them — at any scale, from three unit tests to several hundred.
2. **A CI pipeline** (GitHub Actions) runs the full test suite automatically on every push and every pull request, regardless of how long that suite takes to run.
3. **A pull request** is where the result of that automated check becomes visible, before a change ever reaches `main`.
4. **A branch protection ruleset** turns "please don't merge broken code" into something GitHub itself enforces — with no exception for administrators.

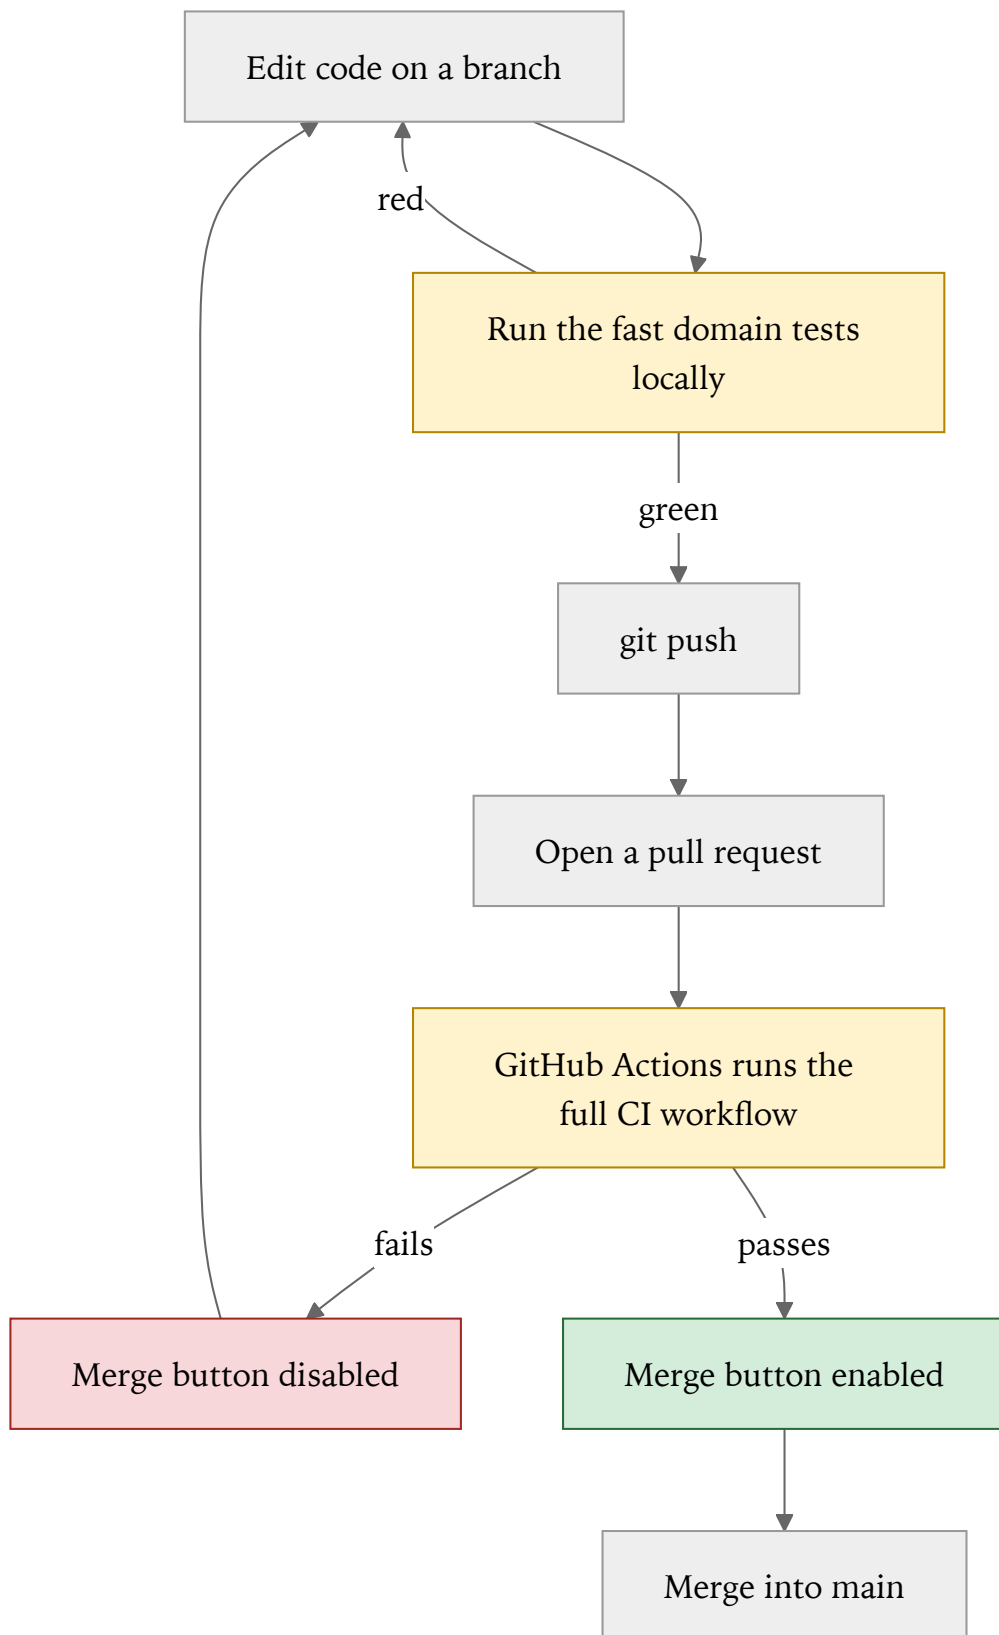


## 2. How HexaStock's pipeline differs from the two smaller demos

|                                | ci-demo-python / ci-demo-java               | HexaStock                                                                                                                                                |
|--------------------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Modules                        | One                                         | Seven (Maven multi-module reactor: <code>domain</code> , <code>application</code> , three adapter modules, <code>bootstrap</code> , plus the parent POM) |
| Test suite, happy path         | ~0.02s                                      | ~2 minutes                                                                                                                                               |
| Infrastructure needed by tests | None                                        | Testcontainers spins up real MySQL and MongoDB instances for the persistence adapter tests                                                               |
| Required check                 | Run domain tests                            | build-and-test                                                                                                                                           |
| Protection mechanism           | Classic branch protection                   | Ruleset (GitHub's newer branch-protection system — same intent, different configuration surface)                                                         |
| What a domain-level bug costs  | The full suite, since there's only one tier | Seconds — the Maven reactor fails fast at the <code>domain</code> module, before the slower modules ever run                                             |

That last row is the most important difference, and it's worth dwelling on.

### The Maven reactor builds modules in dependency order

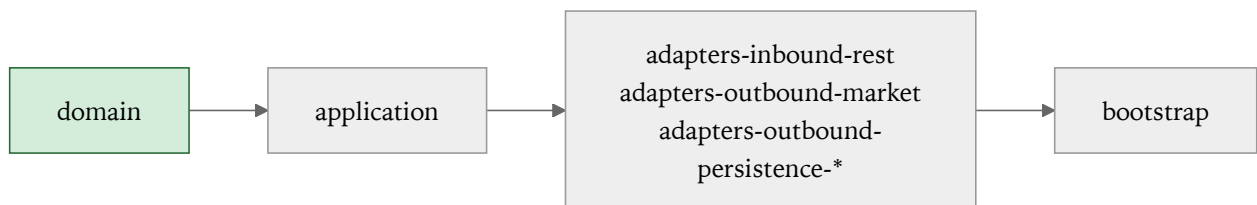

`domain` has no dependencies on anything else in the project — it's pure business logic — so Maven builds and tests it first. By default, Maven stops the entire build at the first module whose tests fail. A bug in a domain value object or aggregate is therefore caught in well under a second of test time, and the build never even reaches the modules that need Docker. A bug that only a slower module can catch — say, a JPA mapping error — costs the full run, because every module before it in the reactor has to build and pass first.

This is the same "test pyramid" idea the two smaller demo repositories teach in isolation — fast, infrastructure-free tests catch what they can before anything slow gets a chance to run — except here it's not a teaching simplification. It's how the reactor actually behaves, because `domain` and `application` are genuinely dependency-free of infrastructure, by architectural design (see [CONTRIBUTING.md](#) for the Hexagonal Architecture principles this project enforces).


### 3. The protection mechanism: a ruleset, not classic branch protection

GitHub has two ways to protect a branch: the classic **branch protection rules** (what the two smaller demo repositories use) and the newer **repository rulesets**, which HexaStock uses. They express the same intent through a different API and a different settings page ( `Settings → Rules → Rulesets` instead of `Settings → Branches` ).

The active ruleset on this repository, `MainProtection` , applies to the default branch and enforces:

| Rule                   | Effect                                                                                                                                           |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| deletion               | <code>main</code> cannot be deleted.                                                                                                             |
| non_fast_forward       | No force-pushes to <code>main</code> — history cannot be rewritten.                                                                              |
| pull_request           | Changes must arrive through a pull request; direct pushes to <code>main</code> are rejected.                                                     |
| required_status_checks | The <code>build-and-test</code> check must pass, and the branch must be up to date with <code>main</code> , before a pull request can be merged. |

Bypass is set to nobody ( `bypass_actors: []` ), meaning these rules apply to every contributor equally, including repository administrators — the same choice made on the two smaller demo repositories via their `enforce_admins: true` setting.

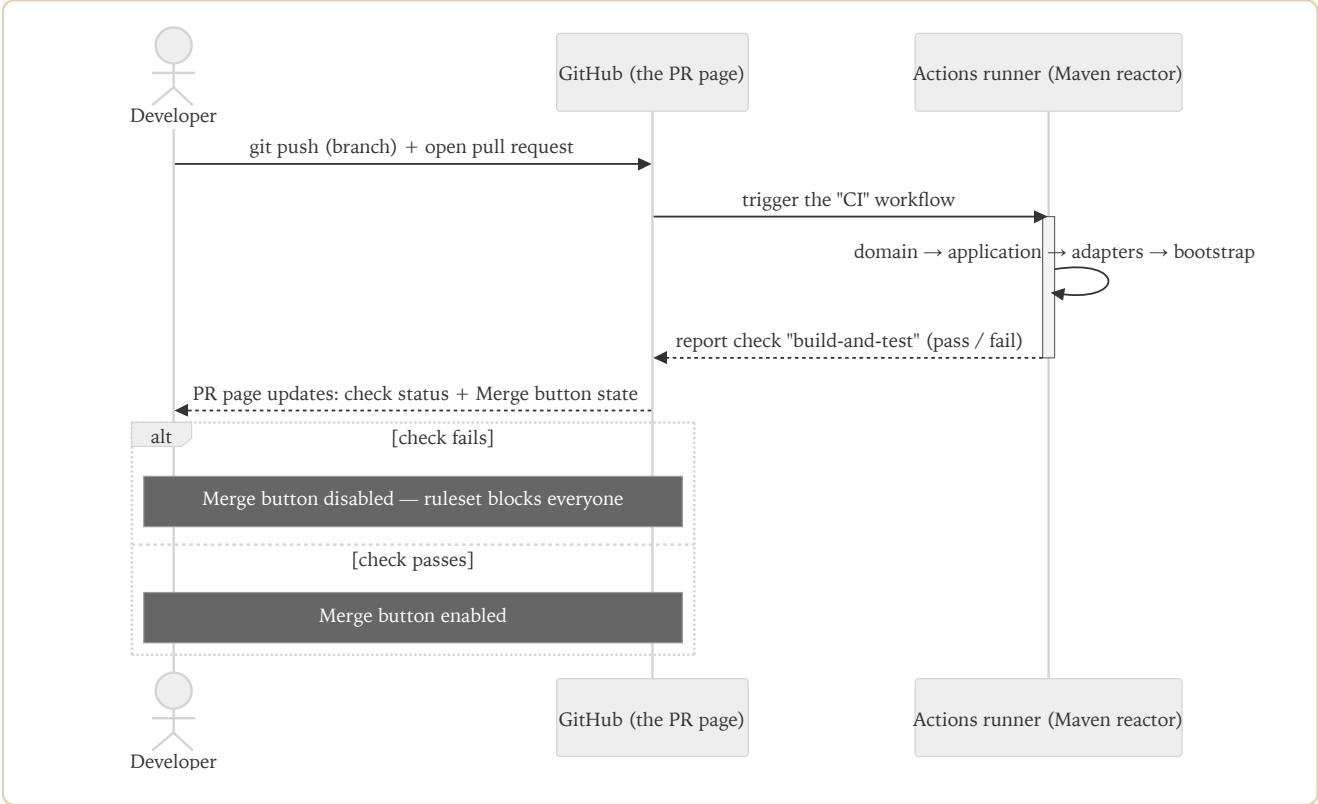

## 4. Verified evidence

The two claims above — "a failing check blocks the merge" and "a passing check allows it" — were each verified directly against this repository, not assumed from configuration alone.

### 4.1 A failing pull request was blocked

[PR #30](#) introduced a single-line, deliberate regression in `Portfolio.buy()` :

#### COPY THIS BLOCK

```
Holding holding = findOrCreateHolding(ticker);
holding.buy(quantity, price);
// balance = balance.subtract(totalCost);  // <-- commented out
```

Result, captured directly from the Actions log:

#### COPY THIS BLOCK

```
[ERROR] Tests run: 9, Failures: 3, Errors: 0, Skipped: 0, Time elapsed: 0.041 s <<< FAILURE
[ERROR] PortfolioTest$StockOperations.shouldAddHoldingAndDecreaseBalanceWhenBuying:126
[ERROR] PortfolioTest$StockOperations.shouldAddLotToExistingHoldingWhenBuyingMore:148 e
[ERROR] PortfolioTest$StockOperations.shouldIncreaseBalanceAndUpdateHoldingWhenSelling:
[ERROR] Tests run: 117, Failures: 3, Errors: 0, Skipped: 0
[ERROR] BUILD FAILURE
```

The `domain` module alone runs 117 tests; three failed, and the reactor stopped there — the whole run, queued to failed, completed in **46 seconds**. The pull request's merge state, read directly from the GitHub API immediately afterward:


#### COPY THIS BLOCK

```
{"mergeable": "MERGEABLE", "mergeStateStatus": "BLOCKED"}
```

`mergeable: true` means there was no textual conflict with `main` — the change could technically be combined. `mergeStateStatus: BLOCKED` is the separate, decisive signal: the ruleset's required check had not passed, so GitHub refused to allow the merge regardless. The PR was closed without merging, exactly as a real failing contribution should be.

### 4.2 This document reached `main` through a passing pull request

This walkthrough and its companion [CI DEMO SCRIPT.md](#) were themselves written on a branch, pushed, and opened as [PR #31](#) against `main` — not committed directly, since the ruleset no longer allows that. The full suite (all seven modules, including the Testcontainers-backed persistence tests) had to pass before the **Merge** button became available. That pull request is the mechanism working as intended, not a separate claim to take on faith.

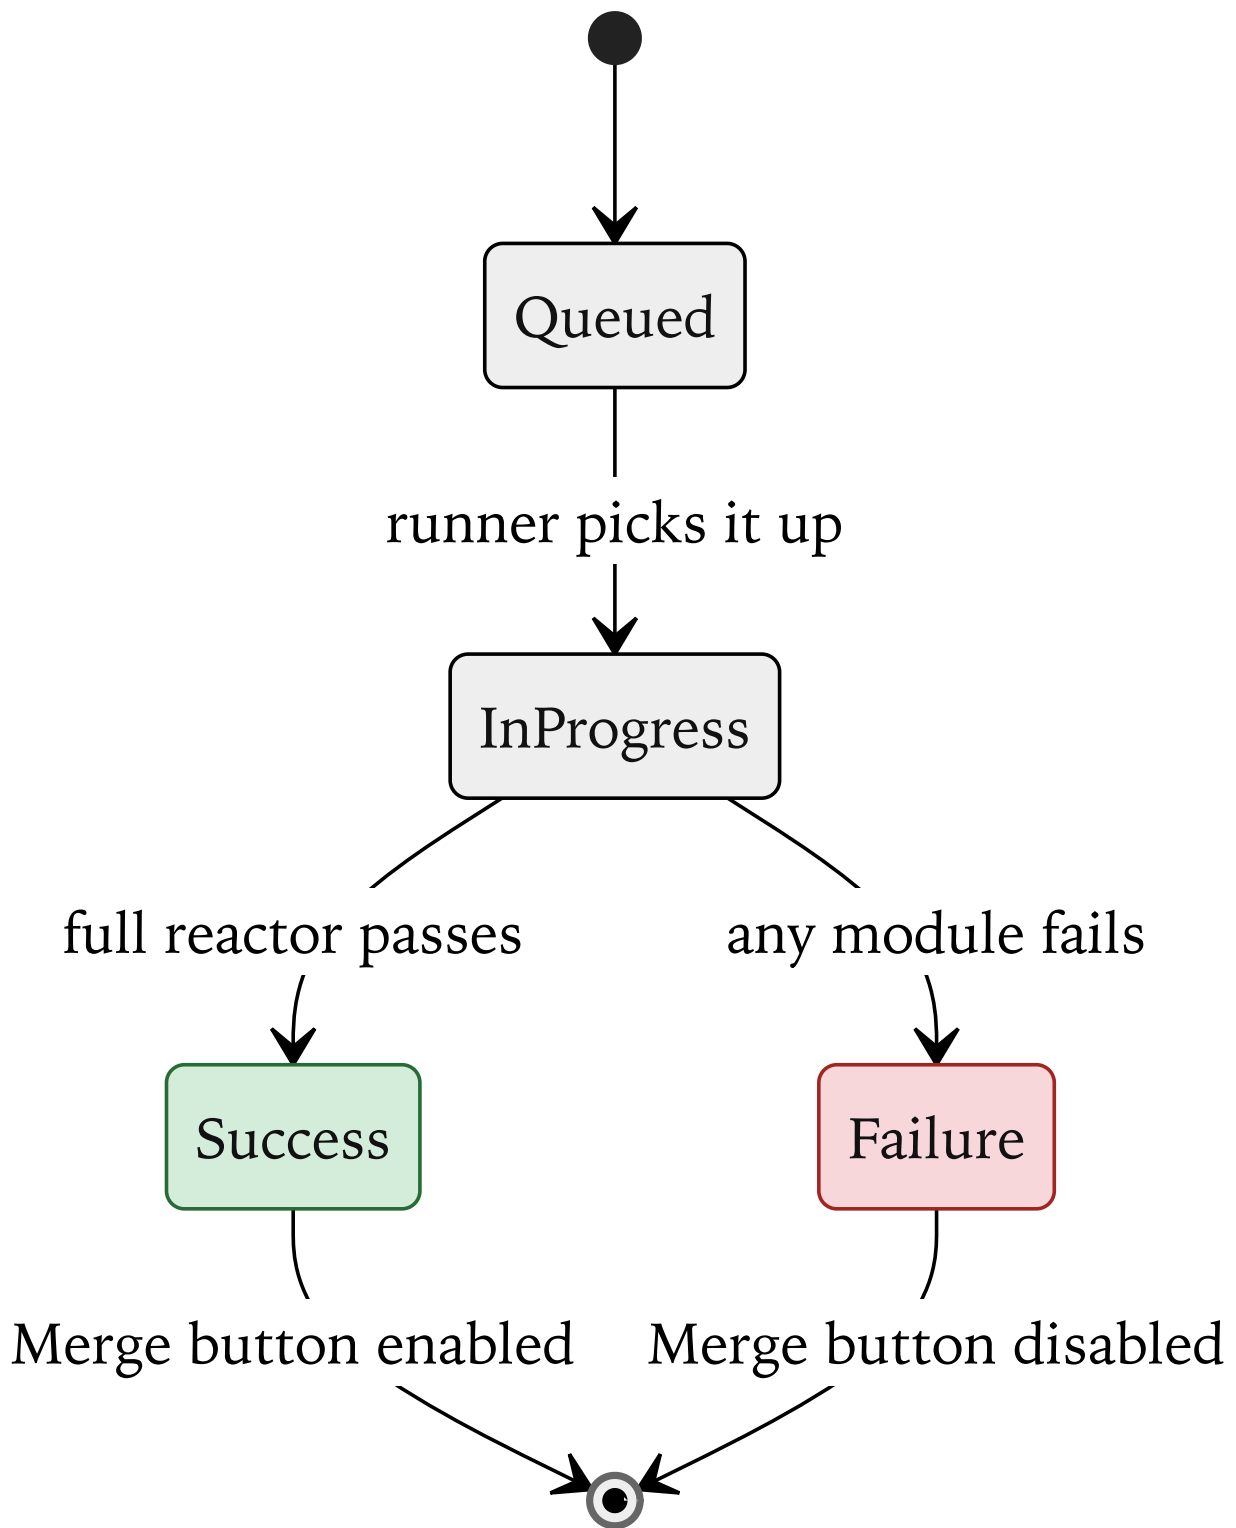

## 5. Reproducing this live

The same deliberate bug used in section 4.1 can be reproduced safely on a throwaway branch — it never has to touch `main`. See [CI\\_DEMO\\_SCRIPT.md](#) for the exact copy-paste steps. In outline:

0. Fork this repository, then clone your fork — not this one. Cloning `alfredorueda/HexaStock` directly won't let you push branches or open pull requests, since you don't have write access to it:

**COPY THIS BLOCK**

```
git clone https://github.com/<your-username>/HexaStock.git
cd HexaStock
```

(Fork first, from `https://github.com/alfredorueda/HexaStock` → **Fork**, top-right. Forking copies the code but not the `MainProtection` ruleset from section 3 — optional to recreate under **Settings** → **Rules** → **Rulesets** on your fork if you also want to see the merge-blocked behavior there.)

1. Branch from `main`.
2. Comment out `balance = balance.subtract(totalCost);` in `Portfolio.buy()`.
3. Run `./mvnw -pl domain,application clean test` locally — confirm 3 failures, in well under a second.
4. Push, open a pull request, watch `build-and-test` fail (about 30–60s) and the **Merge** button disable.
5. Revert the change, push again, watch the full suite run (close to 2 minutes this time) and the **Merge** button enable.
6. Close the pull request without merging, or merge it — either is a correct ending, since the branch no longer contains the bug.

## 6. Glossary

| Term                          | Meaning here                                                                                                                                                                                                       |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maven reactor                 | The order in which a multi-module Maven build compiles and tests each module, following their declared dependencies.                                                                                               |
| Module                        | An independently buildable unit of the project — <code>domain</code> , <code>application</code> , and the various adapters are each their own Maven module with their own <code>pom.xml</code> .                   |
| Fail-fast                     | Maven's default behavior: the build stops at the first module whose tests fail, rather than continuing to build the rest.                                                                                          |
| Testcontainers                | A library that starts real, disposable Docker containers (here, MySQL and MongoDB) for integration tests, then tears them down afterward.                                                                          |
| Ruleset                       | GitHub's newer mechanism for branch protection — a named set of rules (status checks, PR requirements, force-push restrictions, and more) applied to one or more branches.                                         |
| Required status check         | A named CI check that must report success before a pull request can be merged, enforced by a ruleset or classic branch protection rule.                                                                            |
| <code>mergeStateStatus</code> | A field on a pull request, readable via the GitHub API, that reports <i>why</i> a PR can or cannot currently be merged — distinct from <code>mergeable</code> , which only reports the absence of a text conflict. |

## 7. Troubleshooting / FAQ

**A passing run takes much longer here than in the two smaller demo repos.** That's expected. The full suite builds and tests all seven modules, including two that start real database containers via Testcontainers. Roughly two minutes is normal for a happy-path run on this repository.

**A failing run at the `domain` or `application` module finishes fast, but a failing run at a later module doesn't.** That's the Maven reactor's fail-fast behavior interacting with module order: everything before the failing module still has to build and pass first. A bug caught by `domain` tests is nearly free; a bug only caught by, say, the persistence adapter tests costs everything before it in the reactor too.

**The check is green, but the Merge button is still disabled.** The required status check is configured as *strict*: the branch must also be up to date with the latest `main`. Use the **Update branch** button on the PR, wait for the check to re-run, and the Merge button becomes available.

**A direct push to `main` is rejected.** That's the ruleset's `pull_request` rule working as intended — as of this configuration, every change to `main` must arrive through a pull request, with no exception for administrators. Create a branch and open a pull request instead.

**Where do I see the ruleset itself?** `Settings → Rules → Rulesets` on the repository, or via `gh api repos/<owner>/HexaStock/rulesets`.

## 8. Possible future improvement: a two-job staged pipeline

Section 2 shows that the Maven reactor already behaves like a staged pipeline in practice: a `domain`-level bug fails in under a minute, before the slower modules ever run, simply because of module build order. That behavior is real, but implicit — it falls out of how Maven happens to order the reactor, not from an explicit pipeline design.

The next step in maturity would be to make that split explicit in `.github/workflows/build.yml`: a fast job running only `./mvnw -pl domain,application clean test`, and a second job — declared with `needs:` on the first — running the full `clean verify` across all modules. Every push would get feedback from the fast job within seconds; the slower, infrastructure-heavy job would only start once the fast one had already passed.

This is intentionally left as a future improvement rather than done here. Splitting the job would change the required check's name, which this document and [CI\\_DEMO\\_SCRIPT.md](#) currently cite precisely (`build-and-test`, with real log excerpts and timings) — a change worth making deliberately, with its own round of verification, not folded into a documentation update.



## 9. Related documents

---

- [CI\\_DEMO\\_SCRIPT.md](#) — condensed run sheet for this same walkthrough.
- [CI\\_SETUP.md](#) — the original one-time setup instructions for this pipeline (SonarCloud configuration, secrets, and the branch protection step this document supersedes with verified evidence that it is in place and working).
- [CONTRIBUTING.md](#) — the architectural principles this project enforces, including the dependency direction that makes the fast-fail behavior in section 2 possible in the first place.
- [ci-demo-python](#) and [ci-demo-java](#) — the same mechanism, isolated to a minimal domain model, for a first introduction to these ideas before seeing them at this project's scale.