hurobo

From phone video of a human hand to a robot policy in simulation



The question: can human video help?

QUESTION

Can human videos improve a small VLA on a new layout and a new object?

Test case: SmolVLA (450M), bowl onto plate in LIBERO, trained only on data from a phone video of a hand. Simulation only.

1. **One 16 GB GPU**
   450M model in bf16, no 3B/7B models.
2. **Phone only**
   ~15 tripod clips. One camera, no depth sensor, no glove.
3. **8 – 16 October 2026**
   Start of the project to the deadline.
4. **No physical robot**
   Success rate in LIBERO is the only metric.

Pipeline: hand video in, robot demos out

REAL WORLD

1 Record

Tripod phone, ChArUco-calibrated. ArUco markers on table, bowl, plate.

2 Extract

Hand TCP (thumb/index midpoint), grasp from pinch, object poses, in the table frame.

3 Twin

Copy real layout and camera into LIBERO. Real vs. sim side-by-side replay.

SIMULATION (LIBERO)

4 Multiply

Split demo into object-relative segments, retarget to many sim poses, keep only successes.

5 Train

Fine-tune SmolVLA from smolvla_base (never saw LIBERO) on generated data only.

6 Evaluate

lerobot-eval, N = 50, success rate with 95% CI against baselines.

Four ways to close the real-to-sim gap

1 Teleoperate in sim

IDEA

Control the Panda by tracked hand or keyboard in the simulator.

GAP LEFT

No visual gap.

CATCH

Jerky, slow, few demos. Real recording unused.

Debug tool only

2 Scan the objects

IDEA

Bowl and plate from a phone orbit: video, COLMAP, Gaussian splat, collision mesh.

GAP LEFT

Objects match; scene stays synthetic.

CATCH

Scan quality, metric alignment.

Stretch

3 Scan the whole scene

IDEA

Splat the table; render sim from the real view; composite robot by depth.

GAP LEFT

Smallest visual gap.

CATCH

Alignment, GPU time. Physics still LIBERO.

Stretch

4 Size-matched objects

IDEA

Use real objects with the LIBERO bowl and plate dimensions; sim assets are scaled to match.

GAP LEFT

Size matches; look does not, but the policy sees no real pixels.

CATCH

Measure objects, print markers.

Core path

Main concept and current state

Core

Motion-only retargeting

Video as motion capture: a few object-relative numbers cross to the sim.
Now: built, tested on stand-in paths. One real clip extracted; its replay timed out.

Main visual

SceneTwin: real layout in sim

Real clip beside the sim replay from the same viewpoint.
Now: built. No successful real-clip replay yet, so no side-by-side.

Stretch

Gaussian-splat objects and scene

Shows visual fidelity, not a trained result.

Now: bowl, plate and scene scanned; bowl and plate shown in LIBERO.

WHO CONTRIBUTES WHAT


Human video

Approach direction, grasp timing, lift height, carry path, place offset, release timing.

Simulator

Exact object poses, geometry and appearance. Fixed top-down gripper orientation, yaw from the object.

The human demo: hand and markers

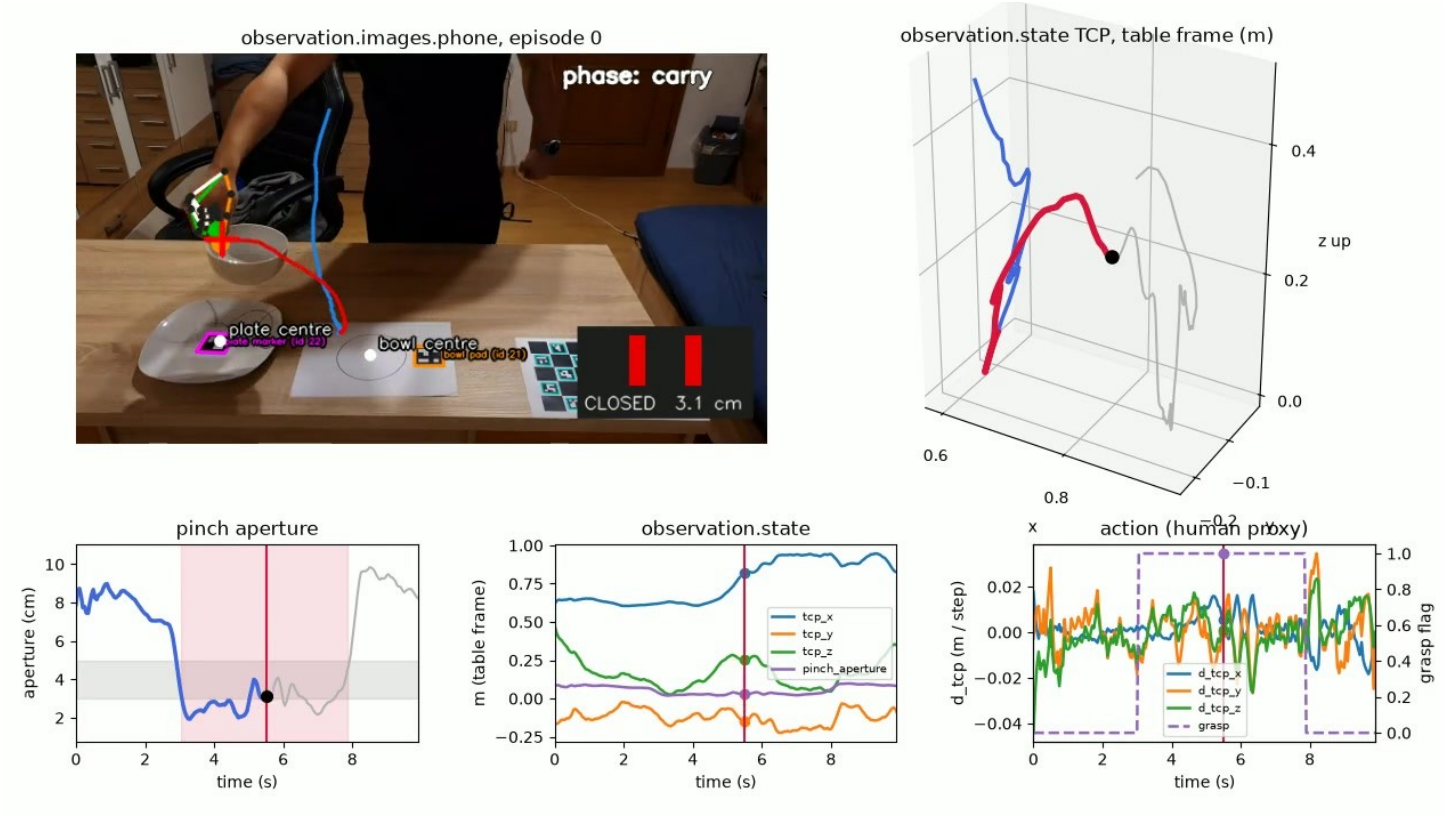

Markers

ArUco on the plate (id 22) and the bowl pad (id 21); the ChArUco board is the table frame.

Hand

MediaPipe skeleton. The TCP is the midpoint of thumb and index tip, in metres in the table frame.

Gripper


Pinch aperture with hysteresis gives open or closed (here: closed).

Episode

199 samples at 20 Hz over 9.9 s, stored as a LeRobot episode.

Real clip test_03, cut to one grasp cycle. The 15 to 20 clip session is still to be recorded.

Pretrained SmolVLA: layout and size matter

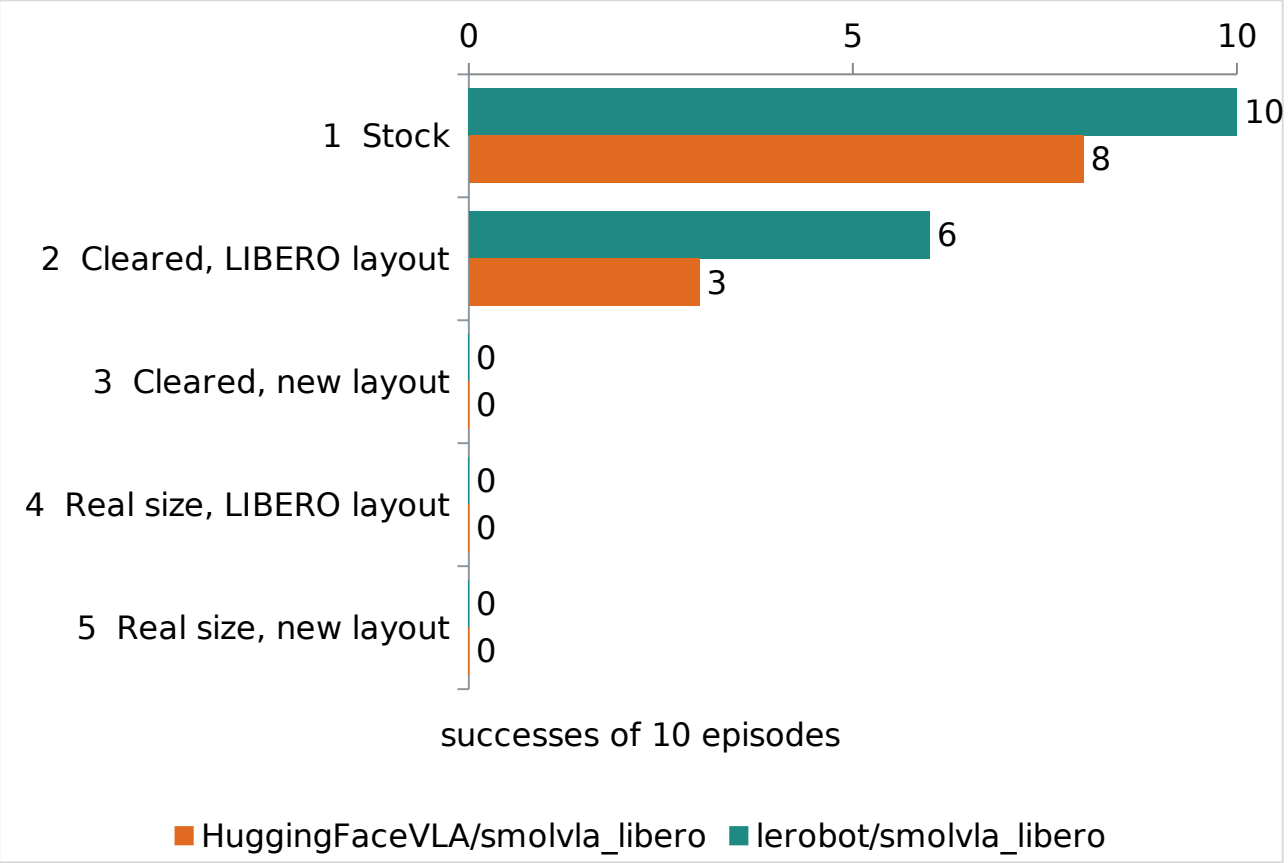

1 Stock

LIBERO's own scene and start positions.

2 Cleared, LIBERO layout

Other objects removed; bowl and plate start where LIBERO puts them.

3 Cleared, new layout

Other objects removed; bowl and plate at random positions.

4 Real size, LIBERO layout

Bowl and plate at measured real sizes (plate 1.86x wider), LIBERO's placement.

5 Real size, new layout

Real sizes at random positions: the target scene of our experiment.

A new layout alone takes the better checkpoint from 6/10 to 0/10; real-size objects give 0 even on LIBERO's layout. Pretrained weights, 10 episodes per cell: 0/10 means 0 to 28% at 95%.


Future work: photoreal real2sim




Whole scene scan: table, background, bowl, plate. Four held-out views, photo left, splat right



Whole scene in 3D (rendered splat)

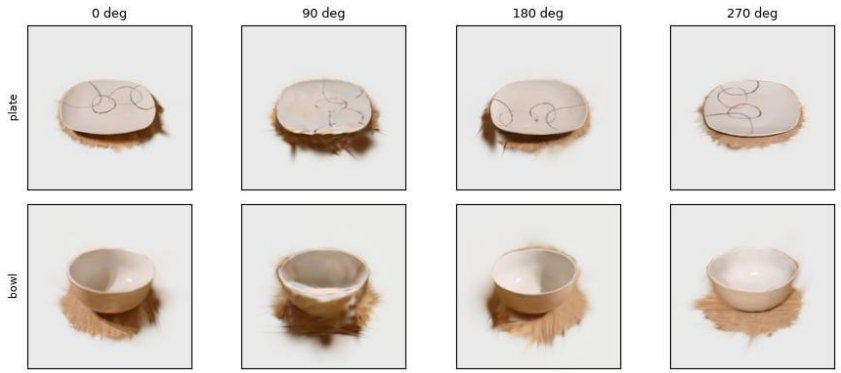

Bowl and plate splats cut out of the scan, four angles.

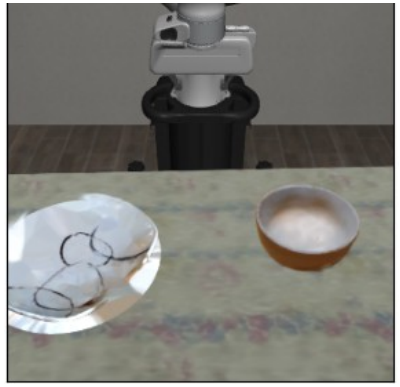

Scanned bowl and plate inside LIBERO. The table cloth is still LIBERO's.

NEXT

Place the whole-scene splat in LIBERO

Collision meshes for bowl and plate

Composite the mesh robot by depth

Show as visual fidelity, not a trained result

Limitations and status

Limitations

Simulation only, no real robot

Hand vs. gripper, real vs. rendered pixels

One camera, markers required

Fixed top-down grasp, one task family

Built, on stand-in data

Perception, SceneTwin, retargeting

Dataset generator and LeRobot export

Scan to splat pipeline (real scene)

Still open

Record the 15 to 20 real clips

Real vs. sim side-by-side

Train SmolVLA on our data

Evaluation N = 50

Every number in this deck comes from a run in the repo. Failed runs are included.