
Three layers, one framework:
`deftest` · `deftestfixture` · `define-relation`

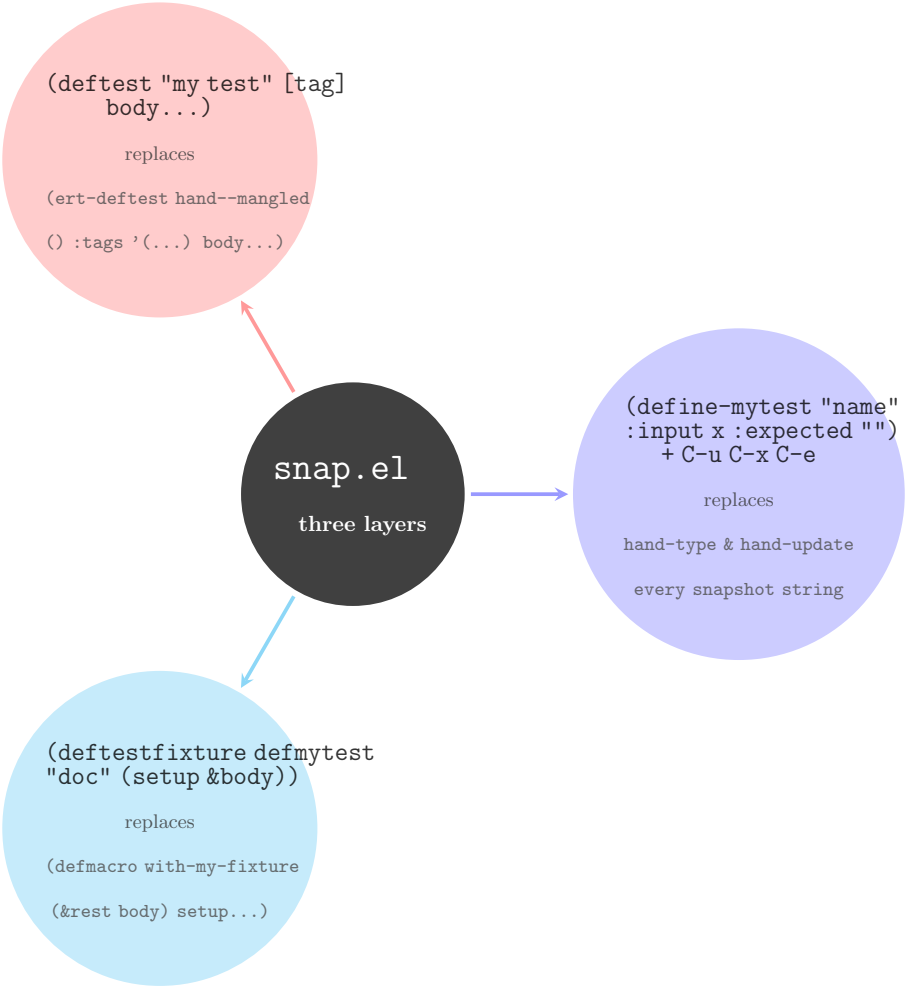

```
(define-double-test "small" :input 3 :expected "")
```

after one `C-u C-x C-e`:

```
(define-double-test "small" :input 3 :expected 6)
```

snap rewrites the output key in the source buffer, then re-runs the test.