
```
"Two CSS properties walk into a bar.
A barstool in a completely different bar falls over.

Thomas Fuchs @thomasfuchs
```


```
.ninja {
   color: black;
   visibility: hidden;
   animation-duration: 0.00001s;
}
```

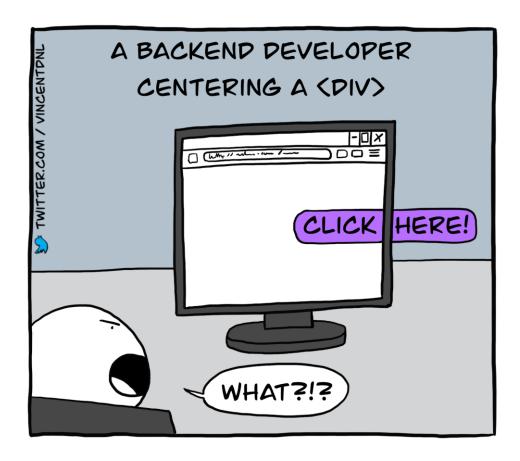

Module 3-3

CSS Grid and Responsive Design


- Learn about Grid container
- Define named grid template areas
- Assign page elements to grid template areas for page layout
- Describe what responsive design is and what mobile first is
- Use media queries to define different dimensions for grid containers
- Use browser developer tools to help developing grid layouts

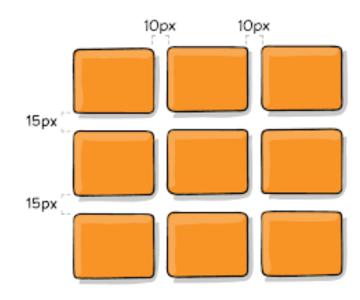

CSS Variables

```
:root {
    --main-bg-color: blue;
}
div p {
    color: var(--main-bg-color);
}
```

```
11.123
```

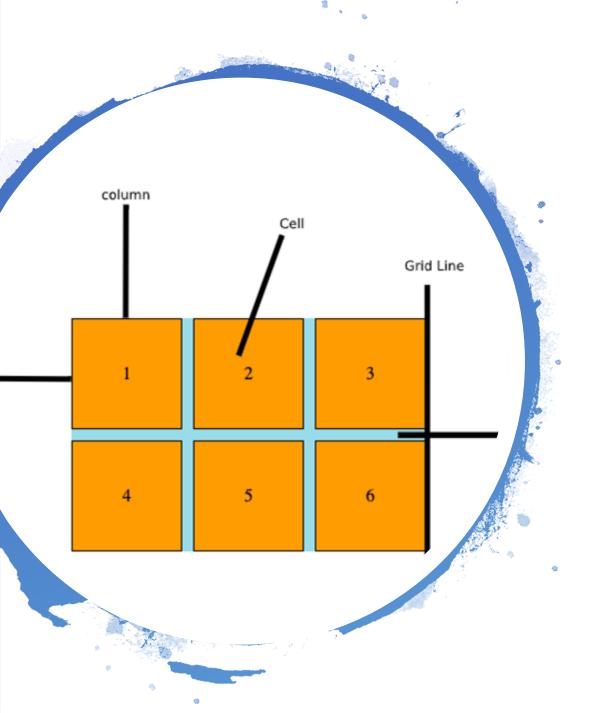

CSS Grid: Introduction

- Grid allows us to write better layouts using in-browser capability of grids.
- Before grid, we had to either use something like Bootstrap or create a custom grid system.
- By defining a grid, we create a twodimensional layout composed of columns and rows allowing us to better organize our web page's contents.

CSS Grids: Defining

To define a grid we must specify a display attribute with a value of grid:

```
.myGrid {

display: grid;
}
```

In this example, the CSS code will specify using a selector by class, that an html element with a class name of myGrid be defined as a grid. All of the direct children of the container will become grid items.

CSS Grids: Columns and grid-gap

grid-template-columns: This property defines the number of columns (and their respective width).

grid-gap: Creates a gutter, setting a width of space between the columns and rows. (note – not around outside of container)

```
body {
  display: grid;
  grid-template-columns: 1fr 2fr 2fr 2fr 1fr;
  gap: 40px;
}
```

fr stands for fractional unit. The 1st column will occupy 10% of the width, the second 20%, etc.

Adds a buffer between the cells of the grid.

CSS Grids: Template Areas

grid-template-areas: Matches each area of the grid to a specific HTML element. By virtue of how this works, it also defines the number of rows.

```
body {
  display: grid;
  grid-template-columns: 1fr 2fr 2fr 2fr 1fr;
  gap: 20px;
  grid-template-areas:
    ". header header nav nav ."
    ". main main main ."
    ". fall-festival fall-festival store store .";
}
```

The period represents an empty space in the final grid layout.

CSS Grids: Template Areas

grid-areas: Allows you to name each element specifically to be able to access it, or allows to give a name for each element to be displayed in the grid.

```
header
   grid-area: header;
nav#menu-nav {
   grid-area: menu-nav;
   grid-area: main;
                                                                                                   grid-template-area
   grid-area: upcoming-events;
                                                                                                   property matches up to
                                                                                                   the grid-area property
   grid-area: footer;
.container {
   display: grid;
   grid-template-columns: 200px 1fr 200px:
   grid-template-areas:
       'header header header
       "menu-nav main upcoming-events"
       "footer footer footer
   height: 100vh;
   gap: 10px;
```

CSS Grids: Template Rows

grid-template-rows: Specifically allow you to specify how many rows.

```
body {
    display: grid;
    grid-template-columns: 1fr 1fr 1fr;
    grid-template-rows: 100px 1fr 100px;
    grid-template-areas:
        "header header nav nav "
        "main main main"
        "fall-festival fall-festival store store";
}
```

First and third row have a set height of 100px.
Second row will take up the rest of the available space.

CSS Units: viewport vs. pixels vs. fractional units

- Pixels are fixed length units. 100px is the same size no matter how big the display (viewport)
- vh (viewport height) and vw (viewport width) can be used to set the height and/or width the container (1vh is 1% of viewport height)
- fr (fractional units) typically used to specify how much of the container each grid item is allotted

```
body {
  margin: 0;
  padding: 0;
}

.container {
  height: 100vh;
  display: grid;
  grid-template-columns: 1fr 1fr 1fr 1fr;
  grid-template-rows: 1fr 1fr 1fr;
  grid-gap: 20px;
}
```

CSS Grids: Align-items

Aligns grid items along the block (column) axis. Used at the container level.

```
body {
  display: grid;
  grid-template-columns: 1fr 2fr 2fr 2fr 2fr 1fr;
  grid-template-rows: 100px 1fr 100px;
  align-items: start;
}
```

Start – flush with start edge of cell End – flush with end edge of cell Center – centers in cell Stretch – fills whole height of cell (default)

CSS Grids: Justify-items

Aligns grid items along the inline (row) axis. Used at the container level.

```
body {
  display: grid;
  grid-template-columns: 1fr 2fr


2fr 2fr 2fr 1fr;
  grid-template rows: 100px 1fr

100px;
  justify-items: start;
}
```

Start – flush with start edge of cell End – flush with end edge of cell Center – centers in cell Stretch – fills whole width of cell (default)

Let's do some coding!

RESPONSIVE DESIGN

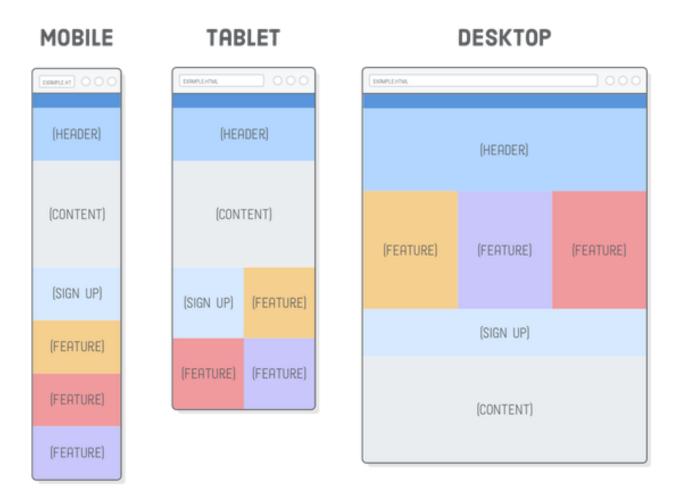

RWD: Setting the viewport

Add meta tag to all web pages:

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

 This sets viewport of the page, giving browser instructions on how to control dimension and scaling

RWD: creating responsive images

Allowing images to scale to fit any browser size.

```
<img src="img_girl.jpg" style="width:100%;">
```

 Above will allow image to be scaled larger than original size. Can set max-width instead – image will scale down but never larger than original size

```
<img src="img_girl.jpg" style="max-width:100%; height:auto;">
```

RWD: creating responsive text

Allowing text to scale to fit any browser size.

<h1 style="font-size:10vw">Hello World</h1>


 Depending on size of viewport, text will grow or shrink to scale.



Resize the browser window to see how the text size scales.



RESPONSIVE DESIGN

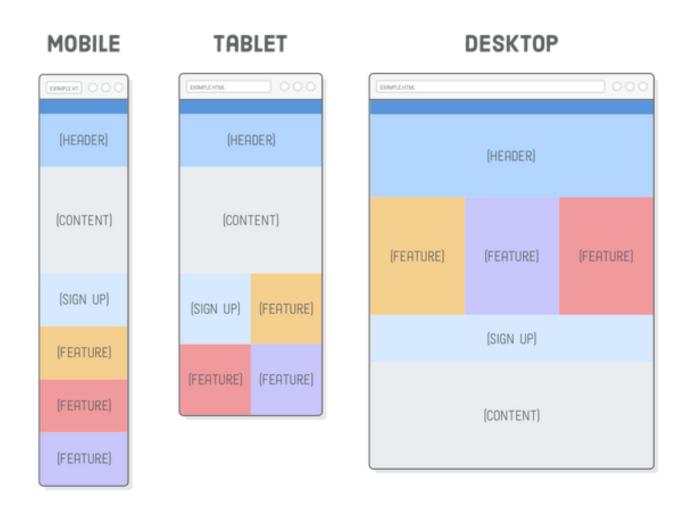


MEDIA QUERIES

```
@media only screen and (max-width: 600px) {
   body {
    background-color: lightblue;
   }
}
```

For screens up to the maximum width of 600px, the background color will be lightblue.


Let's do some coding!

• Learn about Grid container

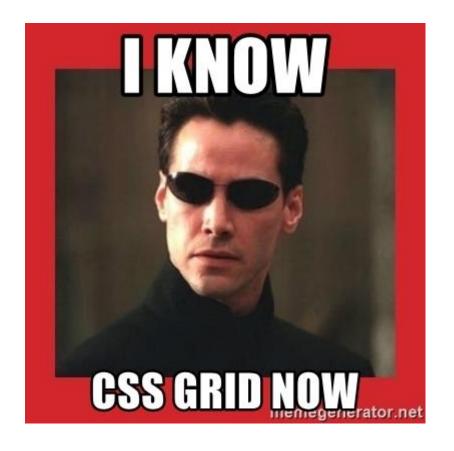


- Learn about Grid container
- Define named grid template areas



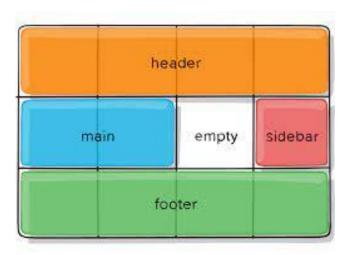

- Learn about Grid container
- Define named grid template areas
- Assign page elements to grid template areas for page layout



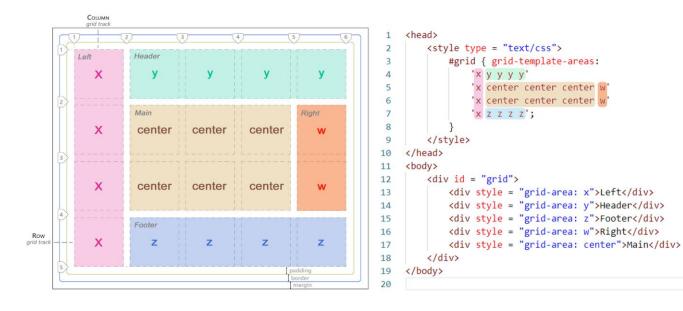

- Learn about Grid container
- Define named grid template areas
- Assign page elements to grid template areas for page layout
- Describe what responsive design is and what mobile first is





- Learn about Grid container
- Define named grid template areas
- Assign page elements to grid template areas for page layout
- Describe what responsive design is and what mobile first is
- User media queries to define different dimensions for grid containers

```
/* normal style */
#header-image {
    background-repeat: no-repeat;
    background-image:url('image.gif');
}

/* show a larger image when you're on a big screen */
@media screen and (min-width: 1200px) {
    #header-image {
        | background-image:url('large-image.gif');
        | }
}

/* remove header image when printing. */
@media print {
        | #header-image {
        | display: none;
        | }
}
```



- Learn about Grid container
- Define named grid template areas
- Assign page elements to grid template areas for page layout
- Describe what responsive design is and what mobile first is
- User media queries to define different dimensions for grid containers
- Use browser developer tools to help developing grid layouts

