Fixed-load and stress benchmark results

Completed 8 October 2026 | AWS, 2-vCPU backend | Nine runtime/framework configurations

Scope: 18 latest fixed-load trials at 100 and 1,000 users; 113 physical stress probes; 18 completed p95/p99 objectives. One disk-interrupted stress probe is invalid and excluded from performance summaries. The historical section separately inventories 334 earlier records, including 500-user trials and the Python version matrix.

Configuration	p99 pass	p99 fail	p95 pass	p95 fail	Search method	Physical probes
Python 3.14 / FastAPI	2,226	2,263	2,300	2,337	binary	14
Java / Spring Boot	2,094	2,126	2,094	2,126	binary	15
PHP / Laravel FPM	262	300	300	337	binary	13
Go / net-http	2,995	3,020	2,995	3,020	binary	13
Rust / Axum	3,296	3,311	3,296	3,311	hybrid	15
Node / Express	2,453	2,472	2,453	2,472	hybrid	12
Bun / Express	2,630	2,654	2,630	2,654	hybrid	15
C# / ASP.NET Core	1,166	1,216	1,166	1,216	upper_probe	7
PHP / Laravel Octane	1,632	1,668	1,632	1,668	upper_probe	9

How to read the bounds: the reported limit is the highest measured passing count, not an exact universal maximum. Each objective also requires operation success and distinct-account authentication coverage of at least 90%. All final brackets are at most 50 users wide. Most limits are authentication/ramp constrained; matching p95 and p99 bounds do not imply identical latency distributions.

All current trials: fixture cleanup is verified and the queue is completed. Binary, hybrid and upper-probe strategies affect which counts were tried; this campaign is not a controlled comparison of search algorithms. Tables below summarize sustained hold windows, never an average diluted by drain or cleanup time. The Python stack includes a beta Pydantic dependency, detailed in the evidence section.

Executive comparison: 100 users

LATEST campaign | 180-second ramp + 240-second sustained hold | Whole-VM CPU and RAM are primary

Config	Result	Op %	Auth %	Mean ms	p95 ms	p99 ms	Good ops/s	VM CPU mean %	VM CPU peak %	VM RAM mean GiB	VM RAM peak GiB
Python	pass	100.0	100.0	7.62	43.00	45.00	16.30	15.9	21.8	0.687	0.707
Java	pass	100.0	100.0	4.01	7.00	8.00	16.33	15.6	28.9	1.223	1.230
FPM	pass	100.0	100.0	61.65	140.00	197.17	16.18	42.6	67.2	0.655	0.672
Go	pass	100.0	100.0	3.37	7.00	8.00	16.37	14.1	18.4	0.658	0.728
Rust	pass	100.0	100.0	3.93	8.00	9.00	16.44	14.0	19.3	0.565	0.587
Node	pass	100.0	100.0	5.22	10.00	12.00	16.38	15.1	27.3	0.660	0.680
Bun	pass	100.0	100.0	4.94	10.00	11.00	16.38	14.9	21.7	0.630	0.673
.NET	pass	100.0	100.0	4.19	8.00	9.00	16.35	14.6	26.7	0.808	0.816
Octane	pass	100.0	100.0	6.35	11.00	12.00	16.30	16.3	25.9	1.391	1.406

CPU is normalized across both backend vCPUs. VM RAM means MemTotal minus MemAvailable, not process RSS; observed Linux memory total is about 3.47 GiB. Authentication is cumulative distinct accounts by the end of the hold, not only logins performed during the hold. Good ops/s counts successful logical operations. A failed fixed-load trial remains valid comparison data.

Config	p50 ms	p99.9 ms	All ops/s	Peak good/s 1s	Peak good/s 10s	RAM p99 GiB	RAM p99.9 GiB	RDS CPU mean %	RDS CPU peak %	RDS freeable min GiB
Python	5.00	47.00	16.30	30	18.3	0.704	0.707	2.0	2.2	10.269
Java	3.00	11.00	16.33	27	18.1	1.230	1.230	2.0	2.0	10.269
FPM	48.00	326.23	16.18	27	18.3	0.661	0.672	5.0	5.2	10.273
Go	3.00	9.00	16.37	29	17.9	0.728	0.728	1.9	2.1	10.263
Rust	3.00	10.00	16.44	28	18.7	0.585	0.587	1.8	1.9	10.263
Node	4.00	14.00	16.38	29	18.3	0.678	0.680	2.2	2.4	10.258
Bun	4.00	13.07	16.38	27	18.2	0.656	0.673	2.2	2.3	10.256
.NET	3.00	12.44	16.35	31	18.6	0.816	0.816	2.1	2.2	10.254
Octane	6.00	14.09	16.30	31	18.3	1.404	1.406	2.3	2.6	10.210

Executive comparison: 1,000 users

LATEST campaign | 180-second ramp + 240-second sustained hold | Whole-VM CPU and RAM are primary

Config	Result	Op %	Auth %	Mean ms	p95 ms	p99 ms	Good ops/s	VM CPU mean %	VM CPU peak %	VM RAM mean GiB	VM RAM peak GiB
Python	pass	100.0	100.0	7.20	43.00	45.00	163.68	27.7	57.9	0.712	0.810
Java	pass	100.0	100.0	3.07	7.00	8.00	163.84	17.6	50.3	1.589	1.609
FPM	fail	0.0	15.7	5,000.68	5,001.00	5,002.00	0.00	100.0	100.0	0.833	0.891
Go	pass	100.0	100.0	2.96	7.00	8.00	163.68	16.9	45.7	0.632	0.807
Rust	pass	100.0	100.0	3.23	7.00	8.00	163.88	16.4	38.2	0.600	0.692
Node	pass	100.0	100.0	4.40	10.00	11.00	163.87	22.2	52.9	0.788	0.886
Bun	pass	100.0	100.0	4.03	9.00	11.00	163.80	19.3	48.4	0.656	0.702
.NET	fail	8.8	4.9	4,565.09	5,001.00	5,002.00	7.93	99.8	100.0	1.004	1.138
Octane	pass	100.0	100.0	7.02	12.00	15.00	163.77	36.4	64.5	1.425	1.485

CPU is normalized across both backend vCPUs. VM RAM means MemTotal minus MemAvailable, not process RSS; observed Linux memory total is about 3.47 GiB. Authentication is cumulative distinct accounts by the end of the hold, not only logins performed during the hold. Good ops/s counts successful logical operations. A failed fixed-load trial remains valid comparison data.

Config	p50 ms	p99.9 ms	All ops/s	Peak good/s 1s	Peak good/s 10s	RAM p99 GiB	RAM p99.9 GiB	RDS CPU mean %	RDS CPU peak %	RDS freeable min GiB
Python	4.00	49.00	163.68	198	169.4	0.777	0.810	7.8	7.9	10.238
Java	2.00	9.00	163.84	203	168.9	1.606	1.609	7.2	7.3	10.222
FPM	5,001.00	5,002.00	86.99	0	0.0	0.890	0.891	3.4	4.0	10.268
Go	2.00	9.00	163.68	194	169.6	0.801	0.807	6.9	7.0	10.251
Rust	3.00	9.00	163.88	208	170.4	0.669	0.692	7.5	7.6	10.244
Node	3.00	14.00	163.87	198	168.7	0.870	0.886	10.0	10.4	10.243
Bun	3.00	13.00	163.80	193	169.2	0.699	0.702	9.9	10.1	10.242
.NET	5,001.00	5,002.00	90.53	26	9.6	1.106	1.138	2.6	3.2	10.208
Octane	6.00	20.00	163.77	205	170.3	1.475	1.485	10.1	10.4	10.210

Historical comparison: 500 users


HISTORICAL ONLY | Nine earlier fixed-load observations | No 500-user rerun in the latest campaign

Config	Result	Op %	Auth %	Mean ms	p95 ms	p99 ms	Good ops/s	VM CPU mean %	VM CPU peak %	VM RAM mean GiB	VM RAM peak GiB
Python	pass	100.0	100.0	6.45	43.00	44.00	81.72	12.6	28.9	0.797	0.843
Java	pass	100.0	100.0	2.90	6.00	7.00	81.55	5.8	32.4	1.339	1.356
FPM	fail	0.0	42.2	5,000.66	5,001.00	5,002.00	0.00	100.0	100.0	0.879	0.925
Go	pass	100.0	100.0	2.53	5.00	5.00	81.60	4.8	8.7	0.792	0.930
Rust	pass	100.0	100.0	2.91	5.00	7.00	81.71	4.8	16.7	0.686	0.699
Node	pass	100.0	100.0	4.00	8.00	10.00	81.60	7.5	11.9	0.875	0.906
Bun	pass	100.0	100.0	3.71	8.00	9.00	81.67	6.7	14.9	0.762	0.775
.NET	pass	100.0	100.0	3.62	8.00	9.00	81.70	7.5	17.6	0.901	0.913
Octane	pass	100.0	100.0	6.18	10.00	12.00	81.66	15.3	21.9	1.546	1.563

Earlier fixed-load timing was also 180/0/240 seconds, but historical monitoring used a different sampling cadence and saved sampled means. Latest means are duration weighted; historical means here are unweighted sample means. Earlier Docker memory is cache-adjusted working set, while the new engine records raw cgroup usage. These are reference observations, not interchangeable with the latest data.

Latest fixed-load comparisons

Sustained hold only | 100 vs 1,000 target users | Failed configurations remain visible

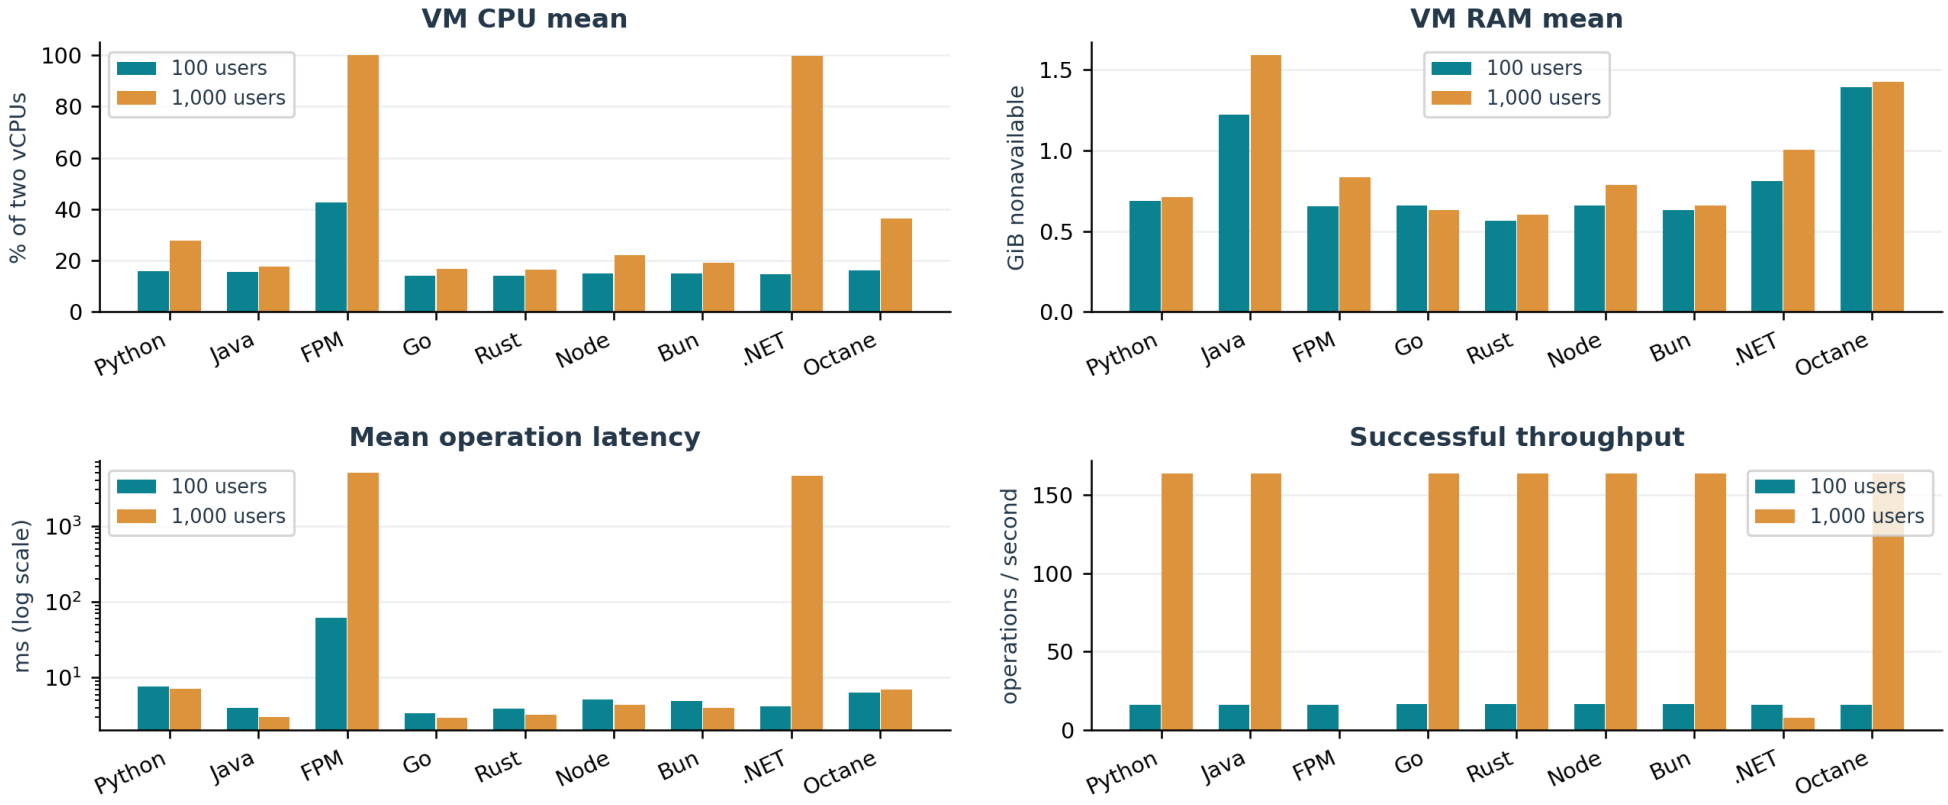

Low sustained latency does not guarantee a passing trial: the separate authenticated-account target can fail during the login ramp. Higher successful throughput may reflect more admitted users; nominal targets alone do not establish equivalent authenticated populations.

What the experiment measures

Workload, resource budget and acceptance criteria

Component	Configuration / meaning
Backend VM	AWS c7i.large; two vCPUs; Linux MemTotal about 3,553.5 MiB; one tested API at a time.
API container	Two-CPU quota; 3 GiB memory cap; no swap; 250,000 process file limits; shared total database pool budget 20.
Load generator	AWS c7i.8xlarge; 32 vCPUs; approximately 64 GiB RAM; four source IPs; independent of the desktop.
Controller	Dedicated c7i.2xlarge monitor; 8 vCPUs / approximately 16 GiB RAM. Storage expanded from 100 to 300 GiB after exhaustion.
Database	RDS PostgreSQL 17.6, db.m7i.xlarge; four vCPUs, nominal 16 GiB RAM, 100 GiB gp3; TLS verify-full.
Fixture	50,000 accounts and 500,000 posts, with follow relationships; guarded fingerprinted restoration before and after trials.
User activity	Distinct real logins; following feed, random post selection, 3-10s waits, like/unlike, optional 20% comment-read, reply; optional 10% new post.
Fixed load	100 and 1,000 users: ramp180s, hold240s, no separate settle. Each configuration/population measured once.
Stress search	Ramp300s, hold120s, no separate settle; request deadline5s; independent p95 and p99 objective evaluation.
Passing rule	Hold operation success >=90%; cumulative distinct-account authentication >=90%; selected hold latency percentile <=5000ms.
Decision policy	First passing observation accepted; failures repeated; a split triggers a third valid vote. Invalid infrastructure evidence is not a vote.
Scope	Capacity for this startup-and-activity workload, fixture, deadlines and hardware; not a language-wide speed ranking.

Metric definitions and interpretation

Use these definitions when comparing summaries or inspecting detailed pages

Metric	Definition / limitation
Operation success	Successful logical operation attempts divided by all operation attempts completed inside the selected half-open phase window. Includes login attempts and retries.
Authentication coverage	Distinct accounts authenticated cumulatively through the end of the selected phase divided by the user target. Not login request success; not restricted to phase-only login events.
Latency	All recorded operation durations, including failed requests. Mean and interpolated p50/p95/p99/p99.9. Five-second timeouts censor slow completion times; their eventual latency is unknown.
Throughput	Attempted and successful completions divided by full configured hold duration. 1s peaks use aligned zero-inclusive completion buckets; 10s peaks use full rolling bucket windows.
VM CPU	1 - delta(idle+iowait)/delta(all CPU ticks), across both VM vCPUs. Main summary averages use interval overlap duration weighting.
Container CPU	Docker CPU nanosecond delta / elapsed seconds / configured two-CPU quota. Snapshot timing can yield isolated values slightly above100%; whole-VM values are primary.
VM RAM	MemTotal - MemAvailable; includes nonavailable OS memory. It is neither application RSS nor total-minus-free.
Container RAM	Raw Docker cgroup memory usage, including cache. Not the cache-adjusted working set in earlier reports.
Resource tails	Duration-weighted inverse-CDF of sampled intervals. p99/p99.9 are descriptive; roughly120/240hold samples do not robustly resolve a 0.1% temporal tail.
RDS RAM	CloudWatch FreeableMemory: available database-instance memory, not database RSS. No database memory_used estimate is invented.
Coverage	Covered interval seconds divided by phase duration. RDS averages/maxima are minute-scale data with partial boundary overlap, not one-second precision.
Monitoring effect	Per-second SSH sampling creates extra backend work. VM-minus-container CPU includes OS/network/monitoring work; it is not a measured causal attribution to SSH alone.

Evidence quality and operational events

Keep valid backend overload separate from interrupted or constrained evidence

Latest campaign: 131 physical trials, 130 valid and one invalid. The monitor filled its 100-GiB filesystem during Bun's 2,654-user probe; measurement/final cleanup could not be verified. After storage expansion, owned resources were removed and the fixture restored. The interrupted attempt was preserved and excluded; fresh probes decided the boundary. No backend memory or CPU budget was increased.

Current Python dependency: the measured Python3.14.8 / FastAPI0.142.2 image uses Pydantic2.14.0b2, a beta dependency. It is the retained pinned modern stack, not an all-stable-dependency comparison. The historical matrix also flags prerelease runtimes and dependencies.

Decision variability: repeated counts can disagree. Octane had fail/pass/pass at1,632 and fail/pass/fail at1,668 for p95. The majority policy retains those individual outcomes; it does not claim every repeat passes at the lower bound. p99 may reclassify the same raw trial differently.

Authentication matters: successful near-boundary trials often have a CPU-heavy login ramp followed by relatively inexpensive sustained feed activity. Failed trials can keep retrying password verification into the hold. These searches therefore measure login-ramp survival together with sustained activity, not only already-logged-in throughput.

Historical qualification: the legacy12-minute queue had retrospective open-file-exhaustion flags in seven Python and five Rust trials, unstable boundaries, and Python prerelease configurations. Those recorded bounds are retained as nonauthoritative historical evidence. The later90% seven-minute brackets also lack the explicit new p95/p99 cutoff and are not equivalent endpoints.

Limits of conclusions: fixed points have one observation per population; target counts are not randomly interleaved across languages. No confidence interval or statistical winner is inferred. Search-algorithm counts are not a same-language A/B comparison. Raw image hashes and per-trial source hashes are retained in the attached CSV and sanitized JSON export.

Python 3.14 / FastAPI: fixed-load metrics

Runtime 3.14.8 | framework 0.142.2 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.30	30	18.3	7.62	5.00	43.00	45.00	47.00	121.00
1000	pass	100.0	100.0	163.68	198	169.4	7.20	4.00	43.00	45.00	49.00	133.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	15.9	21.8	17.6	21.8	0.687	0.707	0.704	0.707	100.0	241
100	Docker	1.7	7.5	2.5	7.5	0.134	0.134	0.134	0.134	100.0	241
100	Generator	1.6	1.9	1.9	1.9	1.378	1.420	1.415	1.420	100.0	241
100	RDS	2.0	2.2	2.2	2.2	10.274	10.277	10.277	10.277	71.7	3
1000	VM	27.7	57.9	32.4	57.9	0.712	0.810	0.777	0.810	100.0	241
1000	Docker	11.8	41.8	13.8	41.8	0.146	0.146	0.146	0.146	100.0	241
1000	Generator	2.2	4.1	4.0	4.1	1.796	1.865	1.851	1.865	100.0	241
1000	RDS	7.8	7.9	7.9	7.9	10.242	10.245	10.245	10.245	70.7	3

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	18.3	23.0	15.9	21.8	10.269	4.5	5	1d0770d93c51
1000	58.2	71.9	27.7	57.9	10.238	13.8	14	01fc6c951245

Python 3.14 / FastAPI: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

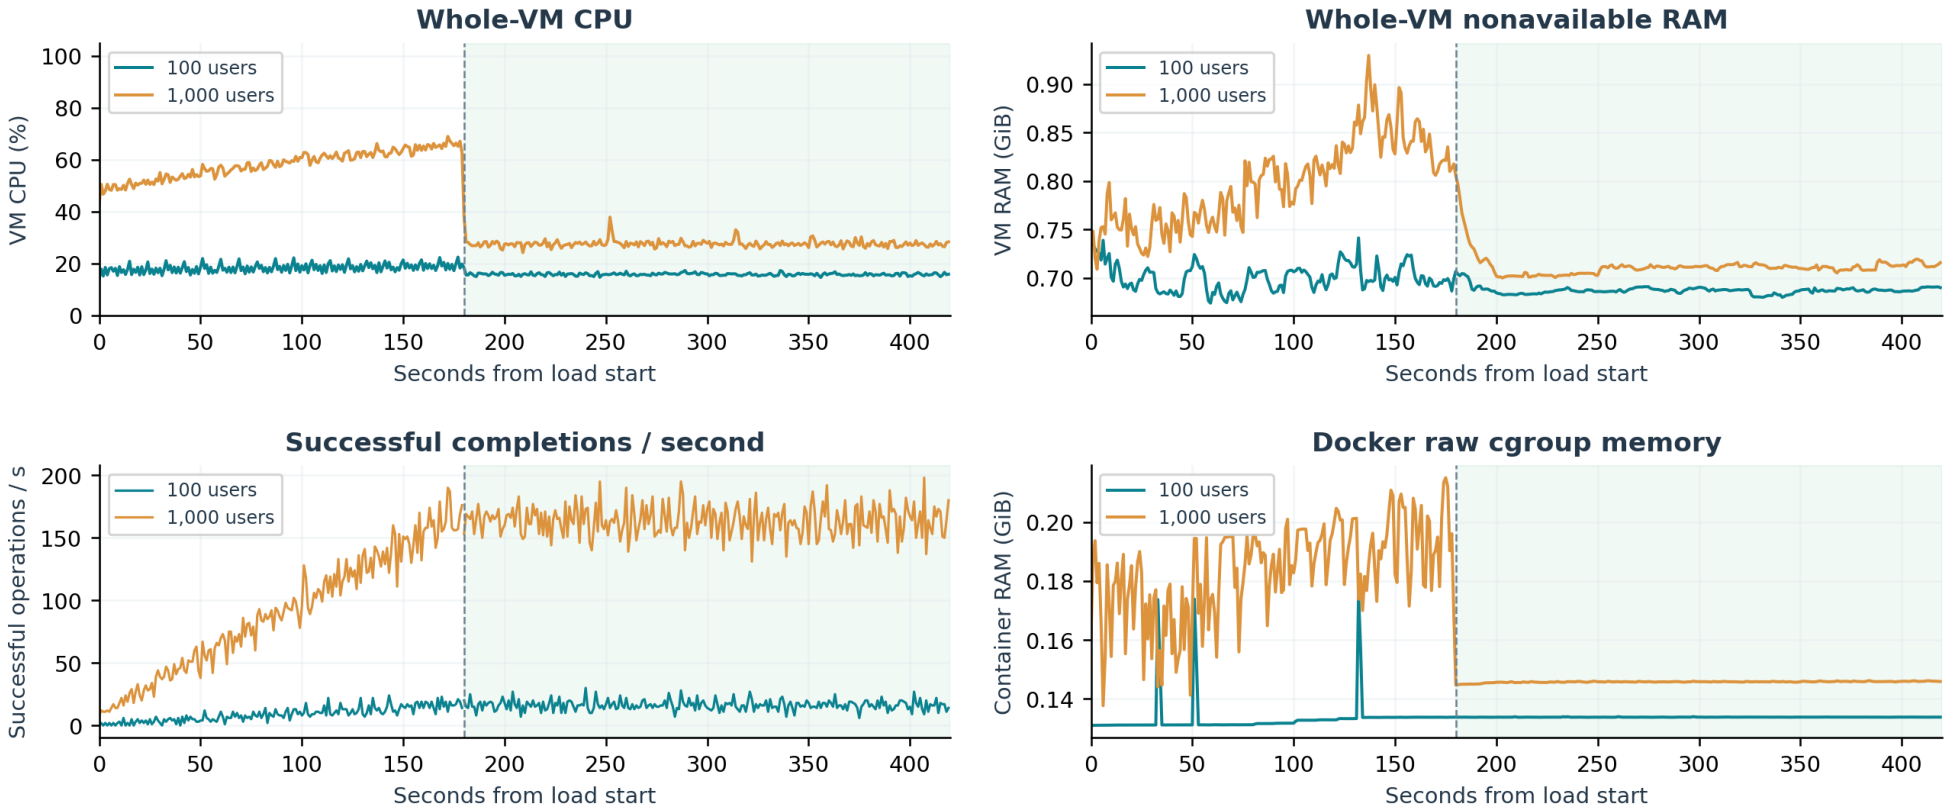

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

Python 3.14 / FastAPI: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	like	870	870	100.0	3.62	4.01	6.00	7.00	8.13	9.00
100	comment	1,195	1,195	100.0	4.98	12.15	45.00	46.00	47.00	47.00
100	login	1	1	100.0	0.00	121.00	121.00	121.00	121.00	121.00
100	feed	1,188	1,188	100.0	4.95	7.67	10.00	12.00	14.63	46.00
100	unlike	323	323	100.0	1.35	3.90	5.00	7.00	7.68	8.00
100	comments	229	229	100.0	0.95	3.69	5.60	7.00	19.81	23.00
100	post	107	107	100.0	0.45	4.54	6.00	6.94	7.00	7.00
1000	comment	11,930	11,930	100.0	49.71	12.09	45.00	47.00	51.00	57.00
1000	comments	2,371	2,371	100.0	9.88	3.01	5.00	8.00	13.00	18.00
1000	feed	11,901	11,901	100.0	49.59	6.97	10.00	12.00	18.10	47.00
1000	like	9,217	9,216	100.0	38.40	3.65	6.00	9.00	17.78	30.00
1000	login	1	1	100.0	0.00	133.00	133.00	133.00	133.00	133.00
1000	post	1,190	1,190	100.0	4.96	4.17	7.00	10.00	12.00	28.00
1000	unlike	2,674	2,674	100.0	11.14	3.62	6.00	9.00	16.00	23.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

Java / Spring Boot: fixed-load metrics

Runtime 27 | framework 4.1.1 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.33	27	18.1	4.01	3.00	7.00	8.00	11.00	146.00
1000	pass	100.0	100.0	163.84	203	168.9	3.07	2.00	7.00	8.00	9.00	149.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	15.6	28.9	24.6	28.9	1.223	1.230	1.230	1.230	100.0	241
100	Docker	1.8	14.5	9.2	14.5	0.668	0.673	0.673	0.673	100.0	241
100	Generator	1.6	2.0	2.0	2.0	1.384	1.436	1.434	1.436	100.0	241
100	RDS	2.0	2.0	2.0	2.0	10.271	10.274	10.274	10.274	61.2	3
1000	VM	17.6	50.3	23.0	50.3	1.589	1.609	1.606	1.609	100.0	241
1000	Docker	3.0	33.6	7.5	33.6	1.035	1.035	1.035	1.035	100.0	241
1000	Generator	2.1	4.1	3.9	4.1	1.802	1.861	1.854	1.861	100.0	241
1000	RDS	7.2	7.3	7.3	7.3	10.224	10.225	10.225	10.225	84.1	4

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	21.1	52.7	15.6	28.9	10.269	3.8	4	64648f264de9
1000	65.0	100.0	17.6	50.3	10.222	20.0	20	eed246fabc85

Java / Spring Boot: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

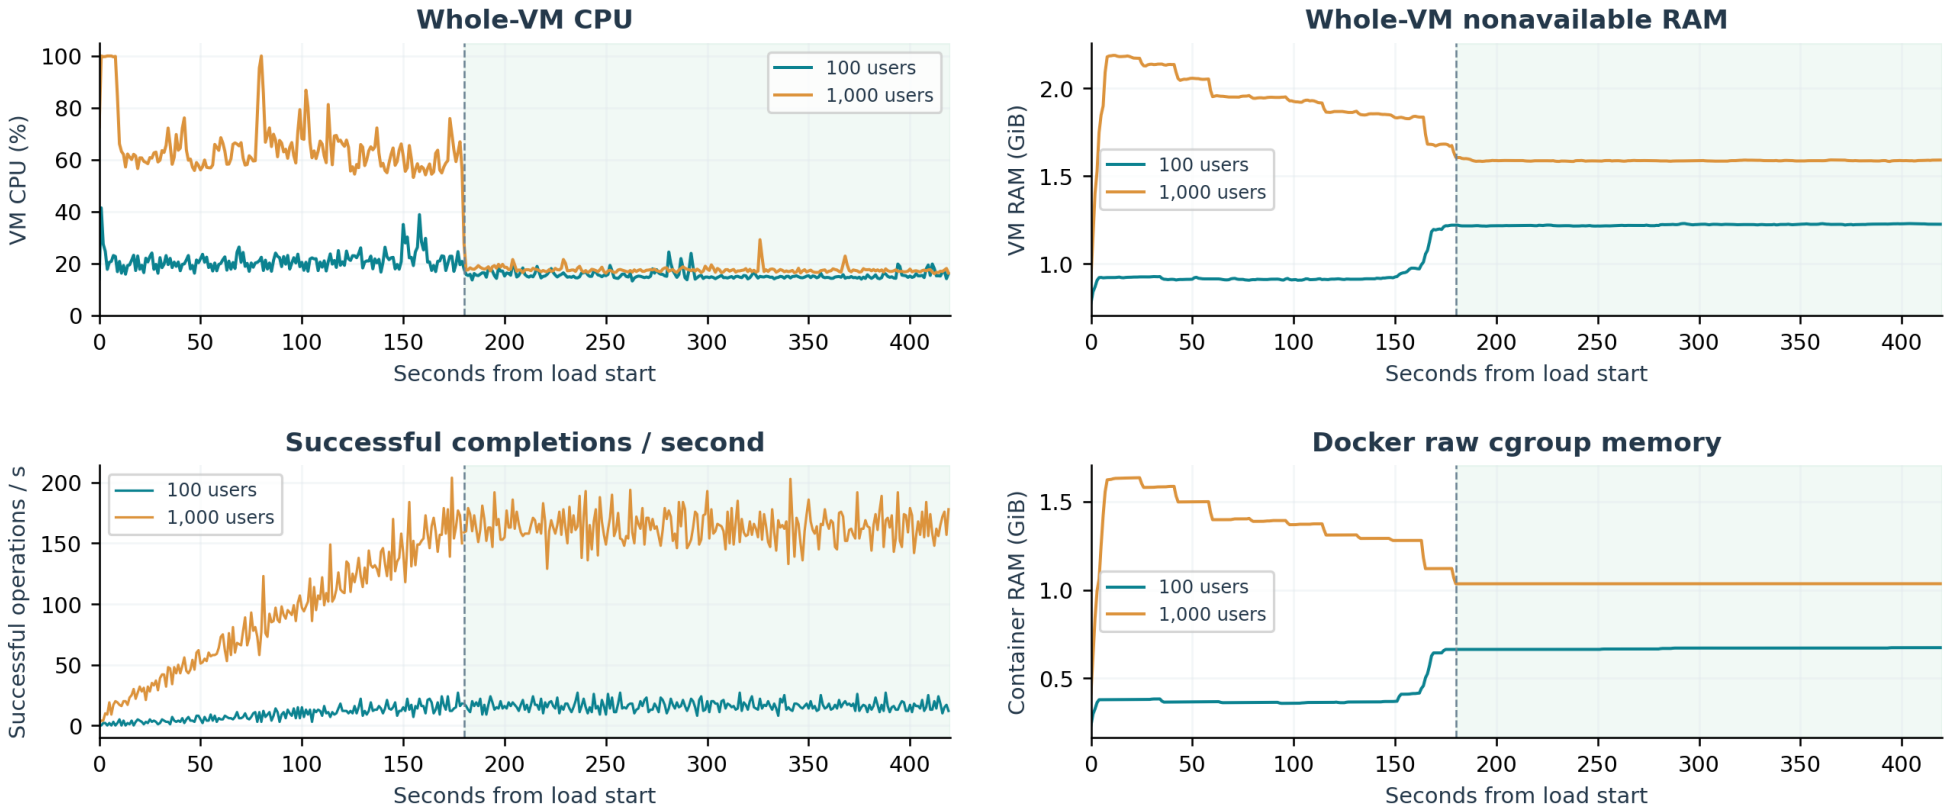

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

Java / Spring Boot: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	like	859	859	100.0	3.58	3.15	4.00	5.00	6.99	13.00
100	login	1	1	100.0	0.00	146.00	146.00	146.00	146.00	146.00
100	feed	1,195	1,195	100.0	4.98	5.87	8.00	9.00	10.81	12.00
100	comment	1,191	1,191	100.0	4.96	3.32	4.00	6.00	7.00	9.00
100	unlike	331	331	100.0	1.38	3.13	4.00	6.00	10.34	11.00
100	comments	226	226	100.0	0.94	2.07	3.00	4.00	4.78	5.00
100	post	116	116	100.0	0.48	3.51	5.00	6.85	7.00	7.00
1000	like	9,219	9,219	100.0	38.41	2.26	3.00	4.00	5.00	9.00
1000	feed	11,919	11,919	100.0	49.66	5.03	7.00	8.00	9.08	15.00
1000	unlike	2,695	2,695	100.0	11.23	2.22	3.00	4.00	5.00	5.00
1000	comment	11,923	11,923	100.0	49.68	2.34	3.00	4.00	6.00	29.00
1000	comments	2,373	2,373	100.0	9.89	1.19	2.00	2.00	3.00	4.00
1000	login	1	1	100.0	0.00	149.00	149.00	149.00	149.00	149.00
1000	post	1,191	1,191	100.0	4.96	2.45	3.00	4.00	5.62	6.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

PHP / Laravel FPM: fixed-load metrics

Runtime 8.5.11 | framework 13.34.0 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.18	27	18.3	61.65	48.00	140.00	197.17	326.23	362.00
1000	fail	0.0	15.7	0.00	0	0.0	5,000.68	5,001.00	5,001.00	5,002.00	5,002.00	5,011.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	42.6	67.2	63.5	67.2	0.655	0.672	0.661	0.672	100.0	241
100	Docker	27.9	50.7	47.7	50.7	0.092	0.093	0.092	0.093	100.0	241
100	Generator	1.6	1.9	1.9	1.9	1.415	1.496	1.491	1.496	100.0	241
100	RDS	5.0	5.2	5.2	5.2	10.275	10.278	10.277	10.278	75.5	4
1000	VM	100.0	100.0	100.0	100.0	0.833	0.891	0.890	0.891	98.3	129
1000	Docker	88.8	108.7	108.7	108.7	0.203	0.235	0.235	0.235	98.3	112
1000	Generator	2.0	3.4	3.3	3.4	1.680	1.718	1.714	1.718	100.0	241
1000	RDS	3.4	4.0	4.0	4.0	10.274	10.277	10.277	10.277	76.5	4

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	32.8	62.6	42.6	67.2	10.273	2.5	5	c83ede3ee956
1000	98.5	100.0	100.0	100.0	10.268	2.3	6	cd7ccd83d00e

PHP / Laravel FPM: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

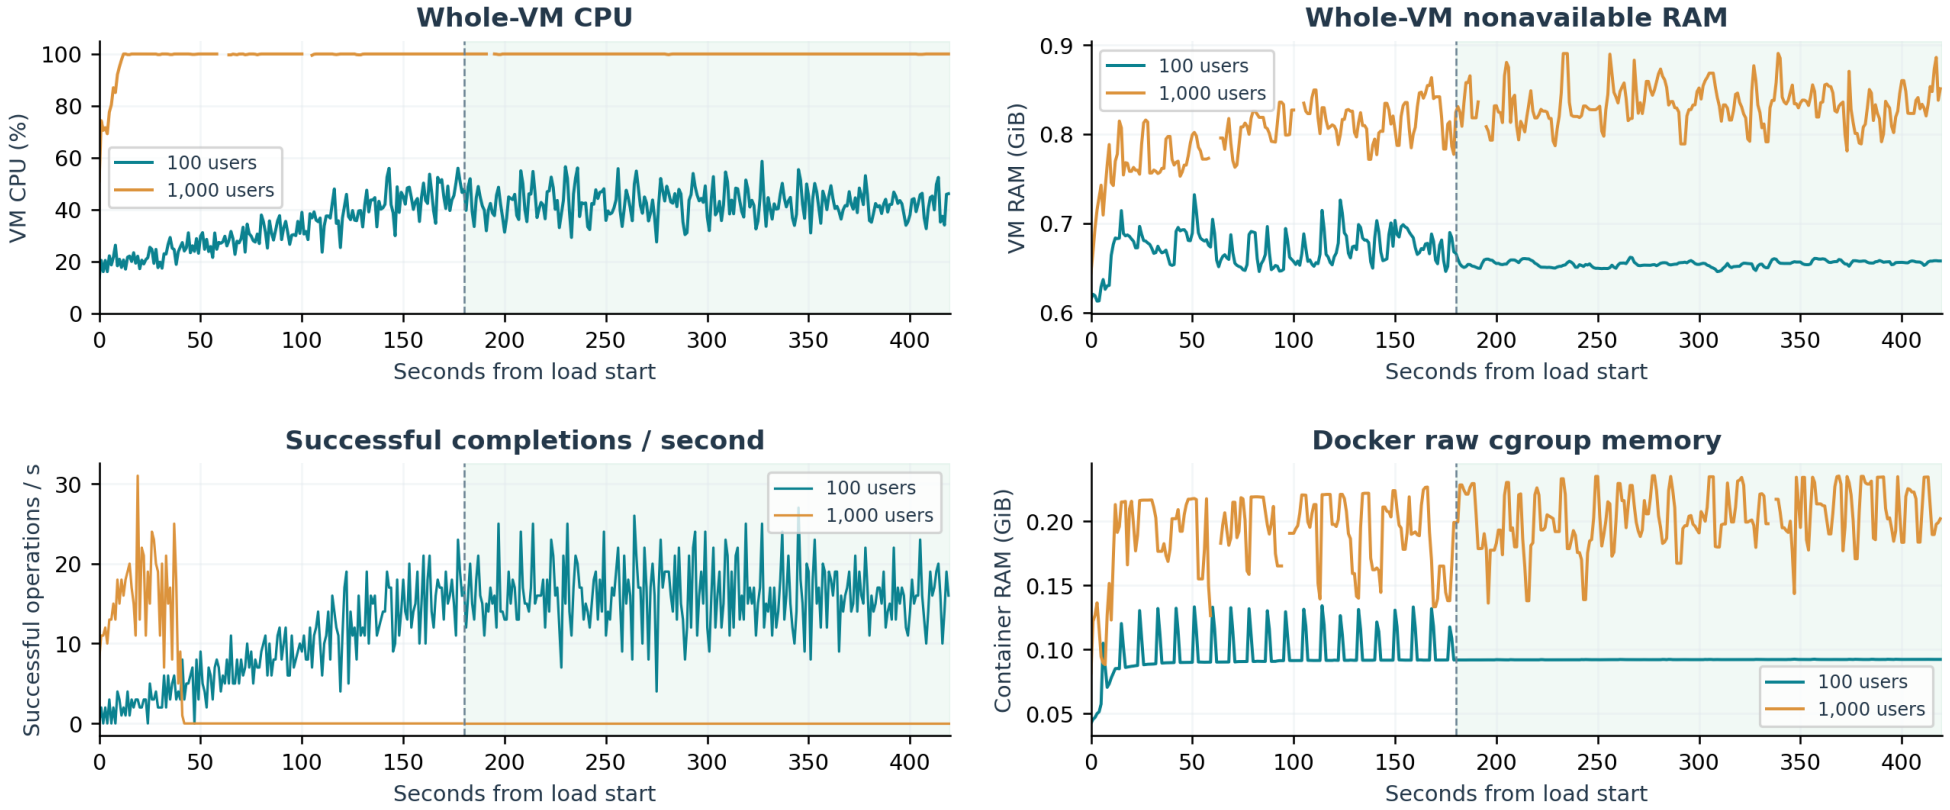

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

PHP / Laravel FPM: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	login	1	1	100.0	0.00	157.00	157.00	157.00	157.00	157.00
100	feed	1,185	1,185	100.0	4.94	65.46	149.80	218.16	334.16	362.00
100	comment	1,177	1,177	100.0	4.90	59.55	132.20	188.24	259.66	347.00
100	like	853	853	100.0	3.55	61.38	147.00	196.92	260.69	328.00
100	unlike	335	335	100.0	1.40	59.11	134.00	180.66	214.99	220.00
100	comments	220	220	100.0	0.92	59.55	155.10	205.58	273.58	290.00
100	post	113	113	100.0	0.47	56.49	107.00	135.72	139.78	140.00
1000	login	17,590	0	0.0	0.00	5,000.68	5,001.00	5,002.00	5,002.00	5,011.00
1000	feed	3,288	0	0.0	0.00	5,000.69	5,001.00	5,002.00	5,002.00	5,011.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

Go / net-http: fixed-load metrics

Runtime 1.27.1 | framework 1.27.1 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.37	29	17.9	3.37	3.00	7.00	8.00	9.00	95.00
1000	pass	100.0	100.0	163.68	194	169.6	2.96	2.00	7.00	8.00	9.00	107.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	14.1	18.4	15.4	18.4	0.658	0.728	0.728	0.728	100.0	241
100	Docker	0.4	5.0	0.6	5.0	0.100	0.170	0.170	0.170	100.0	241
100	Generator	1.6	2.0	1.8	2.0	1.377	1.433	1.427	1.433	100.0	241
100	RDS	1.9	2.1	2.1	2.1	10.266	10.269	10.269	10.269	76.1	4
1000	VM	16.9	45.7	18.7	45.7	0.632	0.807	0.801	0.807	100.0	241
1000	Docker	2.2	27.2	2.7	27.2	0.072	0.241	0.235	0.241	100.0	241
1000	Generator	2.1	4.0	3.9	4.0	1.809	1.873	1.865	1.873	100.0	241
1000	RDS	6.9	7.0	7.0	7.0	10.252	10.255	10.255	10.255	77.5	4

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	16.8	21.0	14.1	18.4	10.263	2.7	3	4fdeeb1e2aad
1000	46.9	53.2	16.9	45.7	10.251	7.0	7	0151f524eed5

Go / net-http: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

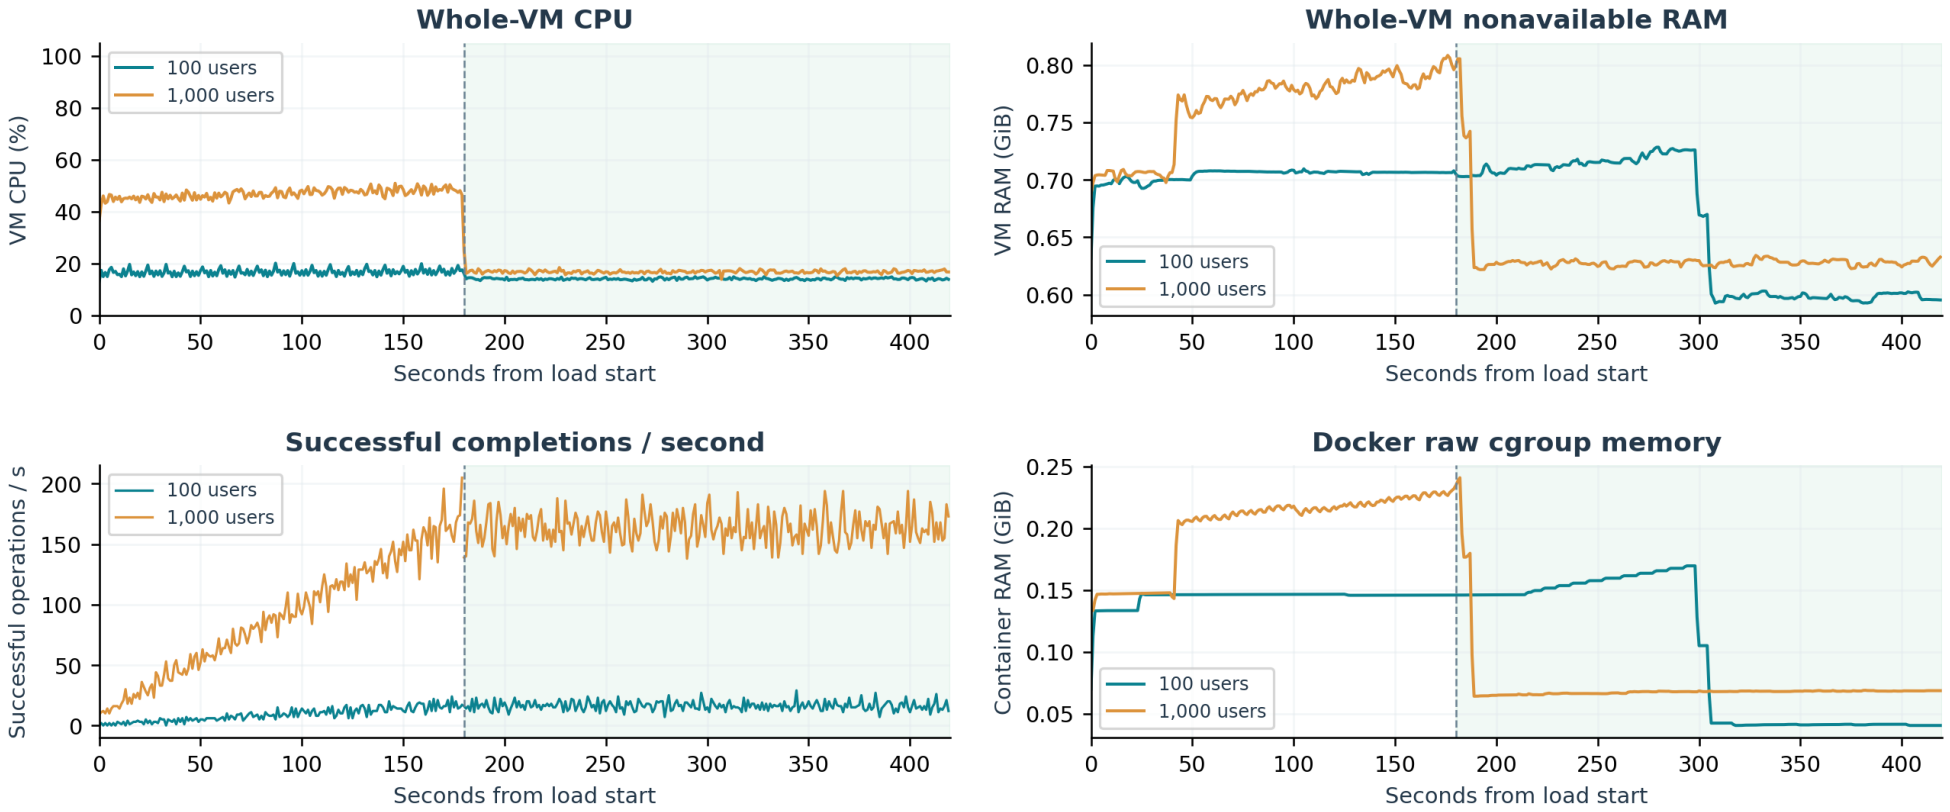

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

Go / net-http: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	comment	1,187	1,187	100.0	4.95	2.47	3.00	4.00	5.63	24.00
100	login	1	1	100.0	0.00	95.00	95.00	95.00	95.00	95.00
100	feed	1,196	1,196	100.0	4.98	5.60	8.00	8.05	9.00	9.00
100	like	865	865	100.0	3.60	2.40	3.00	4.00	5.00	5.00
100	unlike	333	333	100.0	1.39	2.33	3.00	3.68	5.00	5.00
100	post	117	117	100.0	0.49	2.62	3.00	4.00	4.88	5.00
100	comments	229	229	100.0	0.95	1.48	2.00	2.72	9.18	11.00
1000	feed	11,903	11,903	100.0	49.60	5.00	7.00	8.00	10.00	14.00
1000	like	9,240	9,240	100.0	38.50	2.13	3.00	3.00	5.00	8.00
1000	comment	11,914	11,914	100.0	49.64	2.19	3.00	4.00	5.00	17.00
1000	login	1	1	100.0	0.00	107.00	107.00	107.00	107.00	107.00
1000	post	1,195	1,195	100.0	4.98	2.33	3.00	4.00	6.42	7.00
1000	unlike	2,661	2,661	100.0	11.09	2.08	3.00	3.00	4.34	7.00
1000	comments	2,368	2,368	100.0	9.87	1.17	2.00	2.00	3.00	7.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

Rust / Axum: fixed-load metrics

Runtime 1.99.0 | framework 0.8.9 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.44	28	18.7	3.93	3.00	8.00	9.00	10.00	92.00
1000	pass	100.0	100.0	163.88	208	170.4	3.23	3.00	7.00	8.00	9.00	114.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	14.0	19.3	15.3	19.3	0.565	0.587	0.585	0.587	100.0	241
100	Docker	0.3	4.6	0.5	4.6	0.006	0.006	0.006	0.006	100.0	241
100	Generator	1.6	1.9	1.9	1.9	1.493	1.556	1.551	1.556	100.0	241
100	RDS	1.8	1.9	1.9	1.9	10.264	10.265	10.265	10.265	69.4	3
1000	VM	16.4	38.2	17.8	38.2	0.600	0.692	0.669	0.692	100.0	241
1000	Docker	1.8	24.0	2.0	24.0	0.039	0.039	0.039	0.039	100.0	241
1000	Generator	2.1	4.2	3.9	4.2	1.800	1.861	1.852	1.861	100.0	241
1000	RDS	7.5	7.6	7.6	7.6	10.247	10.250	10.250	10.250	69.1	3

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	16.5	20.5	14.0	19.3	10.263	3.0	3	c3ad90f143d0
1000	42.2	47.6	16.4	38.2	10.244	8.1	9	9c3a34a58d1e

Rust / Axum: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

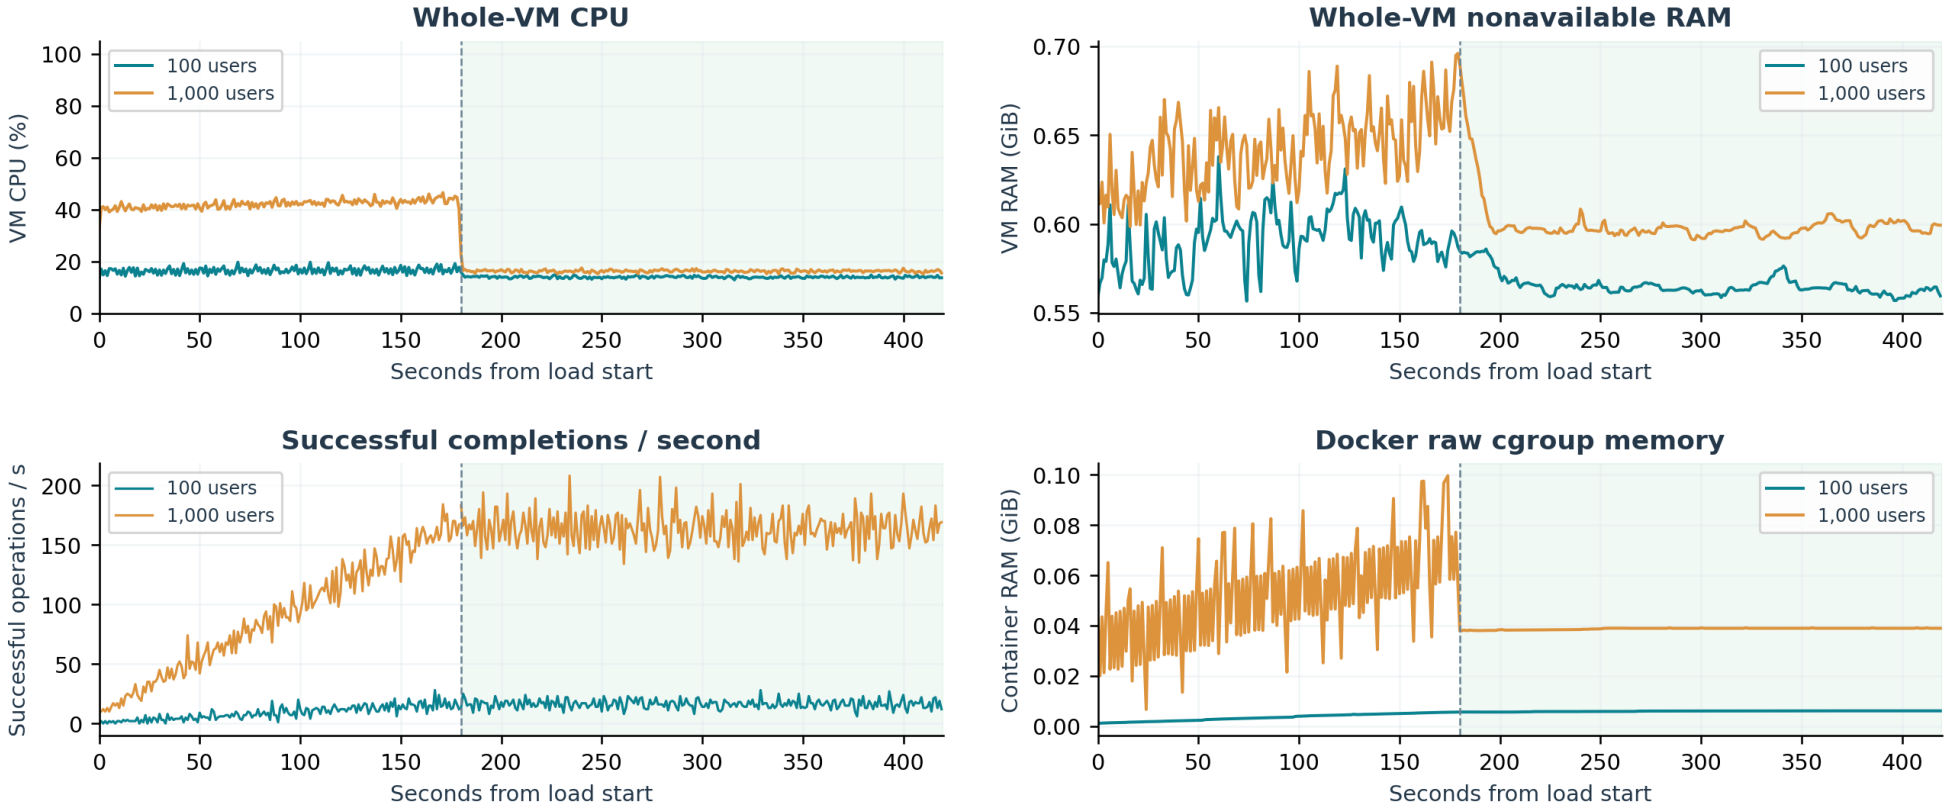

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

Rust / Axum: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	comment	1,199	1,199	100.0	5.00	3.02	4.00	5.00	5.00	10.00
100	login	1	1	100.0	0.00	92.00	92.00	92.00	92.00	92.00
100	feed	1,199	1,199	100.0	5.00	6.09	8.00	9.00	10.00	11.00
100	unlike	333	333	100.0	1.39	2.95	4.00	4.00	5.00	5.00
100	like	868	868	100.0	3.62	3.03	4.00	4.00	5.00	5.00
100	comments	228	228	100.0	0.95	2.09	3.00	3.00	4.00	4.00
100	post	117	117	100.0	0.49	3.33	4.00	5.00	5.00	5.00
1000	feed	11,899	11,899	100.0	49.58	5.36	8.00	9.00	10.00	15.00
1000	comment	11,929	11,929	100.0	49.70	2.41	3.00	4.00	5.00	97.00
1000	comments	2,380	2,380	100.0	9.92	1.40	2.00	3.00	3.62	4.00
1000	like	9,228	9,228	100.0	38.45	2.38	3.00	4.00	5.00	15.00
1000	login	1	1	100.0	0.00	114.00	114.00	114.00	114.00	114.00
1000	post	1,187	1,187	100.0	4.95	2.58	4.00	4.00	5.00	5.00
1000	unlike	2,708	2,708	100.0	11.28	2.32	3.00	4.00	7.29	11.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

Node / Express: fixed-load metrics

Runtime 26.10.0 | framework 5.2.1 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.38	29	18.3	5.22	4.00	10.00	12.00	14.00	113.00
1000	pass	100.0	100.0	163.87	198	168.7	4.40	3.00	10.00	11.00	14.00	132.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	15.1	27.3	17.5	27.3	0.660	0.680	0.678	0.680	100.0	241
100	Docker	1.2	6.7	2.6	6.7	0.097	0.099	0.099	0.099	100.0	241
100	Generator	1.6	2.0	1.9	2.0	1.459	1.562	1.550	1.562	100.0	241
100	RDS	2.2	2.4	2.4	2.4	10.259	10.264	10.264	10.264	60.6	3
1000	VM	22.2	52.9	25.9	52.9	0.788	0.886	0.870	0.886	100.0	241
1000	Docker	7.1	33.1	9.5	33.1	0.218	0.220	0.220	0.220	100.0	241
1000	Generator	2.2	4.0	4.0	4.0	1.804	1.865	1.854	1.865	100.0	241
1000	RDS	10.0	10.4	10.4	10.4	10.247	10.248	10.248	10.248	85.9	4

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	17.8	23.4	15.1	27.3	10.258	3.9	4	fe4650877988
1000	53.4	61.2	22.2	52.9	10.243	8.2	10	7ec97bce898d

Node / Express: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

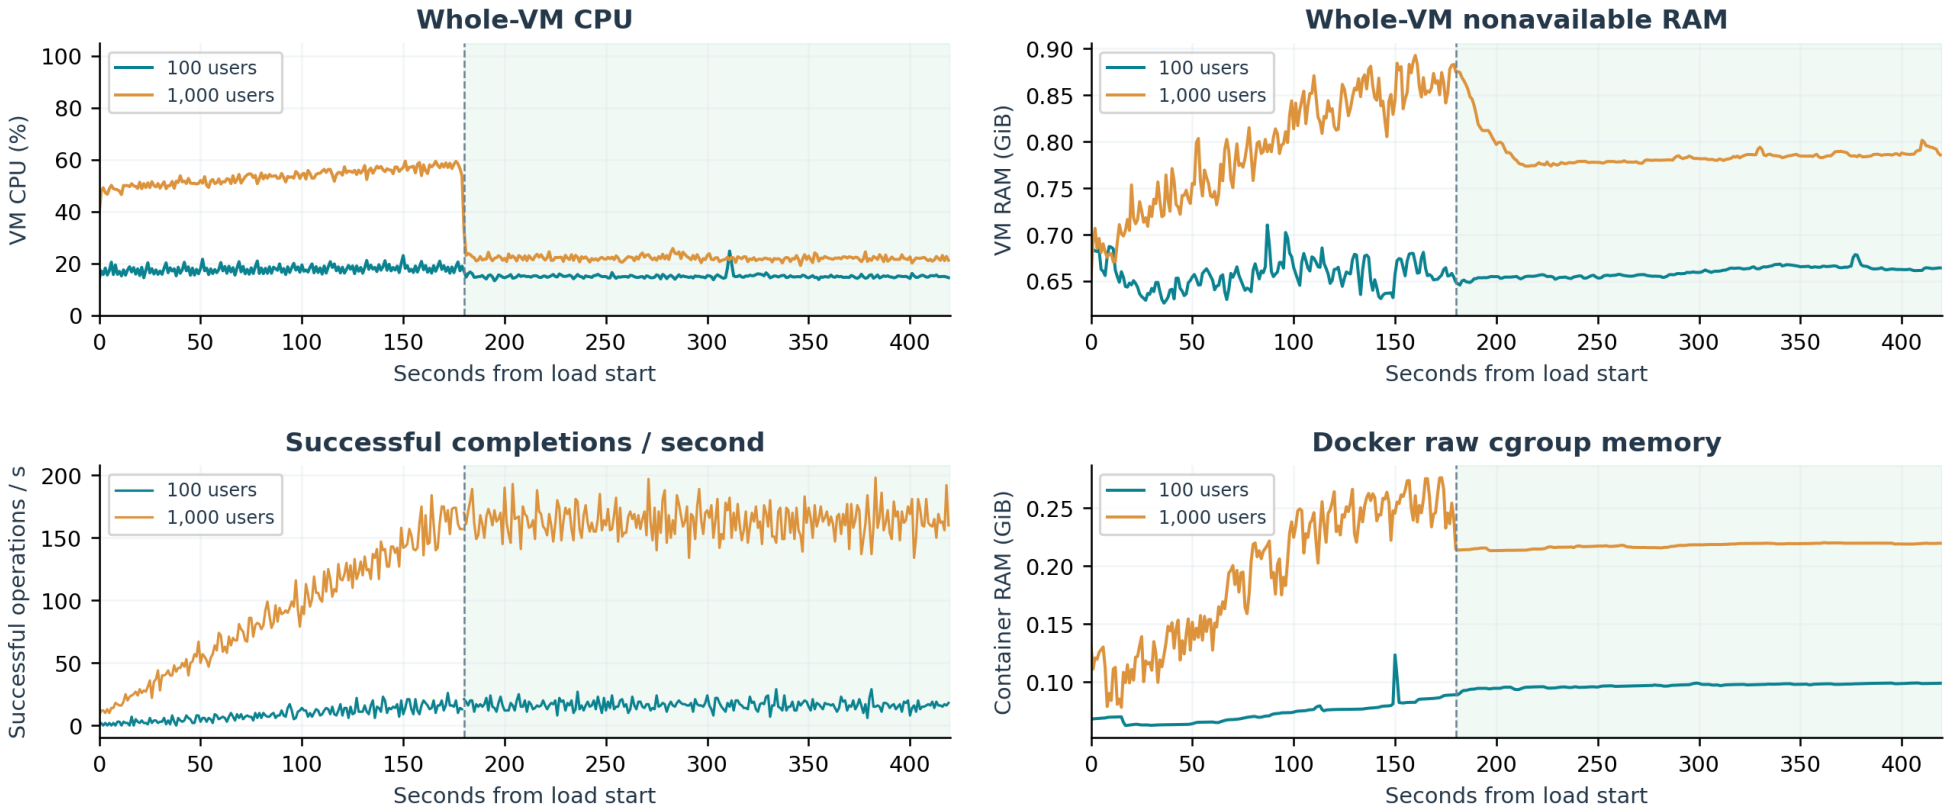

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

Node / Express: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	comment	1,197	1,197	100.0	4.99	4.00	5.00	6.00	10.41	13.00
100	like	880	880	100.0	3.67	3.84	5.00	6.00	7.12	8.00
100	feed	1,188	1,188	100.0	4.95	8.18	11.00	12.00	14.00	14.00
100	login	1	1	100.0	0.00	113.00	113.00	113.00	113.00	113.00
100	comments	226	226	100.0	0.94	3.32	5.00	5.00	6.77	7.00
100	unlike	323	323	100.0	1.35	3.78	5.00	6.00	8.36	9.00
100	post	116	116	100.0	0.48	4.62	6.00	7.85	8.00	8.00
1000	like	9,225	9,224	100.0	38.43	3.04	4.00	7.00	13.00	30.00
1000	comment	11,933	11,933	100.0	49.72	3.25	5.00	7.00	14.00	40.00
1000	feed	11,906	11,906	100.0	49.61	7.46	11.00	12.00	16.10	33.00
1000	comments	2,377	2,377	100.0	9.90	2.23	3.00	6.00	12.62	13.00
1000	post	1,197	1,197	100.0	4.99	3.56	5.00	7.04	12.00	13.00
1000	unlike	2,690	2,690	100.0	11.21	2.92	4.00	6.00	12.31	23.00
1000	login	1	1	100.0	0.00	132.00	132.00	132.00	132.00	132.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

Bun / Express: fixed-load metrics

Runtime 1.4.2 | framework 5.2.1 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.38	27	18.2	4.94	4.00	10.00	11.00	13.07	125.00
1000	pass	100.0	100.0	163.80	193	169.2	4.03	3.00	9.00	11.00	13.00	127.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	14.9	21.7	16.5	21.7	0.630	0.673	0.656	0.673	100.0	241
100	Docker	1.2	7.6	2.2	7.6	0.070	0.074	0.073	0.074	100.0	241
100	Generator	1.6	1.9	1.9	1.9	1.462	1.531	1.529	1.531	100.0	241
100	RDS	2.2	2.3	2.3	2.3	10.258	10.260	10.260	10.260	76.6	4
1000	VM	19.3	48.4	22.4	48.4	0.656	0.702	0.699	0.702	100.0	241
1000	Docker	5.0	34.2	7.6	34.2	0.095	0.099	0.099	0.099	100.0	241
1000	Generator	2.2	4.2	4.1	4.2	1.812	1.869	1.863	1.869	100.0	241
1000	RDS	9.9	10.1	10.1	10.1	10.245	10.247	10.247	10.247	77.2	4

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	18.2	29.4	14.9	21.7	10.256	4.2	5	e1d71ff7f89b
1000	52.8	59.0	19.3	48.4	10.242	9.0	9	74750ccd5ee0

Bun / Express: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

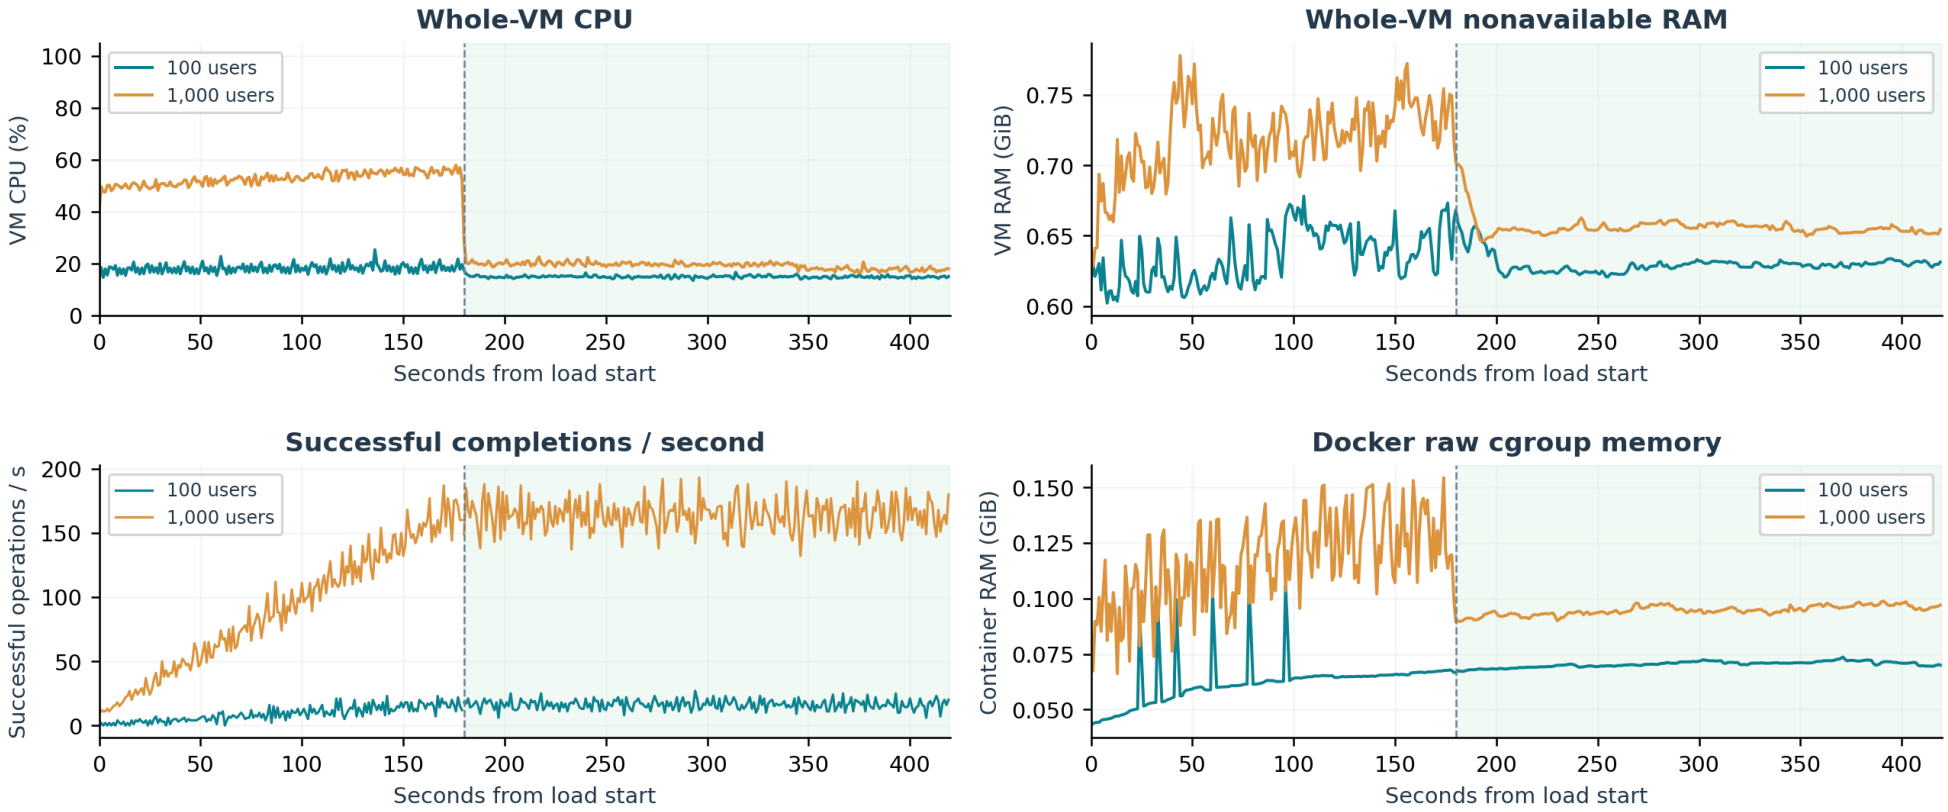

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

Bun / Express: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	like	869	869	100.0	3.62	3.48	4.00	6.00	11.79	17.00
100	login	1	1	100.0	0.00	125.00	125.00	125.00	125.00	125.00
100	feed	1,194	1,194	100.0	4.97	8.09	11.00	12.00	13.81	15.00
100	unlike	328	328	100.0	1.37	3.39	4.00	5.00	5.67	6.00
100	comment	1,198	1,198	100.0	4.99	3.69	5.00	6.00	7.00	9.00
100	post	113	113	100.0	0.47	4.18	5.00	6.00	6.00	6.00
100	comments	229	229	100.0	0.95	2.69	4.00	5.00	5.00	5.00
1000	like	9,258	9,258	100.0	38.58	2.63	4.00	5.00	6.00	13.00
1000	comment	11,918	11,918	100.0	49.66	2.86	4.00	5.00	7.00	19.00
1000	post	1,189	1,189	100.0	4.95	3.20	4.00	5.00	10.25	15.00
1000	feed	11,906	11,906	100.0	49.61	7.13	11.00	12.00	14.00	18.00
1000	login	1	1	100.0	0.00	127.00	127.00	127.00	127.00	127.00
1000	comments	2,373	2,373	100.0	9.89	1.87	3.00	4.00	6.00	12.00
1000	unlike	2,667	2,667	100.0	11.11	2.58	4.00	4.00	6.00	17.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

C# / ASP.NET Core: fixed-load metrics

Runtime 10.0.12 | framework 10.0.12 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.35	31	18.6	4.19	3.00	8.00	9.00	12.44	252.00
1000	fail	8.8	4.9	7.93	26	9.6	4,565.09	5,001.00	5,001.00	5,002.00	5,002.00	5,009.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	14.6	26.7	19.1	26.7	0.808	0.816	0.816	0.816	100.0	241
100	Docker	0.9	12.8	5.5	12.8	0.249	0.252	0.252	0.252	100.0	241
100	Generator	1.6	1.8	1.8	1.8	1.426	1.486	1.481	1.486	100.0	241
100	RDS	2.1	2.2	2.2	2.2	10.256	10.258	10.258	10.258	68.9	3
1000	VM	99.8	100.0	100.0	100.0	1.004	1.138	1.106	1.138	100.0	241
1000	Docker	81.9	88.3	88.0	88.3	0.430	0.539	0.539	0.539	100.0	241
1000	Generator	2.0	3.3	3.3	3.3	1.699	1.738	1.733	1.738	100.0	241
1000	RDS	2.6	3.2	3.2	3.2	10.211	10.219	10.219	10.219	68.7	3

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	22.1	40.2	14.6	26.7	10.254	2.6	3	21acdefaeebb
1000	99.6	100.0	99.8	100.0	10.208	20.0	20	88bb043ee376

C# / ASP.NET Core: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

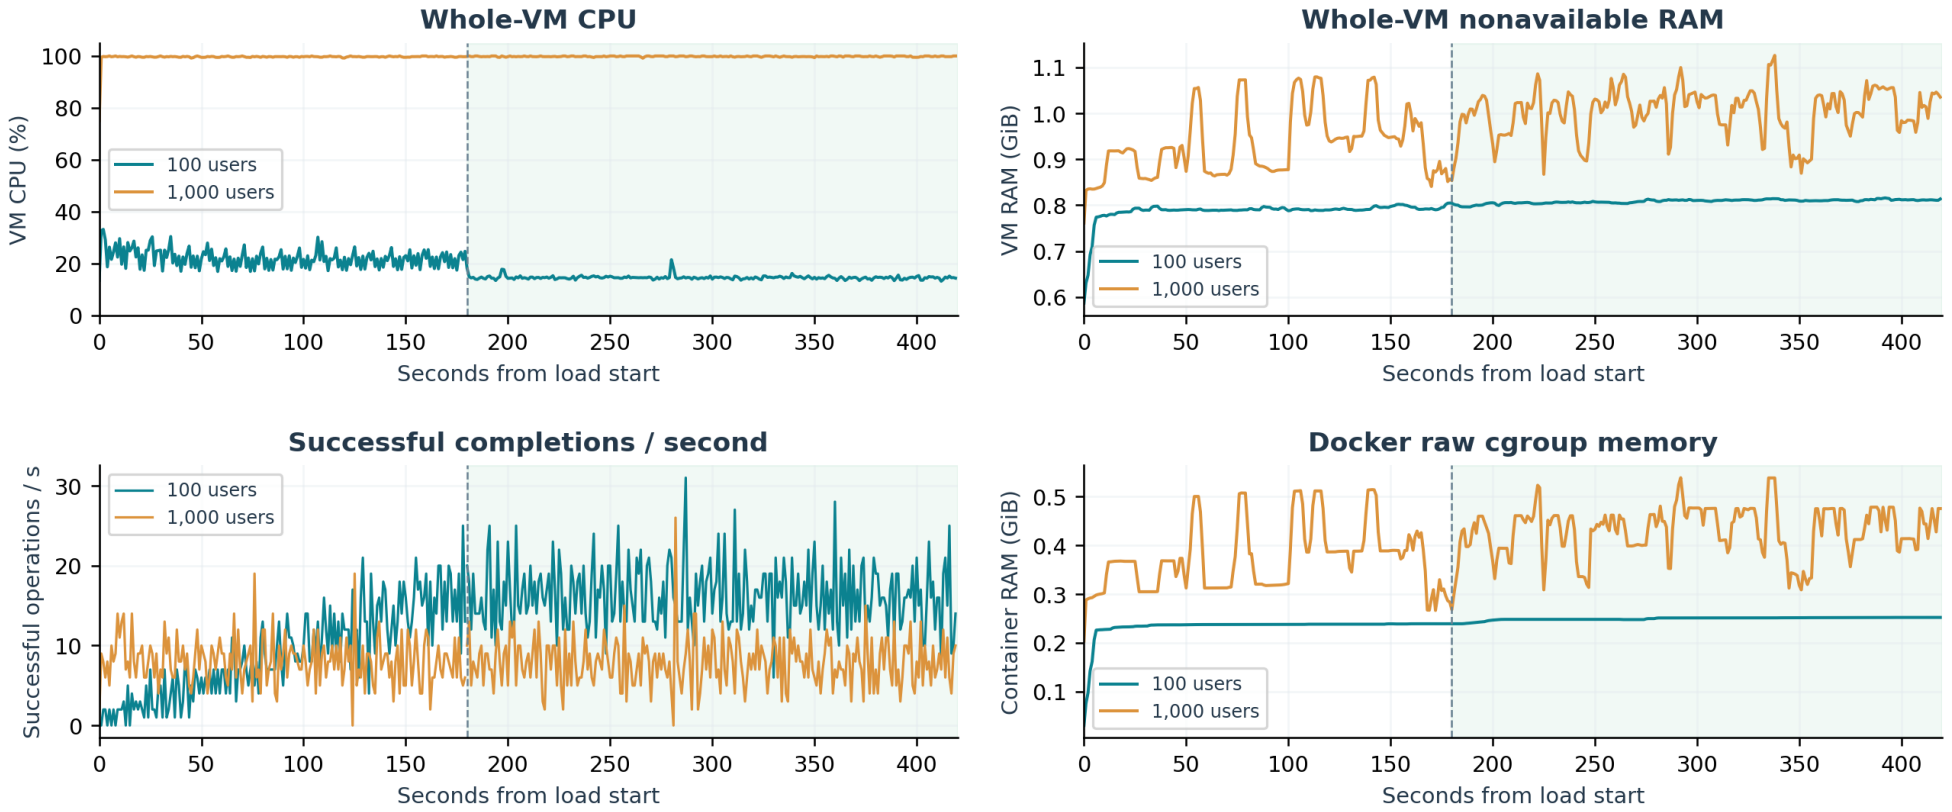

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

C# / ASP.NET Core: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	like	864	864	100.0	3.60	3.15	4.00	5.00	30.14	31.00
100	feed	1,197	1,197	100.0	4.99	6.44	9.00	10.00	11.00	86.00
100	login	1	1	100.0	0.00	252.00	252.00	252.00	252.00	252.00
100	comment	1,193	1,193	100.0	4.97	3.30	4.00	5.00	6.00	6.00
100	unlike	330	330	100.0	1.38	2.95	4.00	4.00	5.67	6.00
100	comments	226	226	100.0	0.94	2.06	3.00	3.00	3.77	4.00
100	post	114	114	100.0	0.47	3.54	4.00	5.00	5.00	5.00
1000	login	19,823	0	0.0	0.00	5,000.69	5,001.00	5,002.00	5,002.00	5,009.00
1000	feed	579	579	100.0	2.41	29.93	26.10	635.84	1,920.48	1,954.00
1000	like	388	388	100.0	1.62	21.29	17.65	620.21	1,056.75	1,210.00
1000	comment	579	579	100.0	2.41	28.25	20.30	820.32	2,037.20	2,095.00
1000	unlike	189	189	100.0	0.79	14.77	9.00	391.40	759.15	774.00
1000	comments	107	107	100.0	0.45	62.78	211.00	1,757.60	2,018.37	2,049.00
1000	post	61	61	100.0	0.25	20.05	10.00	413.60	815.36	860.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

PHP / Laravel Octane: fixed-load metrics

Runtime 8.5.11 | framework 2.21.0 | Sustained hold metrics, latest campaign

Users	Vote	Op %	Auth %	Good/s	Peak1s	Peak10s	Mean ms	p50	p95	p99	p99.9	Max ms
100	pass	100.0	100.0	16.30	31	18.3	6.35	6.00	11.00	12.00	14.09	130.00
1000	pass	100.0	100.0	163.77	205	170.3	7.02	6.00	12.00	15.00	20.00	217.00


Users	Scope	CPU mean %	CPU max %	CPU p99 %	CPU p99.9 %	RAM mean GiB	RAM max GiB	RAM p99 GiB	RAM p99.9 GiB	CPU coverage %	CPU samples
100	VM	16.3	25.9	19.1	25.9	1.391	1.406	1.404	1.406	100.0	241
100	Docker	2.5	9.2	3.6	9.2	0.836	0.838	0.838	0.838	100.0	241
100	Generator	1.6	1.9	1.9	1.9	1.380	1.419	1.416	1.419	100.0	241
100	RDS	2.3	2.6	2.6	2.6	10.211	10.213	10.213	10.213	66.3	3
1000	VM	36.4	64.5	40.9	64.5	1.425	1.485	1.475	1.485	100.0	241
1000	Docker	22.0	31.8	25.9	31.8	0.876	0.876	0.876	0.876	100.0	241
1000	Generator	2.1	4.0	3.9	4.0	1.803	1.877	1.858	1.877	100.0	241
1000	RDS	10.1	10.4	10.4	10.4	10.211	10.214	10.214	10.214	66.7	3

RDS RAM columns are FREEABLE memory (higher is more available); VM/Docker/generator RAM columns are used/nonavailable measures. Resource tail percentiles are descriptive sampled intervals. CPU peaks belong to the hold; ramp peaks are shown separately below.

Users	Ramp CPU mean %	Ramp CPU max %	Hold CPU mean %	Hold CPU max %	RDS free min GiB	RDS conns mean	RDS conns max	Trial ID prefix
100	19.9	54.9	16.3	25.9	10.210	20.0	20	048560eeddb2
1000	70.1	100.0	36.4	64.5	10.210	20.0	20	b7eceb848c7c

PHP / Laravel Octane: fixed-load timelines

Shaded region = sustained hold,180-420s | 100 vs1,000 users | CPU and memory collected at ~1s

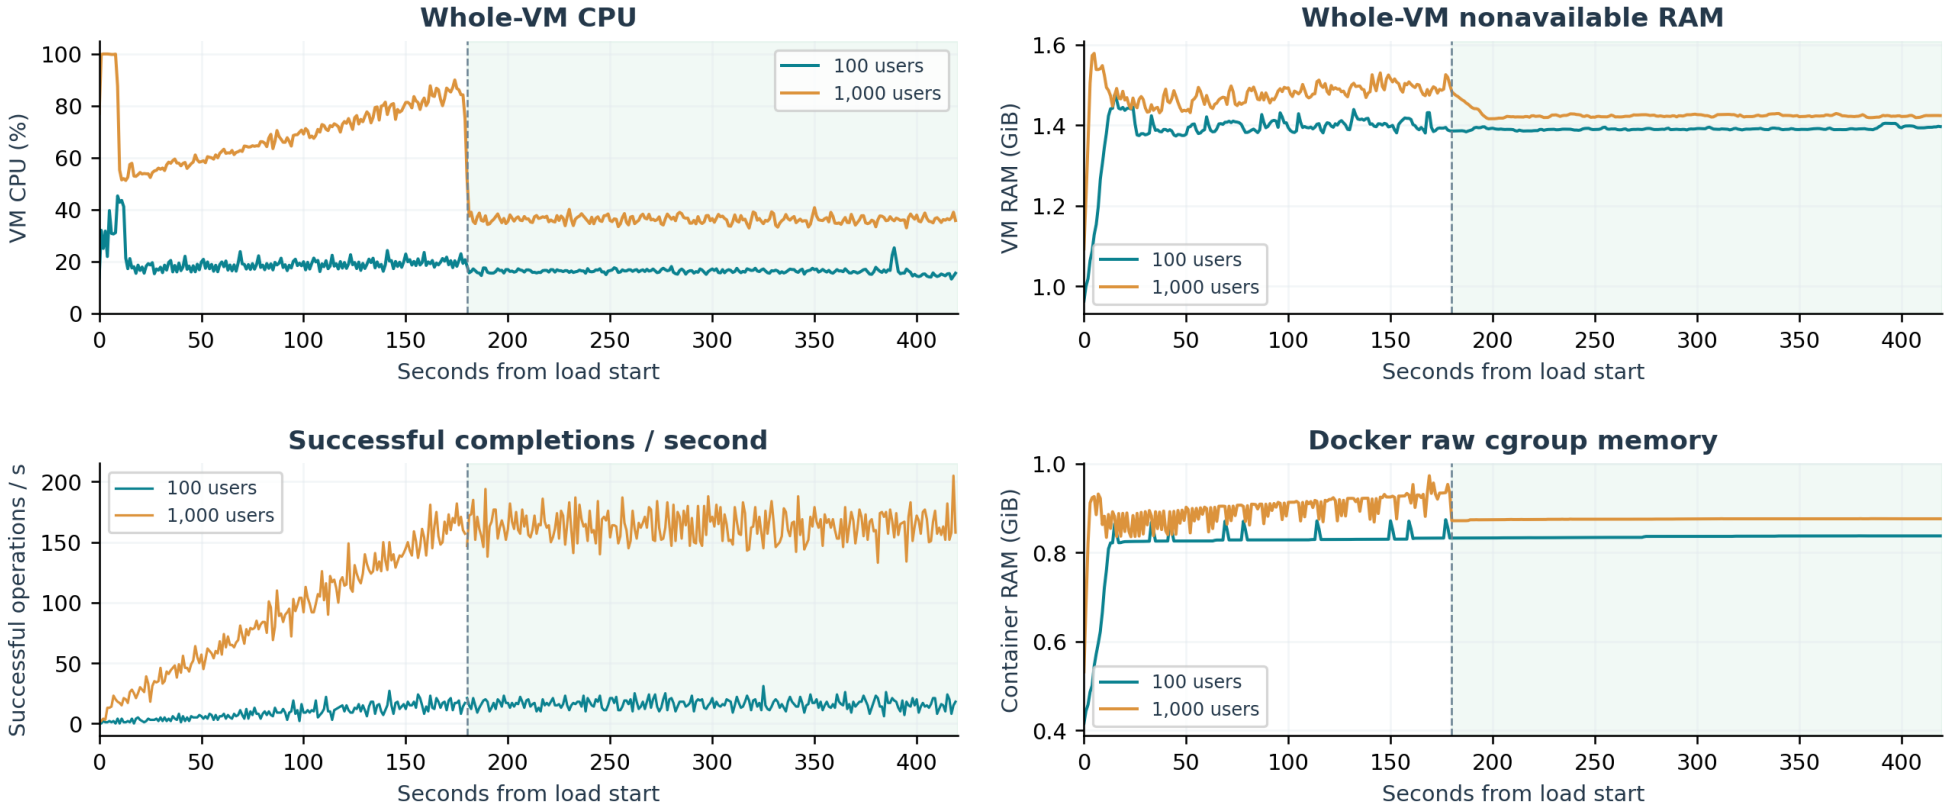

Lines display one-second overlap-weighted resource means, not raw unsampled instantaneous peaks. Exact intersecting-sample maxima are retained in the metric tables. Throughput includes every completed successful operation in each one-second bucket.

PHP / Laravel Octane: operation breakdown

Sustained hold | Failure-inclusive latency and operation throughput

Users	Operation	Attempts	Successes	Success %	Good ops/s	Mean ms	p95 ms	p99 ms	p99.9 ms	Max ms
100	unlike	325	325	100.0	1.35	5.00	7.00	8.76	18.08	21.00
100	like	869	869	100.0	3.62	5.16	7.00	9.00	10.40	13.00
100	feed	1,194	1,194	100.0	4.97	8.87	12.00	13.00	14.00	15.00
100	login	1	1	100.0	0.00	130.00	130.00	130.00	130.00	130.00
100	post	113	113	100.0	0.47	5.80	8.00	9.00	9.00	9.00
100	comment	1,188	1,188	100.0	4.95	5.38	7.00	9.00	11.00	23.00
100	comments	222	222	100.0	0.93	4.44	6.00	7.79	8.78	9.00
1000	comment	11,904	11,904	100.0	49.60	6.21	10.00	13.00	18.00	29.00
1000	like	9,261	9,261	100.0	38.59	5.88	9.00	13.00	18.74	29.00
1000	login	2	2	100.0	0.01	199.00	215.20	216.64	216.96	217.00
1000	feed	11,925	11,925	100.0	49.69	9.41	14.00	17.00	21.00	28.00
1000	comments	2,369	2,369	100.0	9.87	4.91	8.00	12.00	16.26	19.00
1000	unlike	2,654	2,654	100.0	11.06	5.80	9.00	13.00	17.35	19.00
1000	post	1,189	1,189	100.0	4.95	6.52	10.00	13.00	16.62	18.00

Absent operations mean no corresponding completion in the hold, not zero latency. Most first logins occur in the ramp; cumulative authentication is the criterion used by the search and fixed-load pass decisions.

Python 3.14 / FastAPI: stress-search evidence

binary |300s ramp +120s hold | 14 physical probes across both objectives


Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	2300	2337	37	majority_on_disagreement
p99	complete	2226	2263	37	majority_on_disagreement

Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
3750a644	2375	fail	fail	67.3	100.0	198.8	5,001.0	5,001.0	89.3	81.1	1.068
4458bdb0	2375	fail	fail	62.6	100.0	175.4	5,001.0	5,001.0	89.6	87.6	1.091
705342be	1187	pass	pass	100.0	100.0	194.3	43.0	45.0	47.9	29.3	0.783
0ad7d9e5	1781	pass	pass	100.0	100.0	290.5	43.0	46.0	66.8	36.8	0.830
36c79bfe	2078	pass	pass	100.0	100.0	339.1	43.0	46.0	77.5	40.5	0.861
4d14383f	2226	pass	fail	97.9	100.0	352.1	416.0	5,001.0	84.3	49.3	1.021
b50ce2df	2300	pass	fail	93.0	100.0	325.8	5,000.0	5,001.0	86.3	58.7	1.057
8b46de58	2337	fail	fail	86.1	100.0	289.2	5,001.0	5,001.0	87.6	66.1	1.066
ebdb4eb8	2337	fail	fail	89.0	100.0	308.1	5,001.0	5,001.0	87.5	62.9	1.067
70ac17ad	2226	not evaluated	pass	100.0	100.0	363.0	52.0	2,445.3	83.5	45.5	1.086
0dd9df8d	2226	not evaluated	pass	100.0	100.0	363.8	45.0	2,018.4	83.4	44.2	1.001
14e17051	2300	not evaluated	fail	93.4	100.0	331.1	5,000.0	5,001.0	86.3	56.4	1.082
4c0d19a0	2263	not evaluated	fail	87.9	100.0	286.8	5,001.0	5,001.0	85.2	64.5	1.050
bd646d5a	2263	not evaluated	fail	94.7	100.0	335.6	5,000.0	5,001.0	84.9	53.7	1.052

Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.

Python 3.14 / FastAPI: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation

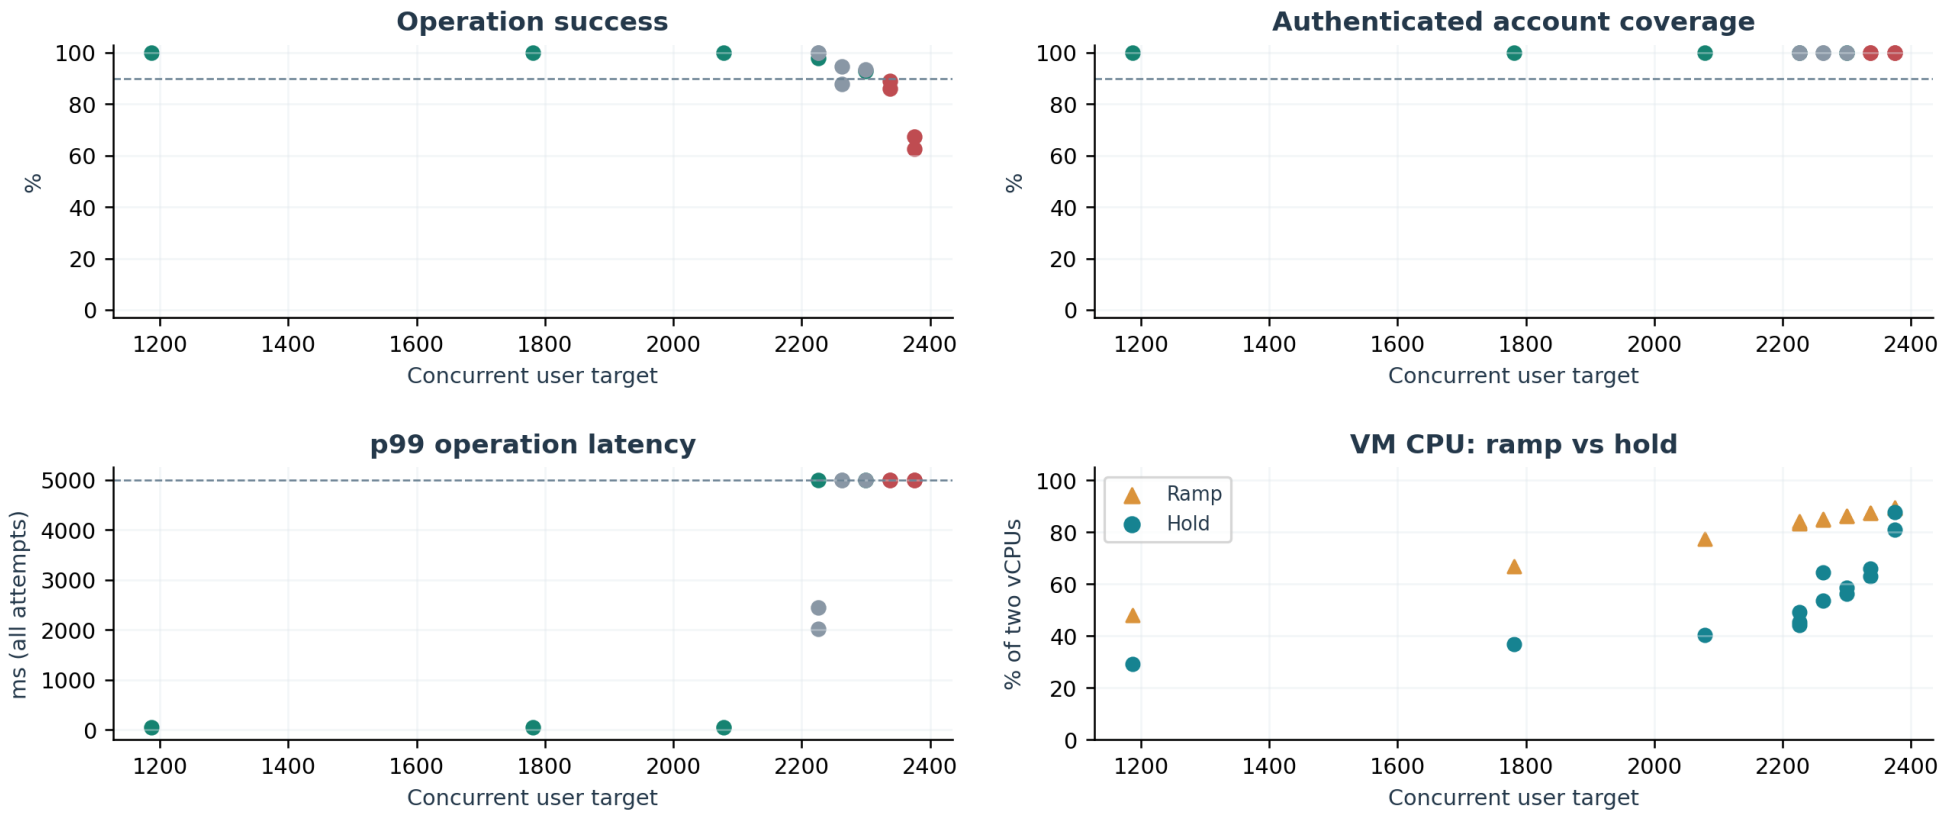

These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

Java / Spring Boot: stress-search evidence

binary |300s ramp +120s hold | 15 physical probes across both objectives


Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	2094	2126	32	majority_on_disagreement
p99	complete	2094	2126	32	majority_on_disagreement

Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
42ecb0a6	2062	pass	pass	100.0	100.0	337.3	6.0	7.0	81.4	19.8	1.914
88712438	4124	fail	fail	0.0	0.8	0.0	5,001.0	5,002.0	99.8	99.9	2.755
2be4127c	4124	fail	fail	0.0	0.8	0.0	5,001.0	5,002.0	99.8	99.8	2.758
cd859a62	3093	fail	fail	0.0	2.8	0.0	5,001.0	5,002.0	99.9	99.8	2.793
851d5e7b	3093	fail	fail	0.0	1.4	0.0	5,001.0	5,002.0	99.8	99.9	2.761
498055ad	2577	fail	fail	0.0	2.2	0.0	5,001.0	5,002.0	99.8	99.9	2.791
cce4183e	2577	fail	fail	0.0	1.9	0.0	5,001.0	5,002.0	99.8	99.9	2.818
eba85d76	2319	fail	fail	0.0	4.4	0.0	5,001.0	5,002.0	99.8	99.9	2.770
40f9a4b4	2319	fail	fail	0.0	4.4	0.0	5,001.0	5,002.0	99.9	99.9	2.770
6a8f4ce8	2190	fail	fail	0.0	5.1	0.0	5,001.0	5,002.0	99.9	99.9	2.790
c3e0eb8c	2190	fail	fail	0.0	3.5	0.0	5,001.0	5,002.0	99.9	99.8	2.780
d93ae8d8	2126	fail	fail	0.0	5.0	0.0	5,001.0	5,002.0	99.9	99.8	2.771
00f01e6e	2126	pass	pass	100.0	100.0	347.5	6.0	7.0	84.2	19.9	1.943
f2316f42	2126	fail	fail	0.0	4.6	0.0	5,001.0	5,002.0	99.9	100.0	2.522
8e32e6b2	2094	pass	pass	100.0	100.0	342.2	6.0	7.0	85.7	20.3	1.978

Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.

Java / Spring Boot: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation

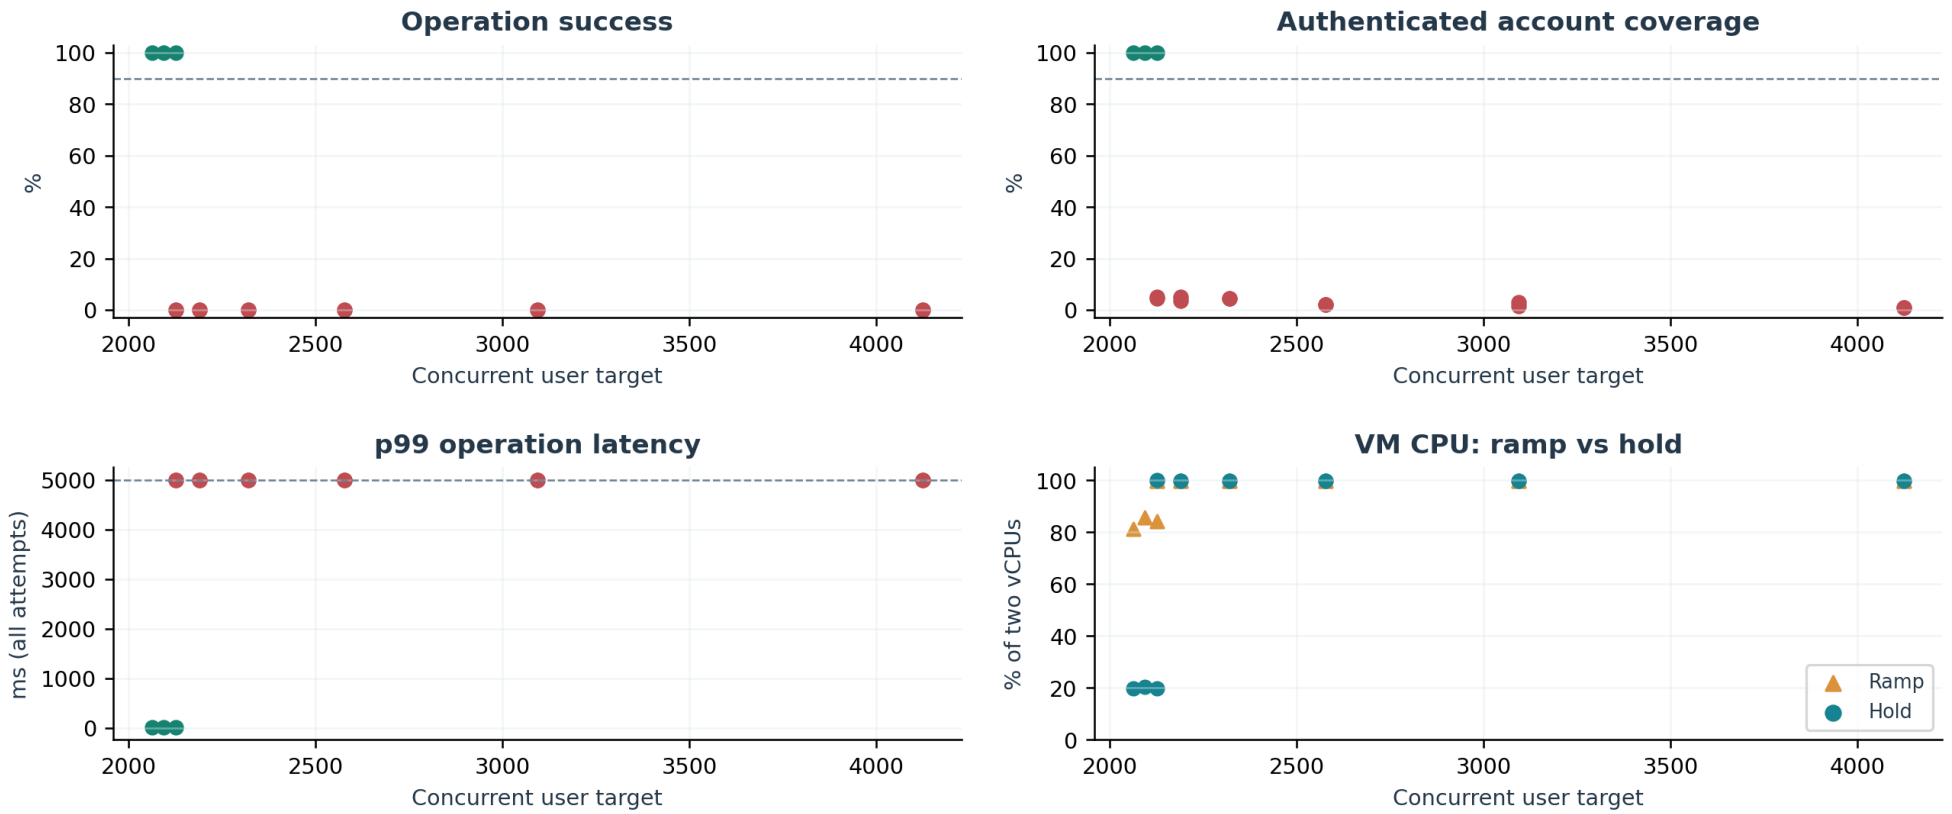

These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

PHP / Laravel FPM: stress-search evidence

binary |300s ramp +120s hold | 13 physical probes across both objectives

Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	300	337	37	majority_on_disagreement
p99	complete	262	300	38	majority_on_disagreement

Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
aecf6509	300	pass	fail	97.3	100.0	32.4	4,510.5	5,001.0	70.6	100.0	0.803
d585f081	600	fail	fail	0.0	39.7	0.0	5,001.0	5,002.0	88.1	100.0	0.866
e0989d6d	600	fail	fail	0.0	39.3	0.0	5,001.0	5,002.0	88.5	100.0	0.866
8bd1c6eb	450	fail	fail	0.0	57.6	0.0	5,001.0	5,002.0	82.4	100.0	0.855
5b3ec2d0	450	fail	fail	0.0	54.2	0.0	5,001.0	5,002.0	81.6	100.0	0.852
b9ffce79	375	fail	fail	0.0	68.5	0.0	5,001.0	5,002.0	78.1	100.0	0.856
b7393fa7	375	fail	fail	0.0	68.3	0.0	5,001.0	5,002.0	78.3	100.0	0.859
f67dae14	337	fail	fail	0.0	78.9	0.0	5,001.0	5,002.0	74.8	100.0	0.835
f4daf55e	337	fail	fail	0.0	78.6	0.0	5,001.0	5,002.0	74.8	100.0	0.878
328e9acc	300	not evaluated	fail	2.3	89.7	0.6	5,001.0	5,002.0	71.3	100.0	0.832
45501379	150	not evaluated	pass	100.0	100.0	24.1	208.0	325.0	41.9	60.8	0.676
ae2742e1	225	not evaluated	pass	100.0	100.0	35.2	622.0	793.8	58.7	90.5	0.744
58485dc8	262	not evaluated	pass	100.0	100.0	38.3	1,187.5	1,710.1	65.3	99.8	0.791

Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.

PHP / Laravel FPM: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation



These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

Go / net-http: stress-search evidence

binary |300s ramp +120s hold | 13 physical probes across both objectives


Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	2995	3020	25	majority_on_disagreement
p99	complete	2995	3020	25	majority_on_disagreement

Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
64820a13	3250	fail	fail	39.5	25.9	136.7	5,001.0	5,002.0	99.9	99.9	1.024
261b184f	3250	fail	fail	40.9	27.1	142.7	5,001.0	5,002.0	99.9	99.9	1.002
5da23f05	1625	pass	pass	100.0	100.0	265.2	6.0	7.0	48.2	18.8	0.852
d84da09e	2437	pass	pass	100.0	100.0	397.6	6.0	8.0	69.8	20.1	0.875
d5346575	2843	pass	pass	100.0	100.0	464.6	6.0	7.0	89.3	20.8	0.996
ad4222fc	3046	fail	fail	79.2	67.2	330.6	5,001.0	5,001.0	99.4	99.9	1.008
59469d62	3046	fail	fail	74.9	61.6	303.4	5,001.0	5,001.0	99.5	99.9	1.011
30a8c775	2944	pass	pass	100.0	100.0	481.7	8.0	1,175.0	96.1	23.2	1.118
ed4ae95e	2995	pass	fail	97.9	100.0	433.9	1,250.0	5,001.0	98.0	79.9	1.117
5bbe6e1c	3020	fail	fail	91.1	85.2	397.7	5,001.0	5,001.0	98.2	99.9	1.067
4020ae42	3020	fail	fail	90.1	83.5	396.0	5,001.0	5,001.0	98.2	99.9	1.046
70ea92a0	2995	not evaluated	pass	99.9	100.0	482.1	1,107.9	1,570.0	97.6	30.6	1.065
724b734d	2995	not evaluated	pass	99.7	100.0	476.0	1,311.0	1,418.0	97.8	37.5	1.012

Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.

Go / net-http: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation

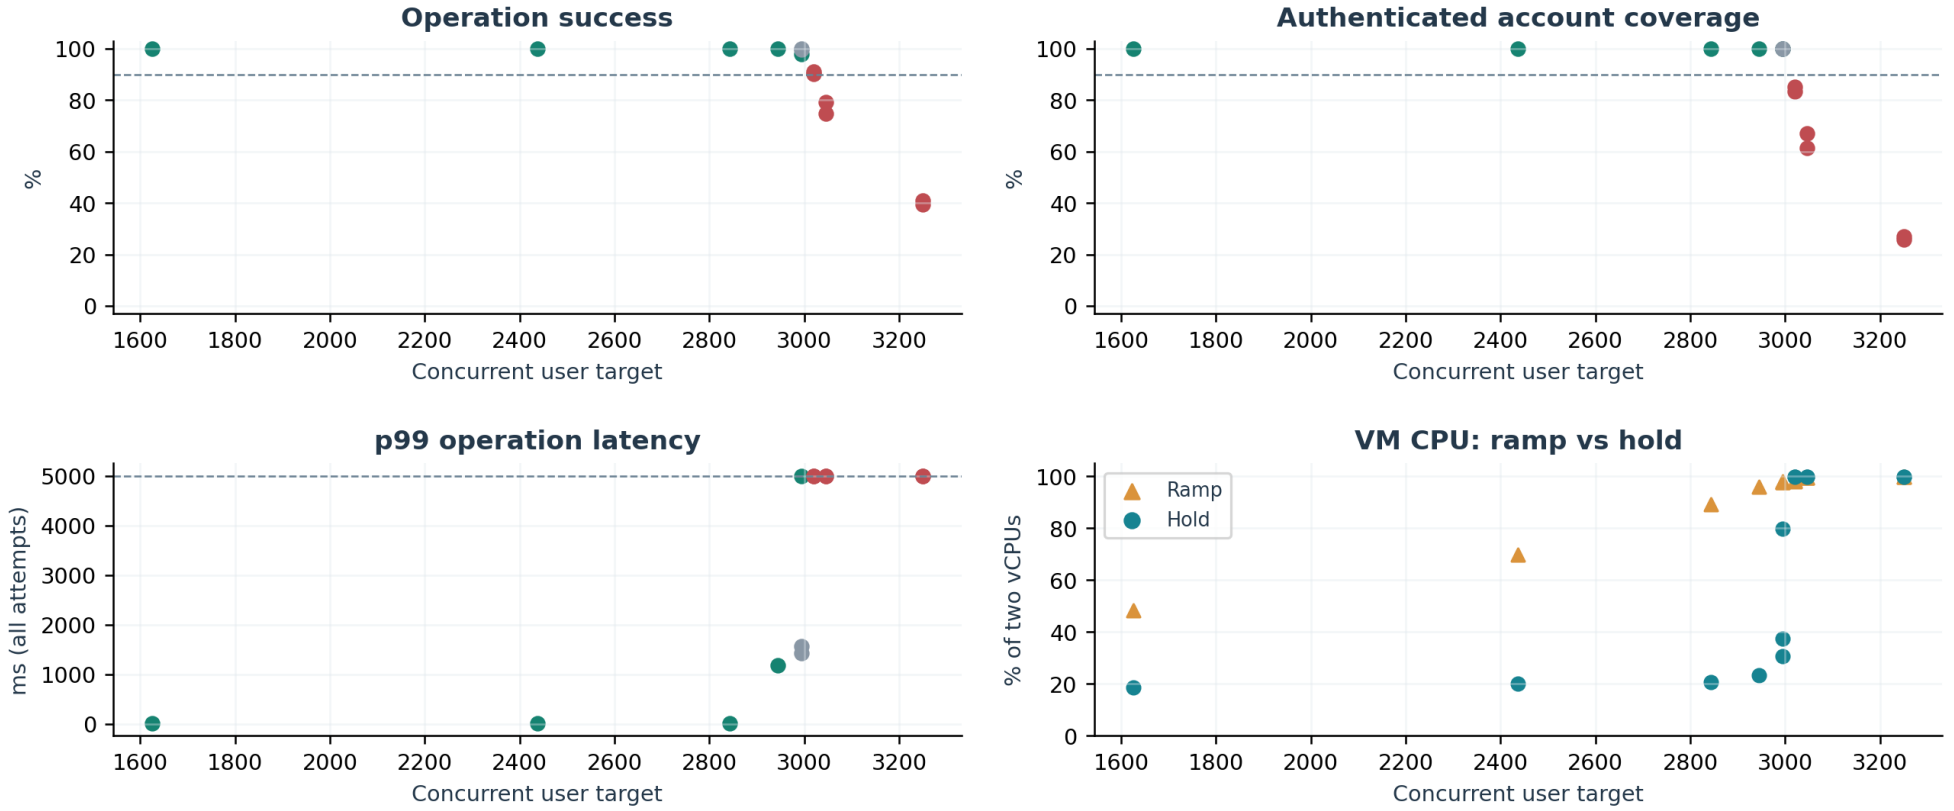

These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

Rust / Axum: stress-search evidence

hybrid |300s ramp +120s hold | 15 physical probes across both objectives


Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	3296	3311	15	majority_on_disagreement
p99	complete	3296	3311	15	majority_on_disagreement

Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
bd46d872	3656	fail	fail	34.0	21.4	128.5	5,001.0	5,002.0	99.9	100.0	0.897
7b929842	3656	fail	fail	37.1	23.8	142.6	5,001.0	5,002.0	99.9	100.0	0.896
78c3b1c9	1828	pass	pass	100.0	100.0	298.5	7.0	8.0	47.8	18.2	0.689
7c5b4401	2194	pass	pass	100.0	100.0	358.3	7.0	8.0	54.0	18.4	0.696
eb8d136e	2487	pass	pass	100.0	100.0	405.9	6.0	8.0	60.7	19.2	0.766
fdf9b77c	2721	pass	pass	100.0	100.0	444.8	6.0	8.0	68.6	19.7	0.754
0166ee40	2908	pass	pass	100.0	100.0	475.5	6.0	7.0	75.7	19.4	0.851
a7f70cbb	3058	pass	pass	100.0	100.0	500.5	6.0	8.0	84.9	20.1	0.734
68c1b1cf	3178	pass	pass	100.0	100.0	520.1	6.0	8.0	92.9	18.6	0.850
81aefa5c	3274	pass	pass	100.0	100.0	536.4	6.0	8.0	96.1	20.6	0.890
74f9303f	3351	fail	fail	78.4	65.8	360.8	5,001.0	5,001.0	99.1	100.0	0.950
e2364352	3351	fail	fail	76.6	63.5	348.3	5,001.0	5,001.0	99.5	100.0	0.873
960b9d69	3296	pass	pass	99.9	100.0	539.1	7.0	9.0	97.8	31.3	0.873
fc9e3d3e	3311	fail	fail	88.1	79.7	432.1	5,001.0	5,001.0	98.4	100.0	0.885
38d2c3c9	3311	fail	fail	90.3	83.3	451.6	5,001.0	5,001.0	98.2	100.0	0.888

Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.

Rust / Axum: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation

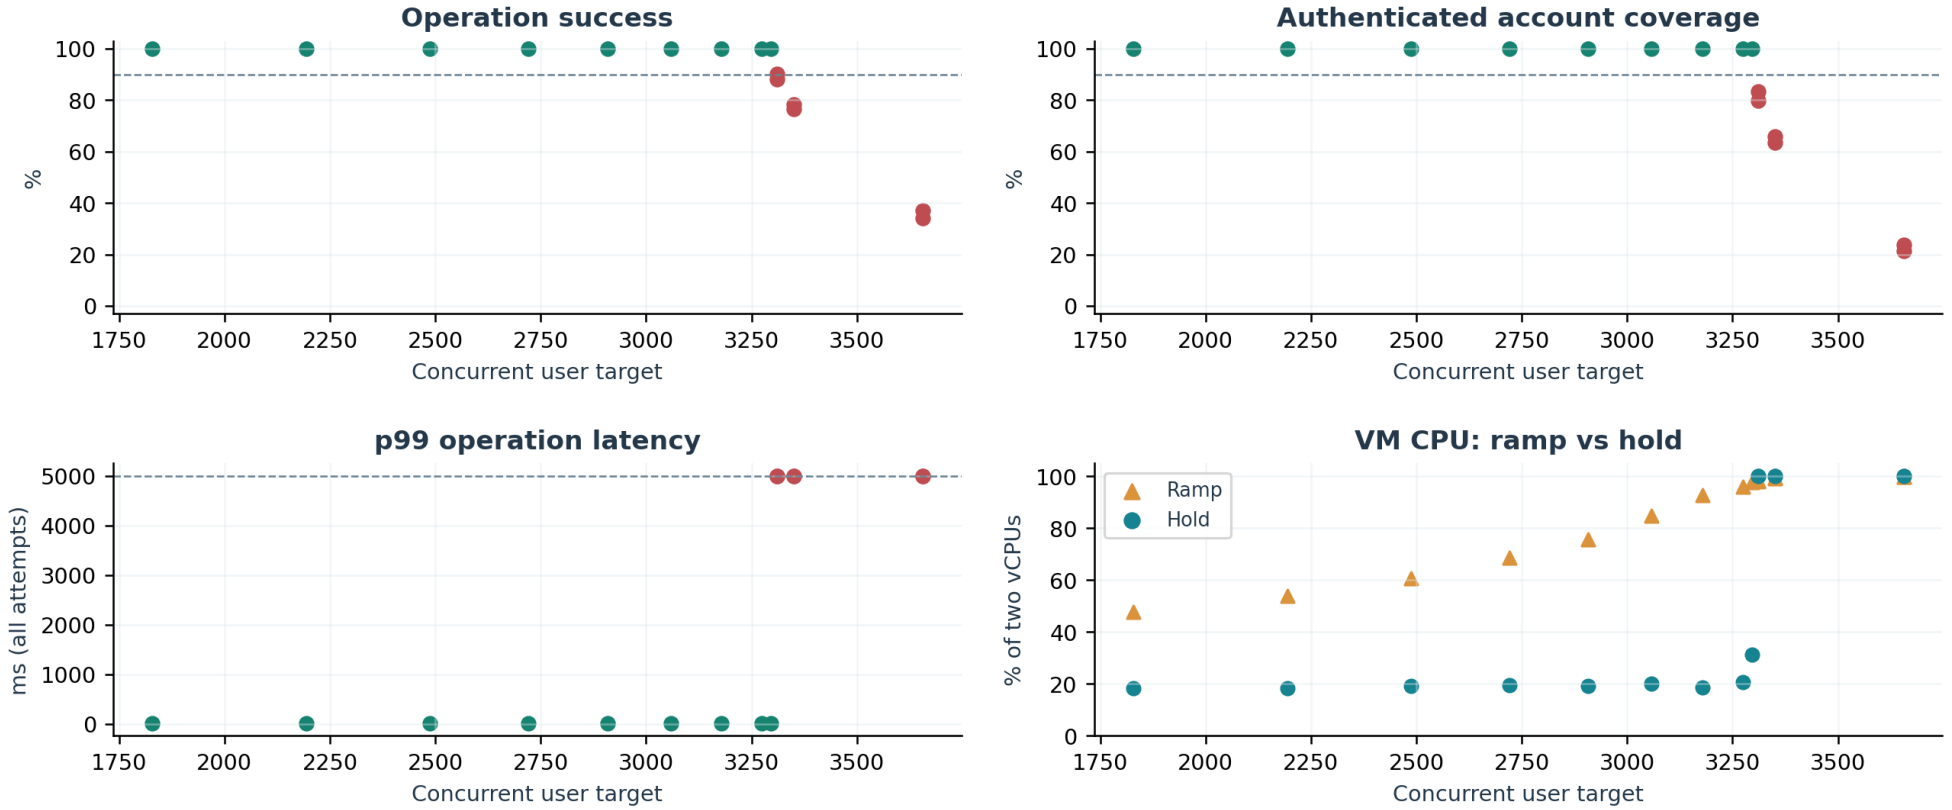

These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

Node / Express: stress-search evidence

hybrid |300s ramp +120s hold | 12 physical probes across both objectives


Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	2453	2472	19	majority_on_disagreement
p99	complete	2453	2472	19	majority_on_disagreement

Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
7bf9be4f	2843	fail	fail	43.3	40.1	185.5	5,000.0	5,001.0	98.8	100.0	1.083
8f7b38b2	2843	fail	fail	45.6	42.1	195.1	5,000.0	5,001.0	98.9	100.0	1.052
1d0f3503	1421	pass	pass	100.0	100.0	232.1	10.0	12.0	52.0	25.4	0.888
3ec3849e	1706	pass	pass	100.0	100.0	278.6	10.0	12.0	60.2	27.9	0.856
b17bd6a9	1934	pass	pass	100.0	100.0	315.9	10.0	12.0	65.4	26.4	0.905
6638a2da	2116	pass	pass	100.0	100.0	345.7	10.0	13.0	72.1	30.5	0.905
083b4234	2262	pass	pass	100.0	100.0	368.7	10.0	13.0	79.2	31.6	0.956
51f7efe2	2379	pass	pass	100.0	100.0	388.4	11.0	16.0	85.9	34.3	0.981
18363290	2472	fail	fail	92.3	88.1	352.6	5,000.0	5,001.0	90.0	100.0	1.054
642a4da2	2472	pass	pass	100.0	100.0	403.9	10.0	14.0	88.7	34.5	1.093
cb869d84	2472	fail	fail	92.4	88.1	353.0	5,000.0	5,001.0	91.1	100.0	1.033
24b68308	2453	pass	pass	99.4	100.0	396.3	13.0	57.6	89.0	54.7	1.109

Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.

Node / Express: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation

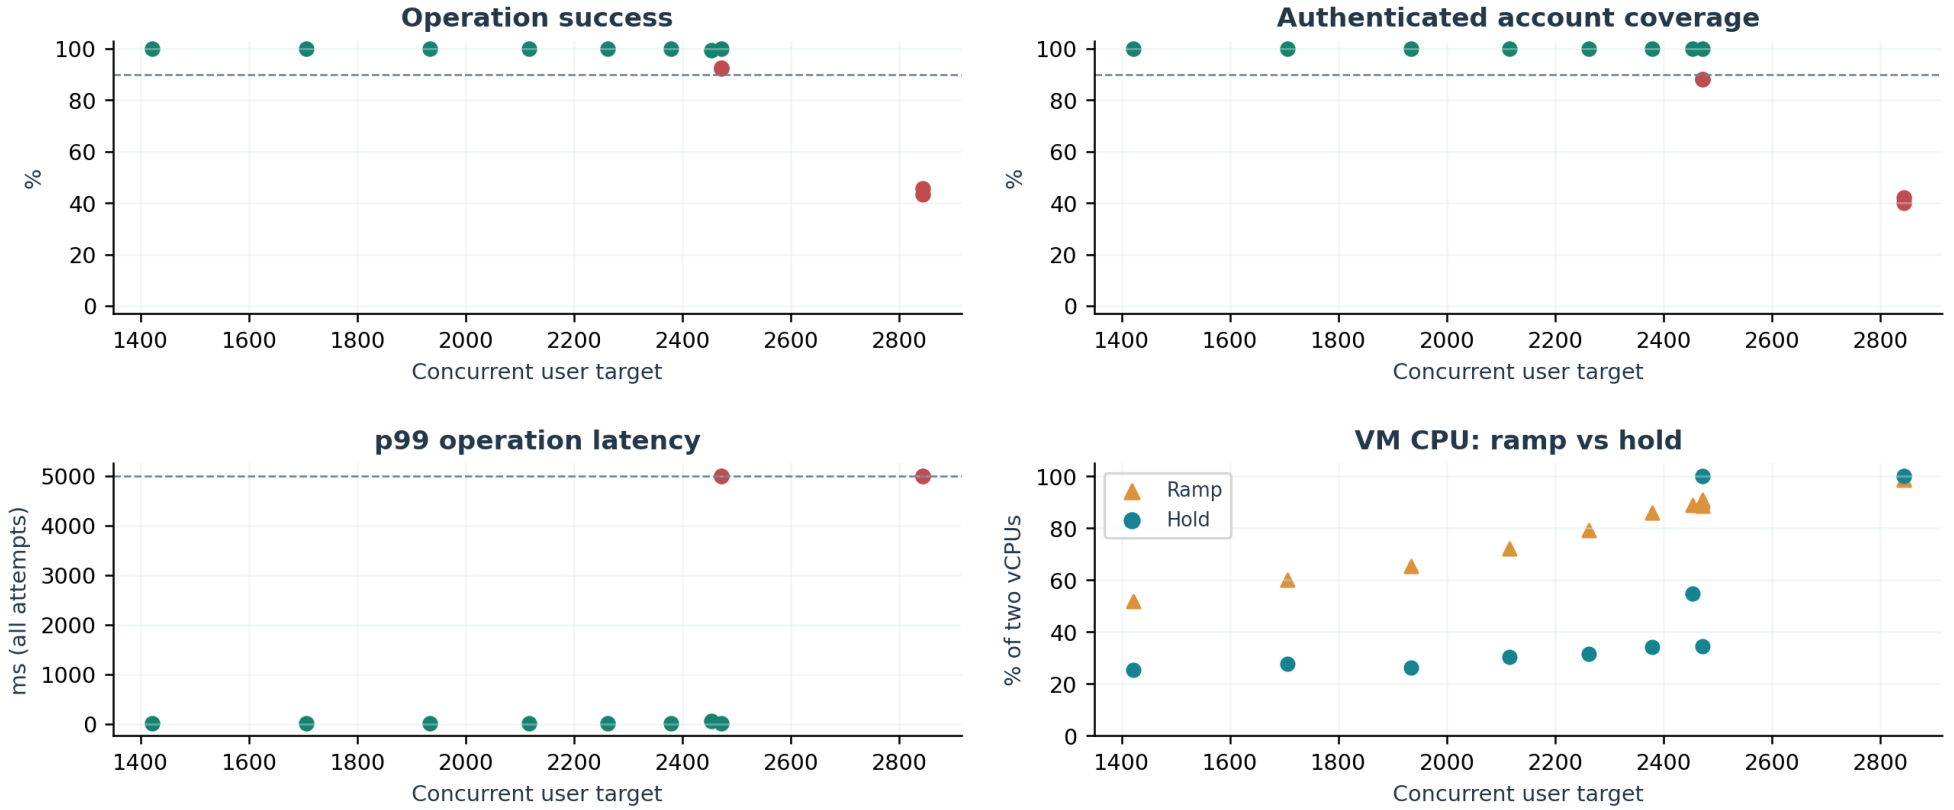

These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

Bun / Express: stress-search evidence

hybrid |300s ramp +120s hold | 15 physical probes across both objectives


Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	2630	2654	24	majority_on_disagreement
p99	complete	2630	2654	24	majority_on_disagreement


Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
8a0a9f0f	2937	fail	fail	36.0	33.2	158.6	5,000.0	5,001.0	99.5	100.0	0.913
9e17992a	2937	fail	fail	37.5	34.7	165.9	5,000.0	5,001.0	99.3	100.0	0.960
1996ded6	1468	pass	pass	100.0	100.0	239.6	10.0	11.0	52.4	22.8	0.739
9796d465	1762	pass	pass	100.0	100.0	287.6	9.0	11.0	60.4	23.8	0.757
9ddec9d7	1997	pass	pass	100.0	100.0	326.2	10.0	11.0	66.9	24.7	0.771
27119f01	2185	pass	pass	100.0	100.0	356.9	10.0	11.0	73.1	25.5	0.774
c2be31d1	2336	pass	pass	100.0	100.0	381.0	10.0	12.0	78.9	26.0	0.762
eae77a4c	2457	pass	pass	100.0	100.0	401.5	10.0	12.0	86.6	25.0	0.786
ecbce4fa	2553	pass	pass	100.0	100.0	417.1	10.0	12.0	93.1	26.7	0.804
1a62a0d4	2630	pass	pass	99.1	100.0	423.6	12.0	4,780.0	95.3	55.6	0.862
f200be68	2692	fail	fail	81.1	76.6	335.0	5,000.0	5,001.0	97.0	100.0	0.925
baf67c3c	2692	fail	fail	79.1	74.4	326.5	5,000.0	5,001.0	97.0	100.0	0.895
0e633bd3	2654	invalid	invalid	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
f93ef1f0	2654	fail	fail	82.5	78.0	336.8	5,000.0	5,001.0	96.3	100.0	0.899
5aa00456	2654	fail	fail	80.2	75.6	326.3	5,000.0	5,001.0	96.5	100.0	0.941


Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.


Bun / Express: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation

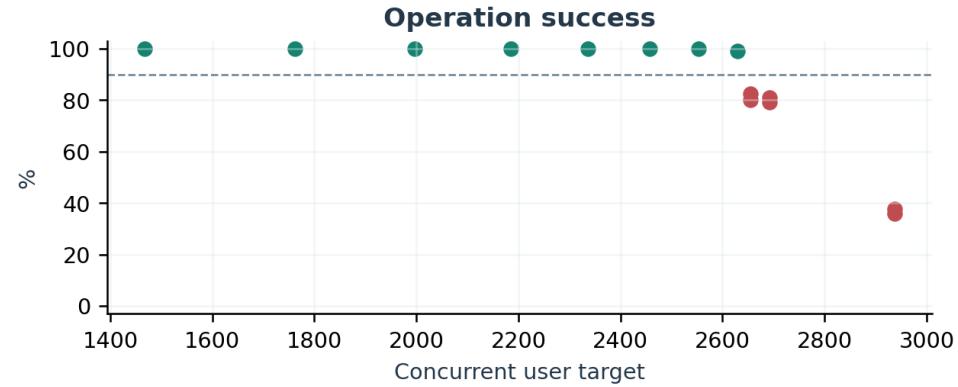

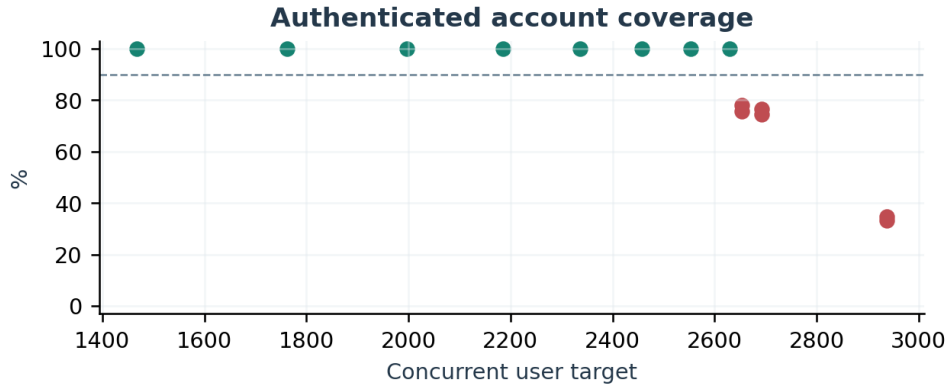

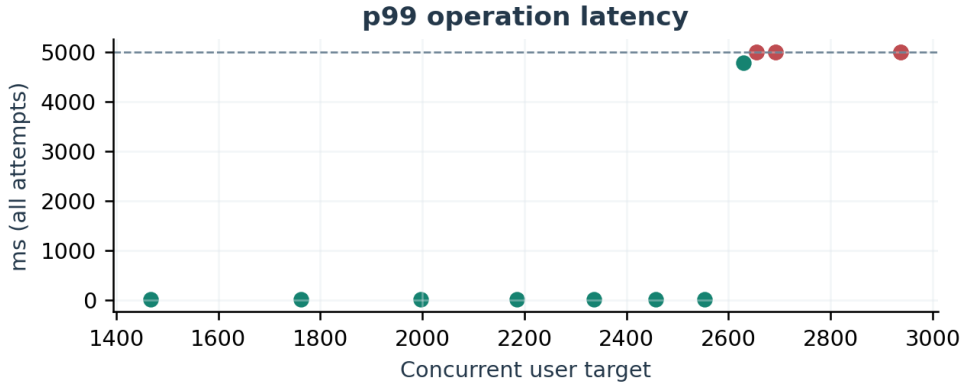

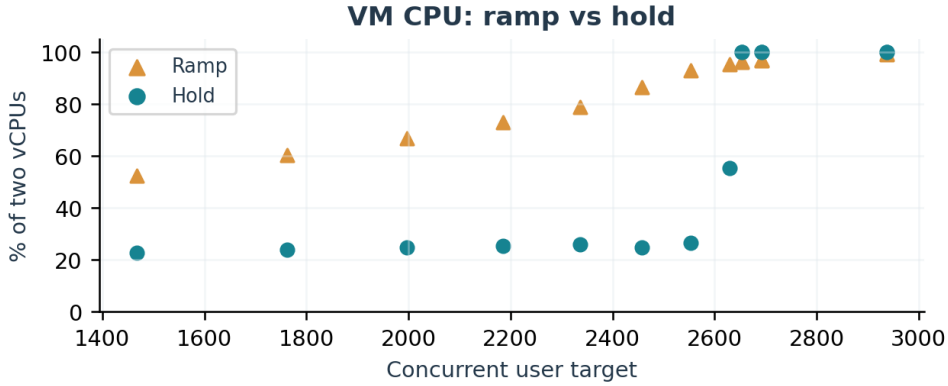

These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

C# / ASP.NET Core: stress-search evidence

upper_probe |300s ramp +120s hold | 7 physical probes across both objectives


Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	1166	1216	50	majority_on_disagreement
p99	complete	1166	1216	50	majority_on_disagreement

Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
6844fa29	1281	fail	fail	4.3	2.3	4.9	5,001.0	5,002.0	99.7	99.8	1.132
8866b26a	1281	fail	fail	21.2	12.5	26.2	5,001.0	5,002.0	99.7	99.9	1.115
b02e2180	640	pass	pass	100.0	100.0	104.8	8.0	9.0	47.2	20.1	0.864
ed877985	1216	fail	fail	57.8	42.3	83.5	5,001.0	5,002.0	99.7	99.9	1.084
8afe5b1f	1216	fail	fail	78.4	65.9	130.8	5,001.0	5,001.0	99.7	99.9	1.114
f04d67d1	928	pass	pass	100.0	100.0	151.9	7.0	9.0	62.7	21.8	0.919
0ab96a24	1166	pass	pass	100.0	100.0	191.0	7.0	9.0	97.0	23.1	1.062

Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.

C# / ASP.NET Core: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation

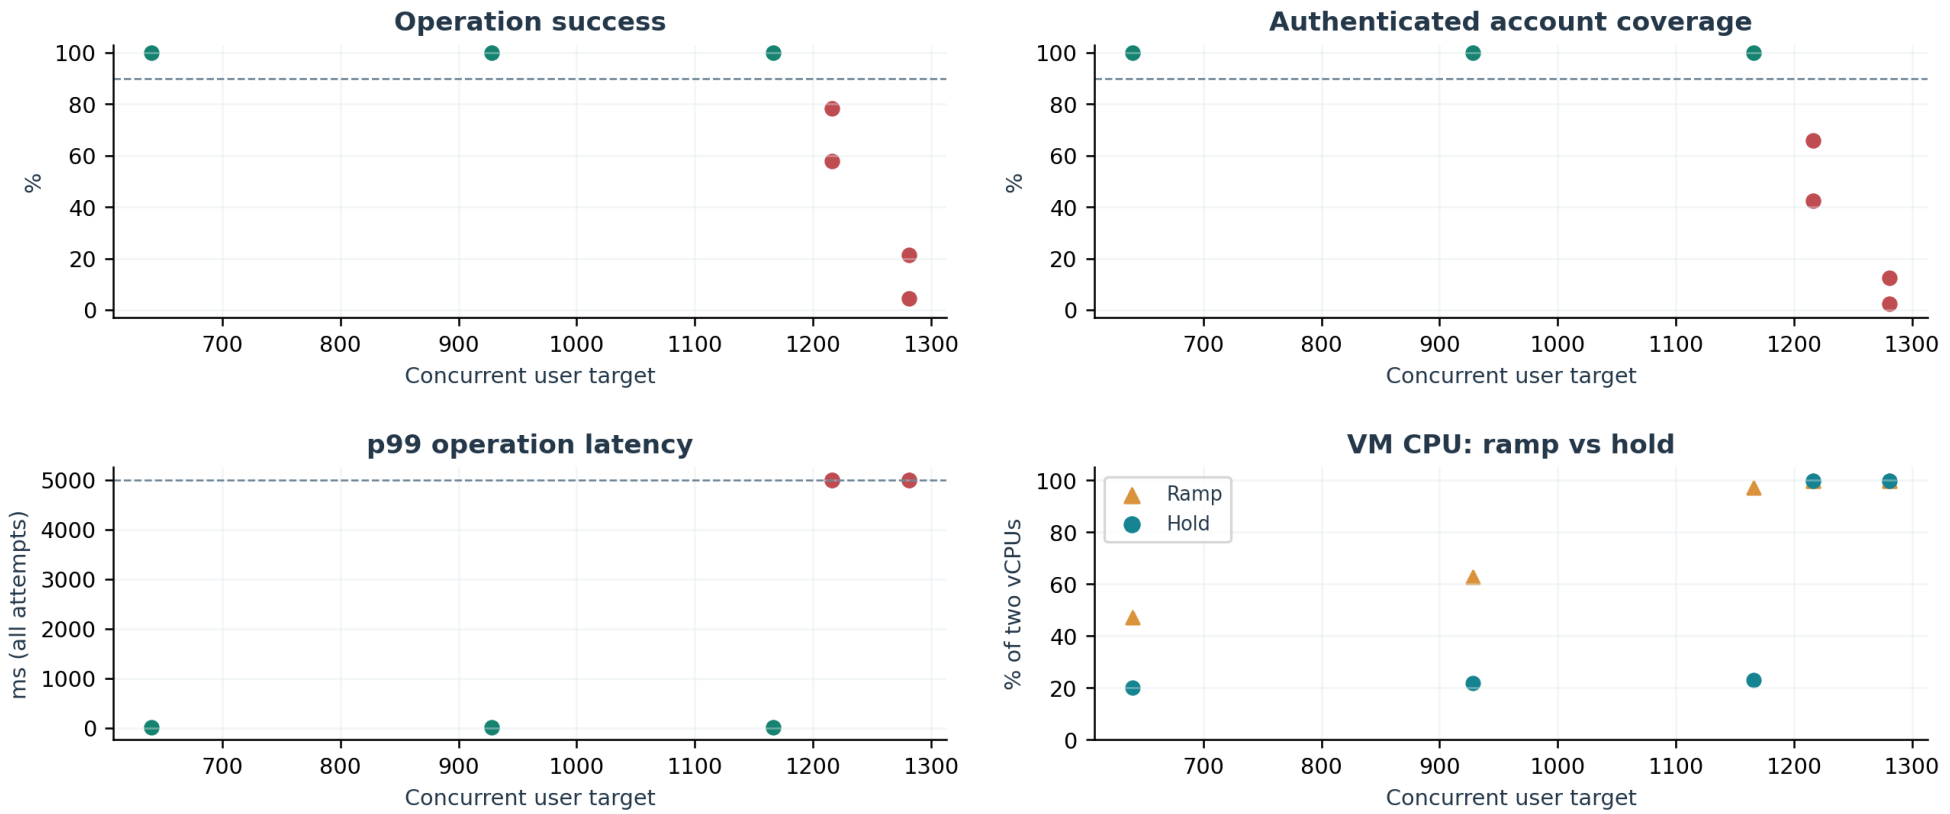

These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

PHP / Laravel Octane: stress-search evidence

upper_probe |300s ramp +120s hold | 9 physical probes across both objectives


Objective	Status	Passing users	Failing users	Gap	Confirmation
p95	complete	1632	1668	36	majority_on_disagreement
p99	complete	1632	1668	36	majority_on_disagreement

Trial prefix	Users	p95 vote	p99 vote	Op %	Auth %	Good/s	p95 ms	p99 ms	Ramp CPU %	Hold CPU %	VM RAM max GiB
3ff40ad5	1718	fail	fail	0.0	85.3	0.0	5,001.0	5,002.0	88.3	100.0	1.789
c05efec3	1718	fail	fail	0.0	87.8	0.0	5,001.0	5,002.0	87.1	100.0	1.777
8ed5db1a	859	pass	pass	100.0	100.0	140.3	12.0	15.0	48.9	36.7	1.508
ad3cec22	1632	fail	fail	1.5	95.8	2.2	5,001.0	5,002.0	85.5	100.0	1.680
03f03b57	1632	pass	pass	99.9	100.0	263.2	2,816.3	4,070.7	85.4	60.0	1.629
f0b8e8b2	1632	pass	pass	100.0	100.0	263.8	1,409.5	4,197.0	83.9	59.1	1.648
1603d802	1668	fail	fail	0.0	86.3	0.0	5,001.0	5,002.0	85.8	100.0	1.810
f16aab6f	1668	pass	fail	98.4	100.0	258.5	3,629.4	5,001.0	85.7	64.8	1.625
2436ef8a	1668	fail	not evaluated	0.0	88.4	0.0	5,001.0	5,002.0	85.5	100.0	1.788

Rows follow measured probe order and include confirmation repeats. p99 classifications may reuse the same raw probe at zero additional execution cost. Invalid trials have no quantitative summary. Counts at a repeated boundary can disagree; the final bound follows the stored majority rule, not selection of the best run.

PHP / Laravel Octane: stress response curves

Every valid physical probe is shown | repeated counts remain separate points | green/red = p95 pass/fail; gray = p99-only evaluation

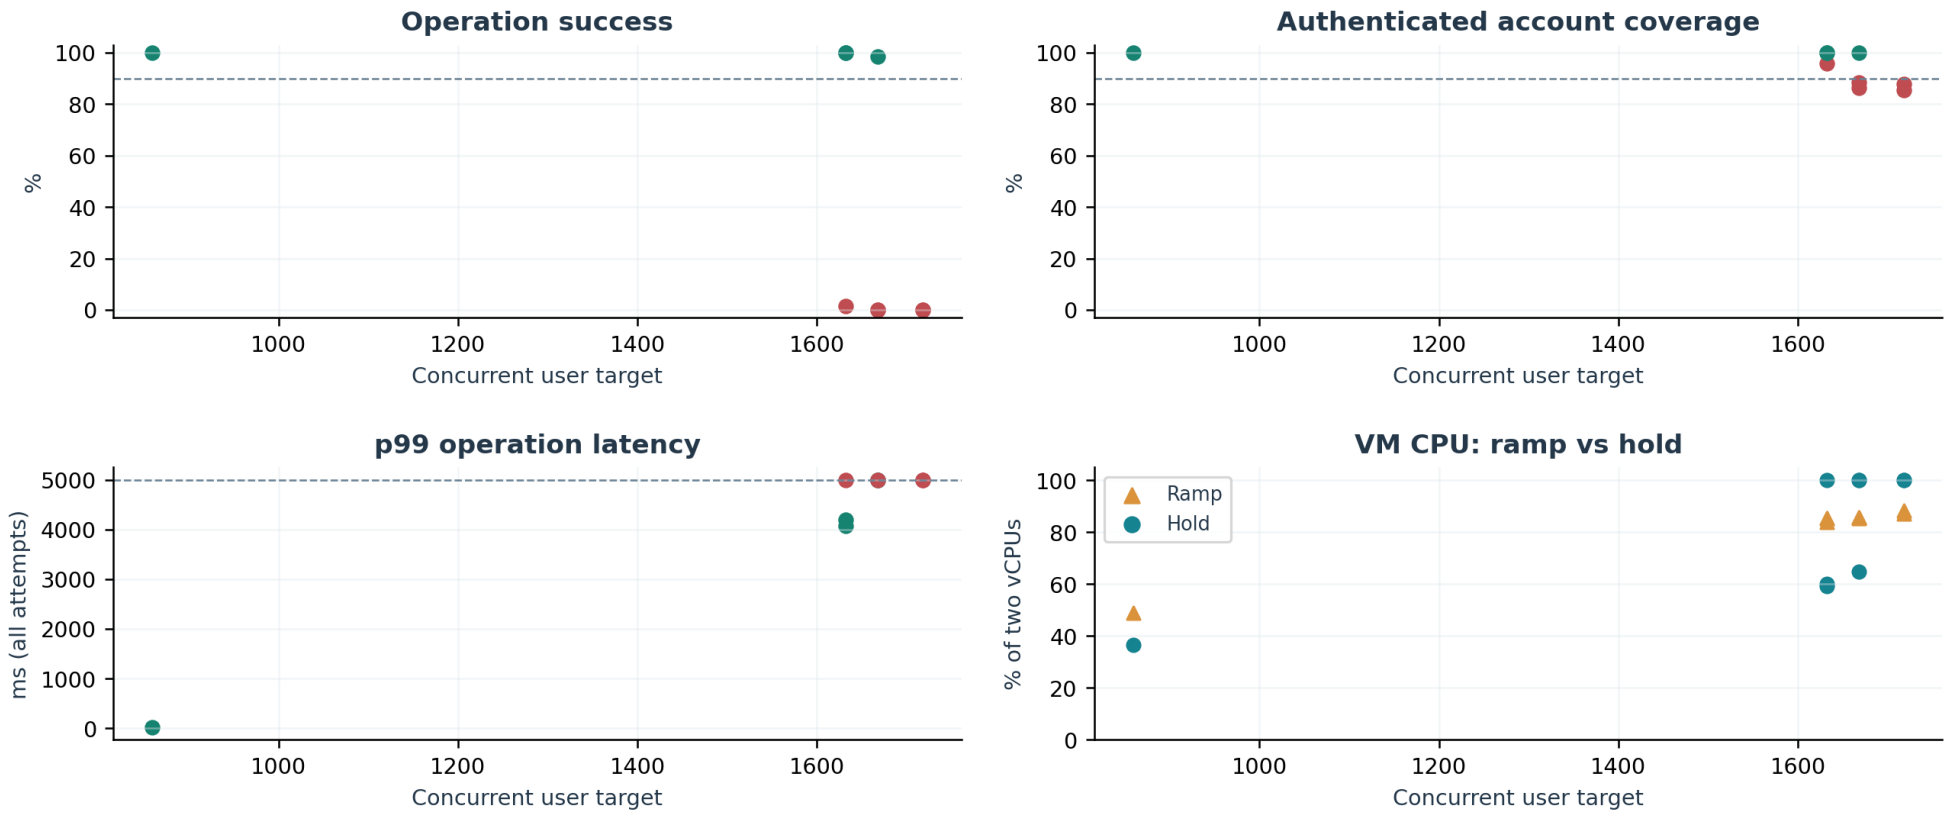

These measured points are not a fitted capacity model. The90% horizontal guides concern operation and account coverage; the5,000ms guide concerns latency. CPU ramp and hold must be interpreted separately. The activity mix and expensive password verification make the startup ramp a material part of the result.

Historical campaigns and methodology

Reference evidence - not pooled with current results

Retained campaign	Records	Recorded outcomes	Review qualifications
cloud-smoke	1	{'measured': 1}	{'valid-recorded-evidence': 1}
dotnet-fixed-20261007	3	{'pass': 2, 'fail': 1}	{'qualified': 3}
fixed-load-20261006	21	{'pass': 19, 'fail': 2}	{'valid-recorded-evidence': 21}
native-capacity	54	{'pass': 22, 'fail': 31, 'invalid': 1}	{'valid-recorded-evidence': 48, 'invalid': 6}
native-capacity-preflight-1791217587	1	{'invalid': 1}	{'invalid': 1}
octane-fixed-20261007	3	{'pass': 3}	{'qualified': 3}
pilot	48	{'measured': 48}	{'valid-recorded-evidence': 48}
user-capacity	102	{'fail': 57, 'pass': 44, 'no-result': 1}	{'valid-recorded-evidence': 94, 'invalid': 8}
user-capacity-invalid-20261004	1	{'invalid': 1}	{'invalid': 1}
capacity90-ramp5-20261006	90	{'pass': 42, 'fail': 47, 'invalid': 1}	{'qualified': 89, 'None': 1}
octane-capacity-20261007	10	{'invalid': 2, 'pass': 5, 'fail': 3}	{'None': 2, 'qualified': 8}

fixed: 27 historical single observations; users 100/500/1000; ramp/settle/hold 180/0/240 seconds; 90% distinct-account authentication and operation success gates; 5-second timeout.

stress90: 100 retained records; 300/0/120 seconds; 90% distinct-account authentication and operation success; 5-second timeout; resolution target 50 users; majority on disagreement.

legacy_capacity: 156 Python/native records; 300/120/300 seconds; 99% authentication and operation success gates; resolution target 100 users; provisional brackets and retrospective validity flags retained.

pilot: 48 open-arrival-rate records, offered operations/s rather than concurrent users; warmup/measure 30/30 seconds.

The48 arrival-rate pilot records use offered operations/s, not simultaneous user counts. Smoke/preflight/invalid archive records are retained in the inventory and never used as completed capacity benchmarks.

Earlier 90% stress brackets

HISTORICAL |300/0/120s | Success/authentication gates; no explicit current p95/p99 objective

Configuration	Status	Recorded pass	Recorded fail	Records	Qualification
Python 3.14 / FastAPI	bracket_found	2375	2406	11	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds
Java / Spring Boot	bracket_found	2062	2093	17	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds
PHP / Laravel FPM	bracket_found	300	350	8	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds
Go / net-http	bracket_found	3250	3281	15	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds
Rust / Axum	bracket_found	3656	3687	10	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds
Node / Express	bracket_found	2843	2875	10	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds
Bun / Express	bracket_found	2937	2968	11	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds
C# / ASP.NET Core	bracket_found	1281	1312	8	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds
PHP / Laravel Octane	bracket_found	1718	1750	10	observed 90% authentication/operation bracket; not equivalent to current p95/p99 search bounds

These values establish history-based starting hints, not fresh measured passes under the current latency criteria. Different telemetry sampling and resource reducers also limit direct comparison. Original evidence is preserved; no historical bound is promoted to a current measured endpoint.

Historical Python version matrix

Python3.10-3.15 and modern feature configurations | Legacy12-minute workload and its validity caveats

Recorded Python configuration	Status	Pass	Fail	Records	Validity qualifications
python-baseline-3.10.22	bracket_found	2031	2109	18	{'valid-recorded-evidence': 18}
python-baseline-3.11.17	unstable_or_invalid_boundary	2187	2265	19	unstable
python-baseline-3.12.13	unstable_boundary	2148	2206	14	FD flags: 1; unstable
python-baseline-3.13.16	unstable_boundary	2118	2206	9	FD flags: 3; unstable
python-baseline-3.14.8	bracket_found	2118	2206	4	FD flags: 2
python-baseline-3.15.0rc3	bracket_found	2118	2206	3	prerelease runtime
python-modern-standard-jit0-gil1-async	bracket_found	2206	2306	5	prerelease runtime; prerelease dependency
python-modern-jit-jit0-gil1-async	bracket_found	2206	2306	3	prerelease runtime; prerelease dependency
python-modern-jit-jit1-gil1-async	bracket_found	2206	2306	3	prerelease runtime; prerelease dependency
python-modern-free-threaded-jit0-gil1-async	bracket_found	2137	2206	7	prerelease runtime; prerelease dependency
python-modern-free-threaded-jit0-gil0-async	bracket_found	2206	2306	5	prerelease runtime; prerelease dependency
python-modern-free-threaded-jit0-gil1-threaded	bracket_found	1240	1309	7	FD flags: 1; prerelease runtime; prerelease dependency
python-modern-free-threaded-jit0-gil0-threaded	bracket_found	1309	1409	5	prerelease runtime; prerelease dependency

Recorded legacy boundaries are not authoritative hardware capacity limits. The original99% success/authentication policy,300s ramp/120s settle/300s hold, file-limit failures and prerelease software differ materially from the latest workload. Their recorded values are provided for completeness, not as a ranking.

Historical native and invalid-archive bounds

Recorded legacy outcomes, with invalid or unstable evidence kept visible

Configuration	Status	Recorded pass	Recorded fail	FD flags	Qualification
java-spring-boot	bracket_found	1937	2025	0	recorded provisional bracket; 99% gates, legacy timing
php-laravel	bracket_found	302	363	0	recorded provisional bracket; 99% gates, legacy timing
go-net-http	bracket_found	3176	3267	0	recorded provisional bracket; 99% gates, legacy timing
rust-axum	bracket_found	992	1091	5	recorded provisional bracket; 99% gates, legacy timing; infrastructure FD flags invalidate flagged trials and prohibit an authoritative ceiling
node-express	bracket_found	2795	2863	0	recorded provisional bracket; 99% gates, legacy timing
bun-express	bracket_found	2863	2952	0	recorded provisional bracket; 99% gates, legacy timing
python-baseline-3.10.22	invalid	0	n/a	0	invalid archived evidence; no usable capacity bound

All historical fixed-load observations

27 earlier measurements at100/500/1,000 | Unweighted sampled VM means

Config	Users	Vote	Op %	Auth %	Good/s	Mean ms	p99 ms	VM CPU %	VM RAM MiB	Trial ID
Bun	100	pass	100.0	100.0	16.36	4.43	11.00	4.1	757.9	e02ce1700d3a-0018
.NET	100	pass	100.0	100.0	16.40	3.98	9.00	4.0	916.1	98b838a32a49-0000
Go	100	pass	100.0	100.0	16.35	3.08	8.00	3.3	785.8	e02ce1700d3a-0009
Java	100	pass	100.0	100.0	16.32	3.46	8.00	4.5	1,680.0	e02ce1700d3a-0003
Node	100	pass	100.0	100.0	16.38	4.71	11.00	4.3	791.1	e02ce1700d3a-0015
FPM	100	pass	100.0	100.0	16.24	55.53	155.04	33.4	763.8	e02ce1700d3a-0006
Octane	100	pass	100.0	100.0	16.29	6.44	12.00	5.6	1,563.0	35749f424096-0000
Python	100	pass	100.0	100.0	16.43	7.02	44.00	6.9	817.9	e02ce1700d3a-0000
Rust	100	pass	100.0	100.0	16.37	3.43	8.00	3.3	688.4	e02ce1700d3a-0012
Bun	500	pass	100.0	100.0	81.67	3.71	9.00	6.7	779.9	e02ce1700d3a-0019
.NET	500	pass	100.0	100.0	81.70	3.62	9.00	7.5	922.5	98b838a32a49-0001
Go	500	pass	100.0	100.0	81.60	2.53	5.00	4.8	811.3	e02ce1700d3a-0010
Java	500	pass	100.0	100.0	81.55	2.90	7.00	5.8	1,371.4	e02ce1700d3a-0004
Node	500	pass	100.0	100.0	81.60	4.00	10.00	7.5	895.6	e02ce1700d3a-0016
FPM	500	fail	0.0	42.2	0.00	5,000.66	5,002.00	100.0	900.6	e02ce1700d3a-0007
Octane	500	pass	100.0	100.0	81.66	6.18	12.00	15.3	1,583.5	35749f424096-0001
Python	500	pass	100.0	100.0	81.72	6.45	44.00	12.6	815.7	e02ce1700d3a-0001
Rust	500	pass	100.0	100.0	81.71	2.91	7.00	4.8	702.4	e02ce1700d3a-0013
Bun	1000	pass	100.0	100.0	163.88	3.56	9.00	9.6	790.3	e02ce1700d3a-0020
.NET	1000	fail	10.0	5.6	9.07	4,505.57	5,002.00	99.7	1,059.9	98b838a32a49-0002
Go	1000	pass	100.0	100.0	163.80	2.42	5.00	6.4	761.9	e02ce1700d3a-0011
Java	1000	pass	100.0	100.0	163.83	2.93	8.00	6.6	1,798.6	e02ce1700d3a-0005
Node	1000	pass	100.0	100.0	163.74	3.82	9.00	11.2	928.0	e02ce1700d3a-0017
FPM	1000	fail	0.0	14.1	0.00	5,000.65	5,002.00	100.0	936.1	e02ce1700d3a-0008
Octane	1000	pass	100.0	100.0	163.67	6.47	13.00	26.5	1,606.3	35749f424096-0002

All historical fixed-load observations (continued)

Config	Users	Vote	Op %	Auth %	Good/s	Mean ms	p99 ms	VM CPU %	VM RAM MiB	Trial ID
Python	1000	pass	100.0	100.0	163.65	6.39	44.00	19.2	833.0	e02ce1700d3a-0002
Rust	1000	pass	100.0	100.0	163.85	2.71	6.00	5.9	723.6	e02ce1700d3a-0014

Current physical-trial inventory

All131 records | Includes the invalid interrupted Bun probe | Source hashes in attachedCSV

#	Config	Type	Users	p95/default	p99	Op %	Auth %	Good/s	p99 ms	Valid	Trial ID prefix
1	Python	fixed	100	pass	-	100.0	100.0	16.3	45.0	yes	1d0770d93c51
2	Python	fixed	1000	pass	-	100.0	100.0	163.7	45.0	yes	01fc6c951245
3	Java	fixed	100	pass	-	100.0	100.0	16.3	8.0	yes	64648f264de9
4	Java	fixed	1000	pass	-	100.0	100.0	163.8	8.0	yes	eed246fabc85
5	FPM	fixed	100	pass	-	100.0	100.0	16.2	197.2	yes	c83ede3ee956
6	FPM	fixed	1000	fail	-	0.0	15.7	0.0	5,002.0	yes	cd7ccd83d00e
7	Go	fixed	100	pass	-	100.0	100.0	16.4	8.0	yes	4fdeeb1e2aad
8	Go	fixed	1000	pass	-	100.0	100.0	163.7	8.0	yes	0151f524eed5
9	Rust	fixed	100	pass	-	100.0	100.0	16.4	9.0	yes	c3ad90f143d0
10	Rust	fixed	1000	pass	-	100.0	100.0	163.9	8.0	yes	9c3a34a58d1e
11	Node	fixed	100	pass	-	100.0	100.0	16.4	12.0	yes	fe4650877988
12	Node	fixed	1000	pass	-	100.0	100.0	163.9	11.0	yes	7ec97bce898d
13	Bun	fixed	100	pass	-	100.0	100.0	16.4	11.0	yes	e1d71ff7f89b
14	Bun	fixed	1000	pass	-	100.0	100.0	163.8	11.0	yes	74750ccd5ee0
15	.NET	fixed	100	pass	-	100.0	100.0	16.4	9.0	yes	21acdefaeebb
16	.NET	fixed	1000	fail	-	8.8	4.9	7.9	5,002.0	yes	88bb043ee376
17	Octane	fixed	100	pass	-	100.0	100.0	16.3	12.0	yes	048560eeddb2
18	Octane	fixed	1000	pass	-	100.0	100.0	163.8	15.0	yes	b7eceb848c7c
19	Python	search	2375	fail	fail	67.3	100.0	198.8	5,001.0	yes	3750a644d253
20	Python	search	2375	fail	fail	62.6	100.0	175.4	5,001.0	yes	4458bdb0052c
21	Python	search	1187	pass	pass	100.0	100.0	194.3	45.0	yes	705342be4340
22	Python	search	1781	pass	pass	100.0	100.0	290.5	46.0	yes	0ad7d9e58d78
23	Python	search	2078	pass	pass	100.0	100.0	339.1	46.0	yes	36c79bfe69b3
24	Python	search	2226	pass	fail	97.9	100.0	352.1	5,001.0	yes	4d14383f2733
25	Python	search	2300	pass	fail	93.0	100.0	325.8	5,001.0	yes	b50ce2dff130

Current physical-trial inventory (continued)

#	Config	Type	Users	p95/default	p99	Op %	Auth %	Good/s	p99 ms	Valid	Trial ID prefix
26	Python	search	2337	fail	fail	86.1	100.0	289.2	5,001.0	yes	8b46de58acc8
27	Python	search	2337	fail	fail	89.0	100.0	308.1	5,001.0	yes	ebdb4eb826b8
28	Python	search	2226	not evaluated	pass	100.0	100.0	363.0	2,445.3	yes	70ac17ad934d
29	Python	search	2226	not evaluated	pass	100.0	100.0	363.8	2,018.4	yes	0dd9df8d34d0
30	Python	search	2300	not evaluated	fail	93.4	100.0	331.1	5,001.0	yes	14e17051960d
31	Python	search	2263	not evaluated	fail	87.9	100.0	286.8	5,001.0	yes	4c0d19a01904
32	Python	search	2263	not evaluated	fail	94.7	100.0	335.6	5,001.0	yes	bd646d5af688
33	Java	search	2062	pass	pass	100.0	100.0	337.3	7.0	yes	42ecb0a6767c
34	Java	search	4124	fail	fail	0.0	0.8	0.0	5,002.0	yes	8871243866f2
35	Java	search	4124	fail	fail	0.0	0.8	0.0	5,002.0	yes	2be4127c6355
36	Java	search	3093	fail	fail	0.0	2.8	0.0	5,002.0	yes	cd859a62f346
37	Java	search	3093	fail	fail	0.0	1.4	0.0	5,002.0	yes	851d5e7b98ad
38	Java	search	2577	fail	fail	0.0	2.2	0.0	5,002.0	yes	498055adbef1
39	Java	search	2577	fail	fail	0.0	1.9	0.0	5,002.0	yes	cce4183e771d
40	Java	search	2319	fail	fail	0.0	4.4	0.0	5,002.0	yes	eba85d7619a9
41	Java	search	2319	fail	fail	0.0	4.4	0.0	5,002.0	yes	40f9a4b4347a
42	Java	search	2190	fail	fail	0.0	5.1	0.0	5,002.0	yes	6a8f4ce84709
43	Java	search	2190	fail	fail	0.0	3.5	0.0	5,002.0	yes	c3e0eb8ce371
44	Java	search	2126	fail	fail	0.0	5.0	0.0	5,002.0	yes	d93ae8d81d1c
45	Java	search	2126	pass	pass	100.0	100.0	347.5	7.0	yes	00f01e6e59d9
46	Java	search	2126	fail	fail	0.0	4.6	0.0	5,002.0	yes	f2316f42f9aa
47	Java	search	2094	pass	pass	100.0	100.0	342.2	7.0	yes	8e32e6b25309
48	FPM	search	300	pass	fail	97.3	100.0	32.4	5,001.0	yes	aecf6509c993
49	FPM	search	600	fail	fail	0.0	39.7	0.0	5,002.0	yes	d585f081db0d
50	FPM	search	600	fail	fail	0.0	39.3	0.0	5,002.0	yes	e0989d6dca2f
51	FPM	search	450	fail	fail	0.0	57.6	0.0	5,002.0	yes	8bd1c6eb65cd

Current physical-trial inventory (continued)

#	Config	Type	Users	p95/default	p99	Op %	Auth %	Good/s	p99 ms	Valid	Trial ID prefix
52	FPM	search	450	fail	fail	0.0	54.2	0.0	5,002.0	yes	5b3ec2d0ea38
53	FPM	search	375	fail	fail	0.0	68.5	0.0	5,002.0	yes	b9ffce79802c
54	FPM	search	375	fail	fail	0.0	68.3	0.0	5,002.0	yes	b7393fa78694
55	FPM	search	337	fail	fail	0.0	78.9	0.0	5,002.0	yes	f67dae14722f
56	FPM	search	337	fail	fail	0.0	78.6	0.0	5,002.0	yes	f4daf55e39f5
57	FPM	search	300	not evaluated	fail	2.3	89.7	0.6	5,002.0	yes	328e9acc35f3
58	FPM	search	150	not evaluated	pass	100.0	100.0	24.1	325.0	yes	455013792b9a
59	FPM	search	225	not evaluated	pass	100.0	100.0	35.2	793.8	yes	ae2742e14826
60	FPM	search	262	not evaluated	pass	100.0	100.0	38.3	1,710.1	yes	58485dc8ce96
61	Go	search	3250	fail	fail	39.5	25.9	136.7	5,002.0	yes	64820a13d3ae
62	Go	search	3250	fail	fail	40.9	27.1	142.7	5,002.0	yes	261b184f349e
63	Go	search	1625	pass	pass	100.0	100.0	265.2	7.0	yes	5da23f05e473
64	Go	search	2437	pass	pass	100.0	100.0	397.6	8.0	yes	d84da09e23bb
65	Go	search	2843	pass	pass	100.0	100.0	464.6	7.0	yes	d53465750070
66	Go	search	3046	fail	fail	79.2	67.2	330.6	5,001.0	yes	ad4222fc8e20
67	Go	search	3046	fail	fail	74.9	61.6	303.4	5,001.0	yes	59469d62c731
68	Go	search	2944	pass	pass	100.0	100.0	481.7	1,175.0	yes	30a8c7750a3b
69	Go	search	2995	pass	fail	97.9	100.0	433.9	5,001.0	yes	ed4ae95e813f
70	Go	search	3020	fail	fail	91.1	85.2	397.7	5,001.0	yes	5bbe6e1c9a41
71	Go	search	3020	fail	fail	90.1	83.5	396.0	5,001.0	yes	4020ae422ba9
72	Go	search	2995	not evaluated	pass	99.9	100.0	482.1	1,570.0	yes	70ea92a00a5e
73	Go	search	2995	not evaluated	pass	99.7	100.0	476.0	1,418.0	yes	724b734d952a
74	Rust	search	3656	fail	fail	34.0	21.4	128.5	5,002.0	yes	bd46d8728340
75	Rust	search	3656	fail	fail	37.1	23.8	142.6	5,002.0	yes	7b929842345c
76	Rust	search	1828	pass	pass	100.0	100.0	298.5	8.0	yes	78c3b1c91a15
77	Rust	search	2194	pass	pass	100.0	100.0	358.3	8.0	yes	7c5b44011177

Current physical-trial inventory (continued)

#	Config	Type	Users	p95/default	p99	Op %	Auth %	Good/s	p99 ms	Valid	Trial ID prefix
78	Rust	search	2487	pass	pass	100.0	100.0	405.9	8.0	yes	eb8d136e47e5
79	Rust	search	2721	pass	pass	100.0	100.0	444.8	8.0	yes	fdf9b77ccc28
80	Rust	search	2908	pass	pass	100.0	100.0	475.5	7.0	yes	0166ee4063df
81	Rust	search	3058	pass	pass	100.0	100.0	500.5	8.0	yes	a7f70cbb55b7
82	Rust	search	3178	pass	pass	100.0	100.0	520.1	8.0	yes	68c1b1cf0408
83	Rust	search	3274	pass	pass	100.0	100.0	536.4	8.0	yes	81aefa5cdf58
84	Rust	search	3351	fail	fail	78.4	65.8	360.8	5,001.0	yes	74f9303fca91
85	Rust	search	3351	fail	fail	76.6	63.5	348.3	5,001.0	yes	e23643523bcd
86	Rust	search	3296	pass	pass	99.9	100.0	539.1	9.0	yes	960b9d690569
87	Rust	search	3311	fail	fail	88.1	79.7	432.1	5,001.0	yes	fc9e3d3eddb4
88	Rust	search	3311	fail	fail	90.3	83.3	451.6	5,001.0	yes	38d2c3c9eb3b
89	Node	search	2843	fail	fail	43.3	40.1	185.5	5,001.0	yes	7bf9be4fb10b
90	Node	search	2843	fail	fail	45.6	42.1	195.1	5,001.0	yes	8f7b38b2cec5
91	Node	search	1421	pass	pass	100.0	100.0	232.1	12.0	yes	1d0f35037790
92	Node	search	1706	pass	pass	100.0	100.0	278.6	12.0	yes	3ec3849e49b0
93	Node	search	1934	pass	pass	100.0	100.0	315.9	12.0	yes	b17bd6a919e6
94	Node	search	2116	pass	pass	100.0	100.0	345.7	13.0	yes	6638a2dadf08
95	Node	search	2262	pass	pass	100.0	100.0	368.7	13.0	yes	083b4234a937
96	Node	search	2379	pass	pass	100.0	100.0	388.4	16.0	yes	51f7efe22a21
97	Node	search	2472	fail	fail	92.3	88.1	352.6	5,001.0	yes	18363290ecc7
98	Node	search	2472	pass	pass	100.0	100.0	403.9	14.0	yes	642a4da28202
99	Node	search	2472	fail	fail	92.4	88.1	353.0	5,001.0	yes	cb869d84dc59
100	Node	search	2453	pass	pass	99.4	100.0	396.3	57.6	yes	24b683082a1b
101	Bun	search	2937	fail	fail	36.0	33.2	158.6	5,001.0	yes	8a0a9f0fdb37
102	Bun	search	2937	fail	fail	37.5	34.7	165.9	5,001.0	yes	9e17992a6817
103	Bun	search	1468	pass	pass	100.0	100.0	239.6	11.0	yes	1996ded6e4d5

Current physical-trial inventory (continued)

#	Config	Type	Users	p95/default	p99	Op %	Auth %	Good/s	p99 ms	Valid	Trial ID prefix
104	Bun	search	1762	pass	pass	100.0	100.0	287.6	11.0	yes	9796d465a34f
105	Bun	search	1997	pass	pass	100.0	100.0	326.2	11.0	yes	9ddec9d73d47
106	Bun	search	2185	pass	pass	100.0	100.0	356.9	11.0	yes	27119f0113aa
107	Bun	search	2336	pass	pass	100.0	100.0	381.0	12.0	yes	c2be31d199d0
108	Bun	search	2457	pass	pass	100.0	100.0	401.5	12.0	yes	eae77a4cf4a2
109	Bun	search	2553	pass	pass	100.0	100.0	417.1	12.0	yes	ecbce4faece4
110	Bun	search	2630	pass	pass	99.1	100.0	423.6	4,780.0	yes	1a62a0d4651a
111	Bun	search	2692	fail	fail	81.1	76.6	335.0	5,001.0	yes	f200be68efbb
112	Bun	search	2692	fail	fail	79.1	74.4	326.5	5,001.0	yes	baf67c3c2a75
113	Bun	search	2654	invalid	invalid	n/a	n/a	n/a	n/a	INVALID	0e633bd3ebd1
114	Bun	search	2654	fail	fail	82.5	78.0	336.8	5,001.0	yes	f93ef1f02fc0
115	Bun	search	2654	fail	fail	80.2	75.6	326.3	5,001.0	yes	5aa00456eb42
116	.NET	search	1281	fail	fail	4.3	2.3	4.9	5,002.0	yes	6844fa296871
117	.NET	search	1281	fail	fail	21.2	12.5	26.2	5,002.0	yes	8866b26a9978
118	.NET	search	640	pass	pass	100.0	100.0	104.8	9.0	yes	b02e2180b8f0
119	.NET	search	1216	fail	fail	57.8	42.3	83.5	5,002.0	yes	ed8779852132
120	.NET	search	1216	fail	fail	78.4	65.9	130.8	5,001.0	yes	8afe5b1f90d6
121	.NET	search	928	pass	pass	100.0	100.0	151.9	9.0	yes	f04d67d1b034
122	.NET	search	1166	pass	pass	100.0	100.0	191.0	9.0	yes	0ab96a24af1d
123	Octane	search	1718	fail	fail	0.0	85.3	0.0	5,002.0	yes	3ff40ad5673e
124	Octane	search	1718	fail	fail	0.0	87.8	0.0	5,002.0	yes	c05efec30d82
125	Octane	search	859	pass	pass	100.0	100.0	140.3	15.0	yes	8ed5db1a433e
126	Octane	search	1632	fail	fail	1.5	95.8	2.2	5,002.0	yes	ad3cec2288a7
127	Octane	search	1632	pass	pass	99.9	100.0	263.2	4,070.7	yes	03f03b57fae7
128	Octane	search	1632	pass	pass	100.0	100.0	263.8	4,197.0	yes	f0b8e8b2f726
129	Octane	search	1668	fail	fail	0.0	86.3	0.0	5,002.0	yes	1603d802bd22

Current physical-trial inventory (continued)

#	Config	Type	Users	p95/default	p99	Op %	Auth %	Good/s	p99 ms	Valid	Trial ID prefix
130	Octane	search	1668	pass	fail	98.4	100.0	258.5	5,001.0	yes	f16aab6f7d55
131	Octane	search	1668	fail	not evaluated	0.0	88.4	0.0	5,002.0	yes	2436ef8a9c7e

Historical physical-trial inventory

234 retained legacy/pilot/fixed/smoke/preflight records | Labels preserve original recorded outcomes

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
1	cloud-smoke	python-baseline-3.10.22	rate 25.0	measured	100.0	n/a	152.0	valid-recorded-evidence	76a6b6771182-0000
2	fixed-load-20261006	python-modern-3.14.8-standard-jit0-gil1-async	100	pass	100.0	100.0	44.0	valid-recorded-evidence	e02ce1700d3a-0000
3	fixed-load-20261006	python-modern-3.14.8-standard-jit0-gil1-async	500	pass	100.0	100.0	44.0	valid-recorded-evidence	e02ce1700d3a-0001
4	fixed-load-20261006	python-modern-3.14.8-standard-jit0-gil1-async	1000	pass	100.0	100.0	44.0	valid-recorded-evidence	e02ce1700d3a-0002
5	fixed-load-20261006	java-spring-boot	100	pass	100.0	100.0	8.0	valid-recorded-evidence	e02ce1700d3a-0003
6	fixed-load-20261006	java-spring-boot	500	pass	100.0	100.0	7.0	valid-recorded-evidence	e02ce1700d3a-0004
7	fixed-load-20261006	java-spring-boot	1000	pass	100.0	100.0	8.0	valid-recorded-evidence	e02ce1700d3a-0005
8	fixed-load-20261006	php-laravel	100	pass	100.0	100.0	155.0	valid-recorded-evidence	e02ce1700d3a-0006
9	fixed-load-20261006	php-laravel	500	fail	0.0	42.2	5,002.0	valid-recorded-evidence	e02ce1700d3a-0007
10	fixed-load-20261006	php-laravel	1000	fail	0.0	14.1	5,002.0	valid-recorded-evidence	e02ce1700d3a-0008
11	fixed-load-20261006	go-net-http	100	pass	100.0	100.0	8.0	valid-recorded-evidence	e02ce1700d3a-0009
12	fixed-load-20261006	go-net-http	500	pass	100.0	100.0	5.0	valid-recorded-evidence	e02ce1700d3a-0010
13	fixed-load-20261006	go-net-http	1000	pass	100.0	100.0	5.0	valid-recorded-evidence	e02ce1700d3a-0011
14	fixed-load-20261006	rust-axum	100	pass	100.0	100.0	8.0	valid-recorded-evidence	e02ce1700d3a-0012
15	fixed-load-20261006	rust-axum	500	pass	100.0	100.0	7.0	valid-recorded-evidence	e02ce1700d3a-0013
16	fixed-load-20261006	rust-axum	1000	pass	100.0	100.0	6.0	valid-recorded-evidence	e02ce1700d3a-0014
17	fixed-load-20261006	node-express	100	pass	100.0	100.0	11.0	valid-recorded-evidence	e02ce1700d3a-0015
18	fixed-load-20261006	node-express	500	pass	100.0	100.0	10.0	valid-recorded-evidence	e02ce1700d3a-0016
19	fixed-load-20261006	node-express	1000	pass	100.0	100.0	9.0	valid-recorded-evidence	e02ce1700d3a-0017
20	fixed-load-20261006	bun-express	100	pass	100.0	100.0	11.0	valid-recorded-evidence	e02ce1700d3a-0018
21	fixed-load-20261006	bun-express	500	pass	100.0	100.0	9.0	valid-recorded-evidence	e02ce1700d3a-0019
22	fixed-load-20261006	bun-express	1000	pass	100.0	100.0	9.0	valid-recorded-evidence	e02ce1700d3a-0020
23	native-capacity	java-spring-boot	1309	pass	100.0	100.0	5.0	valid-recorded-evidence	b111e38e1e4d-0000
24	native-capacity	java-spring-boot	1409	pass	100.0	100.0	5.0	valid-recorded-evidence	b111e38e1e4d-0001
25	native-capacity	java-spring-boot	2818	fail	0.0	2.5	5,002.0	valid-recorded-evidence	b111e38e1e4d-0002

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
26	native-capacity	java-spring-boot	2113	fail	0.0	12.5	5,002.0	valid-recorded-evidence	b111e38e1e4d-0003
27	native-capacity	java-spring-boot	1761	pass	100.0	100.0	5.0	valid-recorded-evidence	b111e38e1e4d-0004
28	native-capacity	java-spring-boot	1937	pass	100.0	100.0	5.0	valid-recorded-evidence	b111e38e1e4d-0005
29	native-capacity	java-spring-boot	2025	fail	0.0	23.8	5,002.0	valid-recorded-evidence	b111e38e1e4d-0006
30	native-capacity	java-spring-boot	2025	fail	0.0	16.9	5,002.0	valid-recorded-evidence	b111e38e1e4d-0007
31	native-capacity	php-laravel	1937	fail	0.0	6.5	5,002.0	valid-recorded-evidence	b111e38e1e4d-0008
32	native-capacity	php-laravel	968	fail	0.0	20.4	5,002.0	valid-recorded-evidence	b111e38e1e4d-0009
33	native-capacity	php-laravel	484	fail	0.0	51.4	5,002.0	valid-recorded-evidence	b111e38e1e4d-0010
34	native-capacity	php-laravel	242	pass	100.0	100.0	690.0	valid-recorded-evidence	b111e38e1e4d-0011
35	native-capacity	php-laravel	363	fail	0.0	72.5	5,002.0	valid-recorded-evidence	b111e38e1e4d-0012
36	native-capacity	php-laravel	302	pass	99.6	100.0	3,402.0	valid-recorded-evidence	b111e38e1e4d-0013
37	native-capacity	php-laravel	363	invalid	0.0	73.0	5,002.0	invalid	b111e38e1e4d-0014
38	native-capacity	php-laravel	363	fail	0.0	76.6	5,002.0	valid-recorded-evidence	b111e38e1e4d-0015
39	native-capacity	go-net-http	302	pass	100.0	100.0	6.0	valid-recorded-evidence	b111e38e1e4d-0016
40	native-capacity	go-net-http	363	pass	100.0	100.0	6.0	valid-recorded-evidence	b111e38e1e4d-0017
41	native-capacity	go-net-http	726	pass	100.0	100.0	6.0	valid-recorded-evidence	b111e38e1e4d-0018
42	native-capacity	go-net-http	1452	pass	100.0	100.0	6.0	valid-recorded-evidence	b111e38e1e4d-0019
43	native-capacity	go-net-http	2904	pass	100.0	100.0	5.0	valid-recorded-evidence	b111e38e1e4d-0020
44	native-capacity	go-net-http	5808	fail	4.1	2.2	5,002.0	valid-recorded-evidence	b111e38e1e4d-0021
45	native-capacity	go-net-http	4356	fail	9.8	5.5	5,002.0	valid-recorded-evidence	b111e38e1e4d-0022
46	native-capacity	go-net-http	3630	fail	29.3	18.2	5,002.0	valid-recorded-evidence	b111e38e1e4d-0023
47	native-capacity	go-net-http	3267	fail	91.4	86.1	5,001.0	valid-recorded-evidence	b111e38e1e4d-0024
48	native-capacity	go-net-http	3085	pass	100.0	100.0	5.0	valid-recorded-evidence	b111e38e1e4d-0025
49	native-capacity	go-net-http	3176	pass	100.0	100.0	5.0	valid-recorded-evidence	b111e38e1e4d-0026
50	native-capacity	go-net-http	3267	fail	91.7	86.6	5,001.0	valid-recorded-evidence	b111e38e1e4d-0027
51	native-capacity	rust-axum	3176	fail	46.7	31.8	5,001.0	invalid	b111e38e1e4d-0028
52	native-capacity	rust-axum	1588	fail	76.6	63.5	5,001.0	invalid	b111e38e1e4d-0029

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
53	native-capacity	rust-axum	794	pass	100.0	100.0	6.0	valid-recorded-evidence	b111e38e1e4d-0030
54	native-capacity	rust-axum	1191	fail	91.2	84.7	5,001.0	invalid	b111e38e1e4d-0031
55	native-capacity	rust-axum	992	pass	100.0	100.0	6.0	valid-recorded-evidence	b111e38e1e4d-0032
56	native-capacity	rust-axum	1091	fail	95.8	92.4	5,001.0	invalid	b111e38e1e4d-0033
57	native-capacity	rust-axum	1091	fail	95.9	92.5	5,001.0	invalid	b111e38e1e4d-0034
58	native-capacity	node-express	992	pass	100.0	100.0	9.0	valid-recorded-evidence	b111e38e1e4d-0035
59	native-capacity	node-express	1091	pass	100.0	100.0	9.0	valid-recorded-evidence	b111e38e1e4d-0036
60	native-capacity	node-express	2182	pass	100.0	100.0	10.0	valid-recorded-evidence	b111e38e1e4d-0037
61	native-capacity	node-express	4364	fail	7.3	7.1	5,001.0	valid-recorded-evidence	b111e38e1e4d-0038
62	native-capacity	node-express	3273	fail	38.6	36.0	5,001.0	valid-recorded-evidence	b111e38e1e4d-0039
63	native-capacity	node-express	2727	pass	100.0	100.0	11.0	valid-recorded-evidence	b111e38e1e4d-0040
64	native-capacity	node-express	3000	fail	71.0	67.9	5,001.0	valid-recorded-evidence	b111e38e1e4d-0041
65	native-capacity	node-express	2863	fail	89.8	86.9	5,001.0	valid-recorded-evidence	b111e38e1e4d-0042
66	native-capacity	node-express	2795	pass	100.0	100.0	11.0	valid-recorded-evidence	b111e38e1e4d-0043
67	native-capacity	node-express	2863	fail	84.8	81.2	5,001.0	valid-recorded-evidence	b111e38e1e4d-0044
68	native-capacity	bun-express	2795	pass	100.0	100.0	9.0	valid-recorded-evidence	b111e38e1e4d-0045
69	native-capacity	bun-express	2863	pass	100.0	100.0	9.0	valid-recorded-evidence	b111e38e1e4d-0046
70	native-capacity	bun-express	5726	fail	3.3	3.2	5,001.0	valid-recorded-evidence	b111e38e1e4d-0047
71	native-capacity	bun-express	4294	fail	7.9	7.7	5,001.0	valid-recorded-evidence	b111e38e1e4d-0048
72	native-capacity	bun-express	3578	fail	17.3	16.3	5,001.0	valid-recorded-evidence	b111e38e1e4d-0049
73	native-capacity	bun-express	3220	fail	43.4	41.2	5,001.0	valid-recorded-evidence	b111e38e1e4d-0050
74	native-capacity	bun-express	3041	fail	67.0	63.1	5,001.0	valid-recorded-evidence	b111e38e1e4d-0051
75	native-capacity	bun-express	2952	fail	80.7	76.8	5,001.0	valid-recorded-evidence	b111e38e1e4d-0052
76	native-capacity	bun-express	2952	fail	95.6	100.0	5,001.0	valid-recorded-evidence	b111e38e1e4d-0053
77	native-capacity-preflight-1791217587	java-spring-boot	1309	invalid	n/a	n/a	n/a	invalid	0ee5448be775-0000
78	pilot	python-baseline-3.15.0rc3	rate 200.0	measured	98.0	n/a	5,034.0	valid-recorded-evidence	1c071c425630-0000
79	pilot	python-baseline-3.14.8	rate 25.0	measured	100.0	n/a	159.5	valid-recorded-evidence	1c071c425630-0001

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
80	pilot	python-baseline-3.15.0rc3	rate 1,600.0	measured	96.7	n/a	5,084.3	valid-recorded-evidence	1c071c425630-0002
81	pilot	python-baseline-3.14.8	rate 400.0	measured	97.4	n/a	5,078.0	valid-recorded-evidence	1c071c425630-0003
82	pilot	python-baseline-3.13.16	rate 800.0	measured	97.6	n/a	5,057.5	valid-recorded-evidence	1c071c425630-0004
83	pilot	python-baseline-3.10.22	rate 25.0	measured	100.0	n/a	165.5	valid-recorded-evidence	1c071c425630-0005
84	pilot	python-baseline-3.12.13	rate 25.0	measured	100.0	n/a	166.5	valid-recorded-evidence	1c071c425630-0006
85	pilot	python-baseline-3.11.17	rate 100.0	measured	100.0	n/a	366.0	valid-recorded-evidence	1c071c425630-0007
86	pilot	python-baseline-3.14.8	rate 1,600.0	measured	96.9	n/a	5,187.8	valid-recorded-evidence	1c071c425630-0008
87	pilot	python-baseline-3.12.13	rate 1,600.0	measured	95.2	n/a	5,290.5	valid-recorded-evidence	1c071c425630-0009
88	pilot	python-baseline-3.10.22	rate 800.0	measured	97.4	n/a	5,134.6	valid-recorded-evidence	1c071c425630-0010
89	pilot	python-baseline-3.11.17	rate 1,600.0	measured	98.7	n/a	5,207.9	valid-recorded-evidence	1c071c425630-0011
90	pilot	python-baseline-3.13.16	rate 200.0	measured	97.4	n/a	5,047.0	valid-recorded-evidence	1c071c425630-0012
91	pilot	python-baseline-3.12.13	rate 100.0	measured	100.0	n/a	328.0	valid-recorded-evidence	1c071c425630-0013
92	pilot	python-baseline-3.14.8	rate 800.0	measured	97.7	n/a	5,153.1	valid-recorded-evidence	1c071c425630-0014
93	pilot	python-baseline-3.13.16	rate 400.0	measured	97.3	n/a	5,099.7	valid-recorded-evidence	1c071c425630-0015
94	pilot	python-baseline-3.15.0rc3	rate 800.0	measured	97.3	n/a	5,098.6	valid-recorded-evidence	1c071c425630-0016
95	pilot	python-baseline-3.10.22	rate 50.0	measured	100.0	n/a	179.0	valid-recorded-evidence	1c071c425630-0017
96	pilot	python-baseline-3.13.16	rate 3,200.0	measured	96.7	n/a	5,160.4	valid-recorded-evidence	1c071c425630-0018
97	pilot	python-baseline-3.13.16	rate 25.0	measured	100.0	n/a	161.5	valid-recorded-evidence	1c071c425630-0019
98	pilot	python-baseline-3.12.13	rate 800.0	measured	97.5	n/a	5,336.2	valid-recorded-evidence	1c071c425630-0020
99	pilot	python-baseline-3.14.8	rate 100.0	measured	100.0	n/a	316.0	valid-recorded-evidence	1c071c425630-0021
100	pilot	python-baseline-3.13.16	rate 100.0	measured	100.0	n/a	340.0	valid-recorded-evidence	1c071c425630-0022
101	pilot	python-baseline-3.10.22	rate 100.0	measured	100.0	n/a	418.0	valid-recorded-evidence	1c071c425630-0023
102	pilot	python-baseline-3.10.22	rate 3,200.0	measured	97.4	n/a	5,118.5	valid-recorded-evidence	1c071c425630-0024
103	pilot	python-baseline-3.12.13	rate 400.0	measured	97.3	n/a	5,170.4	valid-recorded-evidence	1c071c425630-0025
104	pilot	python-baseline-3.10.22	rate 400.0	measured	96.4	n/a	5,136.8	valid-recorded-evidence	1c071c425630-0026
105	pilot	python-baseline-3.15.0rc3	rate 100.0	measured	100.0	n/a	396.0	valid-recorded-evidence	1c071c425630-0027
106	pilot	python-baseline-3.14.8	rate 3,200.0	measured	96.2	n/a	5,498.5	valid-recorded-evidence	1c071c425630-0028

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
107	pilot	python-baseline-3.15.0rc3	rate 50.0	measured	100.0	n/a	184.0	valid-recorded-evidence	1c071c425630-0029
108	pilot	python-baseline-3.15.0rc3	rate 25.0	measured	100.0	n/a	166.0	valid-recorded-evidence	1c071c425630-0030
109	pilot	python-baseline-3.15.0rc3	rate 3,200.0	measured	97.1	n/a	5,259.4	valid-recorded-evidence	1c071c425630-0031
110	pilot	python-baseline-3.11.17	rate 3,200.0	measured	98.5	n/a	5,080.8	valid-recorded-evidence	1c071c425630-0032
111	pilot	python-baseline-3.10.22	rate 1,600.0	measured	97.9	n/a	5,092.6	valid-recorded-evidence	1c071c425630-0033
112	pilot	python-baseline-3.14.8	rate 200.0	measured	98.7	n/a	5,019.1	valid-recorded-evidence	1c071c425630-0034
113	pilot	python-baseline-3.11.17	rate 800.0	measured	98.6	n/a	5,074.1	valid-recorded-evidence	1c071c425630-0035
114	pilot	python-baseline-3.12.13	rate 3,200.0	measured	96.8	n/a	5,278.0	valid-recorded-evidence	1c071c425630-0036
115	pilot	python-baseline-3.15.0rc3	rate 400.0	measured	96.4	n/a	5,198.6	valid-recorded-evidence	1c071c425630-0037
116	pilot	python-baseline-3.11.17	rate 50.0	measured	100.0	n/a	177.0	valid-recorded-evidence	1c071c425630-0038
117	pilot	python-baseline-3.13.16	rate 1,600.0	measured	97.7	n/a	5,052.5	valid-recorded-evidence	1c071c425630-0039
118	pilot	python-baseline-3.11.17	rate 25.0	measured	100.0	n/a	159.5	valid-recorded-evidence	1c071c425630-0040
119	pilot	python-baseline-3.11.17	rate 400.0	measured	98.4	n/a	5,087.1	valid-recorded-evidence	1c071c425630-0041
120	pilot	python-baseline-3.14.8	rate 50.0	measured	100.0	n/a	194.0	valid-recorded-evidence	1c071c425630-0042
121	pilot	python-baseline-3.12.13	rate 50.0	measured	100.0	n/a	176.0	valid-recorded-evidence	1c071c425630-0043
122	pilot	python-baseline-3.13.16	rate 50.0	measured	100.0	n/a	179.0	valid-recorded-evidence	1c071c425630-0044
123	pilot	python-baseline-3.12.13	rate 200.0	measured	97.4	n/a	5,063.3	valid-recorded-evidence	1c071c425630-0045
124	pilot	python-baseline-3.10.22	rate 200.0	measured	98.2	n/a	5,055.9	valid-recorded-evidence	1c071c425630-0046
125	pilot	python-baseline-3.11.17	rate 200.0	measured	99.0	n/a	5,032.0	valid-recorded-evidence	1c071c425630-0047
126	user-capacity	python-baseline-3.10.22	10000	fail	0.0	1.6	5,002.0	valid-recorded-evidence	f46eca46638a-0000
127	user-capacity	python-baseline-3.10.22	5000	fail	0.0	6.2	5,002.0	valid-recorded-evidence	f46eca46638a-0001
128	user-capacity	python-baseline-3.10.22	2500	fail	1.4	60.7	5,002.0	valid-recorded-evidence	f46eca46638a-0002
129	user-capacity	python-baseline-3.10.22	1250	pass	100.0	100.0	48.0	valid-recorded-evidence	f46eca46638a-0003
130	user-capacity	python-baseline-3.10.22	1875	pass	100.0	100.0	59.0	valid-recorded-evidence	f46eca46638a-0004
131	user-capacity	python-baseline-3.10.22	2187	fail	11.4	88.5	5,002.0	valid-recorded-evidence	f46eca46638a-0005
132	user-capacity	python-baseline-3.10.22	2031	pass	100.0	100.0	70.0	valid-recorded-evidence	f46eca46638a-0006
133	user-capacity	python-baseline-3.10.22	2109	fail	40.3	100.0	5,002.0	valid-recorded-evidence	f46eca46638a-0007

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
134	user-capacity	python-baseline-3.10.22	2031	pass	100.0	100.0	80.0	valid-recorded-evidence	f46eca46638a-0008
135	user-capacity	python-baseline-3.10.22	2031	pass	100.0	100.0	64.0	valid-recorded-evidence	f46eca46638a-0009
136	user-capacity	python-baseline-3.10.22	2031	pass	100.0	100.0	60.0	valid-recorded-evidence	f46eca46638a-0010
137	user-capacity	python-baseline-3.10.22	2031	pass	100.0	100.0	68.0	valid-recorded-evidence	f46eca46638a-0011
138	user-capacity	python-baseline-3.10.22	2031	pass	100.0	100.0	68.0	valid-recorded-evidence	f46eca46638a-0012
139	user-capacity	python-baseline-3.10.22	2109	fail	83.1	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0013
140	user-capacity	python-baseline-3.10.22	2109	fail	74.2	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0014
141	user-capacity	python-baseline-3.10.22	2109	fail	19.4	92.8	5,002.0	valid-recorded-evidence	f46eca46638a-0015
142	user-capacity	python-baseline-3.10.22	2109	fail	62.1	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0016
143	user-capacity	python-baseline-3.10.22	2109	fail	59.1	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0017
144	user-capacity	python-baseline-3.11.17	2031	pass	100.0	100.0	51.0	valid-recorded-evidence	f46eca46638a-0018
145	user-capacity	python-baseline-3.11.17	12031	fail	0.0	1.1	5,002.0	valid-recorded-evidence	f46eca46638a-0019
146	user-capacity	python-baseline-3.11.17	7031	fail	0.0	2.5	5,002.0	valid-recorded-evidence	f46eca46638a-0020
147	user-capacity	python-baseline-3.11.17	4531	fail	0.0	6.5	5,002.0	valid-recorded-evidence	f46eca46638a-0021
148	user-capacity	python-baseline-3.11.17	3281	fail	0.6	29.4	5,002.0	valid-recorded-evidence	f46eca46638a-0022
149	user-capacity	python-baseline-3.11.17	2656	fail	2.6	68.0	5,002.0	valid-recorded-evidence	f46eca46638a-0023
150	user-capacity	python-baseline-3.11.17	2343	fail	35.1	100.0	5,002.0	valid-recorded-evidence	f46eca46638a-0024
151	user-capacity	python-baseline-3.11.17	2187	pass	100.0	100.0	55.0	valid-recorded-evidence	f46eca46638a-0025
152	user-capacity	python-baseline-3.11.17	2265	fail	59.8	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0026
153	user-capacity	python-baseline-3.11.17	2187	pass	100.0	100.0	57.0	valid-recorded-evidence	f46eca46638a-0027
154	user-capacity	python-baseline-3.11.17	2187	pass	100.0	100.0	57.0	valid-recorded-evidence	f46eca46638a-0028
155	user-capacity	python-baseline-3.11.17	2187	fail	98.5	100.0	5,000.0	valid-recorded-evidence	f46eca46638a-0029
156	user-capacity	python-baseline-3.11.17	2187	fail	98.0	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0030
157	user-capacity	python-baseline-3.11.17	2187	fail	95.2	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0031
158	user-capacity	python-baseline-3.11.17	2265	fail	81.9	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0032
159	user-capacity	python-baseline-3.11.17	2265	fail	59.6	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0033
160	user-capacity	python-baseline-3.11.17	2265	fail	88.1	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0034

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
161	user-capacity	python-baseline-3.11.17	2265	fail	76.5	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0035
162	user-capacity	python-baseline-3.11.17	2265	fail	69.8	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0036
163	user-capacity	python-baseline-3.12.13	2031	pass	100.0	100.0	56.0	valid-recorded-evidence	f46eca46638a-0037
164	user-capacity	python-baseline-3.12.13	2265	fail	74.6	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0038
165	user-capacity	python-baseline-3.12.13	2148	pass	100.0	100.0	66.0	valid-recorded-evidence	f46eca46638a-0039
166	user-capacity	python-baseline-3.12.13	2206	fail	95.5	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0040
167	user-capacity	python-baseline-3.12.13	2148	pass	100.0	100.0	66.0	valid-recorded-evidence	f46eca46638a-0041
168	user-capacity	python-baseline-3.12.13	2148	fail	98.8	100.0	5,000.0	valid-recorded-evidence	f46eca46638a-0042
169	user-capacity	python-baseline-3.12.13	2148	pass	100.0	100.0	1,963.9	valid-recorded-evidence	f46eca46638a-0043
170	user-capacity	python-baseline-3.12.13	2148	pass	100.0	100.0	65.0	valid-recorded-evidence	f46eca46638a-0044
171	user-capacity	python-baseline-3.12.13	2148	pass	100.0	100.0	66.0	valid-recorded-evidence	f46eca46638a-0045
172	user-capacity	python-baseline-3.12.13	2206	fail	92.6	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0046
173	user-capacity	python-baseline-3.12.13	2206	fail	79.2	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0047
174	user-capacity	python-baseline-3.12.13	2206	fail	76.1	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0048
175	user-capacity	python-baseline-3.12.13	2206	pass	99.3	100.0	4,190.2	invalid	f46eca46638a-0049
176	user-capacity	python-baseline-3.12.13	2206	fail	96.6	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0050
177	user-capacity	python-baseline-3.13.16	2031	pass	100.0	100.0	54.0	valid-recorded-evidence	f46eca46638a-0051
178	user-capacity	python-baseline-3.13.16	2206	fail	86.8	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0052
179	user-capacity	python-baseline-3.13.16	2118	pass	100.0	100.0	53.0	valid-recorded-evidence	f46eca46638a-0053
180	user-capacity	python-baseline-3.13.16	2118	pass	100.0	100.0	53.0	invalid	f46eca46638a-0054
181	user-capacity	python-baseline-3.13.16	2118	pass	100.0	100.0	53.0	invalid	f46eca46638a-0055
182	user-capacity	python-baseline-3.13.16	2118	pass	100.0	100.0	56.0	valid-recorded-evidence	f46eca46638a-0056
183	user-capacity	python-baseline-3.13.16	2118	pass	100.0	100.0	59.0	valid-recorded-evidence	f46eca46638a-0057
184	user-capacity	python-baseline-3.13.16	2118	no-result	n/a	n/a	n/a	invalid	f46eca46638a-0058
185	user-capacity	python-baseline-3.13.16	2206	pass	100.0	100.0	58.0	invalid	f46eca46638a-0059
186	user-capacity	python-baseline-3.14.8	2031	pass	100.0	100.0	55.0	valid-recorded-evidence	f46eca46638a-0060
187	user-capacity	python-baseline-3.14.8	2206	fail	96.1	100.0	5,001.0	invalid	f46eca46638a-0061

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
188	user-capacity	python-baseline-3.14.8	2118	pass	100.0	100.0	59.0	invalid	f46eca46638a-0062
189	user-capacity	python-baseline-3.14.8	2206	fail	85.3	100.0	5,001.0	valid-recorded-evidence	f46eca46638a-0063
190	user-capacity	python-baseline-3.15.0rc3	2118	pass	100.0	100.0	59.0	valid-recorded-evidence	f46eca46638a-0064
191	user-capacity	python-baseline-3.15.0rc3	2206	fail	12.1	98.5	5,002.0	valid-recorded-evidence	f46eca46638a-0065
192	user-capacity	python-baseline-3.15.0rc3	2206	fail	8.9	94.2	5,002.0	valid-recorded-evidence	f46eca46638a-0066
193	user-capacity	python-modern-standard-jit0-gil1-asyn c	2118	pass	100.0	100.0	45.0	valid-recorded-evidence	f46eca46638a-0067
194	user-capacity	python-modern-standard-jit0-gil1-asyn c	2206	pass	100.0	100.0	45.0	valid-recorded-evidence	f46eca46638a-0068
195	user-capacity	python-modern-standard-jit0-gil1-asyn c	2406	fail	0.0	86.4	271.0	valid-recorded-evidence	f46eca46638a-0069
196	user-capacity	python-modern-standard-jit0-gil1-asyn c	2306	fail	0.0	94.1	196.0	valid-recorded-evidence	f46eca46638a-0070
197	user-capacity	python-modern-standard-jit0-gil1-asyn c	2306	fail	0.0	97.7	211.0	valid-recorded-evidence	f46eca46638a-0071
198	user-capacity	python-modern-jit-jit0-gil1-async	2206	pass	100.0	100.0	45.0	valid-recorded-evidence	f46eca46638a-0072
199	user-capacity	python-modern-jit-jit0-gil1-async	2306	fail	0.0	97.4	201.0	valid-recorded-evidence	f46eca46638a-0073
200	user-capacity	python-modern-jit-jit0-gil1-async	2306	fail	0.0	95.2	192.0	valid-recorded-evidence	f46eca46638a-0074
201	user-capacity	python-modern-jit-jit1-gil1-async	2206	pass	100.0	100.0	46.0	valid-recorded-evidence	f46eca46638a-0075
202	user-capacity	python-modern-jit-jit1-gil1-async	2306	fail	0.0	92.7	211.0	valid-recorded-evidence	f46eca46638a-0076
203	user-capacity	python-modern-jit-jit1-gil1-async	2306	fail	0.0	91.2	214.0	valid-recorded-evidence	f46eca46638a-0077
204	user-capacity	python-modern-free-threaded-jit0-gil1-async	2206	fail	0.0	97.6	258.0	valid-recorded-evidence	f46eca46638a-0078
205	user-capacity	python-modern-free-threaded-jit0-gil1-async	1103	pass	100.0	100.0	45.0	valid-recorded-evidence	f46eca46638a-0079
206	user-capacity	python-modern-free-threaded-jit0-gil1-async	1654	pass	100.0	100.0	45.0	valid-recorded-evidence	f46eca46638a-0080
207	user-capacity	python-modern-free-threaded-jit0-gil1-async	1930	pass	100.0	100.0	45.0	valid-recorded-evidence	f46eca46638a-0081
208	user-capacity	python-modern-free-threaded-jit0-gil1-async	2068	pass	100.0	100.0	45.0	valid-recorded-evidence	f46eca46638a-0082
209	user-capacity	python-modern-free-threaded-jit0-gil1-async	2137	pass	100.0	100.0	46.0	valid-recorded-evidence	f46eca46638a-0083

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
210	user-capacity	python-modern-free-threaded-jit0-gil1-async	2206	fail	0.0	98.5	292.0	valid-recorded-evidence	f46eca46638a-0084
211	user-capacity	python-modern-free-threaded-jit0-gil0-async	2137	pass	100.0	100.0	46.0	valid-recorded-evidence	f46eca46638a-0085
212	user-capacity	python-modern-free-threaded-jit0-gil0-async	2206	pass	100.0	100.0	46.0	valid-recorded-evidence	f46eca46638a-0086
213	user-capacity	python-modern-free-threaded-jit0-gil0-async	2406	fail	2.2	87.9	5,001.0	valid-recorded-evidence	f46eca46638a-0087
214	user-capacity	python-modern-free-threaded-jit0-gil0-async	2306	fail	0.0	97.5	324.0	valid-recorded-evidence	f46eca46638a-0088
215	user-capacity	python-modern-free-threaded-jit0-gil0-async	2306	fail	0.0	94.6	338.0	valid-recorded-evidence	f46eca46638a-0089
216	user-capacity	python-modern-free-threaded-jit0-gil1-threaded	2206	fail	0.0	59.7	5,002.0	invalid	f46eca46638a-0090
217	user-capacity	python-modern-free-threaded-jit0-gil1-threaded	1103	pass	100.0	100.0	13.0	valid-recorded-evidence	f46eca46638a-0091
218	user-capacity	python-modern-free-threaded-jit0-gil1-threaded	1654	fail	0.0	79.3	5,002.0	valid-recorded-evidence	f46eca46638a-0092
219	user-capacity	python-modern-free-threaded-jit0-gil1-threaded	1378	fail	0.0	98.8	5,002.0	valid-recorded-evidence	f46eca46638a-0093
220	user-capacity	python-modern-free-threaded-jit0-gil1-threaded	1240	pass	100.0	100.0	14.0	valid-recorded-evidence	f46eca46638a-0094
221	user-capacity	python-modern-free-threaded-jit0-gil1-threaded	1309	fail	0.0	99.8	5,002.0	valid-recorded-evidence	f46eca46638a-0095
222	user-capacity	python-modern-free-threaded-jit0-gil1-threaded	1309	fail	0.0	100.0	5,002.0	valid-recorded-evidence	f46eca46638a-0096
223	user-capacity	python-modern-free-threaded-jit0-gil0-threaded	1240	pass	100.0	100.0	16.0	valid-recorded-evidence	f46eca46638a-0097
224	user-capacity	python-modern-free-threaded-jit0-gil0-threaded	1309	pass	100.0	100.0	18.0	valid-recorded-evidence	f46eca46638a-0098
225	user-capacity	python-modern-free-threaded-jit0-gil0-threaded	1509	fail	0.0	90.1	5,002.0	valid-recorded-evidence	f46eca46638a-0099
226	user-capacity	python-modern-free-threaded-jit0-gil0-threaded	1409	fail	0.0	95.2	5,002.0	valid-recorded-evidence	f46eca46638a-0100
227	user-capacity	python-modern-free-threaded-jit0-gil0-threaded	1409	fail	0.0	93.4	5,002.0	valid-recorded-evidence	f46eca46638a-0101

Historical physical-trial inventory (continued)

#	Campaign	Configuration	Users / rate	Recorded vote	Op %	Auth %	p99 ms	Review validity	Trial ID
228	user-capacity-invalid-20261004	python-baseline-3.10.22	10000	invalid	0.0	1.7	5,005.0	invalid	1edfe9a70457-0000
229	dotnet-fixed-20261007	csharp-aspnet-core	100	pass	100.0	100.0	9.0	qualified	98b838a32a49-0000
230	dotnet-fixed-20261007	csharp-aspnet-core	500	pass	100.0	100.0	9.0	qualified	98b838a32a49-0001
231	dotnet-fixed-20261007	csharp-aspnet-core	1000	fail	10.0	5.6	5,002.0	qualified	98b838a32a49-0002
232	octane-fixed-20261007	php-laravel-octane	100	pass	100.0	100.0	12.0	qualified	35749f424096-0000
233	octane-fixed-20261007	php-laravel-octane	500	pass	100.0	100.0	12.0	qualified	35749f424096-0001
234	octane-fixed-20261007	php-laravel-octane	1000	pass	100.0	100.0	13.0	qualified	35749f424096-0002

Historical seven-minute stress inventory

100 retained ramp5/refinement records | Original votes and validity labels

#	Config	Users	Recorded vote	Op %	Auth %	Good/s	p99 ms	Review validity	Trial ID
1	Python	1000	pass	100.0	100.0	163.3	44.0	qualified	30addecfe5d5-0000
2	Python	2000	pass	100.0	100.0	326.4	45.0	qualified	30addecfe5d5-0001
3	Python	4000	fail	0.0	8.0	0.0	5,002.0	qualified	30addecfe5d5-0002
4	Python	3000	fail	0.2	36.2	0.6	5,002.0	qualified	30addecfe5d5-0003
5	Python	2500	fail	64.5	100.0	187.3	5,001.0	qualified	30addecfe5d5-0004
6	Python	2250	pass	100.0	100.0	365.5	49.0	qualified	30addecfe5d5-0005
7	Python	2375	pass	91.7	100.0	316.4	5,001.0	qualified	30addecfe5d5-0006
8	Python	2437	fail	81.0	100.0	262.5	5,001.0	qualified	30addecfe5d5-0007
9	Python	2437	fail	76.0	100.0	233.0	5,001.0	qualified	30addecfe5d5-0008
10	Java	1000	pass	100.0	100.0	163.5	8.0	qualified	30addecfe5d5-0009
11	Java	2000	fail	0.0	22.7	0.0	5,002.0	qualified	30addecfe5d5-0010
12	Java	1500	pass	100.0	100.0	245.0	8.0	qualified	30addecfe5d5-0011
13	Java	1750	pass	100.0	100.0	285.8	8.0	qualified	30addecfe5d5-0012
14	Java	1875	pass	100.0	100.0	306.5	8.0	qualified	30addecfe5d5-0013
15	Java	1937	pass	100.0	100.0	316.6	8.0	qualified	30addecfe5d5-0014
16	Java	2000	pass	100.0	100.0	327.0	7.0	qualified	30addecfe5d5-0015
17	FPM	100	pass	100.0	100.0	16.3	142.4	qualified	30addecfe5d5-0016
18	FPM	500	fail	0.0	46.6	0.0	5,002.0	qualified	30addecfe5d5-0017
19	FPM	300	pass	100.0	100.0	40.1	2,453.6	qualified	30addecfe5d5-0018
20	FPM	400	invalid	n/a	n/a	n/a	n/a	INVALID	30addecfe5d5-0019
21	Java	2000	pass	100.0	100.0	326.9	8.0	qualified	30addecfe5d5-0020
22	Java	4000	fail	0.0	1.8	0.0	5,002.0	qualified	30addecfe5d5-0021
23	Java	3000	fail	0.0	1.8	0.0	5,002.0	qualified	30addecfe5d5-0022
24	Java	2500	fail	0.0	3.5	0.0	5,002.0	qualified	30addecfe5d5-0023
25	Java	2250	fail	0.0	6.2	0.0	5,002.0	qualified	30addecfe5d5-0024

Historical seven-minute stress inventory (continued)

#	Config	Users	Recorded vote	Op %	Auth %	Good/s	p99 ms	Review validity	Trial ID
26	Java	2125	fail	0.0	17.2	0.0	5,002.0	qualified	30addecfe5d5-0025
27	Java	2062	pass	100.0	100.0	337.0	8.0	qualified	30addecfe5d5-0026
28	Java	2125	fail	0.0	8.7	0.0	5,002.0	qualified	30addecfe5d5-0027
29	FPM	400	fail	0.0	64.5	0.0	5,002.0	qualified	30addecfe5d5-0028
30	FPM	400	fail	0.0	66.5	0.0	5,002.0	qualified	30addecfe5d5-0029
31	Go	1000	pass	100.0	100.0	163.5	8.0	qualified	30addecfe5d5-0030
32	Go	2000	pass	100.0	100.0	326.9	8.0	qualified	30addecfe5d5-0031
33	Go	4000	fail	14.7	8.5	54.6	5,002.0	qualified	30addecfe5d5-0032
34	Go	3000	pass	100.0	100.0	490.8	8.0	qualified	30addecfe5d5-0033
35	Go	3500	fail	43.9	29.5	167.5	5,002.0	qualified	30addecfe5d5-0034
36	Go	3250	fail	92.5	87.8	424.3	5,001.0	qualified	30addecfe5d5-0035
37	Go	3125	pass	100.0	100.0	509.8	10.0	qualified	30addecfe5d5-0036
38	Go	3187	pass	100.0	100.0	516.6	1,194.1	qualified	30addecfe5d5-0037
39	Go	3250	pass	99.5	100.0	493.4	2,367.2	qualified	30addecfe5d5-0038
40	Go	3250	pass	99.6	100.0	495.9	1,835.0	qualified	30addecfe5d5-0039
41	Go	3375	fail	67.8	53.0	289.9	5,001.0	qualified	30addecfe5d5-0040
42	Go	3312	fail	80.2	68.6	366.1	5,001.0	qualified	30addecfe5d5-0041
43	Go	3312	fail	80.2	68.5	365.8	5,001.0	qualified	30addecfe5d5-0042
44	Rust	1000	pass	100.0	100.0	163.7	8.0	qualified	30addecfe5d5-0043
45	Rust	2000	pass	100.0	100.0	327.1	8.0	qualified	30addecfe5d5-0044
46	Rust	4000	fail	37.0	23.8	155.9	5,002.0	qualified	30addecfe5d5-0045
47	Rust	3000	pass	100.0	100.0	491.4	8.0	qualified	30addecfe5d5-0046
48	Rust	3500	pass	100.0	100.0	572.9	8.0	qualified	30addecfe5d5-0047
49	Rust	3750	fail	80.6	68.8	422.6	5,001.0	qualified	30addecfe5d5-0048
50	Rust	3625	pass	100.0	100.0	592.8	8.0	qualified	30addecfe5d5-0049
51	Rust	3687	fail	90.3	83.2	502.1	5,001.0	qualified	30addecfe5d5-0050
52	Rust	3687	fail	93.2	88.1	530.8	5,001.0	qualified	30addecfe5d5-0051

Historical seven-minute stress inventory (continued)

#	Config	Users	Recorded vote	Op %	Auth %	Good/s	p99 ms	Review validity	Trial ID
53	Node	1000	pass	100.0	100.0	163.6	12.0	qualified	30addecfe5d5-0052
54	Node	2000	pass	100.0	100.0	327.2	13.0	qualified	30addecfe5d5-0053
55	Node	4000	fail	9.9	9.3	59.5	5,001.0	qualified	30addecfe5d5-0054
56	Node	3000	fail	64.9	61.2	297.9	5,001.0	qualified	30addecfe5d5-0055
57	Node	2500	pass	100.0	100.0	408.0	13.0	qualified	30addecfe5d5-0056
58	Node	2750	pass	100.0	100.0	449.1	16.0	qualified	30addecfe5d5-0057
59	Node	2875	fail	90.4	86.6	403.8	5,001.0	qualified	30addecfe5d5-0058
60	Node	2812	pass	99.6	100.0	455.4	26.0	qualified	30addecfe5d5-0059
61	Node	2875	fail	88.2	84.2	392.7	5,001.0	qualified	30addecfe5d5-0060
62	Bun	1000	pass	100.0	100.0	163.9	11.0	qualified	30addecfe5d5-0061
63	Bun	2000	pass	100.0	100.0	326.8	12.0	qualified	30addecfe5d5-0062
64	Bun	4000	fail	9.6	9.1	57.7	5,001.0	qualified	30addecfe5d5-0063
65	Bun	3000	fail	77.5	73.5	358.3	5,001.0	qualified	30addecfe5d5-0064
66	Bun	2500	pass	100.0	100.0	408.1	13.0	qualified	30addecfe5d5-0065
67	Bun	2750	pass	100.0	100.0	449.5	13.0	qualified	30addecfe5d5-0066
68	Bun	2875	pass	100.0	100.0	470.3	13.0	qualified	30addecfe5d5-0067
69	Bun	2937	pass	94.2	92.4	432.5	5,001.0	qualified	30addecfe5d5-0068
70	Bun	3000	fail	75.9	72.0	350.5	5,001.0	qualified	30addecfe5d5-0069
71	.NET	1000	pass	100.0	100.0	163.7	9.0	qualified	30addecfe5d5-0070
72	.NET	2000	fail	2.9	1.6	5.1	5,002.0	qualified	30addecfe5d5-0071
73	.NET	1500	fail	10.8	6.1	14.8	5,002.0	qualified	30addecfe5d5-0072
74	.NET	1250	pass	100.0	100.0	204.6	9.0	qualified	30addecfe5d5-0073
75	.NET	1375	fail	29.6	18.4	41.1	5,002.0	qualified	30addecfe5d5-0074
76	.NET	1312	fail	83.0	72.1	154.5	5,001.0	qualified	30addecfe5d5-0075
77	.NET	1312	fail	85.7	76.1	162.7	5,001.0	qualified	30addecfe5d5-0076
78	Python	2406	fail	87.2	100.0	295.8	5,001.0	qualified	30addecfe5d5-0077
79	Python	2406	fail	86.5	100.0	288.1	5,001.0	qualified	30addecfe5d5-0078

Historical seven-minute stress inventory (continued)

#	Config	Users	Recorded vote	Op %	Auth %	Good/s	p99 ms	Review validity	Trial ID
80	Java	2093	fail	0.0	9.5	0.0	5,002.0	qualified	30addecfe5d5-0079
81	Java	2093	fail	0.0	13.4	0.0	5,002.0	qualified	30addecfe5d5-0080
82	FPM	350	fail	0.0	76.3	0.0	5,002.0	qualified	30addecfe5d5-0081
83	FPM	350	fail	0.0	76.9	0.0	5,002.0	qualified	30addecfe5d5-0082
84	Go	3281	fail	90.3	84.3	416.1	5,001.0	qualified	30addecfe5d5-0083
85	Go	3281	fail	89.7	83.8	404.1	5,001.0	qualified	30addecfe5d5-0084
86	Rust	3656	pass	96.7	96.7	561.3	5,001.0	qualified	30addecfe5d5-0085
87	Node	2843	pass	94.5	92.2	420.5	5,001.0	qualified	30addecfe5d5-0086
88	Bun	2968	fail	88.6	84.8	409.0	5,001.0	qualified	30addecfe5d5-0087
89	Bun	2968	fail	87.4	83.4	402.5	5,001.0	qualified	30addecfe5d5-0088
90	.NET	1281	pass	100.0	100.0	209.6	11.0	qualified	30addecfe5d5-0089
91	Octane	1000	invalid	n/a	n/a	n/a	n/a	INVALID	8776286d0c49-0000
92	Octane	1000	invalid	n/a	n/a	n/a	n/a	INVALID	8776286d0c49-0001
93	Octane	1000	pass	100.0	100.0	163.6	13.0	qualified	8776286d0c49-0002
94	Octane	2000	fail	0.0	67.3	0.0	5,002.0	qualified	8776286d0c49-0003
95	Octane	1500	pass	100.0	100.0	244.7	17.0	qualified	8776286d0c49-0004
96	Octane	1750	fail	0.0	91.0	0.0	5,002.0	qualified	8776286d0c49-0005
97	Octane	1625	pass	100.0	100.0	264.9	21.0	qualified	8776286d0c49-0006
98	Octane	1687	pass	100.0	100.0	272.8	1,270.0	qualified	8776286d0c49-0007
99	Octane	1750	fail	0.0	93.6	0.0	5,002.0	qualified	8776286d0c49-0008
100	Octane	1718	pass	99.9	100.0	264.2	3,720.7	qualified	8776286d0c49-0009

Source integrity and reproducibility

Attached ZIP: sanitized current/historicalJSON exports and full per-trial metricCSV

The current compact export was derived read-only from the completed queue and immutable per-trial evidence. Each physical trial retains its sourceSHA256 and pinned image identity. The historical export preserves existing reducer fields rather than inventing missing steady means. Private database URLs, JWT secrets, SSH keys and account passwords are not included.

Attached / source file	Size	SHA256
confirmation-data.json	15.68 MiB	804cf7e9a5bfb7febabfe72d6680306178e097949c9733c024a716ff39594d72
history-data.json	4.33 MiB	8f245a799c04bfb97928921b3cea052591c46a3941aebbca3c24efb6e369571e
confirmation-data.csv	0.86 MiB	f4cf71f9129db6666090378f88059d7379bb33430e668c8bd1d54818078fe38e

The CSV contains complete per-trial quantitative reductions. The sanitizedJSON exports retain phase summaries, endpoint distributions, one-second plot series, individual decision votes, source hashes and historical validity qualifications. Save the attached all-benchmark-metrics.zip with a PDF viewer supporting attachments, then extract its CSV and JSON files. The131 current plus334 historical physical records total465 retained records; reuse of one raw trial for p95/p99 is not counted as another execution.

Source package: language-benchmark main worktree. Current campaign used original binary policies, then explicit hybrid replacements, then upper_probe for.NET/Octane. Native runtimes and Python3.14modern retained pinned images. Full fixture restoration and absence of owned backend/generator test containers were verified at completion. No later benchmark suite was started.