

# Linked Data-driven Web Components

Ali Khalili  
Dept. of Computer Science  
VU University Amsterdam  
The Netherlands  
a.khalili@vu.nl

## ABSTRACT

This paper provides a ...

## 1. INTRODUCTION

The

The remainder of this article...

## 2. RELATED WORK

Web Components and the Semantic Web [1]

## 3. WEB COMPONENTS

*Web Components* are a set of W3C standards that enable the creation of reusable widgets or components in Web documents and Web applications. Web components aim to bring *Component-Based Software Development* (CBSD) to the World Wide Web. Some advantages of CBSD approach are reusability, replacability, extensibility, encapsulation and independence.

## 4. LINKED DATA-DRIVEN WEB COMPONENTS

Definition

We define a *Linked Data-driven* (LD-R) Web Component as a Web component which employs RDF data model for representing its content and specification (i.e. metadata about the component).

### 4.1 Features

Linked Data-driven Web components provide the following features:

- *Fine-grained Web applications.* Resource Description Framework (RDF) provides a common data model that allows data-driven components to be created, shared

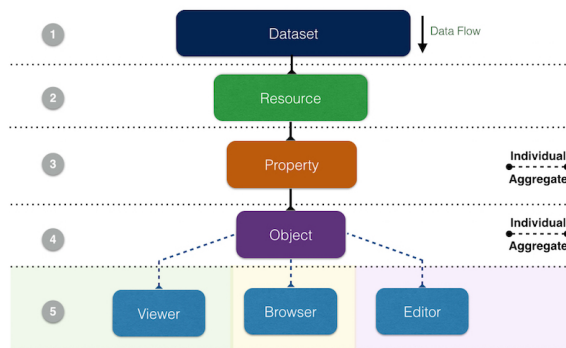


Figure 1: Architecture of LD-R Applications.

and integrated in a structured way across different applications. Figure 1 depicts the 5 main component levels in a Linked Data-driven Web application. The dataflow in the application starts from the *Dataset* component which handles all the events related to a set of resources embedded in a named graph. The next level is the *Resource* component which is identified by a URI and indicates what is described in the application. A resource is specified by a set of properties which are handled by the *Property* component. Properties can be either individual or aggregate when combining multiple features of a resource. Each property is instantiated by a value (or multiple values in case of an aggregate object). The values of properties are controlled by the *Object* component which invokes different components to view, edit and browse the property values. *Viewer*, *Editor* and *Browser* components are terminals in the LD-R single directional data flow where customized user-generated components can be plugged into the system.

In addition to the fine-grained component architecture, LD-R Web applications provide a fine-grained access control over the data provided by the components. RDF-based access control in LD-R applications operates at four different granularities provided by Dataset, Resource, Property and Object component levels. For example, we can restrict access to a specific property of a specific resource in a certain dataset.

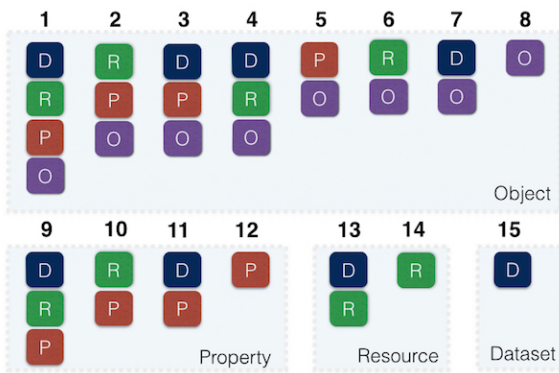


Figure 2: Scopes

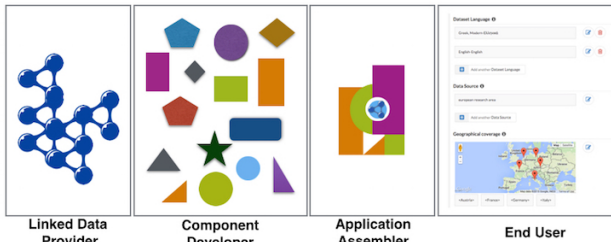


Figure 3: Life-cycle

- scopes

Better content visibility reusability

- RDFa, Microdata

Better component visibility, reusability and assembly

## 4.2 Life Cycle

## 5. IMPLEMENTATION

<http://ld-r.org>

## 6. EVALUATION

RISIS

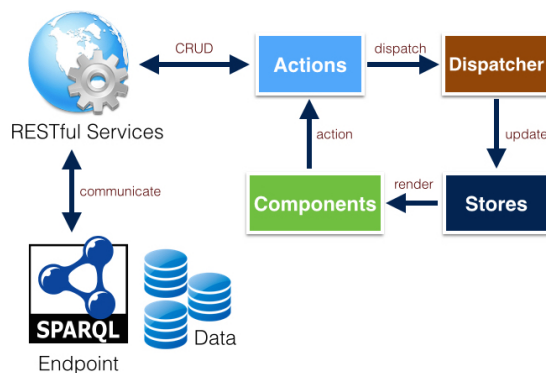


Figure 4: Data Flow

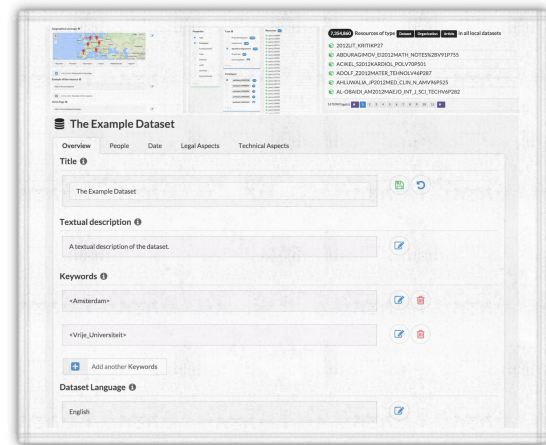


Figure 5: Screenshot

OpenPhacts

## 7. CONCLUSION AND FUTURE WORK

## 8. ACKNOWLEDGEMENT

We would like to thank our colleagues from the KRR research group at VU University Amsterdam for their helpful comments during the development of the LD-R framework. This work was supported by a grant from the European Union's 7th Framework Programme provided for the project RISIS (GA no. 313082).

## 9. REFERENCES

- [1] M. Casey and C. Pahl. Web components and the semantic web. *Electr. Notes Theor. Comput. Sci.*, 82(5):156–163, 2003.