

What is today's agenda?

Today we are going to learn following things :

- Data Understanding
- Data Quality
- Data Preprocessing
 - Data Cleaning
 - Data Integration
 - Data Reduction
 - Data Transformation and Data Discretization

What is Data?

- Collection of data objects and their attributes
- An attribute is a property or characteristic of an object
 - Examples: eye color of a person, temperature, etc.
 - Attribute is also known as variable, field, characteristic, or feature
- A collection of attributes describe an object
 - Object is also known as record, point, case, sample, entity, or instance

Attributes

Objects

| <i>Tid</i> | <i>Refund</i> | <i>Marital Status</i> | <i>Taxable Income</i> | <i>Cheat</i> |
|------------|---------------|-----------------------|-----------------------|--------------|
| 1 | Yes | Single | 125K | No |
| 2 | No | Married | 100K | No |
| 3 | No | Single | 70K | No |
| 4 | Yes | Married | 120K | No |
| 5 | No | Divorced | 95K | Yes |
| 6 | No | Married | 60K | No |
| 7 | Yes | Divorced | 220K | No |
| 8 | No | Single | 85K | Yes |
| 9 | No | Married | 75K | No |
| 10 | No | Single | 90K | Yes |

Attribute Values

- Attribute values are numbers or symbols assigned to an attribute
- Distinction between attributes and attribute values
 - Same attribute can be mapped to different attribute values
 - ◆ Example: height can be measured in feet or meters
 - Different attributes can be mapped to the same set of values
 - ◆ Example: Attribute values for ID and age are integers
 - ◆ But properties of attribute values can be different
 - ID has no limit but age has a maximum and minimum value

Discrete and Continuous Attributes

- Discrete Attribute
 - Has only a finite or countably infinite set of values
 - Examples: zip codes, counts, or the set of words in a collection of documents
 - Note: binary attributes are a special case of discrete attributes
- Continuous Attribute
 - Has real numbers as attribute values
 - Examples: temperature, height, or weight.
 - Practically, real values can only be measured with limited precision.
 - Continuous attributes are typically represented as floating-point variables.

Type of Attributes

- Categorical (Qualitative)
 - Nominal
 - ◆ Examples: ID numbers, eye color, zip codes
 - Ordinal
 - ◆ Examples: rankings (e.g., taste of potato chips on a scale from 1-10), grades, height in {tall, medium, short}
- Numeric (Quantitative)
 - Interval
 - ◆ Examples: temperatures in Celsius or Fahrenheit.
 - Ratio
 - ◆ Examples: temperature in Kelvin, length, time, counts

Type of Attributes

| OK to compute.... | Nominal | Ordinal | Interval | Ratio |
|---|---------|---------|----------|-------|
| Mode, Entropy | Yes | Yes | Yes | Yes |
| median and percentiles. | No | Yes | Yes | Yes |
| add or subtract. | No | No | Yes | Yes |
| mean, standard deviation, standard error of the mean. | No | No | Yes | Yes |
| ratio, or coefficient of variation. | No | No | No | Yes |
| | | | | |

Types of Data Sets

- Record
 - Data Matrix
 - Document Data
 - Transaction Data
- Graph
 - World Wide Web
 - Molecular Structures
- Ordered
 - Spatial Data
 - Temporal Data
 - Sequential Data
 - Genetic Sequence Data

Record Data

- Data that consists of a collection of records, each of which consists of a fixed set of attributes

| <i>Tid</i> | Refund | Marital Status | Taxable Income | Cheat |
|------------|--------|----------------|----------------|-------|
| 1 | Yes | Single | 125K | No |
| 2 | No | Married | 100K | No |
| 3 | No | Single | 70K | No |
| 4 | Yes | Married | 120K | No |
| 5 | No | Divorced | 95K | Yes |
| 6 | No | Married | 60K | No |
| 7 | Yes | Divorced | 220K | No |
| 8 | No | Single | 85K | Yes |
| 9 | No | Married | 75K | No |
| 10 | No | Single | 90K | Yes |

Data Matrix

- If data objects have the same fixed set of numeric attributes, then the data objects can be thought of as points in a multi-dimensional space, where each dimension represents a distinct attribute
- Such data set can be represented by an m by n matrix, where there are m rows, one for each object, and n columns, one for each attribute

| Projection of x Load | Projection of y load | Distance | Load | Thickness |
|-------------------------|-------------------------|----------|------|-----------|
| 10.23 | 5.27 | 15.22 | 2.7 | 1.2 |
| 12.65 | 6.25 | 16.22 | 2.2 | 1.1 |

Document Data

- Each document becomes a 'term' vector,
 - each term is a component (attribute) of the vector,
 - the value of each component is the number of times the corresponding term occurs in the document.


| | team | coach | player | ball | score | game | win | lost | timeout | season |
|------------|------|-------|--------|------|-------|------|-----|------|---------|--------|
| Document 1 | 3 | 0 | 5 | 0 | 2 | 6 | 0 | 2 | 0 | 2 |
| Document 2 | 0 | 7 | 0 | 2 | 1 | 0 | 0 | 3 | 0 | 0 |
| Document 3 | 0 | 1 | 0 | 0 | 1 | 2 | 2 | 0 | 3 | 0 |

Transaction Data

- A special type of record data, where
 - each record (transaction) involves a set of items.
 - For example, consider a grocery store. The set of products purchased by a customer during one shopping trip constitute a transaction, while the individual products that were purchased are the items.


| <i>TID</i> | <i>Items</i> |
|-------------------|----------------------------------|
| 1 | Bread, Coke, Milk |
| 2 | Beer, Bread |
| 3 | Beer, Coke, Diaper, Milk |
| 4 | Beer, Bread, Diaper, Milk |
| 5 | Coke, Diaper, Milk |

Graph Data : “Love Obama”

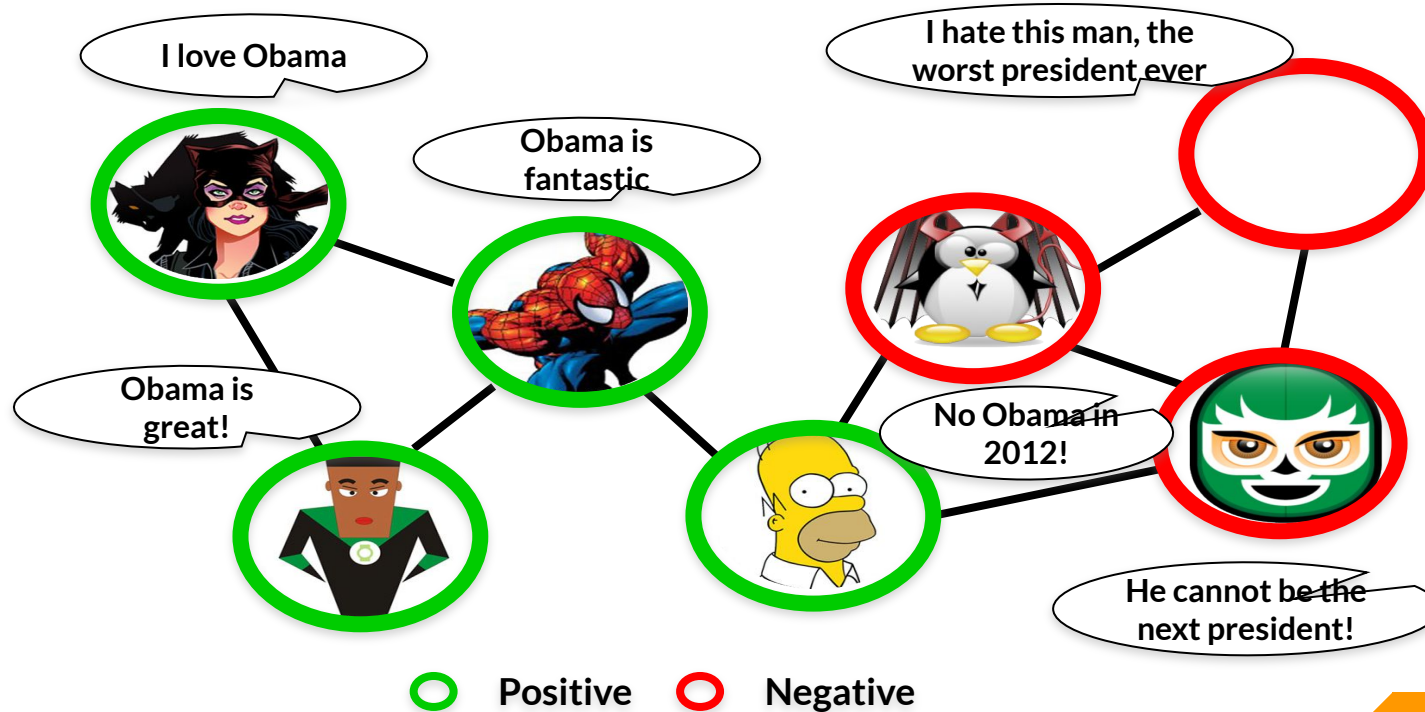

Chemical Data


- Benzene Molecule: C_6H_6

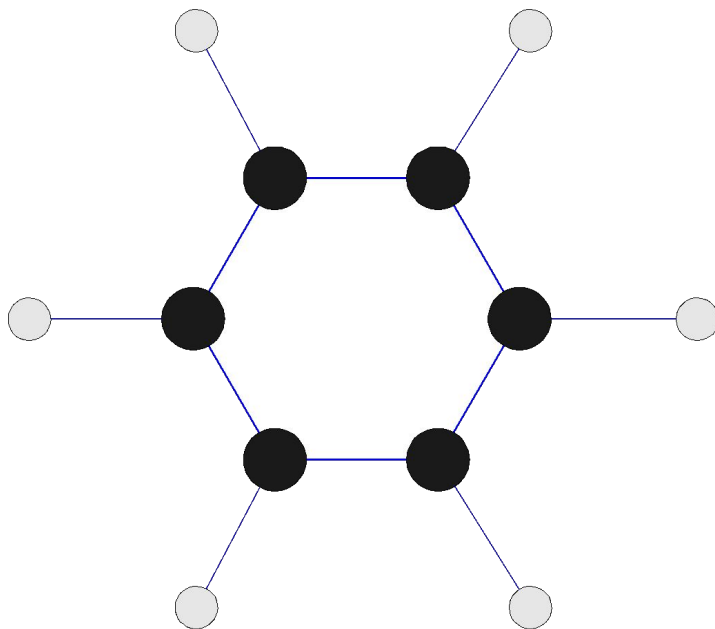

Ordered Data

- Sequences of transactions


Items/Events

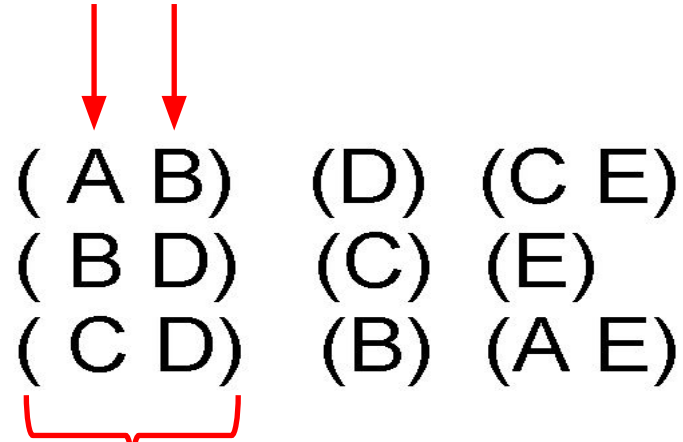

An element of the
sequence

Ordered Data

- Spatio-Temporal Data

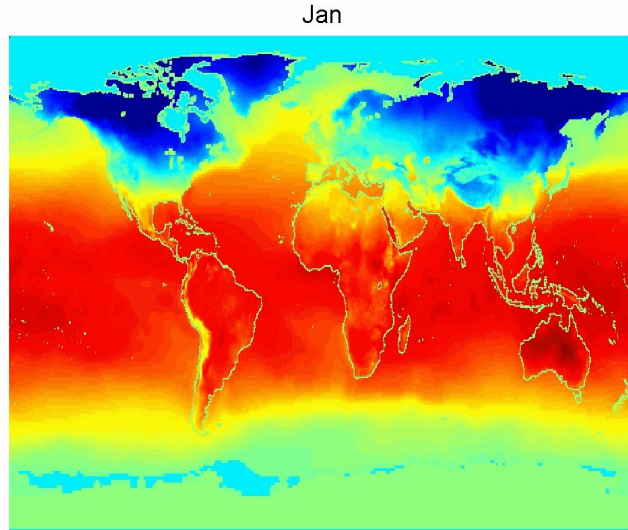

Average Monthly Temperature of Land and Ocean

Data Preprocessing


- Data Preprocessing: An Overview
 - Data Quality
 - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary

Data Quality


- What kinds of data quality problems?
 - How can we detect problems with the data?
 - What can we do about these problems?
-
- Examples of data quality problems:
 - Noise and outliers
 - missing values
 - duplicate data

Noise

- Noise refers to modification of original values
 - Examples: distortion of a person's voice when talking on a poor phone and “snow” on television screen

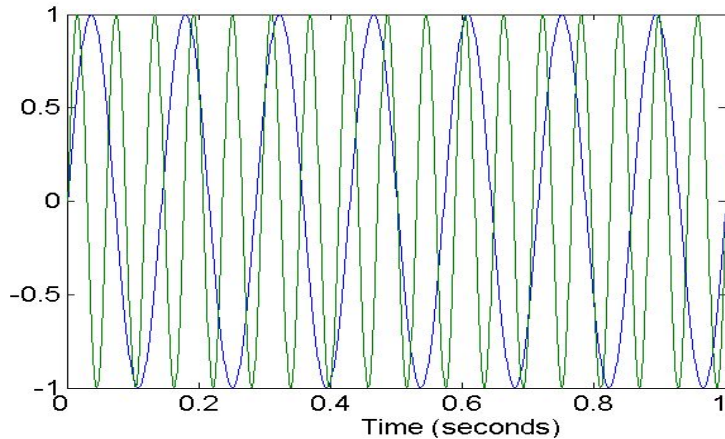


Two Sine Waves

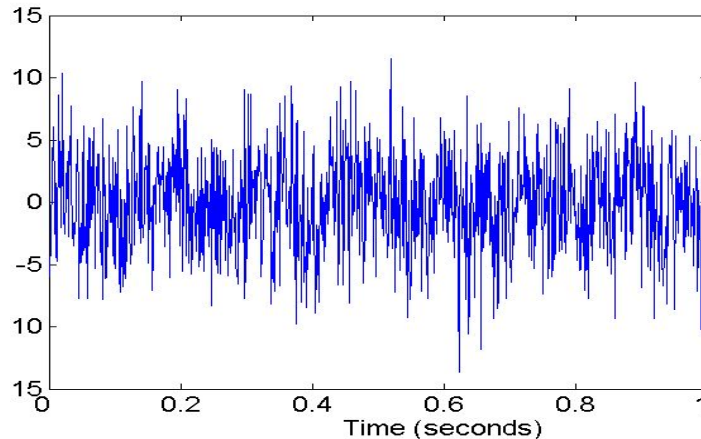

Two Sine Waves + Noise

Outliers

- Outliers are data objects with characteristics that are considerably different than most of the other data objects in the data set

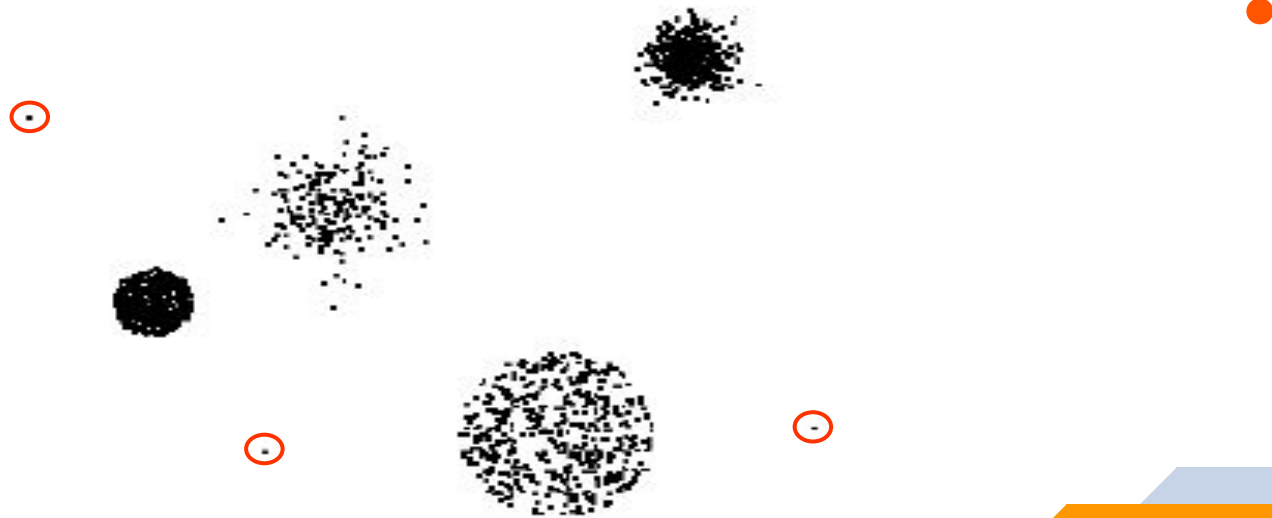

Missing Values

- Reasons for missing values
 - Information is not collected
(e.g., people decline to give their age and weight)
 - Attributes may not be applicable to all cases
(e.g., annual income is not applicable to children)
 - Data got corrupted and replaced by nulls

Duplicate Data

- Data set may include data objects that are duplicates, or almost duplicates of one another
 - Major issue when merging data from heterogeneous sources
- Examples:
 - Same person with multiple email addresses



Data Quality : Why Preprocess the Data ?

- Measures for data quality: A multidimensional view
 - Accuracy: correct or wrong, accurate or not
 - Completeness: not recorded, unavailable, ...
 - Consistency: some modified but some not, dangling, ...
 - Timeliness: timely update?
 - Believability: how trustable the data are correct?
 - Interpretability: how easily the data can be understood?

Major Tasks in Data Preprocessing

- **Data cleaning**
 - Fill in missing values, smooth noisy data, identify or remove outliers, and resolve inconsistencies
- **Data integration**
 - Integration of multiple databases, data cubes, or files
- **Data reduction**
 - Dimensionality reduction
 - Numerosity reduction
 - Data compression
- **Data transformation and data discretization**
 - Normalization
 - Concept hierarchy generation

Data Preprocessing

- Data Preprocessing: An Overview
 - Data Quality
 - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary



Data Cleaning

- Data in the Real World Is Dirty: Lots of potentially incorrect data, e.g., instrument faulty, human or computer error, transmission error
 - incomplete: lacking attribute values, lacking certain attributes of interest, or containing only aggregate data
 - e.g., *Occupation*=" " (missing data)
 - noisy: containing noise, errors, or outliers
 - e.g., *Salary*=" -10" (an error)
 - inconsistent: containing discrepancies in codes or names, e.g.,
 - *Age*="42", *Birthday*="03/07/2010"
 - Was rating "1, 2, 3", now rating "A, B, C"
 - discrepancy between duplicate records
 - Intentional (e.g., *disguised missing data*)
 - Jan. 1 as everyone's birthday?

Incomplete (Missing) Data



- Data is not always available
 - E.g., many tuples have no recorded value for several attributes, such as customer income in sales data
- Missing data may be due to
 - equipment malfunction
 - inconsistent with other recorded data and thus deleted
 - data not entered due to misunderstanding
 - certain data may not be considered important at the time of entry
 - not register history or changes of the data
- Missing data may need to be inferred

How to Handle Missing Data ?

- Ignore the tuple: usually done when class label is missing (when doing classification)—not effective when the % of missing values per attribute varies considerably
- Fill in the missing value manually: tedious + infeasible?
- Fill in it automatically with
 - a global constant : e.g., “unknown”, a new class?!
 - the attribute mean
 - the attribute mean for all samples belonging to the same class: smarter
 - the most probable value: inference-based such as Bayesian formula or decision tree



Noisy Data



- **Noise**: random error or variance in a measured variable
- **Incorrect attribute values** may be due to
 - faulty data collection instruments
 - data entry problems
 - data transmission problems
 - technology limitation
 - inconsistency in naming convention
- **Other data problems** which require data cleaning
 - duplicate records
 - incomplete data
 - inconsistent data

How to Handle Noisy Data ?

- Binning
 - first sort data and partition into (equal-frequency) bins
 - then one can smooth by bin means, smooth by bin median, etc.
- Regression
 - smooth by fitting the data into regression functions
- Clustering
 - detect and remove outliers
- Combined computer and human inspection
 - detect suspicious values and check by human (e.g., deal with possible outliers)

Data Cleaning as a Process

- Data discrepancy detection
 - Use metadata (e.g., domain, range, dependency, distribution)
 - Use commercial tools
 - Data scrubbing: use simple domain knowledge (e.g., postal code, spell-check) to detect errors and make corrections
 - Data auditing: by analyzing data to discover rules and relationship to detect violators (e.g., correlation and clustering to find outliers)
- Data migration and integration
 - Data migration tools: allow transformations to be specified
 - ETL (Extraction/Transformation/Loading) tools: allow users to specify transformations through a graphical user interface
- Integration of the two processes
 - Iterative and interactive (e.g., Potter's Wheels)

Data Preprocessing

- Data Preprocessing: An Overview
 - Data Quality
 - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary



Data Integration

- **Data integration:**
 - Combines data from multiple sources into a coherent store
- Schema integration: e.g., $A.cust-id \equiv B.cust-\#$
 - Integrate metadata from different sources
- **Entity identification problem:**
 - Identify real world entities from multiple data sources, e.g., Bill Clinton = William Clinton
- Detecting and resolving data value conflicts
 - For the same real world entity, attribute values from different sources are different
 - Possible reasons: different representations, different scales, e.g., metric vs. British units

Handling Redundancy in Data Integration

- Redundant data occur often when integration of multiple databases
 - *Object identification*: The same attribute or object may have different names in different databases
 - *Derivable data*: One attribute may be a “derived” attribute in another table, e.g., annual revenue
- Redundant attributes may be able to be detected by *correlation analysis* and *covariance analysis*
- Careful integration of the data from multiple sources may help reduce/avoid redundancies and inconsistencies and improve mining speed and quality

Correlation Analysis(Nominal Data)

- χ^2 (chi-square) test

$$\chi^2 = \sum \frac{(\text{Observed} - \text{Expected})^2}{\text{Expected}}$$

- The larger the χ^2 value, the more likely the variables are related
- The cells that contribute the most to the χ^2 value are those whose actual count is very different from the expected count
- Correlation does not imply causality
 - # of hospitals and # of car-theft in a city are correlated
 - Both are causally linked to the third variable: population

Chi-Square Calculation : An Example

| | Play chess | Not play chess | Sum (row) |
|--------------------------|------------|----------------|-----------|
| Like science fiction | 250(90) | 200(360) | 450 |
| Not like science fiction | 50(210) | 1000(840) | 1050 |
| Sum(col.) | 300 | 1200 | 1500 |

- χ^2 (chi-square) calculation (numbers in parenthesis are expected counts calculated based on the data distribution in the two categories)

$$\chi^2 = \frac{(250 - 90)^2}{90} + \frac{(50 - 210)^2}{210} + \frac{(200 - 360)^2}{360} + \frac{(1000 - 840)^2}{840} = 507.93$$

- It shows that like_science_fiction and play_chess are correlated in the group

Correlation Analysis(Numeric Data)


- Correlation coefficient (also called **Pearson's product moment coefficient**)

$$r_{A,B} = \frac{\sum_{i=1}^n (a_i - \bar{A})(b_i - \bar{B})}{(n-1)\sigma_A\sigma_B} = \frac{\sum_{i=1}^n (a_i b_i) - n\bar{A}\bar{B}}{(n-1)\sigma_A\sigma_B}$$

where n is the number of tuples, \bar{A} and \bar{B} are the respective means of A and B, σ_A and σ_B are the respective standard deviation of A and B, and $\sum(a_i b_i)$ is the sum of the AB cross-product.

- If $r_{A,B} > 0$, A and B are positively correlated (A's values increase as B's). The higher, the stronger correlation.
- $r_{A,B} = 0$: independent; $r_{AB} < 0$: negatively correlated

Visually Evaluating Correlation

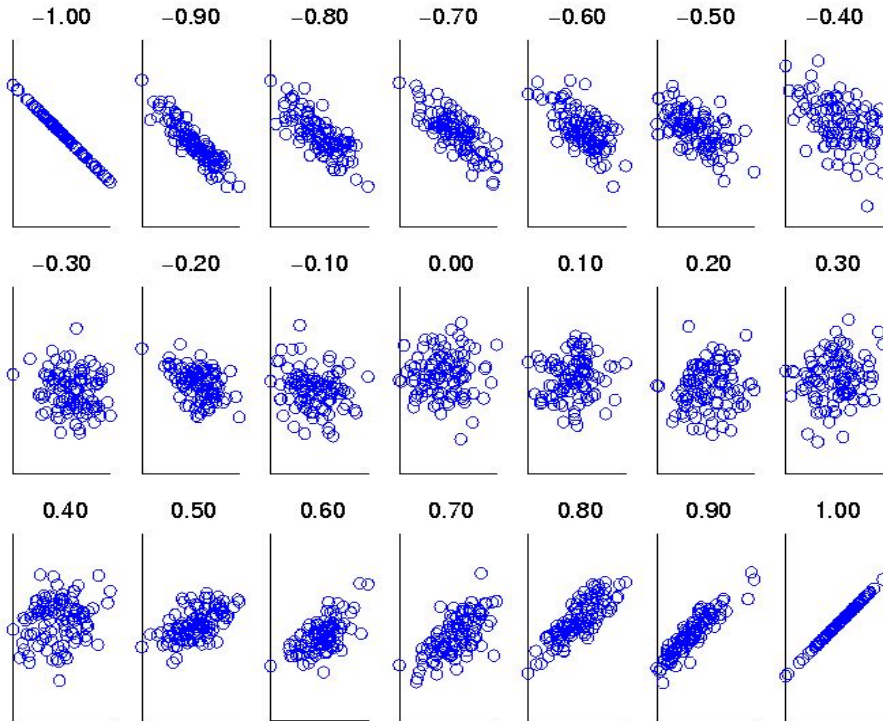

Scatter plots showing the similarity from -1 to 1.

Covariance(Numeric Data)

- Covariance is similar to correlation

$$Cov(A, B) = E((A - \bar{A})(B - \bar{B})) = \frac{\sum_{i=1}^n (a_i - \bar{A})(b_i - \bar{B})}{n}$$

Correlation coefficient: $r_{A,B} = \frac{Cov(A, B)}{\sigma_A \sigma_B}$

where n is the number of tuples, \bar{A} and \bar{B} are the respective mean or **expected values** of A and B , σ_A and σ_B are the respective standard deviation of A and B .

- **Positive covariance:** If $Cov_{A,B} > 0$, then A and B both tend to be larger than their expected values.
- **Negative covariance:** If $Cov_{A,B} < 0$ then if A is larger than its expected value, B is likely to be smaller than its expected value.
- **Independence:** $Cov_{A,B} = 0$:
 - Some pairs of random variables may have a covariance of 0 but are not independent.
 - Only under some additional assumptions (e.g., the data follow multivariate normal distributions) does a covariance of 0 imply independence

Covariance : An Example

$$Cov(A, B) = E((A - \bar{A})(B - \bar{B})) = \frac{\sum_{i=1}^n (a_i - \bar{A})(b_i - \bar{B})}{n}$$

- It can be simplified in computation as

$$Cov(A, B) = E(A \cdot B) - \bar{A}\bar{B}$$

- Suppose two stocks A and B have the following values in one week: (2, 5), (3, 8), (5, 10), (4, 11), (6, 14).
- Question: If the stocks are affected by the same industry trends, will their prices rise or fall together?
 - $E(A) = (2 + 3 + 5 + 4 + 6) / 5 = 20 / 5 = 4$
 - $E(B) = (5 + 8 + 10 + 11 + 14) / 5 = 48 / 5 = 9.6$
 - $Cov(A, B) = (2 \times 5 + 3 \times 8 + 5 \times 10 + 4 \times 11 + 6 \times 14) / 5 - 4 \times 9.6 = 4$
- Thus, A and B rise together since $Cov(A, B) > 0$.

Data Preprocessing

- Data Preprocessing: An Overview
 - Data Quality
 - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary



Data Reduction : Strategies

- **Data reduction:** Obtain a reduced representation of the data set that is much smaller in volume but yet produces the same (or almost the same) analytical results
- Why data reduction? — A database/data warehouse may store terabytes of data. Complex data analysis may take a very long time to run on the complete data set.
- Data reduction strategies
 - **Dimensionality reduction**, e.g., remove unimportant attributes
 - ◆ Wavelet transforms
 - ◆ Principal Components Analysis (PCA)
 - ◆ Feature subset selection, feature creation
 - **Numerosity reduction** (some simply call it: Data Reduction)
 - ◆ Regression and Log-Linear Models
 - ◆ Histograms, clustering, sampling
 - ◆ Data cube aggregation
 - **Data compression**

Data Reduction 1 : Dimensionality Reduction

■ Curse of dimensionality

- When dimensionality increases, data becomes increasingly sparse
- Density and distance between points, which is critical to clustering, outlier analysis, becomes less meaningful
- The possible combinations of subspaces will grow exponentially

■ Dimensionality reduction


- Avoid the curse of dimensionality
- Help eliminate irrelevant features and reduce noise
- Reduce time and space required in data mining
- Allow easier visualization

■ Dimensionality reduction techniques


- Wavelet transforms
- Principal Component Analysis
- Supervised and nonlinear techniques (e.g., feature selection)

Principal Component Analysis(PCA)

- Find a projection that captures the largest amount of variation in data
- The original data are projected onto a much smaller space, resulting in dimensionality reduction. We find the eigenvectors of the covariance matrix, and these eigenvectors define the new space

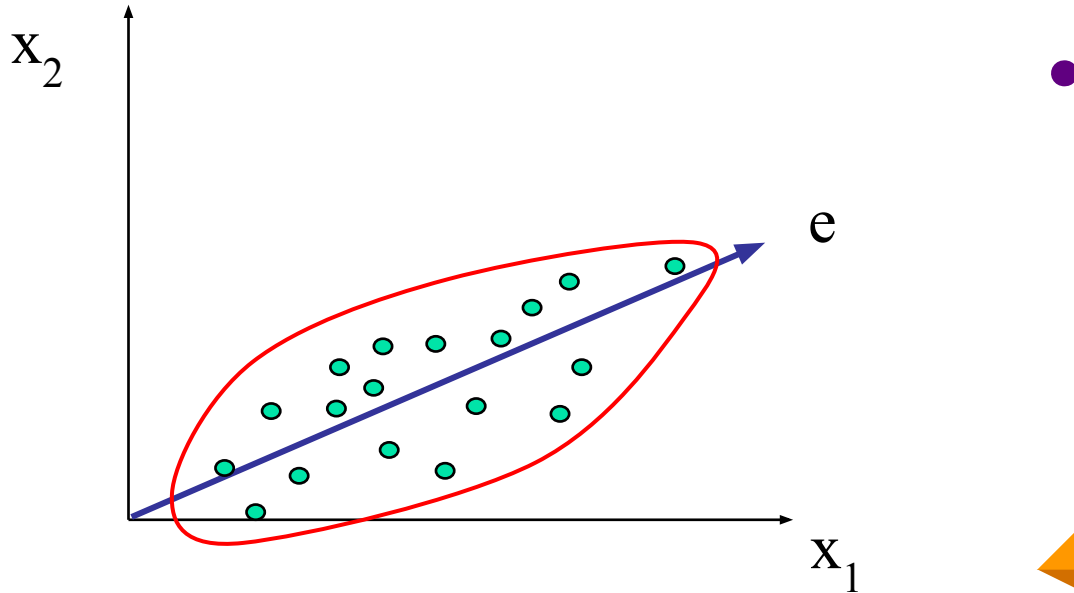

Principal Component Analysis(PCA)

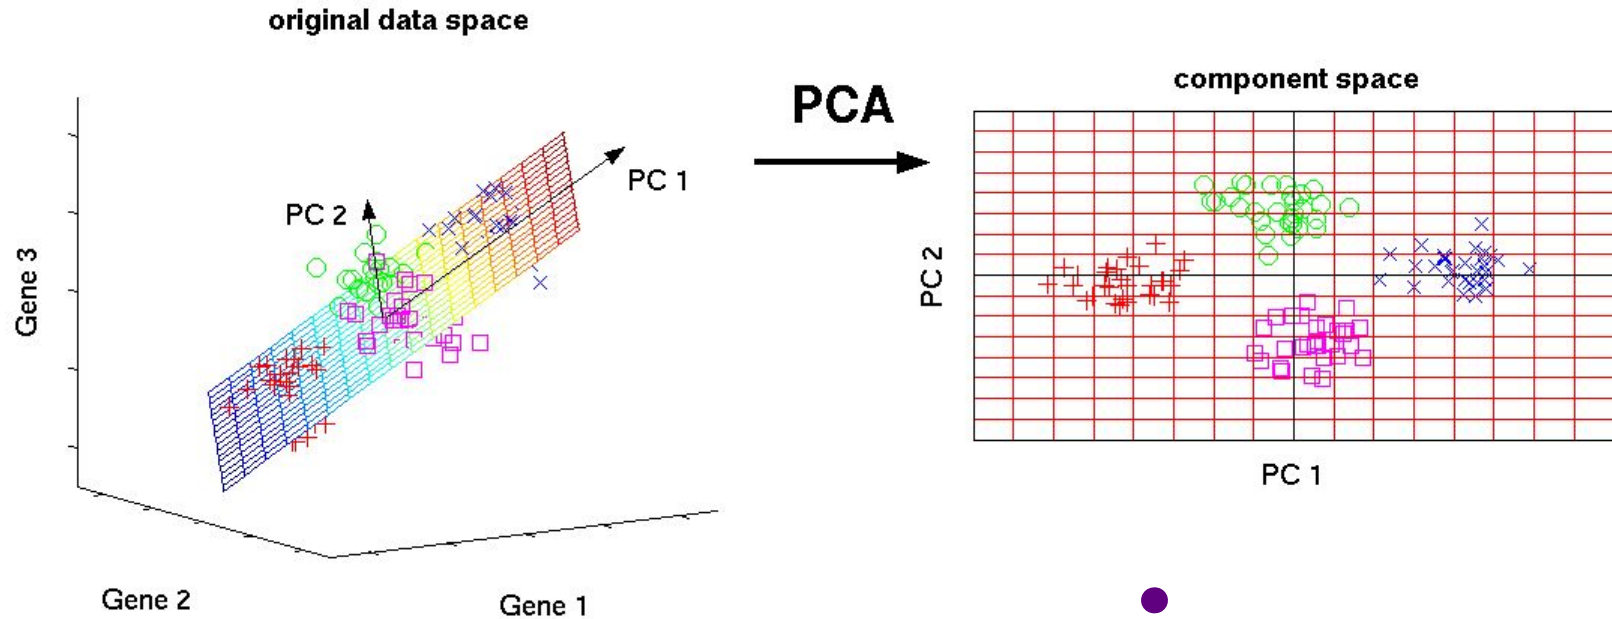

Principal Component Analysis (Steps)

- Given N data vectors from n -dimensions, find $k \leq n$ orthogonal vectors (*principal components*) that can be best used to represent data
 - Normalize input data: Each attribute falls within the same range
 - Compute k orthonormal (unit) vectors, i.e., *principal components*
 - Each input data (vector) is a linear combination of the k principal component vectors
 - The principal components are sorted in order of decreasing “significance” or strength
 - Since the components are sorted, the size of the data can be reduced by eliminating the *weak components*, i.e., those with low variance (i.e., using the strongest principal components, it is possible to reconstruct a good approximation of the original data)
- Works for numeric data only

Attribute Subset Selection

- Another way to reduce dimensionality of data
- Redundant attributes
 - Duplicate much or all of the information contained in one or more other attributes
 - E.g., purchase price of a product and the amount of sales tax paid
- Irrelevant attributes
 - Contain no information that is useful for the data mining task at hand
 - E.g., students' ID is often irrelevant to the task of predicting students' GPA

Heuristic Search in Attribute Selection



- There are 2^d possible attribute combinations of d attributes
- Typical heuristic attribute selection methods:
 - Best single attribute under the attribute independence assumption: choose by significance tests
 - Best step-wise feature selection:
 - The best single-attribute is picked first
 - Then next best attribute condition to the first, ...
 - Step-wise attribute elimination:
 - Repeatedly eliminate the worst attribute
 - Best combined attribute selection and elimination

Attribute Creation (Feature Generation)

- Create new attributes (features) that can capture the important information in a data set more effectively than the original ones
- Three general methodologies
 - Attribute extraction
 - Domain-specific
 - Mapping data to new space (see: data reduction)
 - E.g., Fourier transformation, wavelet transformation, manifold approaches (not covered)
 - Attribute construction
 - Combining features
 - Data discretization

Data Reduction 2 : Numerosity Reduction

- Reduce data volume by choosing alternative, *smaller forms* of data representation
- **Parametric methods** (e.g., regression)
 - Assume the data fits some model, estimate model parameters, store only the parameters, and discard the data (except possible outliers)
 - Ex.: Log-linear models—obtain value at a point in m -D space as the product on appropriate marginal subspaces
- **Non-parametric methods**
 - Do not assume models
 - Major families: histograms, clustering, sampling, ...

Sampling


- Sampling: obtaining a small sample s to represent the whole data set N
- Allow a mining algorithm to run in complexity that is potentially sub-linear to the size of the data
- Key principle: Choose a **representative** subset of the data
 - Simple random sampling may have very poor performance in the presence of skew
 - Develop adaptive sampling methods, e.g., stratified sampling:
- Note: Sampling may not reduce database I/Os (page at a time)

Types of Sampling

- **Simple random sampling**
 - There is an equal probability of selecting any particular item
- **Sampling without replacement**
 - Once an object is selected, it is removed from the population
- **Sampling with replacement**
 - A selected object is not removed from the population
- **Stratified sampling:**
 - Partition the data set, and draw samples from each partition (proportionally, i.e., approximately the same percentage of the data)
 - Used in conjunction with skewed data




Sampling With or Without Replacement

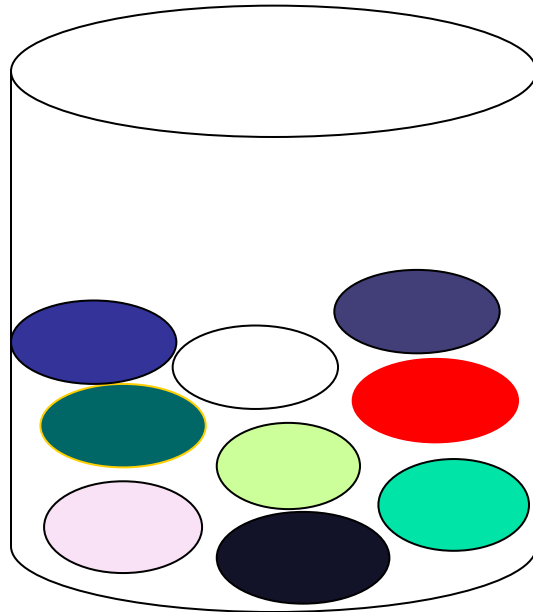


Raw Data

SRSWOR
(simple random
sample without
replacement)

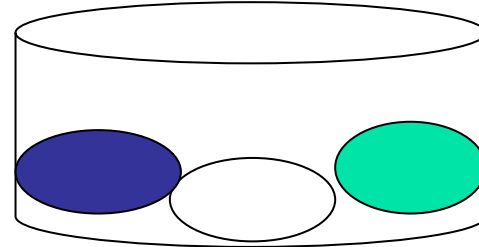


SRSWR

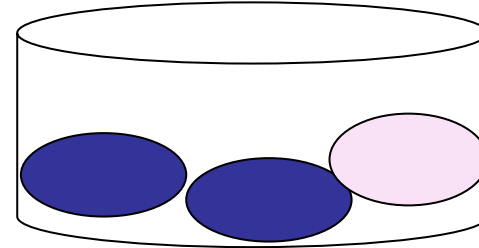


Sampling: Cluster or Stratified Sampling

Raw Data

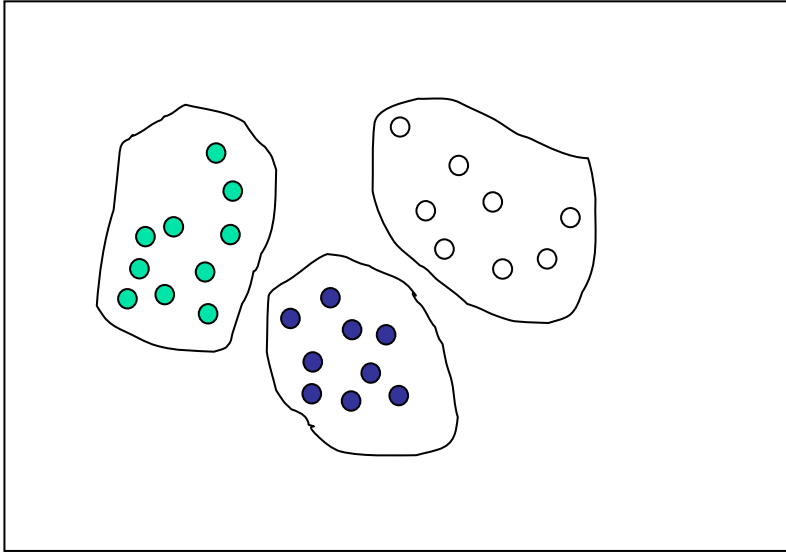

Cluster/Stratified Sample ●

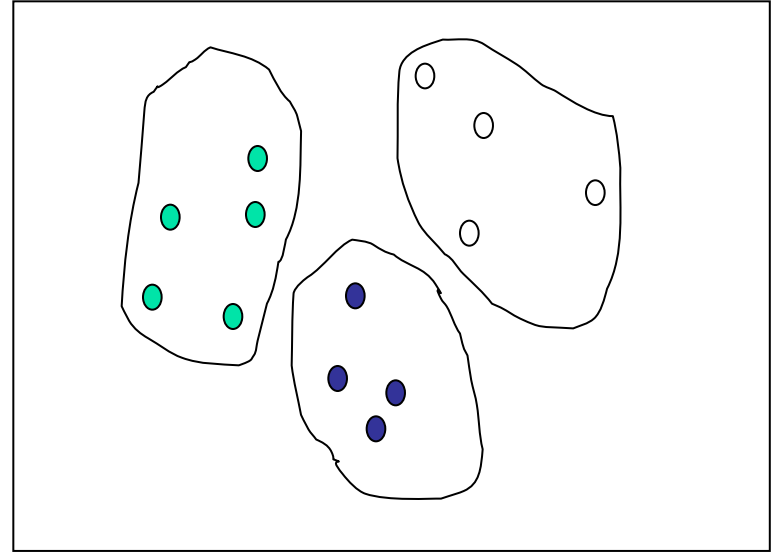


Data Cube Aggregation

- The lowest level of a data cube (base cuboid)
 - The aggregated data for an **individual entity of interest**
 - E.g., a customer in a phone calling data warehouse
- Multiple levels of aggregation in data cubes
 - Further reduce the size of data to deal with
- Reference appropriate levels
 - Use the smallest representation which is enough to solve the task
- Queries regarding aggregated information should be answered using data cube, when possible

Data Reduction 3 : Data Compression

- String compression
 - There are extensive theories and well-tuned algorithms ●
 - Typically lossless, but only limited manipulation is possible without expansion
- Audio/video compression
 - Typically lossy compression, with progressive refinement ●
 - Sometimes small fragments of signal can be reconstructed without reconstructing the whole
- Time sequence is not audio
 - Typically short and vary slowly with time ●
- Dimensionality and numerosity reduction may also be considered as forms of data compression

Data Compression

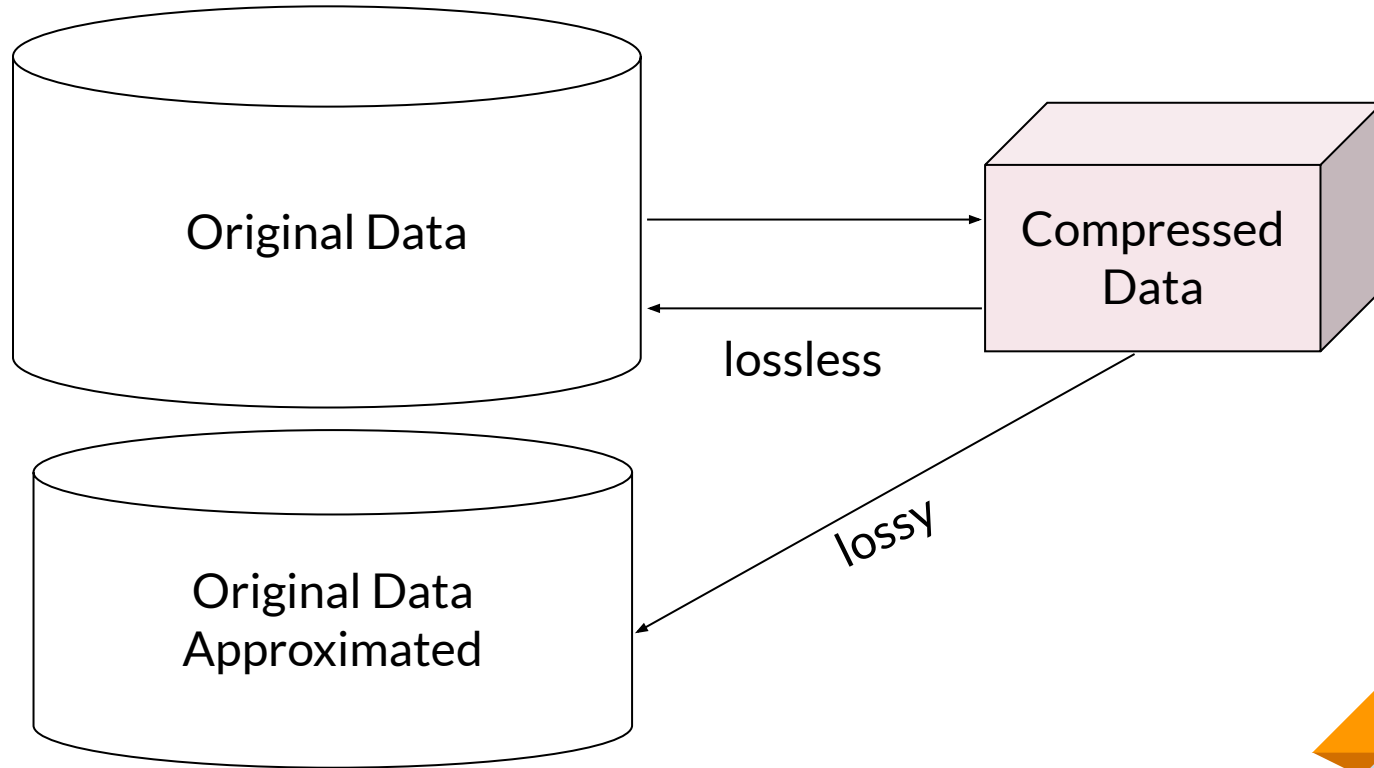

Data Preprocessing

- Data Preprocessing: An Overview
 - Data Quality
 - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary



Data Transformation

- A function that maps the entire set of values of a given attribute to a new set of replacement values s.t. each old value can be identified with one of the new values
- Methods
 - Smoothing: Remove noise from data
 - Attribute/feature construction
 - New attributes constructed from the given ones
 - Aggregation: Summarization, data cube construction
 - Normalization: Scaled to fall within a smaller, specified range
 - min-max normalization
 - z-score normalization
 - normalization by decimal scaling
 - Discretization: Concept hierarchy climbing

Normalization

- **Min-max normalization:** to $[\text{new_min}_A, \text{new_max}_A]$

$$v' = \frac{v - \text{min}_A}{\text{max}_A - \text{min}_A} (\text{new_max}_A - \text{new_min}_A) + \text{new_min}_A$$

- Ex. Let income range \$12,000 to \$98,000 normalized to $[0.0, 1.0]$.

Then \$73,000 is mapped to $\frac{73,600 - 12,000}{98,000 - 12,000} (1.0 - 0) + 0 = 0.716$

- **Z-score normalization** (μ : mean, σ : standard deviation):

$$v' = \frac{v - \mu_A}{\sigma_A}$$

- Ex. Let $\mu = 54,000$, $\sigma = 16,000$. Then $\frac{73,600 - 54,000}{16,000} = 1.225$

Discretization

- Three types of attributes
 - Nominal—values from an unordered set, e.g., color, profession
 - Ordinal—values from an ordered set, e.g., military or academic rank
 - Numeric—real numbers, e.g., integer or real numbers
- Discretization: Divide the range of a continuous attribute into intervals
 - Interval labels can then be used to replace actual data values
 - Reduce data size by discretization
 - Supervised vs. unsupervised
 - Split (top-down) vs. merge (bottom-up)
 - Discretization can be performed recursively on an attribute
 - Prepare for further analysis, e.g., classification

Data Discretization Methods

- Typical methods: All the methods can be applied recursively
 - Binning
 - Top-down split, unsupervised
 - Histogram analysis
 - Top-down split, unsupervised
 - Clustering analysis (unsupervised, top-down split or bottom-up merge)
 - Decision-tree analysis (supervised, top-down split)
 - Correlation (e.g., χ^2) analysis (unsupervised, bottom-up merge)

Simple Discretization : Binning

- **Equal-width** (distance) partitioning
 - Divides the range into N intervals of equal size: uniform grid
 - if A and B are the lowest and highest values of the attribute, the width of intervals will be: $W = (B - A)/N$.
 - The most straightforward, but outliers may dominate presentation
 - Skewed data is not handled well
- **Equal-depth** (frequency) partitioning
 - Divides the range into N intervals, each containing approximately same number of samples
 - Good data scaling
 - Managing categorical attributes can be tricky

Binning Method for Data Smoothing

■ Sorted data for price (in dollars): 4, 8, 9, 15, 21, 21, 24, 25, 26, 28, 29, 34

* Partition into equal-frequency (**equi-depth**) bins:

- Bin 1: 4, 8, 9, 15
- Bin 2: 21, 21, 24, 25
- Bin 3: 26, 28, 29, 34

* Smoothing by **bin means**:

- Bin 1: 9, 9, 9, 9
- Bin 2: 23, 23, 23, 23
- Bin 3: 29, 29, 29, 29

* Smoothing by **bin boundaries**:

- Bin 1: 4, 4, 4, 15
- Bin 2: 21, 21, 25, 25
- Bin 3: 26, 26, 26, 34

Concept Hierarchy Generation


- **Concept hierarchy** organizes concepts (i.e., attribute values) hierarchically and is usually associated with each dimension in a data warehouse
- Concept hierarchies facilitate drilling and rolling in data warehouses to view data in multiple granularity
- Concept hierarchy formation: Recursively reduce the data by collecting and replacing low level concepts (such as numeric values for *age*) by higher level concepts (such as *youth*, *adult*, or *senior*)
- Concept hierarchies can be explicitly specified by domain experts and/or data warehouse designers
- Concept hierarchy can be automatically formed for both numeric and nominal data. For numeric data, use discretization methods shown. ●

Concept Hierarchy Generation For Nominal Data

- Specification of a partial/total ordering of attributes explicitly at the schema level by users or experts
 - $street < city < state < country$
- Specification of a hierarchy for a set of values by explicit data grouping
 - $\{Urbana, Champaign, Chicago\} < Illinois$
- Specification of only a partial set of attributes
 - E.g., only $street < city$, not others
- Automatic generation of hierarchies (or attribute levels) by the analysis of the number of distinct values
 - E.g., for a set of attributes: $\{street, city, state, country\}$

Concept Hierarchy Generation

- Some hierarchies can be automatically generated based on the analysis of the number of distinct values per attribute in the data set
 - The attribute with the most distinct values is placed at the lowest level of the hierarchy
 - Exceptions, e.g., weekday, month, quarter, year

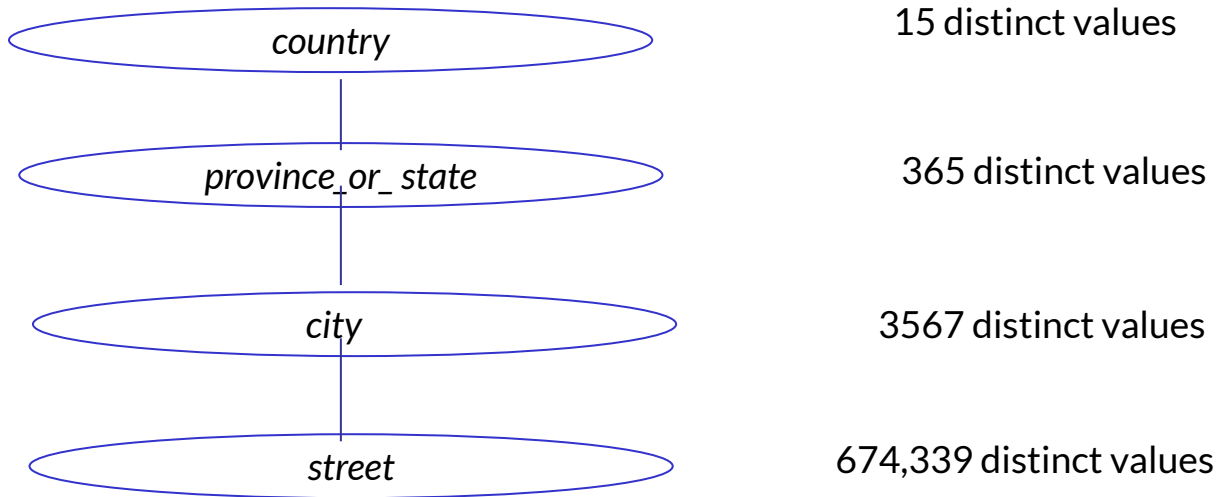

Data Preprocessing

- Data Preprocessing: An Overview
 - Data Quality
 - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary



Summary

- **Data quality:** accuracy, completeness, consistency, timeliness, believability, interpretability
- **Data cleaning:** e.g. missing/noisy values, outliers
- **Data integration** from multiple sources:
 - Entity identification problem
 - Remove redundancies
 - Detect inconsistencies
- **Data reduction**
 - Dimensionality reduction
 - Numerosity reduction
 - Data compression
- **Data transformation and data discretization**
 - Normalization
 - Concept hierarchy generation

“

Questions ?

References

- D. P. Ballou and G. K. Tayi. Enhancing data quality in data warehouse environments. *Comm. of ACM*, 42:73-78, 1999
- A. Bruce, D. Donoho, and H.-Y. Gao. Wavelet analysis. *IEEE Spectrum*, Oct 1996
- T. Dasu and T. Johnson. *Exploratory Data Mining and Data Cleaning*. John Wiley, 2003
- J. Devore and R. Peck. *Statistics: The Exploration and Analysis of Data*. Duxbury Press, 1997.
- H. Galhardas, D. Florescu, D. Shasha, E. Simon, and C.-A. Saita. Declarative data cleaning: Language, model, and algorithms. *VLDB'01*
- M. Hua and J. Pei. Cleaning disguised missing data: A heuristic approach. *KDD'07*
- H. V. Jagadish, et al., *Special Issue on Data Reduction Techniques*. *Bulletin of the Technical Committee on Data Engineering*, 20(4), Dec. 1997
- H. Liu and H. Motoda (eds.). *Feature Extraction, Construction, and Selection: A Data Mining Perspective*. Kluwer Academic, 1998
- J. E. Olson. *Data Quality: The Accuracy Dimension*. Morgan Kaufmann, 2003
- D. Pyle. *Data Preparation for Data Mining*. Morgan Kaufmann, 1999
- V. Raman and J. Hellerstein. *Potters Wheel: An Interactive Framework for Data Cleaning and Transformation*, *VLDB'2001*
- T. Redman. *Data Quality: The Field Guide*. Digital Press (Elsevier), 2001
- R. Wang, V. Storey, and C. Firth. A framework for analysis of data quality research. *IEEE Trans. Knowledge and Data Engineering*, 7:623-640, 1995