



NF-UNSW-NB15 (10 classes)

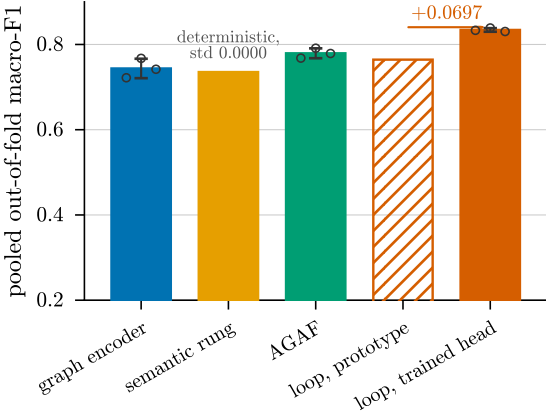

NF-ToN-IoT (8 classes)

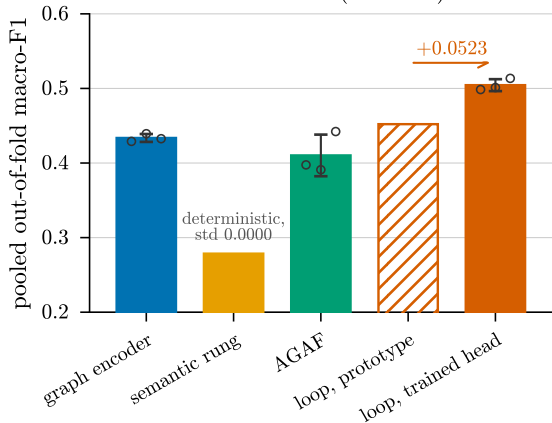

Error bars are training-seed variance at a fixed fold partition; fold-partition variance is not measured. Open circles are the three individual seeds. The consultant change is separated on NF-UNSW-NB15 and not on NF-ToN-IoT; the two loop versions also differ in their selected top-k (31 to 29, and 25 to 16). The two panels have independent y-axes.