



NF-UNSW-NB15

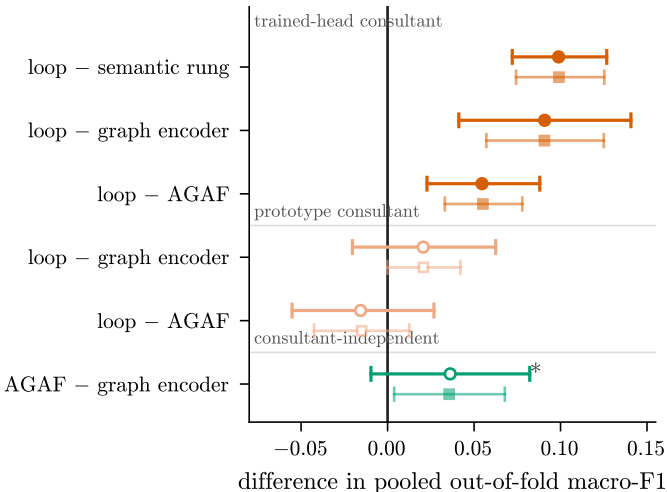

NF-ToN-IoT

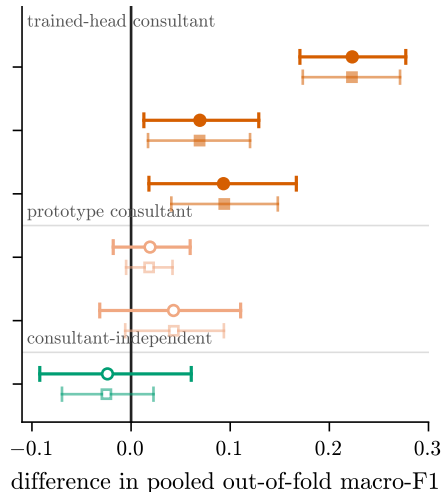

* On NF-UNSW-NB15, AGAF minus graph encoder is separated under the seed-matched procedure and not once training-seed variance is admitted; the two-level result decides. There is no loop-versus-semantic-rung comparison for the prototype consultant.

● two-level (edges and training seed) ■ seed-matched (edges only) ○ interval includes zero