

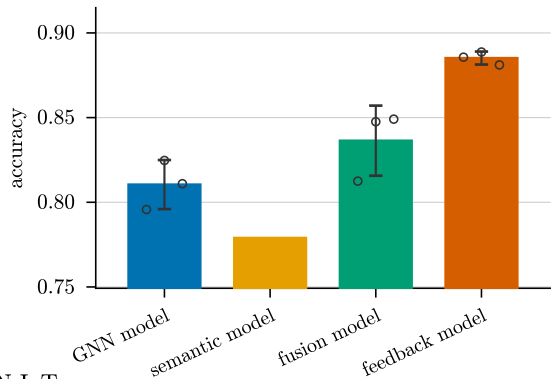
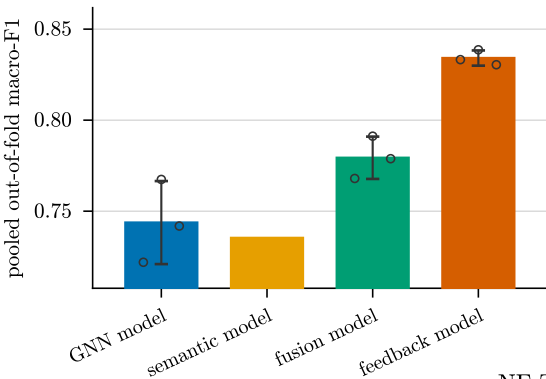


NF-UNSW-NB15

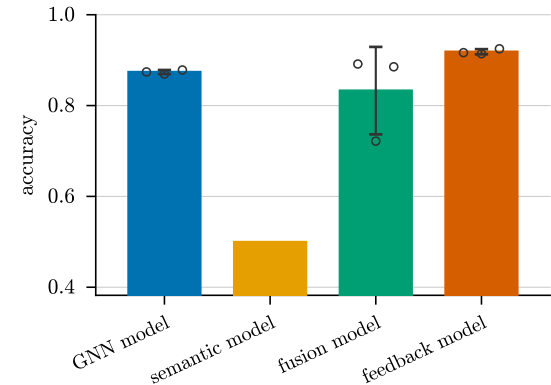

NF-ToN-IoT

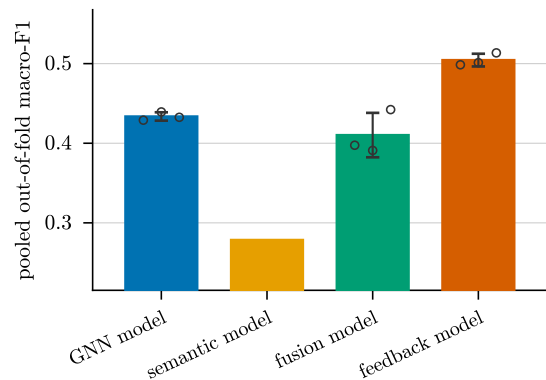

Left column macro-F1, right column accuracy, both on the rows the metric scores. Error bars are training-seed variance at a fixed fold partition; open circles are the three seeds. The semantic model is deterministic and has none. Every panel has its own y-axis. On NF-ToN-IoT the benign class holds 82% of scored edges, so accuracy stays high for every graph rung while macro-F1 separates them.