

# Week-7: Challenge

Alicia Tan

4 oct 2023

```
library(tidyverse)
```

```
## — Attaching core tidyverse packages — tidyverse 2.0.0 —
## ✓ dplyr      1.1.2      ✓ readr      2.1.4
## ✓ forcats    1.0.0      ✓ stringr    1.5.0
## ✓ ggplot2     3.4.3      ✓ tibble     3.2.1
## ✓ lubridate  1.9.2      ✓ tidyr      1.3.0
## ✓ purrr      1.0.2
## — Conflicts — tidyverse_conflicts() —
## ✖ dplyr::filter() masks stats::filter()
## ✖ dplyr::lag()     masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
library(palmerpenguins)
glimpse(penguins)
```


```
## Rows: 344
## Columns: 8
## $ species      <fct> Adelie, Adelie, Adelie, Adelie, Adelie, Adelie, Adel...
## $ island        <fct> Torgersen, Torgersen, Torgersen, Torgersen, Torgerse...
## $ bill_length_mm <dbl> 39.1, 39.5, 40.3, NA, 36.7, 39.3, 38.9, 39.2, 34.1, ...
## $ bill_depth_mm <dbl> 18.7, 17.4, 18.0, NA, 19.3, 20.6, 17.8, 19.6, 18.1, ...
## $ flipper_length_mm <int> 181, 186, 195, NA, 193, 190, 181, 195, 193, 190, 186...
## $ body_mass_g   <int> 3750, 3800, 3250, NA, 3450, 3650, 3625, 4675, 3475, ...
## $ sex           <fct> male, female, female, NA, female, male, female, male...
## $ year          <int> 2007, 2007, 2007, 2007, 2007, 2007, 2007, 2007, 2007...
```

```
library(ggplot2)
ggplot(data = penguins, #penguins data frame
  mapping = aes(x = bill_depth_mm, #mapping to the x-axis
    y = bill_length_mm, #mapping to the y-axis
    colour = species)) + #Map species to the colour of each point
  geom_point() +
  labs(title = "Bill depth and length", #title of graph
    subtitle = "Dimensions for Adelie, Chinstrap, and Gentoo Penguins")
```

```
## Warning: Removed 2 rows containing missing values (`geom_point()`).
```


## Bill depth and length

Dimensions for Adelie, Chinstrap, and Gentoo Penguins

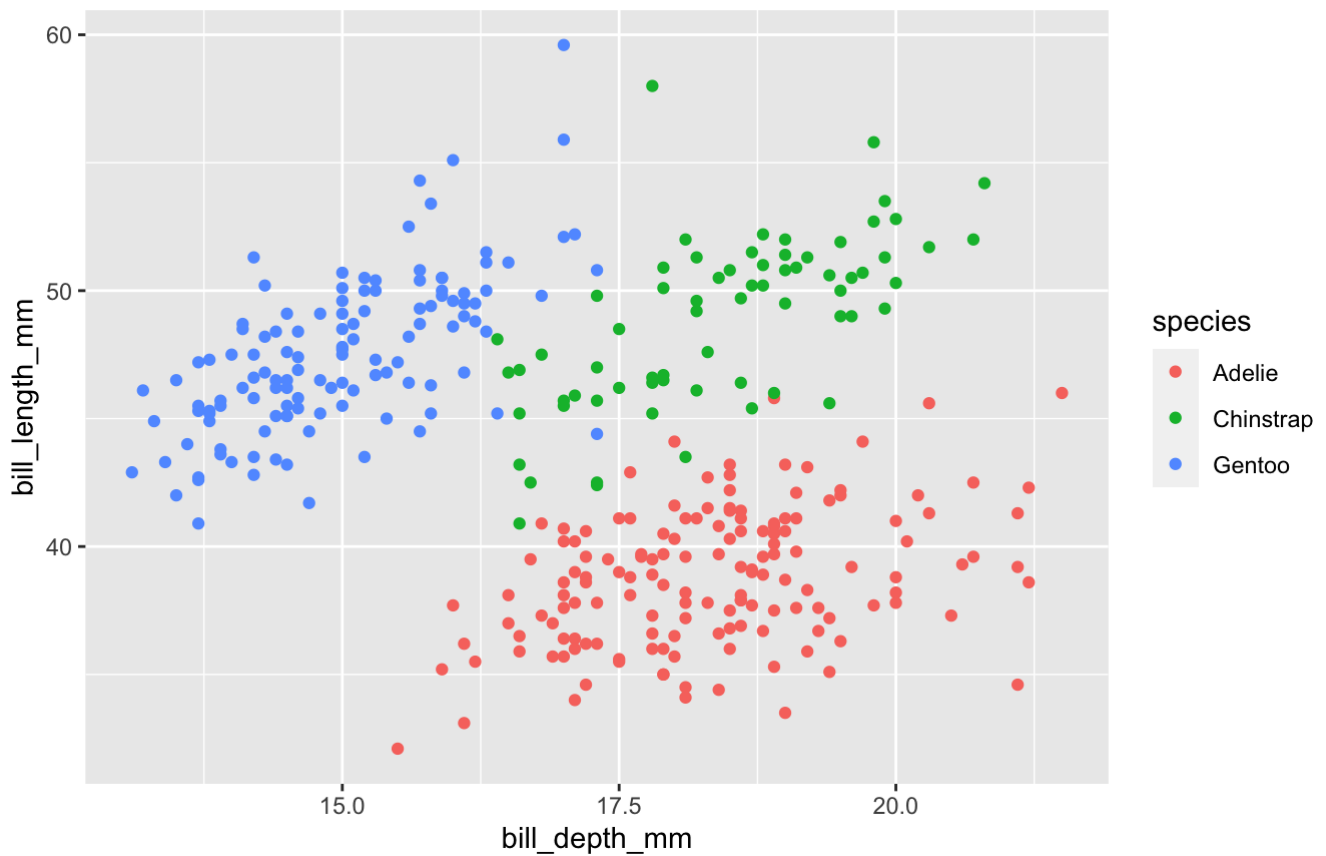


```
ggplot(penguins, aes(x = bill_depth_mm, y = bill_length_mm, colour = species, shape = species,
  size = body_mass_g)) + #mapping to the x-axis, y-axis, colour, shape and size of the points
  geom_point() + scale_colour_viridis_d() #type of graph and
```

```
## Warning: Removed 2 rows containing missing values (`geom_point()`).
```

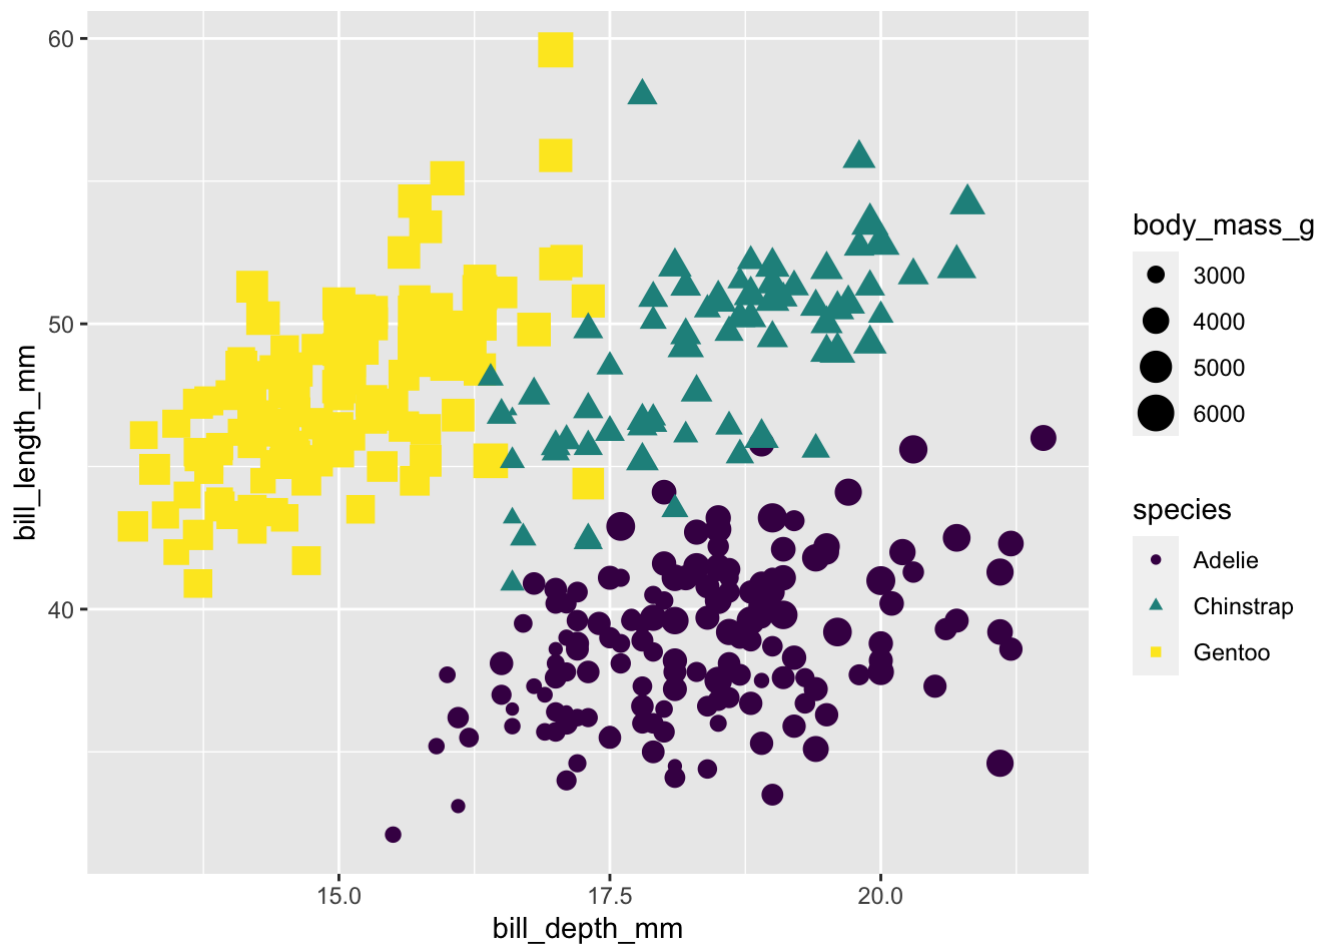

```
ggplot(penguins, aes(x = bill_depth_mm, y = bill_length_mm, color = species)) + #penguins data frame, mapping to the x-axis and y-axis
  geom_point() + facet_grid(species ~ sex) + scale_color_viridis_d() #type of graph shown and the colour of the points
```

```
## Warning: Removed 2 rows containing missing values (`geom_point()`).
```

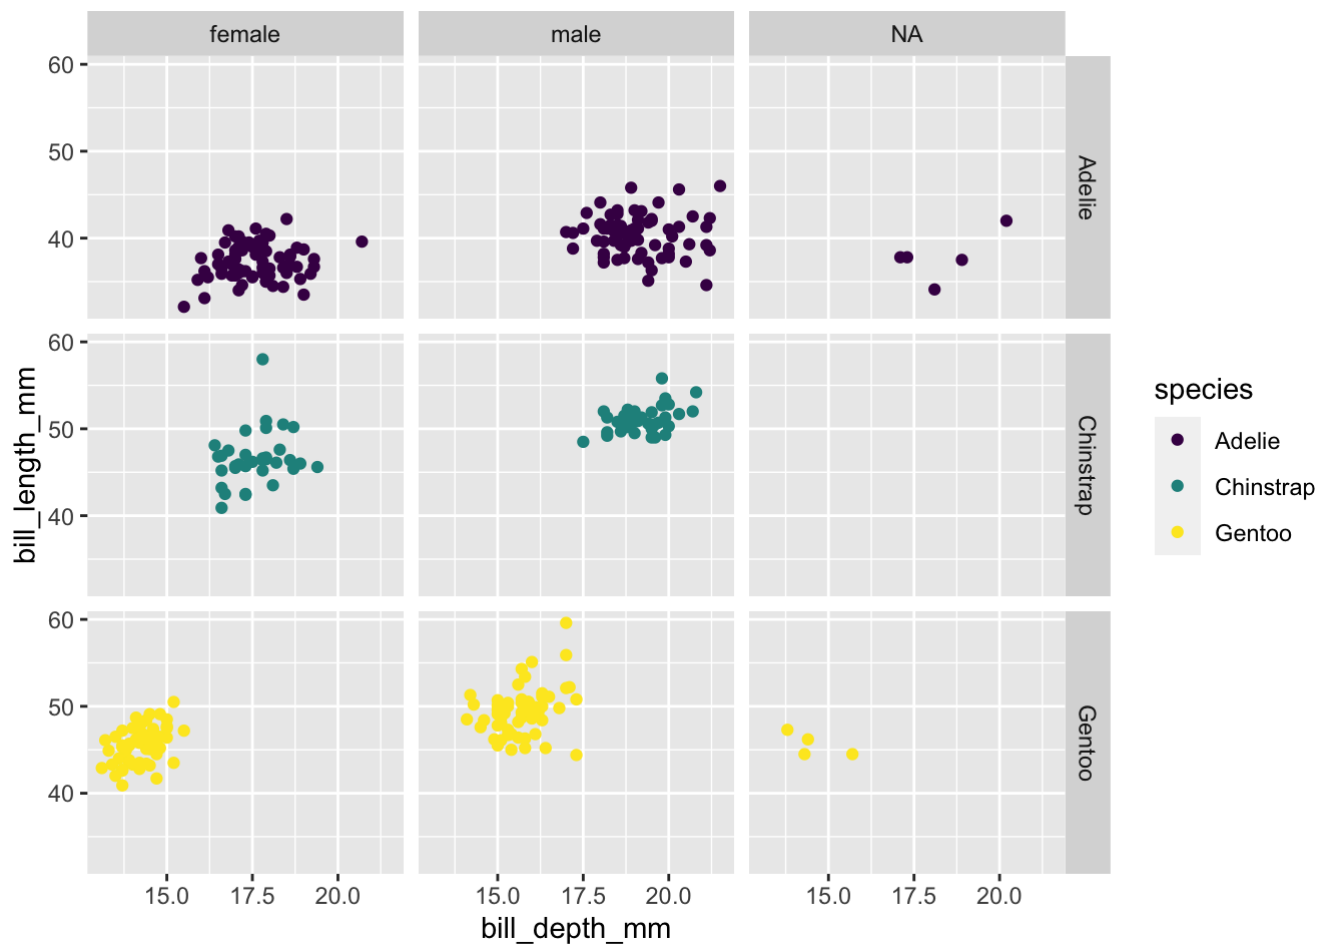

```
library(openintro)
```

```
## Loading required package: airports
```

```
## Loading required package: cherryblossom
```

```
## Loading required package: usdata
```

```
glimpse(loans_full_schema)
```

```

## Rows: 10,000
## Columns: 55
## $ emp_title                <chr> "global config engineer ", "warehouse...
## $ emp_length               <dbl> 3, 10, 3, 1, 10, NA, 10, 10, 10, 3, 1...
## $ state                    <fct> NJ, HI, WI, PA, CA, KY, MI, AZ, NV, I...
## $ homeownership            <fct> MORTGAGE, RENT, RENT, RENT, RENT, OWN...
## $ annual_income             <dbl> 90000, 40000, 40000, 30000, 35000, 34...
## $ verified_income           <fct> Verified, Not Verified, Source Verifi...
## $ debt_to_income            <dbl> 18.01, 5.04, 21.15, 10.16, 57.96, 6.4...
## $ annual_income_joint       <dbl> NA, NA, NA, NA, 57000, NA, 155000, NA...
## $ verification_income_joint <fct> , , , , Verified, , Not Verified, , ,...
## $ debt_to_income_joint      <dbl> NA, NA, NA, NA, 37.66, NA, 13.12, NA,...
## $ delinq_2y                 <int> 0, 0, 0, 0, 0, 1, 0, 1, 1, 0, 0, 0, 0...
## $ months_since_last_delinq  <int> 38, NA, 28, NA, NA, 3, NA, 19, 18, NA...
## $ earliest_credit_line       <dbl> 2001, 1996, 2006, 2007, 2008, 1990, 2...
## $ inquiries_last_12m        <int> 6, 1, 4, 0, 7, 6, 1, 1, 3, 0, 4, 4, 8...
## $ total_credit_lines        <int> 28, 30, 31, 4, 22, 32, 12, 30, 35, 9,...
## $ open_credit_lines         <int> 10, 14, 10, 4, 16, 12, 10, 15, 21, 6,...
## $ total_credit_limit         <int> 70795, 28800, 24193, 25400, 69839, 42...
## $ total_credit_utilized      <int> 38767, 4321, 16000, 4997, 52722, 3898...
## $ num_collections_last_12m  <int> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0...
## $ num_historical_failed_to_pay <int> 0, 1, 0, 1, 0, 0, 0, 0, 0, 0, 1, 0, 0...
## $ months_since_90d_late     <int> 38, NA, 28, NA, NA, 60, NA, 71, 18, N...
## $ current_accounts_delinq   <int> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0...
## $ total_collection_amount_ever <int> 1250, 0, 432, 0, 0, 0, 0, 0, 0, 0, 0,...
## $ current_installment_accounts <int> 2, 0, 1, 1, 1, 0, 2, 2, 6, 1, 2, 1, 2...
## $ accounts_opened_24m       <int> 5, 11, 13, 1, 6, 2, 1, 4, 10, 5, 6, 7...
## $ months_since_last_credit_inquiry <int> 5, 8, 7, 15, 4, 5, 9, 7, 4, 17, 3, 4,...
## $ num_satisfactory_accounts <int> 10, 14, 10, 4, 16, 12, 10, 15, 21, 6,...
## $ num_accounts_120d_past_due <int> 0, 0, 0, 0, 0, 0, 0, 0, NA, 0, 0, 0, 0, ...
## $ num_accounts_30d_past_due <int> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0...
## $ num_active_debit_accounts <int> 2, 3, 3, 2, 10, 1, 3, 5, 11, 3, 2, 2,...
## $ total_debit_limit         <int> 11100, 16500, 4300, 19400, 32700, 272...
## $ num_total_cc_accounts     <int> 14, 24, 14, 3, 20, 27, 8, 16, 19, 7, ...
## $ num_open_cc_accounts      <int> 8, 14, 8, 3, 15, 12, 7, 12, 14, 5, 8,...
## $ num_cc_carrying_balance    <int> 6, 4, 6, 2, 13, 5, 6, 10, 14, 3, 5, 3...
## $ num_mort_accounts         <int> 1, 0, 0, 0, 0, 3, 2, 7, 2, 0, 2, 3, 3...
## $ account_never_delinq_percent <dbl> 92.9, 100.0, 93.5, 100.0, 100.0, 78.1...
## $ tax_liens                 <int> 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0...
## $ public_record_bankrupt     <int> 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0...
## $ loan_purpose                 <fct> moving, debt_consolidation, other, de...
## $ application_type           <fct> individual, individual, individual, i...
## $ loan_amount                <int> 28000, 5000, 2000, 21600, 23000, 5000...
## $ term                       <dbl> 60, 36, 36, 36, 36, 36, 60, 60, 36, 3...
## $ interest_rate              <dbl> 14.07, 12.61, 17.09, 6.72, 14.07, 6.7...
## $ installment               <dbl> 652.53, 167.54, 71.40, 664.19, 786.87...
## $ grade                      <fct> C, C, D, A, C, A, C, B, C, A, C, B, C...
## $ sub_grade                  <fct> C3, C1, D1, A3, C3, A3, C2, B5, C2, A...
## $ issue_month                <fct> Mar-2018, Feb-2018, Feb-2018, Jan-201...
## $ loan_status                <fct> Current, Current, Current, Current, C...
## $ initial_listing_status      <fct> whole, whole, fractional, whole, whol...
## $ disbursement_method        <fct> Cash, Cash, Cash, Cash, Cash, Cash, C...
## $ balance                    <dbl> 27015.86, 4651.37, 1824.63, 18853.26,...
## $ paid_total                 <dbl> 1999.330, 499.120, 281.800, 3312.890,...
## $ paid_principal             <dbl> 984.14, 348.63, 175.37, 2746.74, 1569...


```

```
## $ paid_interest      <dbl> 1015.19, 150.49, 106.43, 566.15, 754.1...
## $ paid_late_fees      <dbl> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0...
```


```
loans <- loans_full_schema %>% #forward pipe operator, expressing loans_full_schema as loans
  select(loan_amount, interest_rate, term, grade, state, annual_income, homeownership,
  debt_to_income) #choosing these categories to be shown
glimpse(loans)
```

```
## Rows: 10,000
## Columns: 8
## $ loan_amount      <int> 28000, 5000, 2000, 21600, 23000, 5000, 24000, 20000, 20...
## $ interest_rate    <dbl> 14.07, 12.61, 17.09, 6.72, 14.07, 6.72, 13.59, 11.99, 1...
## $ term              <dbl> 60, 36, 36, 36, 36, 36, 60, 60, 36, 36, 60, 60, 36, 60,...
## $ grade             <fct> C, C, D, A, C, A, C, B, C, A, C, B, C, B, D, D, D, F, E...
## $ state             <fct> NJ, HI, WI, PA, CA, KY, MI, AZ, NV, IL, IL, FL, SC, CO,...
## $ annual_income     <dbl> 90000, 40000, 40000, 30000, 35000, 34000, 35000, 110000...
## $ homeownership     <fct> MORTGAGE, RENT, RENT, RENT, RENT, OWN, MORTGAGE, MORTGA...
## $ debt_to_income    <dbl> 18.01, 5.04, 21.15, 10.16, 57.96, 6.46, 23.66, 16.19, 3...
```


```
ggplot(loans, aes(x = loan_amount, fill = homeownership)) + #giving x-axis a frame, filling with a categorical variable
  geom_histogram(binwidth = 5000, alpha = 0.5) + #features of the histogram chart
  labs(x = "Loan amount ($)", y = "Frequency", title = "Amounts of Lending Club loans")
#mapping to the x-axis, y-axis and giving a title to the graph
```

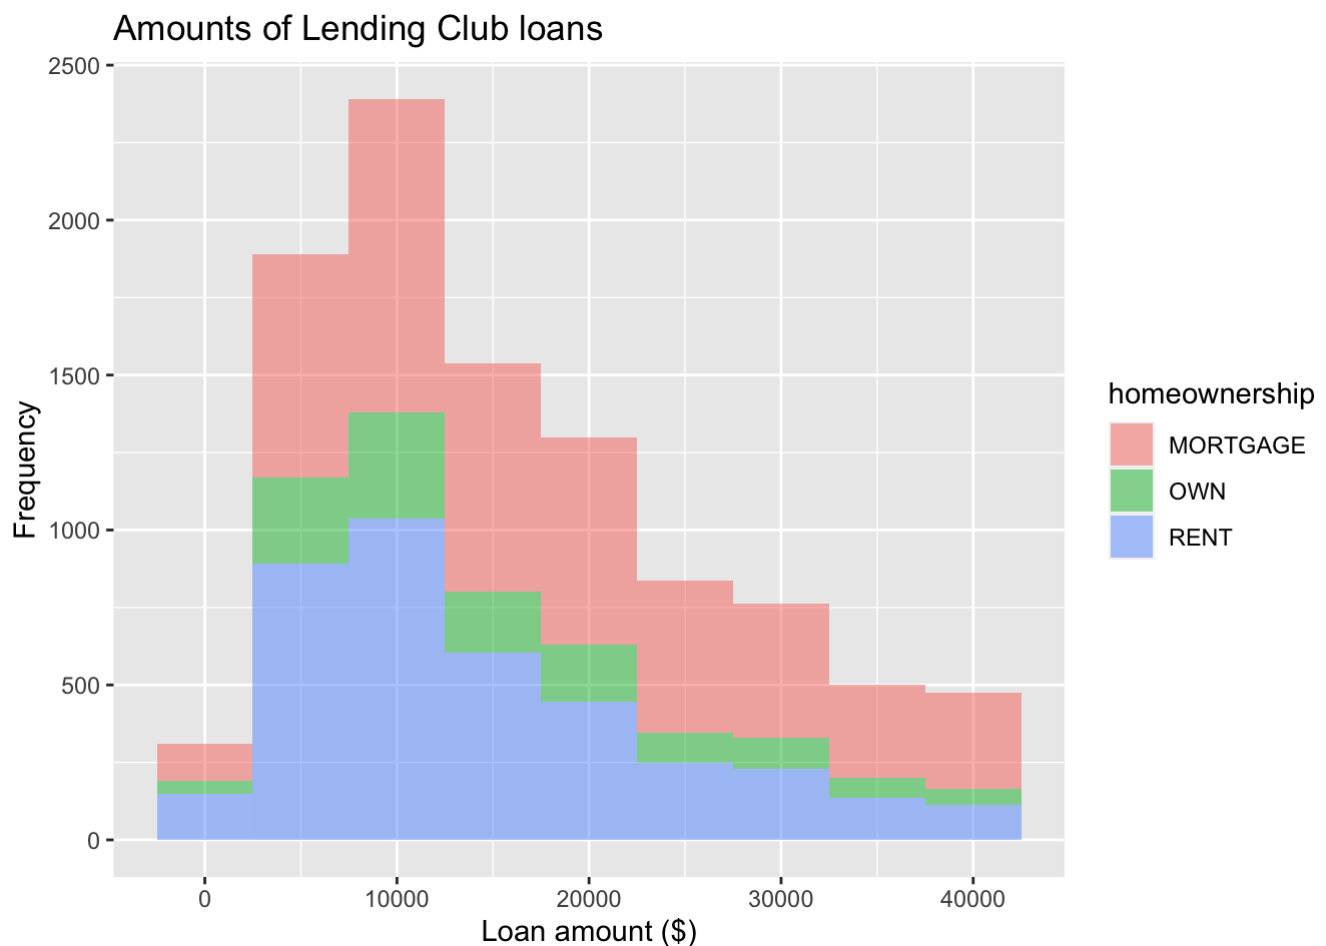

```
ggplot(loans, aes(x = loan_amount)) + #using data frame loans and mapping x axis  
  geom_density() #type of chart
```

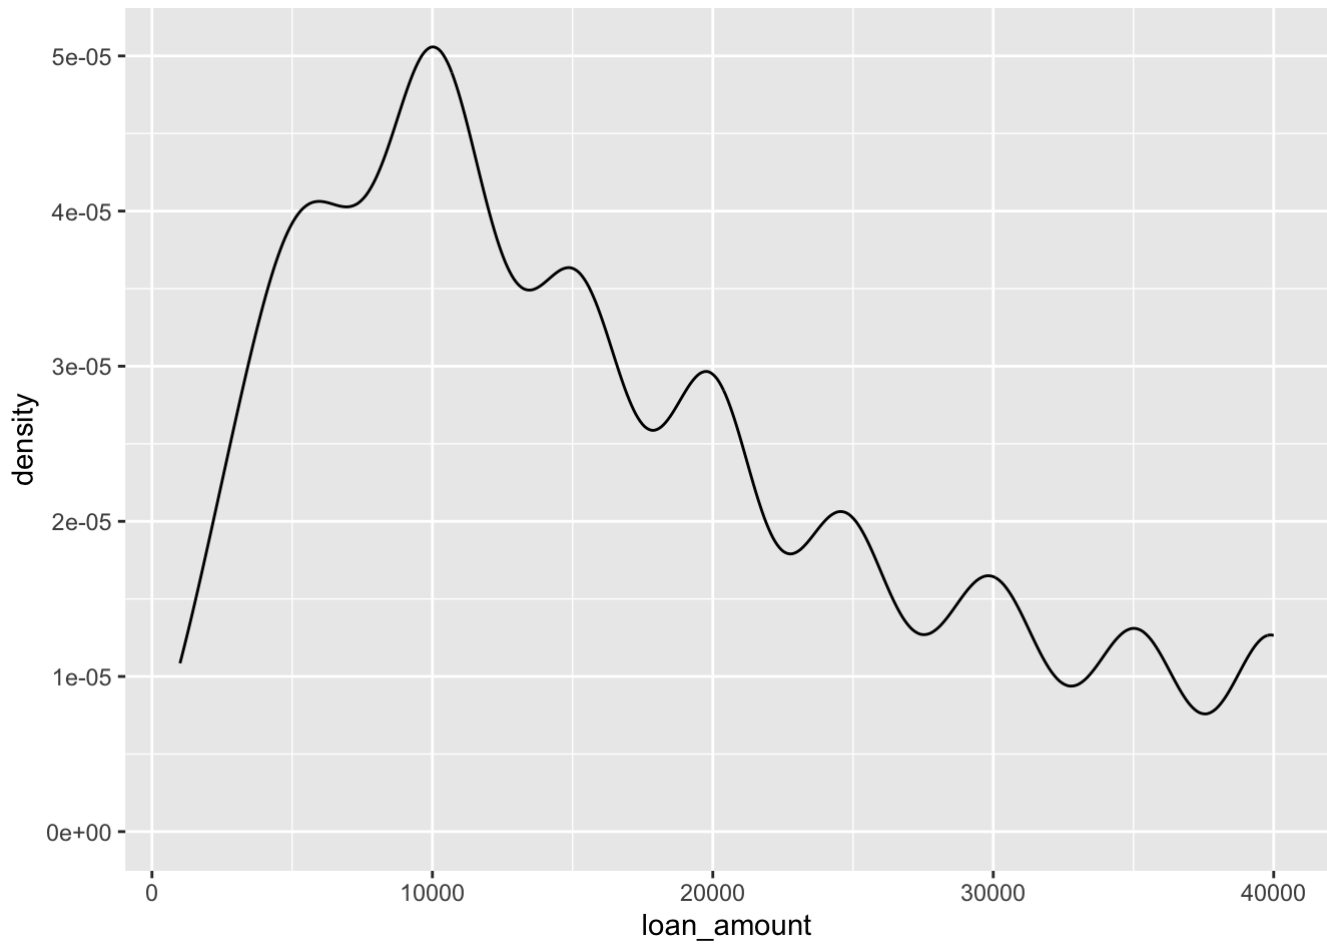


```
ggplot(loans, aes(x = loan_amount)) + #using data frame loans and mapping x axis  
  geom_density(adjust = 2) #adjusting bandwidth
```

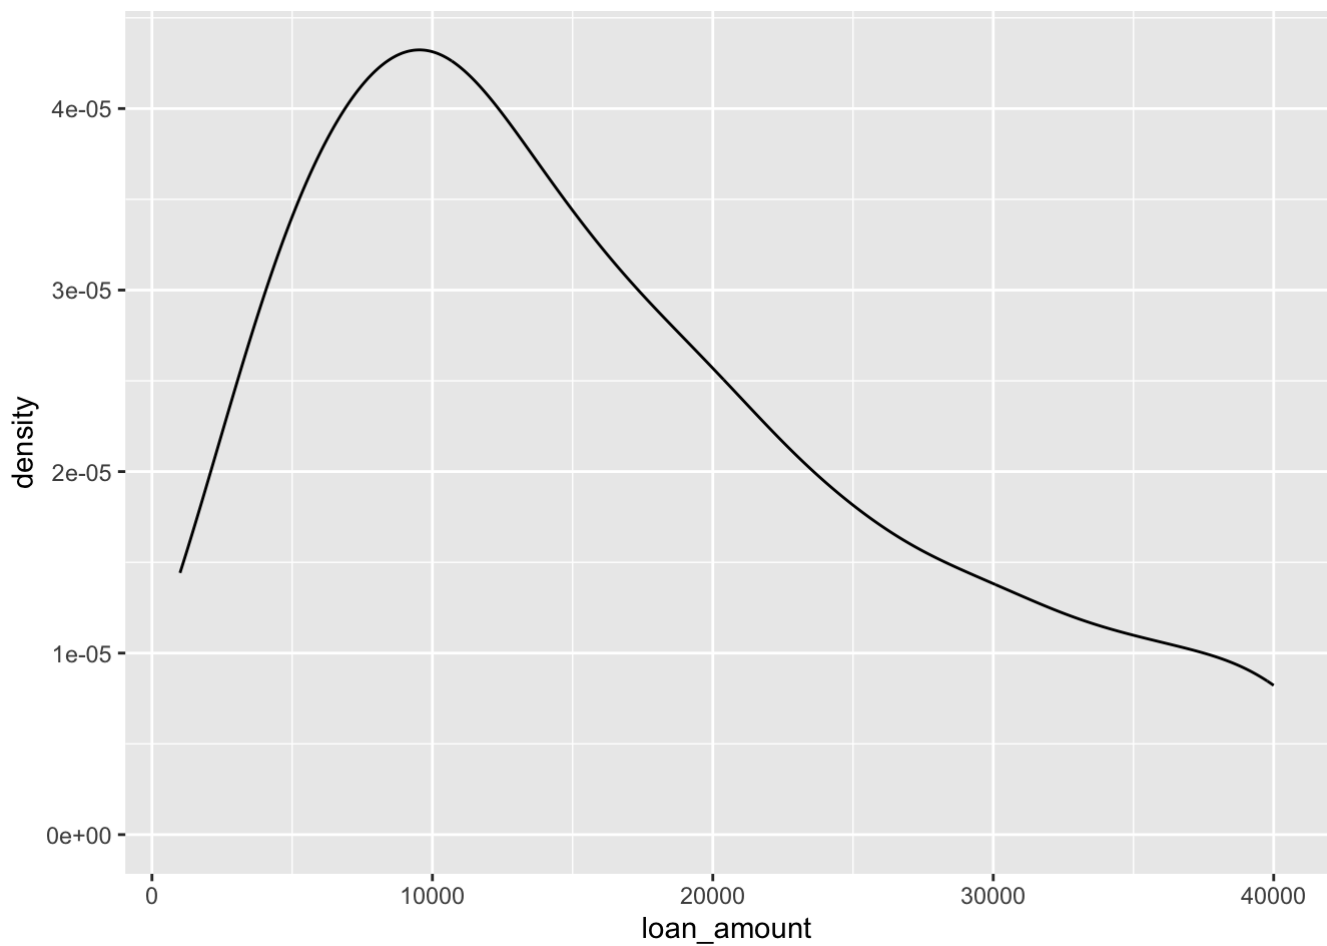


```
ggplot(loans, aes(x = loan_amount, fill = homeownership)) + #mapping of x-axis and fi  
  lling with a categorical variable  
  geom_density(adjust = 2, alpha = 0.5) +  
  labs(x = "Loan amount ($)", y = "Density", title = "Amounts of Lending Club loans", fi  
ll = "Homeownership")
```



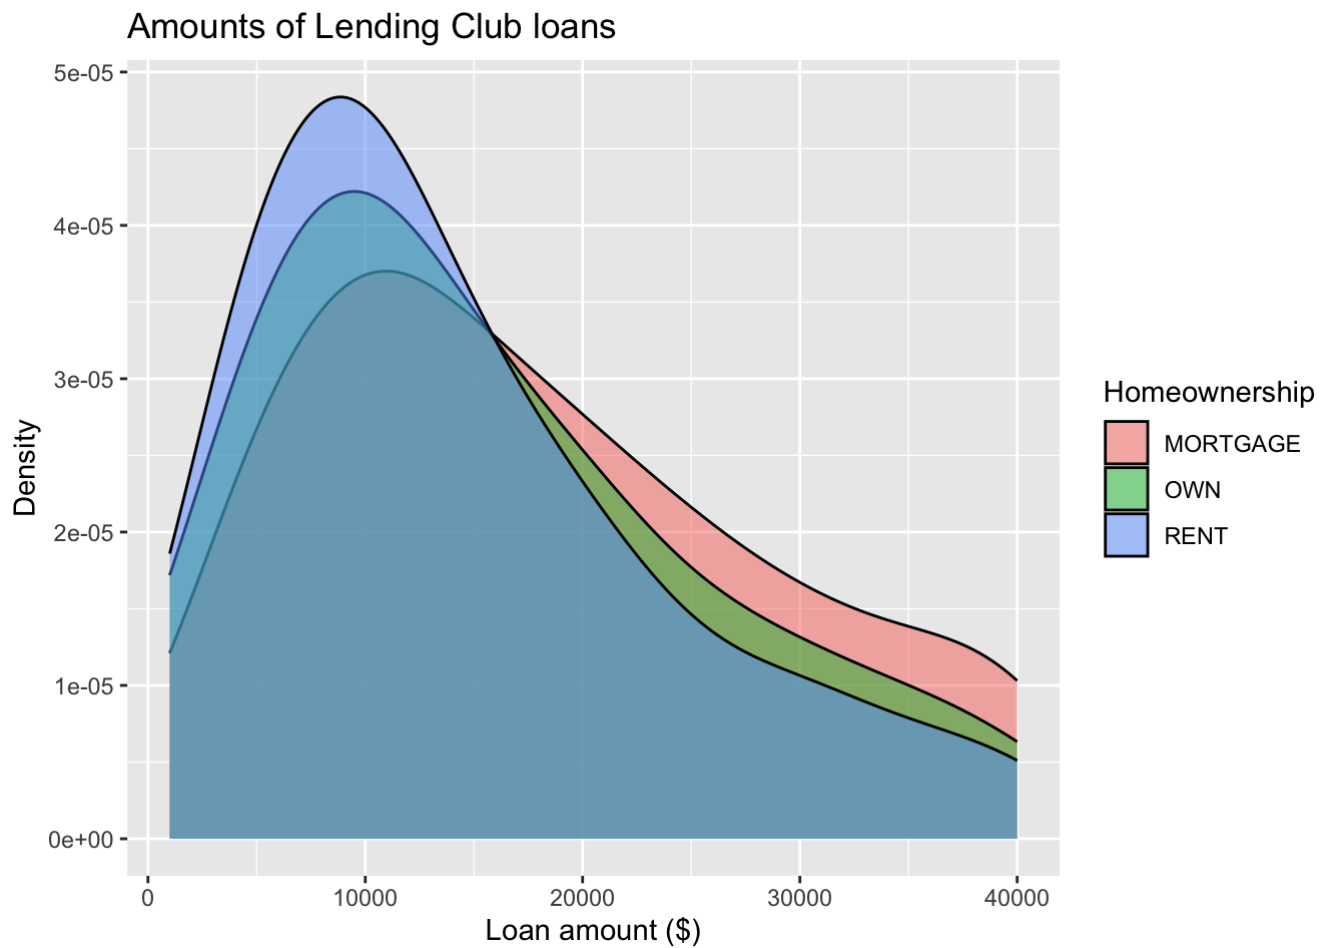


```
ggplot(loans, aes(x = loan_amount, fill = homeownership)) + geom_histogram(binwidth =  
5000) + #using loans data frame, giving x-axis a frame, filling with a categorical va  
riable, type of chart  
  labs(x = "Loan amount ($)", y = "Frequency", title = "Amounts of Lending Club loans")  
+ #non-numerical variables in the chart  
  facet_wrap(~ homeownership, nrow = 3) #makes a long ribbon of panels into 2d
```

## Amounts of Lending Club loans

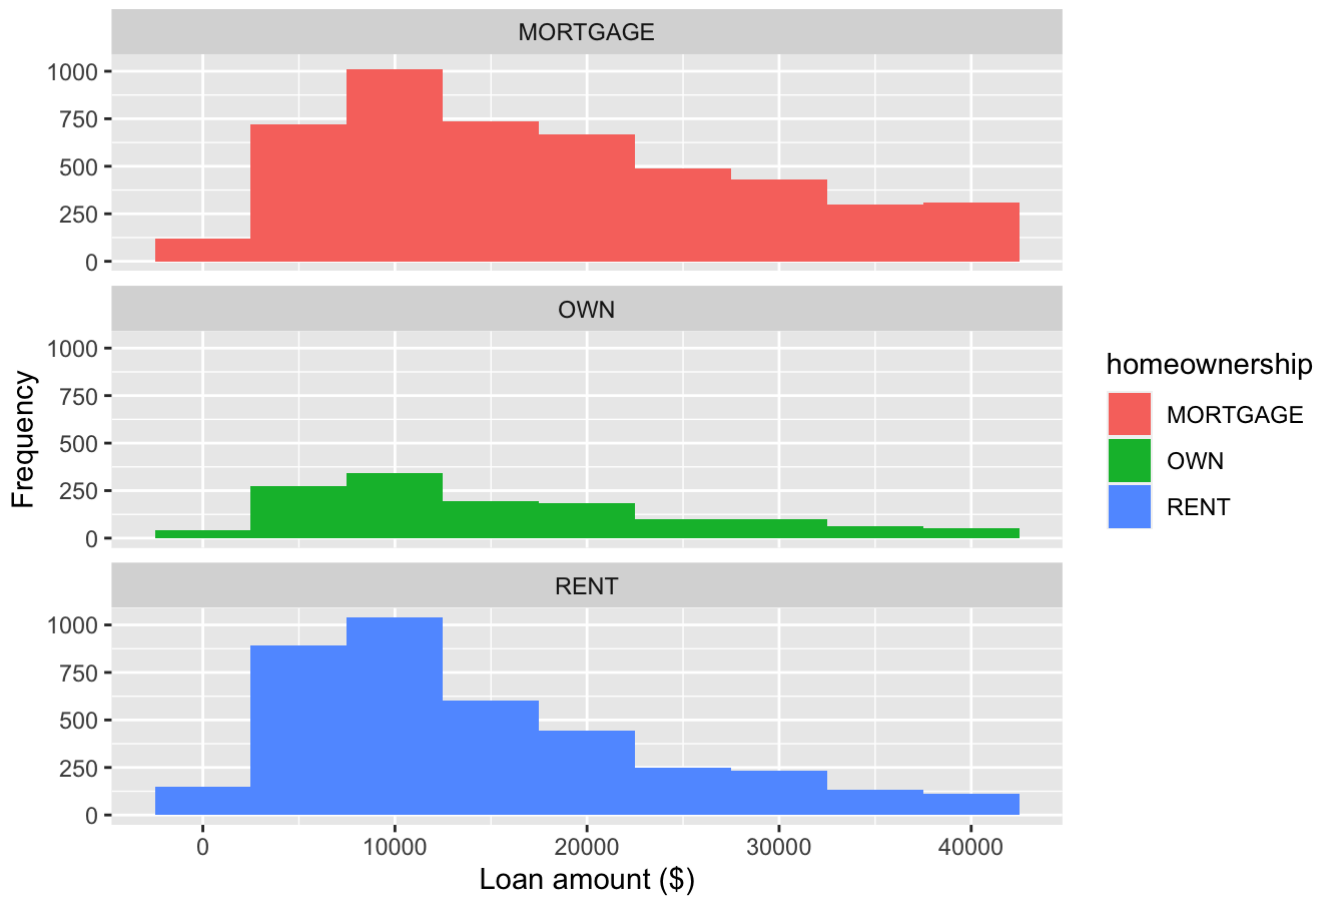


```
ggplot(loans, aes(x = interest_rate)) + #giving x-axis a frame
  geom_boxplot() + #type of chart
  labs(x = "Interest rate (%)", y = NULL, #mapping to the x-axis and y-axis
  title = "Interest rates of Lending Club loans") + #giving a title to the graph
  theme( axis.ticks.y = element_blank(), axis.text.y = element_blank() ) #customising
the non-data components of the graph
```


## Interest rates of Lending Club loans

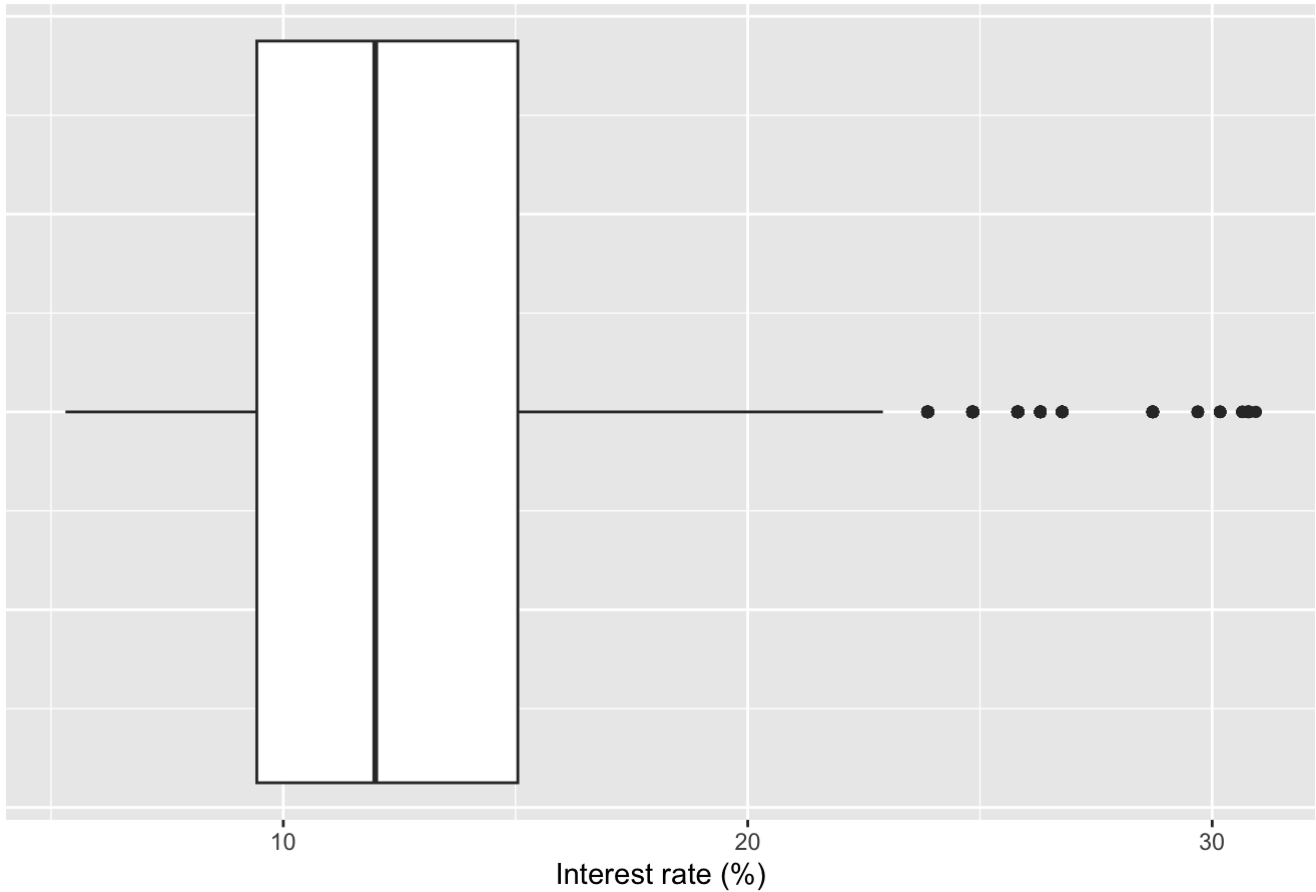


```
ggplot(loans, aes(x = homeownership, #using loans data frame, mapping x-axis  
  fill = grade)) + #filling with a categorical variable  
  geom_bar() #type of graph
```

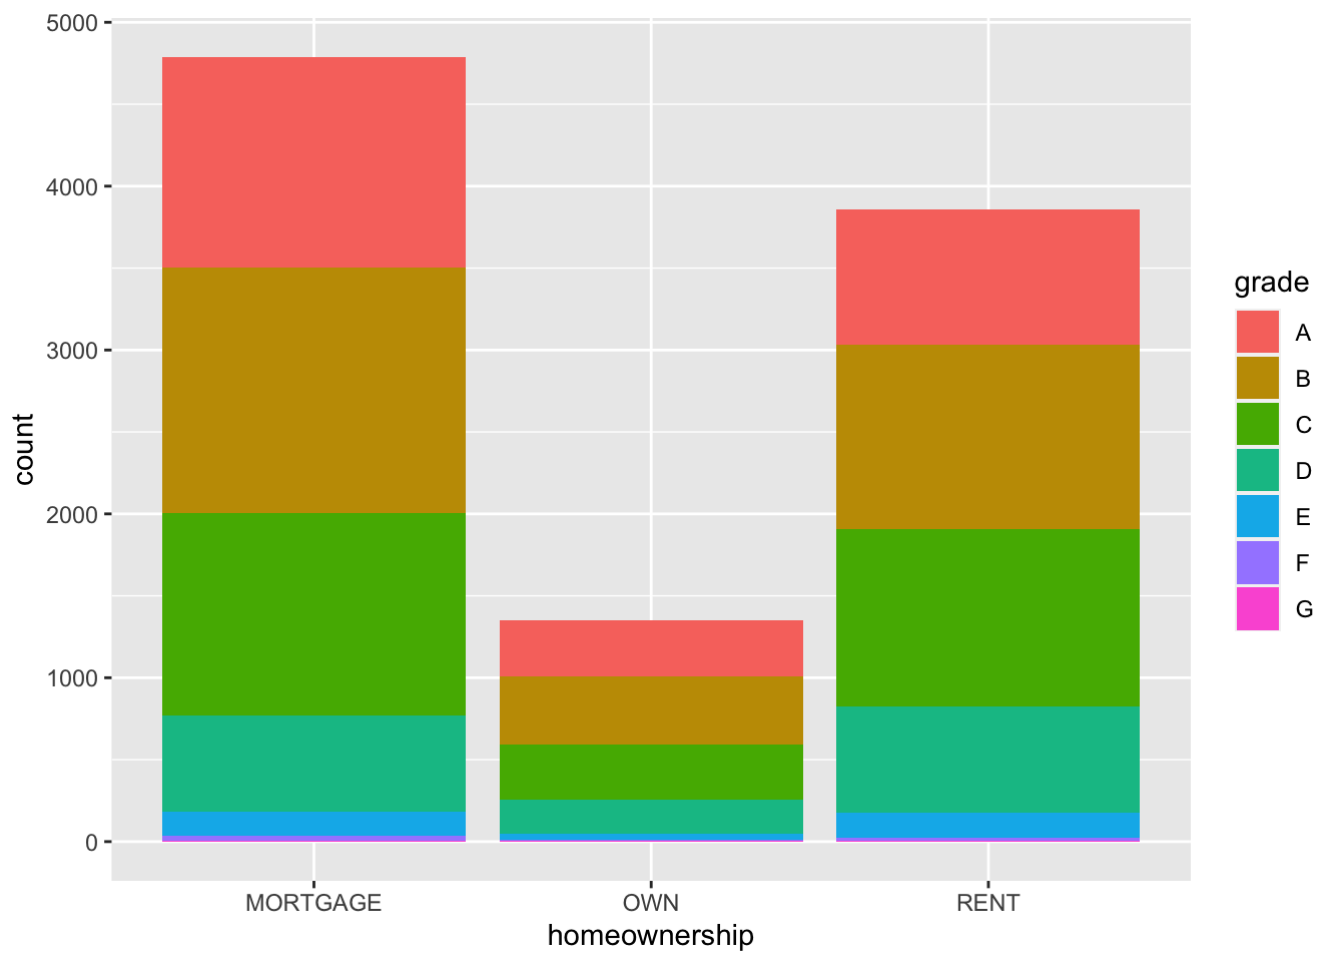

```
ggplot(loans, #Start with the loans_full_schema data frame
       aes(x = homeownership, fill = grade)) + # Map homeownership to x-axis and fill
       geom_bar(position = "fill") #Calculate the proportion by percentage
```

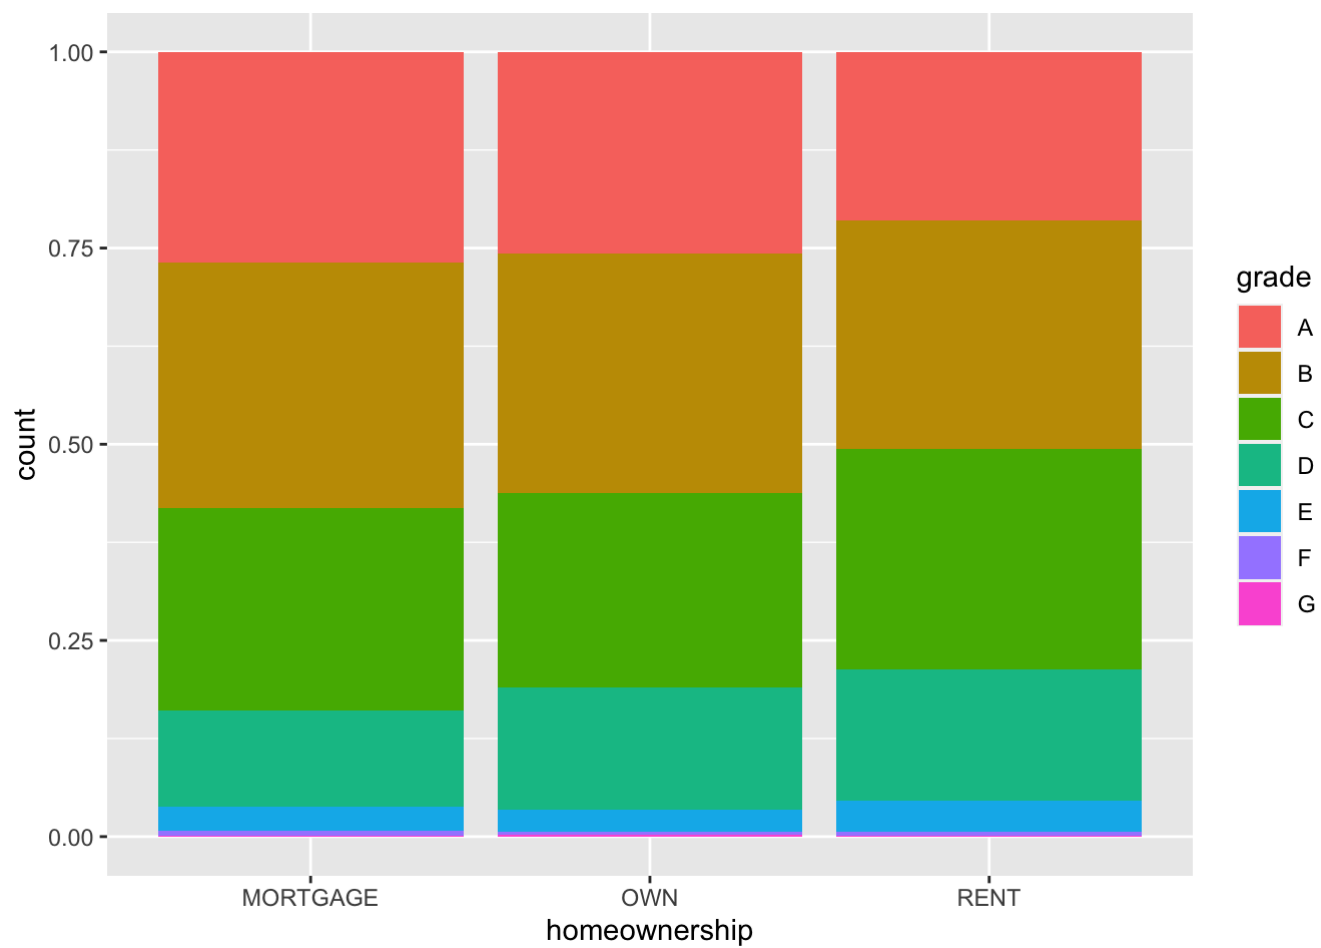


```
ggplot(loans, aes(x = homeownership, y = loan_amount)) + #using loans data, mapping x  
and y axis  
geom_violin() #type of chart
```

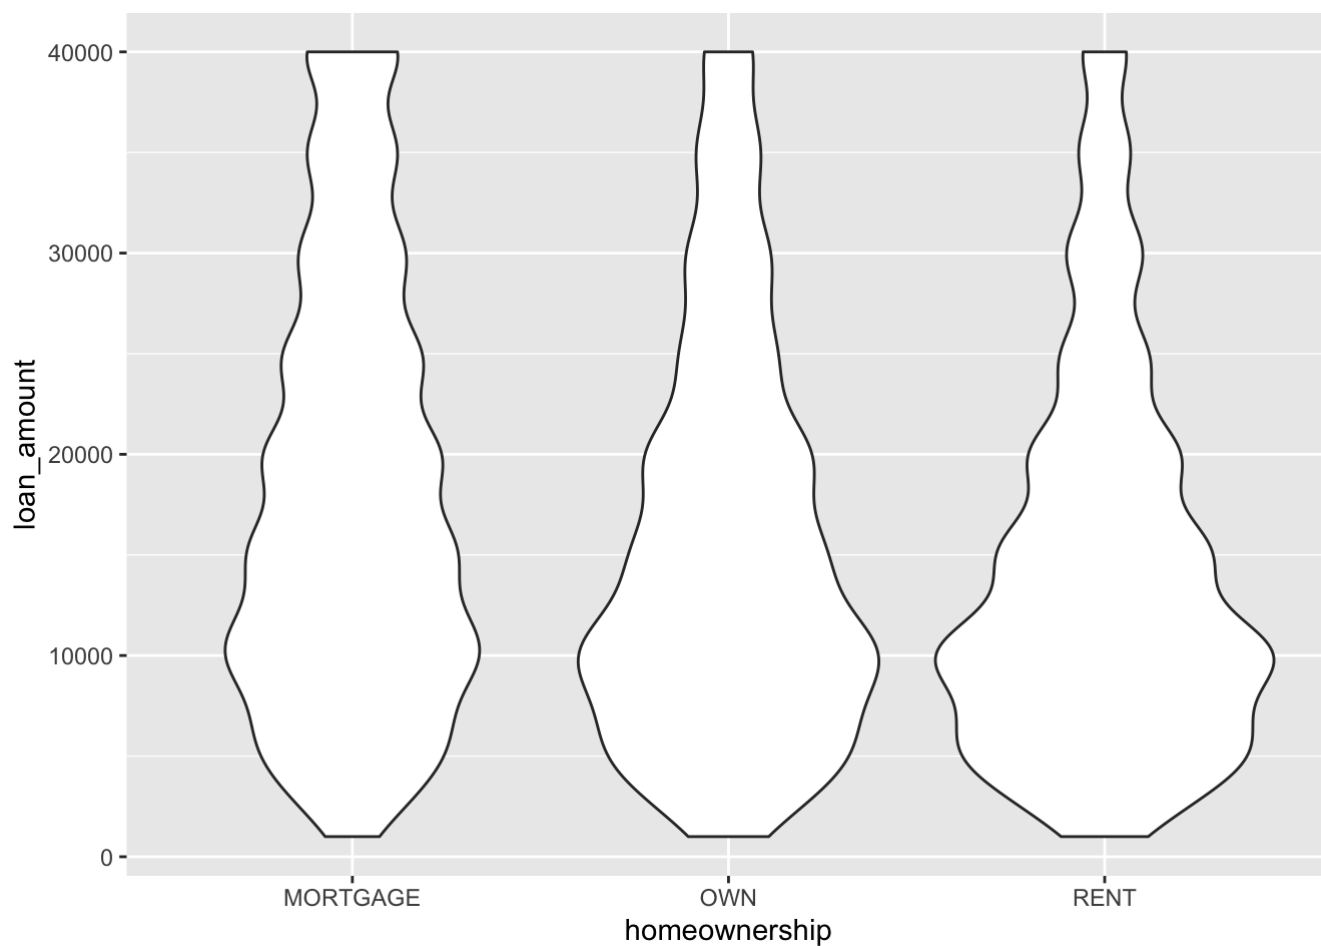


```
library(openintro)
ggplot(loans, aes(x = debt_to_income, y = interest_rate)) + #giving x-axis and y-axis
a frame
geom_point() #type of graph
```

```
## Warning: Removed 24 rows containing missing values (`geom_point()`).
```

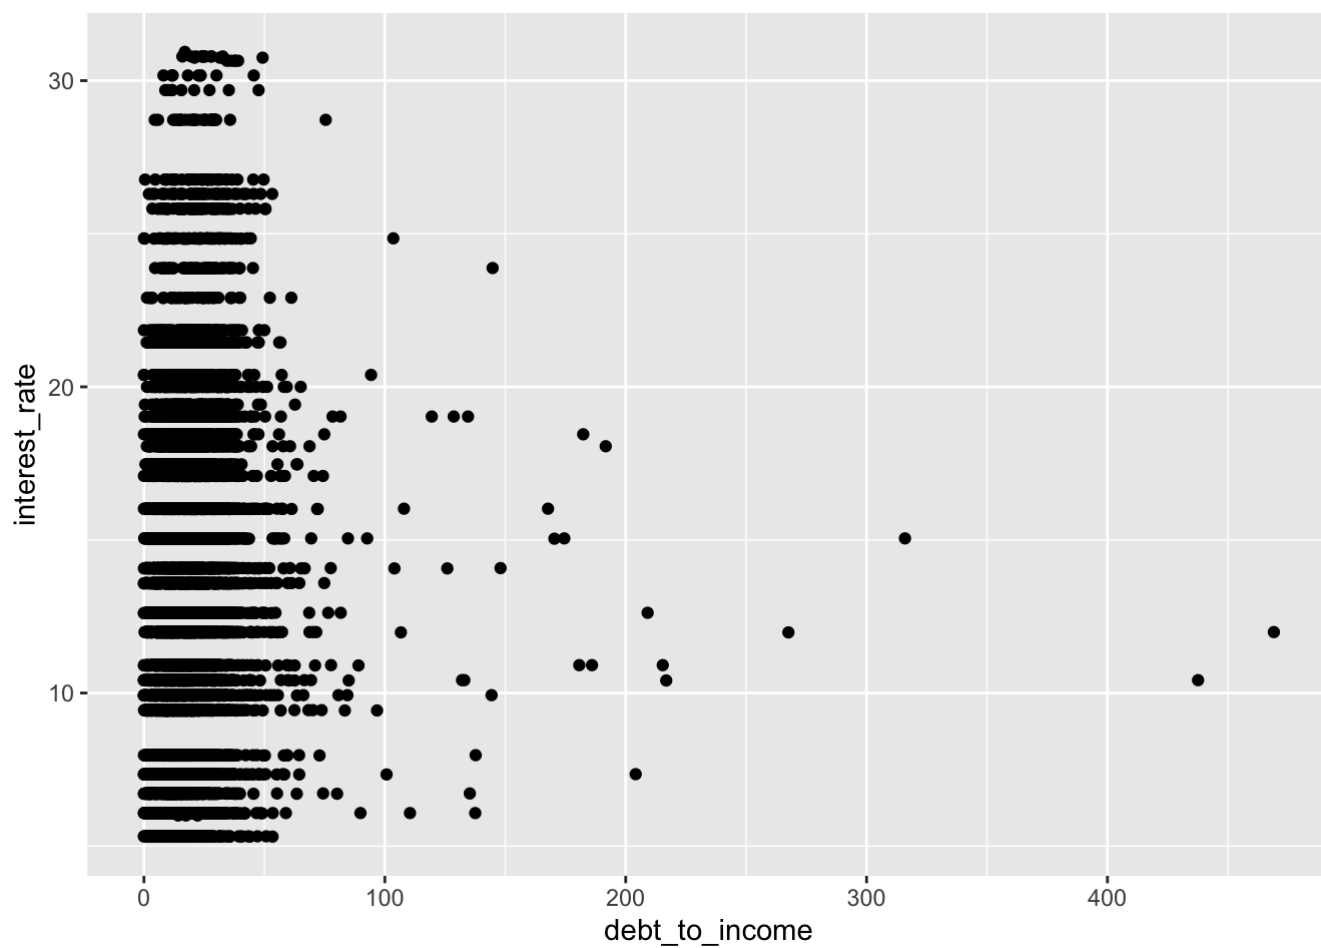

```
ggplot(loans, aes(x = debt_to_income, y = interest_rate)) + #mapping of x and y axis
  geom_hex() #types of graph
```

```
## Warning: Removed 24 rows containing non-finite values (`stat_binhex()`).
```

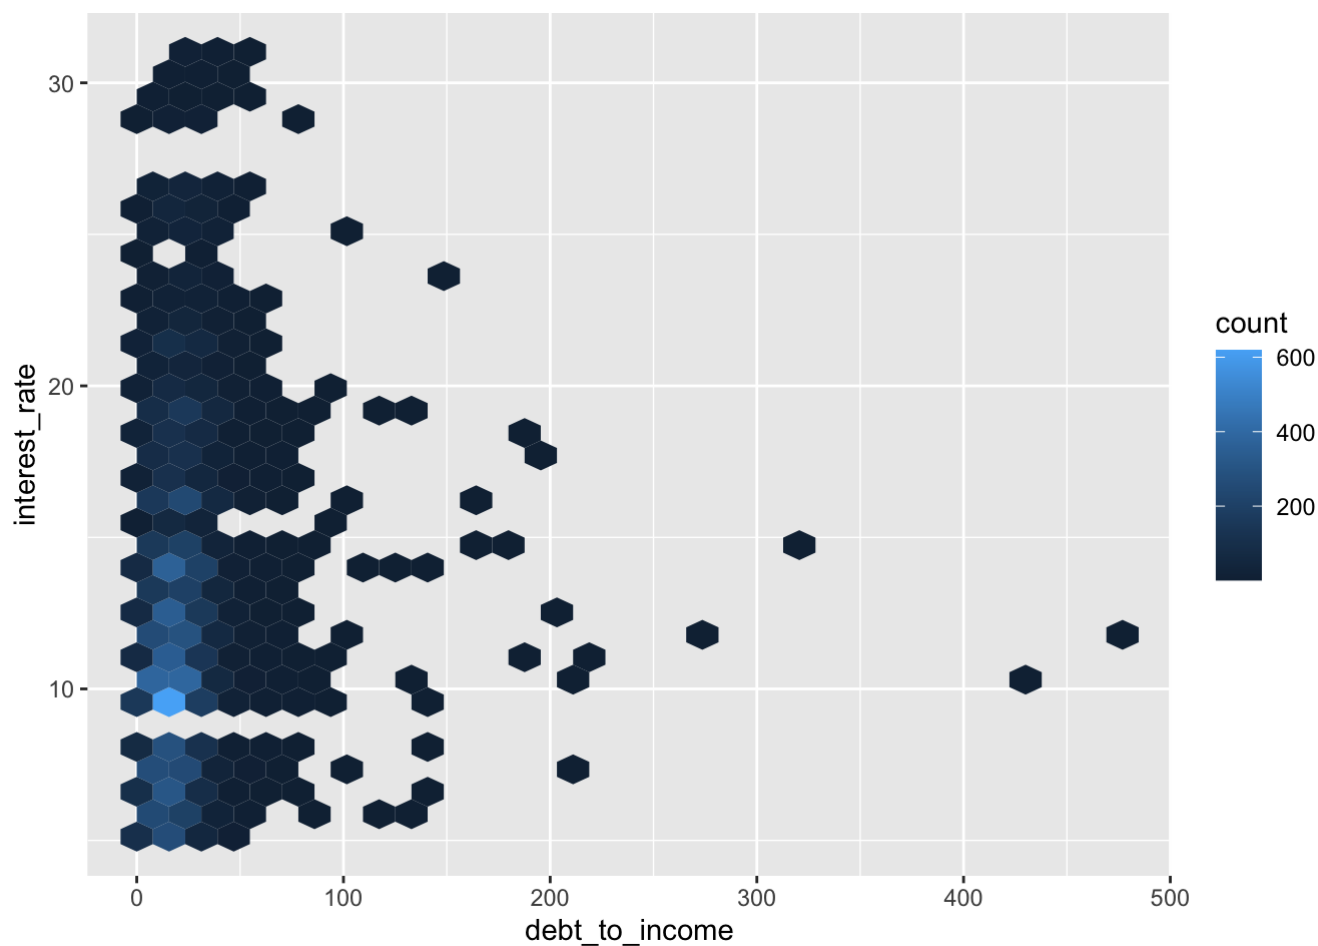

```
library(ggribes)
ggplot(loans_full_schema, #Start with the loans_full_scheme data frame
  aes(x = loan_amount, #Map loan-amount to x-axis
    y = grade, #Map grade to y-axis
    fill = grade, #Represent each grade as proportion
    color = grade)) + #Separate each grade by colour
geom_density_ridges(alpha = 0.5) #Setting the transparency
```

```
## Picking joint bandwidth of 2360
```



