

# Home Work #2

Ali BaniAsad 96108378

May 19, 2021

## 1 Question 1

System:

$$\dot{x}(t) = -0.1x(t) + u(t)$$

Subjected to  $0 \leq u(t) \leq M$

### 1.1 part a

$$J = \int_0^{100} -x(t) dt$$

Hamiltonian matrix:

$$\begin{aligned}\mathcal{H} &= g(\vec{x}(t), u(t), t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t) \\ \mathcal{H} &= -x(t) - 0.1p(t)x(t) + p(t)u(t)\end{aligned}\tag{1}$$

Euler-Lagrange equation:

$$\dot{\vec{x}} = \frac{\partial \mathcal{H}}{\partial \vec{p}} = a(\vec{x}(t), u(t), t)\tag{2}$$

$$\dot{\vec{p}} = -\frac{\partial \mathcal{H}}{\partial \vec{x}}\tag{3}$$

Now we use above equation for solve problem.

$$-\frac{\partial \mathcal{H}}{\partial x} = 1 + 0.1p$$

There is two differential equation and two unknowns.

$$\dot{x} = -x(t) - 0.1px + pu\tag{4}$$

$$\dot{p} = 1 + 0.1p\tag{5}$$

Equation 5 solved in MATLAB(Q1\_a.m) and code attached to file.

$$p(t) = C_1 \exp(t/10) - 10\tag{6}$$

Final  $x(t)$  is free so:

$$h_{\vec{x}} - \vec{p} = \vec{0} \Big|_{*, t_f} \rightarrow p(t_f) = 0$$

Use new boundry condition( $p(t_f) = 0$ ) in equation 6 to find  $p$  function( $p(t)$ ).

$$p(100) = C_1 \exp(100/10) - 10 = 0 \rightarrow C_1 = 10 \exp(-10)$$

$$p(t) = 10 \exp(0.1(t - 100)) - 10 \quad (7)$$

We know that  $u(t)$  has limit so for optimization we have another condition to select  $u(t)$  for every time.

$$u(t) = \begin{cases} \frac{\partial \mathcal{H}}{\partial u} < 0 & u(t) = M \\ \frac{\partial \mathcal{H}}{\partial u} = 0 & \mathcal{H} \text{ is not a function of } u(t) \\ \frac{\partial \mathcal{H}}{\partial u} > 0 & u(t) = 0 \end{cases} \quad (8)$$

From equation 1 we calculate  $\frac{\partial \mathcal{H}}{\partial u}$ .

$$\frac{\partial \mathcal{H}}{\partial u} = p(t)$$

From equation 7 we know that at  $t_0 \rightarrow t_f$   $p(t)$  is less than zero ( $p(t) < 0$ ), so  $u(t)$  for every time is  $M$ .

## 1.2 part b

$$J = \int_0^{100} -x(t) dt$$

Subjected to:

$$\int_0^{100} u(t) dt = K (\text{a known constant})$$

$z(t)$  is new state:

$$z(t) = \int_0^t u(t) dt \rightarrow \frac{dz}{dt} = u(t)$$

New differential constraints:

$$\begin{aligned} \frac{dz}{dt} - u(t) &= 0 \\ g_a(x, \dot{x}, \dot{z}, t, \lambda) &= g(x, \dot{x}, t) + \lambda(t)f(x, \dot{x}, \dot{z}, t) \\ g_a &= -x(t) + \lambda(\dot{z}(t) - u(t)) \end{aligned}$$

Hamiltonian matrix:

$$\mathcal{H} = g_a(\vec{x}(t), u(t), z(t), \lambda, t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t)$$

We assume  $p_2 = \lambda$

$$\mathcal{H} = -x(t) - 0.1p_1(t)x(t) + p_1(t)u(t) + p_2(t)(\dot{z}(t) - u(t)) \quad (9)$$

$$\begin{aligned} \dot{\vec{p}} &= -\frac{\partial \mathcal{H}}{\partial \vec{x}} = \begin{bmatrix} -\frac{\partial \mathcal{H}}{\partial x} \\ -\frac{\partial \mathcal{H}}{\partial z} \end{bmatrix} = \begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \end{bmatrix} \\ \begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \end{bmatrix} &= \begin{bmatrix} 0.1p_1 + 1 \\ 0 \end{bmatrix} \end{aligned}$$

Above equation solved in previous part.

$$\begin{bmatrix} p_1(t) \\ p_2(t) \end{bmatrix} = \begin{bmatrix} 10 \exp(0.1(t - 100)) - 10 \\ C_1 \end{bmatrix} \quad (10)$$

In this part we have the same condition that described in previous in equation 8. From equation 9 we calculate  $\frac{\partial \mathcal{H}}{\partial u}$ .

$$\frac{\partial \mathcal{H}}{\partial u} = p_1 - p_2 = (10 \exp(0.1(t - 100)) - 10) - C_1$$

From equation 10 we know that  $C_1$  is constant.

There is four scenario for this problem.

1. For all the time( $t_0 \rightarrow t_f$ )  $\frac{\partial \mathcal{H}}{\partial u} > 0$  so  $u(t) = 0$ , this scenario maybe possible if  $K = 0$ .
2. For all the time( $t_0 \rightarrow t_f$ )  $\frac{\partial \mathcal{H}}{\partial u} < 0$  so  $u(t) = M$ , this scenario maybe possible if  $K = M \times t_f$ .
3. For time( $t_0 \rightarrow t$ )  $\frac{\partial \mathcal{H}}{\partial u} < 0$  and for time( $t \rightarrow t_f$ )  $\frac{\partial \mathcal{H}}{\partial u} > 0$  so for time( $t_0 \rightarrow t$ ),  $u(t) = M$  and for time( $t \rightarrow t_f$ ),  $u(t) = 0$  and this scenario maybe possible for  $0 \leq K \leq M \times t_f$ .
4. For time( $t_0 \rightarrow t$ )  $\frac{\partial \mathcal{H}}{\partial u} > 0$  and for time( $t \rightarrow t_f$ )  $\frac{\partial \mathcal{H}}{\partial u} < 0$  so for time( $t_0 \rightarrow t$ ),  $u(t) = 0$  and for time( $t \rightarrow t_f$ ),  $u(t) = M$  and this scenario is not possible because  $p_1$  is growing by the time and  $p_2$  is constant all the time.

### 1.3 part c

$$J = -x(100)$$

Subjected to:

$$\int_0^{100} u(t) dt = K (\text{a known constant})$$

$z(t)$  is new state:

$$z(t) = \int_0^t u(t) dt \rightarrow \frac{dz}{dt} = u(t)$$

New differential constraints:

$$\begin{aligned} \frac{dz}{dt} - u(t) &= 0 \\ g_a(x, \dot{x}, \dot{z}, t, \lambda) &= g(x, \dot{x}, t) + \lambda(t)f(x, \dot{x}, \dot{z}, t) \\ g_a &= -x(t) + \lambda(\dot{z}(t) - u(t)) \end{aligned}$$

Hamiltonian matrix:

$$\mathcal{H} = g_a(\vec{x}(t), u(t), z(t), \lambda, t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t)$$

We assume  $p_2 = \lambda$

$$\mathcal{H} = -0.1p_1(t)x(t) + p_1(t)u(t) + p_2(t)(\dot{z}(t) - u(t)) \quad (11)$$

$$\begin{aligned} \dot{\vec{p}} &= -\frac{\partial \mathcal{H}}{\partial \vec{x}} = \begin{bmatrix} -\frac{\partial \mathcal{H}}{\partial x} \\ -\frac{\partial \mathcal{H}}{\partial z} \end{bmatrix} = \begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \end{bmatrix} \\ \begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \end{bmatrix} &= \begin{bmatrix} 0.1p_1 \\ 0 \end{bmatrix} \\ \begin{bmatrix} p_1(t) \\ p_2(t) \end{bmatrix} &= \begin{bmatrix} C_1 \exp(t/10) \\ C_2 \end{bmatrix} \end{aligned} \quad (12)$$

Final  $x(t)$  is free so:

$$h_{\vec{x}} - \vec{p} = \vec{0} \Big|_{*,t_f} \rightarrow p_1(t_f) = -1 \quad (13)$$

From equation 12 and 13 we can find  $p_1(t)$  function.

$$p_1(100) = C_1 \exp(100/10) = -1 \rightarrow C_1 = -\exp(-10)$$

$$p_1(t) = -\exp(0.1(t - 100))$$

This problem is like section 1.2 and have the same scenarios.

## 2 Question 2

### 2.1 part a

Dynamic of system:

$$\ddot{x}(t) = \frac{T}{M} \cos(\beta(t)), \quad \ddot{y}(t) = \frac{T}{M} \sin(\beta(t))$$

Now we define new states:

$$x_1(t) = x(t), \quad x_2(t) = \dot{x}_1(t), \quad x_3(t) = y(t), \quad x_4(t) = \dot{x}_3(t), \quad u(t) = \beta(t)$$

New dynamic of system:

$$a(\vec{x}(t), u, t) = \begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \\ \dot{x}_4(t) \end{bmatrix} = \begin{bmatrix} x_2(t) \\ \frac{T}{M} \cos(u(t)) \\ x_4(t) \\ \frac{T}{M} \sin(u(t)) \end{bmatrix}$$

### 2.2 part b

For minimum time:

$$J = t_f - t_0 = \int_{t_0}^{t_f} dt$$

Hamiltonian matrix:

$$\mathcal{H} = g(\vec{x}(t), u(t), t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t)$$

$$\mathcal{H} = 1 + \begin{bmatrix} p_1(t) & p_2(t) & p_3(t) & p_4(t) \end{bmatrix} \begin{bmatrix} x_2(t) \\ \frac{T}{M} \cos(u(t)) \\ x_4(t) \\ \frac{T}{M} \sin(u(t)) \end{bmatrix}$$

$$\mathcal{H} = 1 + p_1(t)x_2(t) + \frac{T}{M}p_2(t)\cos(u(t)) + p_3(t)x_4(t) + \frac{T}{M}p_4(t)\sin(u(t)) \quad (14)$$

Euler–Lagrange equation:

$$\dot{\vec{x}} = \frac{\partial \mathcal{H}}{\partial \vec{p}} = a(\vec{x}(t), u(t), t) \quad (15)$$

$$\dot{\vec{p}} = -\frac{\partial \mathcal{H}}{\partial \vec{x}} \quad (16)$$

$$\vec{0} = \frac{\partial \mathcal{H}}{\partial \vec{u}} \quad (17)$$

Now we use equation 14 to solve Euler-Lagrange equation.

$$\begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \\ \dot{p}_3 \\ \dot{p}_4 \end{bmatrix} = \begin{bmatrix} -\frac{\partial \mathcal{H}}{\partial x_1} \\ -\frac{\partial \mathcal{H}}{\partial x_2} \\ -\frac{\partial \mathcal{H}}{\partial x_3} \\ -\frac{\partial \mathcal{H}}{\partial x_4} \end{bmatrix} = \begin{bmatrix} 0 \\ -p_1 \\ 0 \\ -p_3 \end{bmatrix} \quad (18)$$

Answer of equation 18 is:

$$\begin{bmatrix} p_1(t) \\ p_2(t) \\ p_3(t) \\ p_4(t) \end{bmatrix} = \begin{bmatrix} C_1 \\ -C_1 t + C_2 \\ C_3 \\ -C_3 t + C_4 \end{bmatrix} \quad (19)$$

From Euler-Lagrange equation:

$$\vec{0} = \frac{\partial \mathcal{H}}{\partial \vec{u}} \rightarrow p_4 \cos(u) = p_2 \sin(u) \rightarrow u(t) = \tan^{-1} \left( \frac{p_4(t)}{p_2(t)} \right) \quad (20)$$

Boundary conditions:

$$t_0 = 0, \quad t_f = \text{free}$$

$$\vec{x}(0) = \begin{bmatrix} x_1(0) \\ x_2(0) \\ x_3(0) \\ x_4(0) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \quad \vec{x}(t_f) = \begin{bmatrix} x_1(t_f) \\ x_2(t_f) \\ x_3(t_f) \\ x_4(t_f) \end{bmatrix} = \begin{bmatrix} \text{Free} \\ V \\ D \\ 0 \end{bmatrix} \quad (D, V \text{ Are known constant})$$

Final time is free so:

$$(\mathcal{H} + h_t)|_{*,t_f} = 0 \rightarrow \mathcal{H}|_{*,t_f} = 0 \quad (21)$$

Final  $x_1$  is free so:

$$\left( \frac{\partial h}{\partial x_1} - p_1 \right) \Big|_{*,t_f} = 0 \rightarrow p_1(t_f) = 0 \quad (22)$$

## 2.3 part c

There is  $11(2n+3)$  equation and 11 unknowns.

Unknowns:

$$\vec{x}(t)|_{4 \times 1}, \quad \vec{p}(t)|_{4 \times 1}, \quad t_f, \quad x_1(t_f), \quad u(t)$$

Now use previous equation to find unknowns. From equation 22 and 19 we can find out:

$$p_1(t) = C_1 = 0, \quad p_2(t) = 0t + C_2 = C_2 \quad (23)$$

Now we use equation 23, 19, 20 and 14 to have new equation and put parameters in equation 21.

$$\mathcal{H}|_{*,t_f} = 1 + 0 \times x_2(t_f) + \frac{T}{M} C_2 \cos \left( \tan^{-1} \left( \frac{-C_3 t + C_4}{C_2} \right) \right) + p_3(t_f) \times 0 + \frac{T}{M} p_4(t) \sin \left( \tan^{-1} \left( \frac{-C_3 t + C_4}{C_2} \right) \right)$$

$$\mathcal{H}|_{*,t_f} = 1 + \frac{T}{M} C_2 \cos \left( \tan^{-1} \left( \frac{-C_3 t + C_4}{C_2} \right) \right) + \frac{T}{M} p_4(t) \sin \left( \tan^{-1} \left( \frac{-C_3 t + C_4}{C_2} \right) \right) = 0 \quad (24)$$

This far i could go to solve problem analytically. :)

## 2.4 part d

For maximize horizontal range we must change cost function.

$$J = -x_1(t_f)$$

Hamiltonian matrix:

$$\begin{aligned} \mathcal{H} &= g(\vec{x}(t), u(t), t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t) \\ \mathcal{H} &= \begin{bmatrix} p_1(t) & p_2(t) & p_3(t) & p_4(t) \end{bmatrix} \begin{bmatrix} x_2(t) \\ \frac{T}{M} \cos(u(t)) \\ x_4(t) \\ \frac{T}{M} \sin(u(t)) \end{bmatrix} \\ \mathcal{H} &= p_1(t)x_2(t) + \frac{T}{M}p_2(t) \cos(u(t)) + p_3(t)x_4(t) + \frac{T}{M}p_4(t) \sin(u(t)) \end{aligned} \quad (25)$$

Euler–Lagrange equation:

$$\dot{\vec{x}} = \frac{\partial \mathcal{H}}{\partial \vec{p}} = a(\vec{x}(t), u(t), t) \quad (26)$$

$$\dot{\vec{p}} = -\frac{\partial \mathcal{H}}{\partial \vec{x}} \quad (27)$$

$$\vec{0} = \frac{\partial \mathcal{H}}{\partial \vec{u}} \quad (28)$$

In this problem like previous we must satisfy Euler–Equation equation. Now we use equation 25 to solve Euler–Lagrange equation.

$$\begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \\ \dot{p}_3 \\ \dot{p}_4 \end{bmatrix} = \begin{bmatrix} -\frac{\partial \mathcal{H}}{\partial x_1} \\ -\frac{\partial \mathcal{H}}{\partial x_2} \\ -\frac{\partial \mathcal{H}}{\partial x_3} \\ -\frac{\partial \mathcal{H}}{\partial x_4} \end{bmatrix} = \begin{bmatrix} 0 \\ -p_1 \\ 0 \\ -p_3 \end{bmatrix} \quad (29)$$

Answer of equation 18 is:

$$\begin{bmatrix} p_1(t) \\ p_2(t) \\ p_3(t) \\ p_4(t) \end{bmatrix} = \begin{bmatrix} C_1 \\ -C_1 t + C_2 \\ C_3 \\ -C_3 t + C_4 \end{bmatrix} \quad (30)$$

Boundary conditions:

$$\begin{aligned} t_0 &= 0, \quad t_f = t_1 \\ \vec{x}(0) &= \begin{bmatrix} x_1(0) \\ x_2(0) \\ x_3(0) \\ x_4(0) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \quad \vec{x}(t_f) = \begin{bmatrix} x_1(t_f) \\ x_2(t_f) \\ x_3(t_f) \\ x_4(t_f) \end{bmatrix} = \begin{bmatrix} \text{Free} \\ \text{Free} \\ D \\ \text{Free} \end{bmatrix} \quad (D \text{ is known constant}) \end{aligned}$$

Final  $x_1$ ,  $x_2$  and  $x_4$  are free so:

$$\left(\frac{\partial h}{\partial \vec{x}} - \vec{p}\right)\Big|_{*,t_f} = \vec{0} \rightarrow \left[\begin{array}{c} \frac{\partial h}{\partial \vec{x}_1} \\ \frac{\partial h}{\partial \vec{x}_2} \\ \frac{\partial h}{\partial \vec{x}_4} \end{array}\right]\Big|_{*,t_f} = \begin{bmatrix} -1 \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} p_1(t_f) \\ p_2(t_f) \\ p_4(t_f) \end{bmatrix} \quad (31)$$

Now we use equation 31 data to get 30 constants.

$$p_1(t_f) = C_1 = -1, \quad p_2(t_f) = -t_f + C_2 \Rightarrow C_2 = t_f, \quad p_4(t_f) = -C_3 t_f + C_4 = 0$$

Now we use other equation that described previous part to solve problem. This far i could go to solve problem analytically. :)

### 3 Question 3

$$\ddot{x}(t) = -x(t) - 0.1\dot{x}(t) + u(t), \quad x(0) = \dot{x}(0) = 1$$

Assume:

$$x_1(t) = x(t), \quad x_2(t) = \dot{x}(t) \rightarrow a(\vec{x}, u, t) = \begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \end{bmatrix} = \begin{bmatrix} x_2(t) \\ -x_1(t) - 0.1x_2(t) + u(t) \end{bmatrix}$$

$$\dot{\vec{x}} = A(t)\vec{x}(t) + B(t)\vec{u}(t) \quad (32)$$

$$\dot{\vec{x}} = \begin{bmatrix} 0 & 1 \\ -1 & -0.1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u \quad (33)$$

$$J = \frac{1}{2}x^T(t_f)Hx(t_f) + \frac{1}{2}\int_0^{t_f} (\alpha(x^2 + \dot{x}^2) + \beta u^2) dt$$

It's LQR problem.

$$J = \frac{1}{2}x^T(t_f)Hx(t_f) + \frac{1}{2}\int_0^{t_f} (\dot{\vec{x}}^T(t)Q(t)\dot{\vec{x}}(t) + \dot{\vec{u}}^T(t)R(t)\dot{\vec{u}}(t)) dt \quad (34)$$

$$Q(t) = \begin{bmatrix} \alpha & 0 \\ 0 & \alpha \end{bmatrix}, \quad R(t) = \beta$$

#### 3.1 part a

$\alpha = \beta = 1$ ,  $t_f \rightarrow \infty$  and  $H = 0$

Riccati equation:

$$\dot{K} + KA + A^TK - KBR^{-1}B^TK + Q = 0 \quad (35)$$

$$u(t) = -R^{-1}B^TK(t)x(t); \quad (36)$$

$$\dot{x}(t) = Ax(t) + Bu(t) \quad (37)$$

Because of  $t \rightarrow \infty$ ,  $\dot{K} = 0$  so Differential riccati equation change to Algebraic riccati equation.

$$KA + A^TK - KBR^{-1}B^TK + Q = 0 \quad (38)$$

$$\begin{aligned} & \begin{bmatrix} K_{11} & K_{12} \\ K_{21} & K_{22} \end{bmatrix} \begin{bmatrix} 0 & 1 \\ -1 & -0.1 \end{bmatrix} + \begin{bmatrix} 0 & -1 \\ 1 & -0.1 \end{bmatrix} \begin{bmatrix} K_{11} & K_{12} \\ K_{21} & K_{22} \end{bmatrix} + \\ & \begin{bmatrix} K_{11} & K_{12} \\ K_{21} & K_{22} \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} \begin{bmatrix} 1 \end{bmatrix} \begin{bmatrix} 0 & 1 \end{bmatrix} \begin{bmatrix} K_{11} & K_{12} \\ K_{21} & K_{22} \end{bmatrix} + \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix} \\ & \begin{bmatrix} 1 - K_{21} - K_{12}K_{21} - K_{12} & K_{11} - K_{12}/10 - K_{22} - K_{12}K_{22} \\ K_{11} - K_{21}/10 - K_{22} - K_{21}K_{22} & K_{22}^2 - K_{22}/5 + K_{12} + K_{21} + 1 \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix} \end{aligned}$$

We know that  $K_{12} = K_{21}$  Equation 3.1 solved in MATLAB(Q3\_a.m). There is two answer in real numbers.

$$K_1 = \begin{bmatrix} -2.0175 & 0.4142 \\ 0.4142 & -1.4556 \end{bmatrix}, \quad K_2 = \begin{bmatrix} 1.8175 & 0.4142 \\ 0.4142 & 1.2558 \end{bmatrix}$$

Now we use equation 36 and 37 in MATLAB ode45(Q3\_aODE.m) to simulate system and find out which K is appropriate for system.

Figure 1: System simulation with  $K_1$  matrix

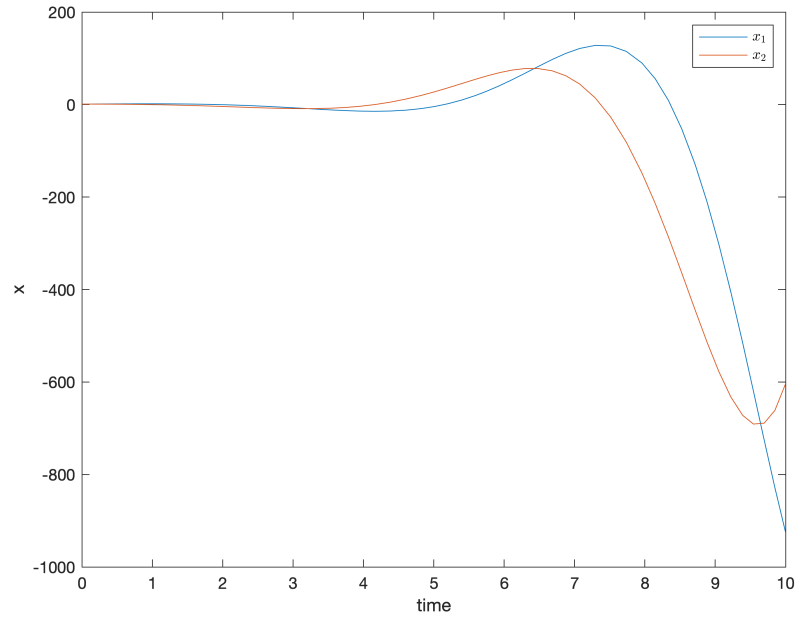
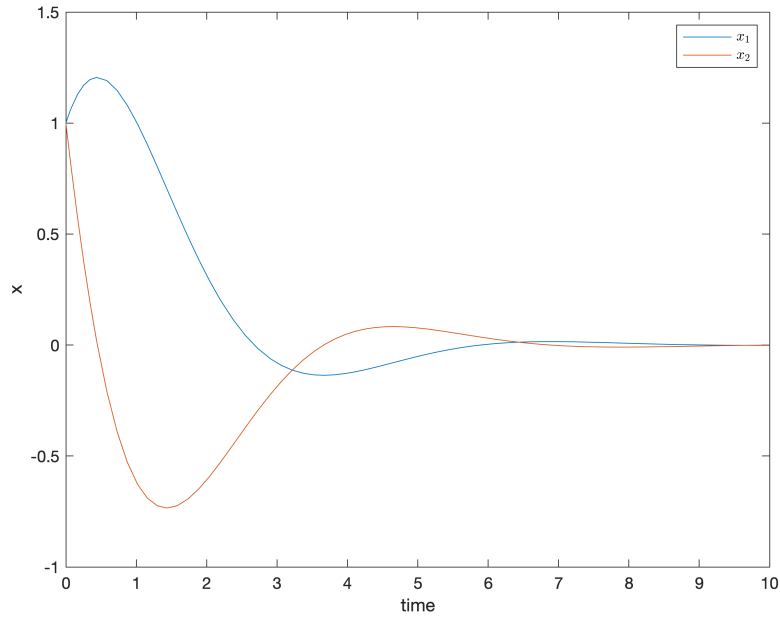
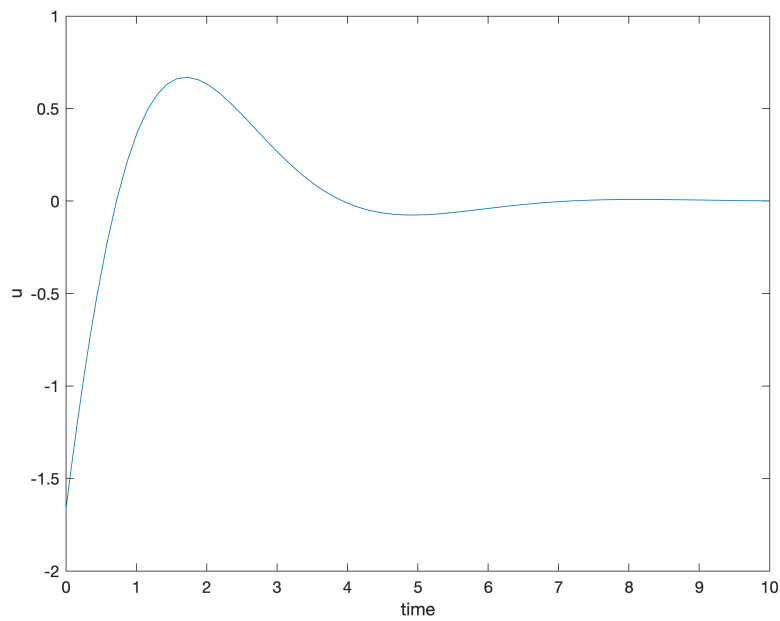




Figure 2: System simulation with  $K_2$  matrix


From ode simulation we can find out that  $K_2$  is appropriate for system. Figure of system state had plot in figure 2.

Figure 3: System effort  $u(t)$ 

### 3.2 part b

Simulation and Code has attached to Homework(Q3\_b.m). For this  $\beta$  we can find out that for 100 second all  $J$  costs are zero and very near to zero so we neglect time after that.


Figure 4: System simulation for  $\beta = 1000$

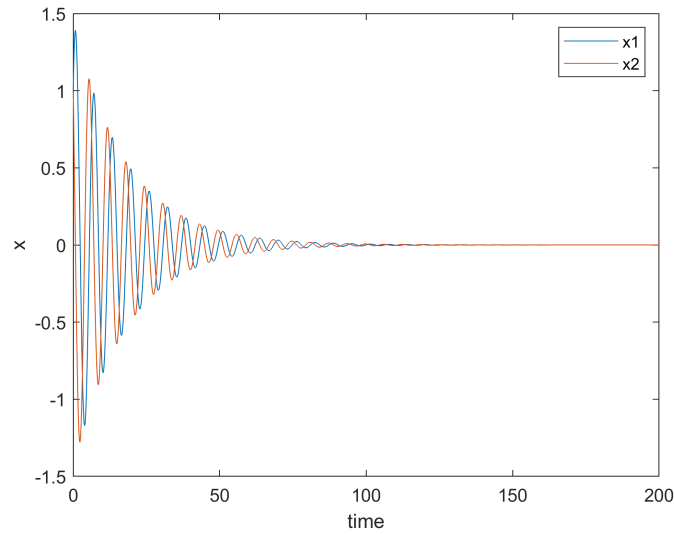

#### 3.2.1 I

$u(t)$  Cost:


$$J_u = \int_0^{\infty} u(t)^2 dt$$

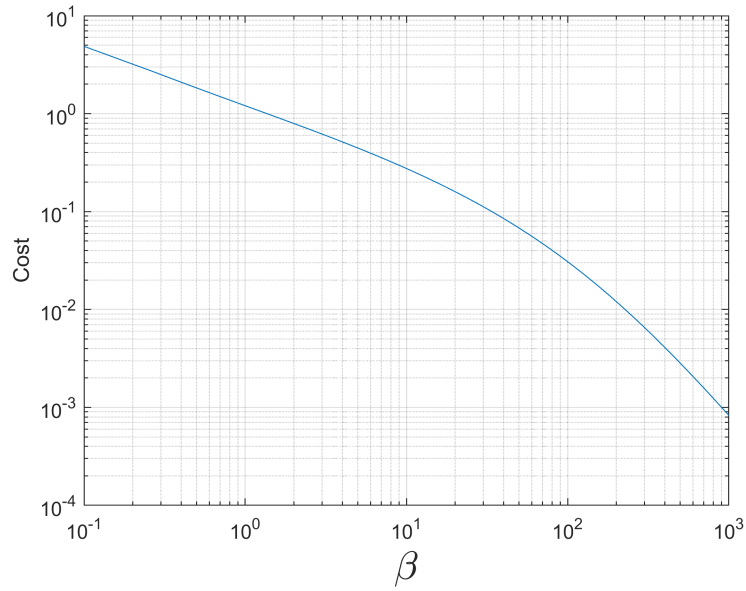Figure 5:  $u(t)$  cost in different  $\beta$ 

### 3.2.2 II

$x_1^2 + x_2^2$  Cost:

$$J_u = \int_0^\infty (x^2 + \dot{x}^2) d(t)$$

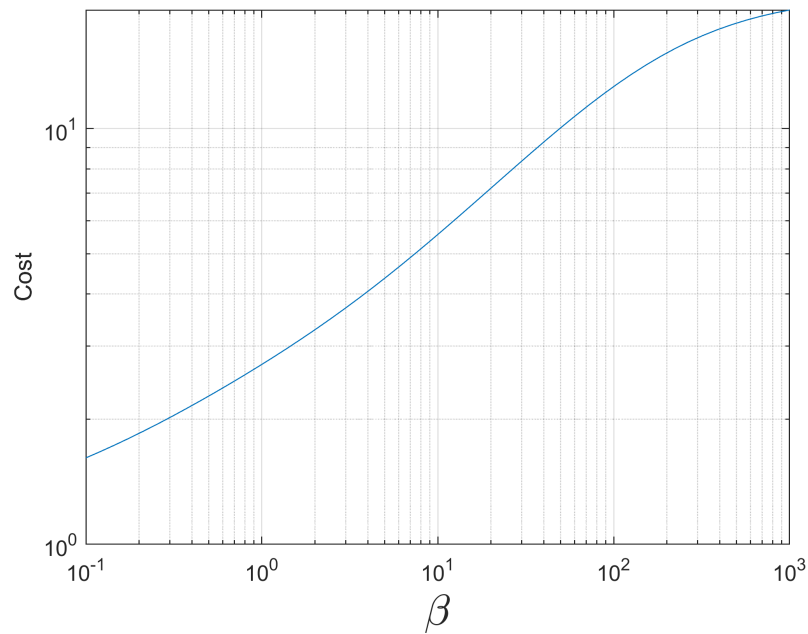Figure 6:  $x^2 + \dot{x}^2$  cost in different  $\beta$ 

### 3.3 part c

#### 3.3.1 I

$\alpha = \beta = 1$  and  $H = 0$  Now we simulate our system for  $t_f = 3, 5, 10, 15$  sec and plot  $K(t)$  matrix,  $u(t)$  and states of system.

- $t_f = 3$  sec

Figure 7:  $K(t)$  in  $t_f = 3$  sec

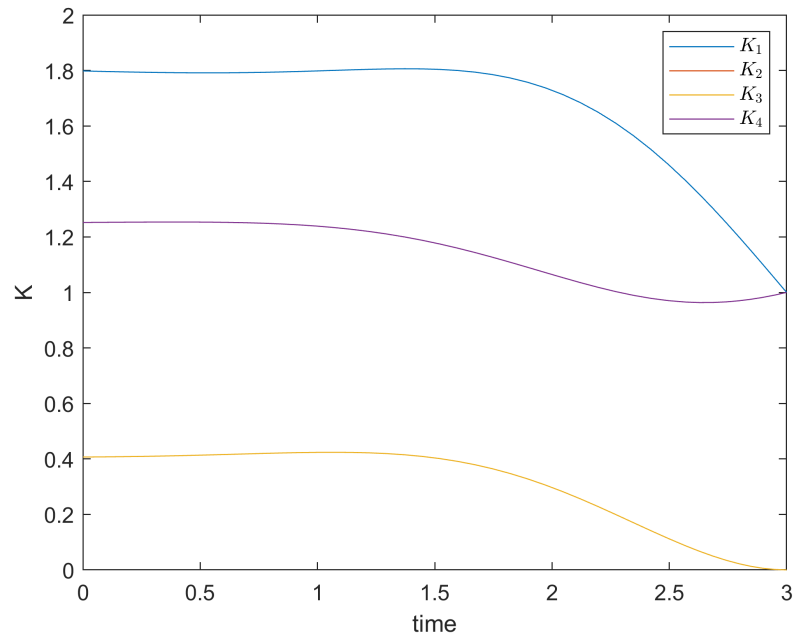
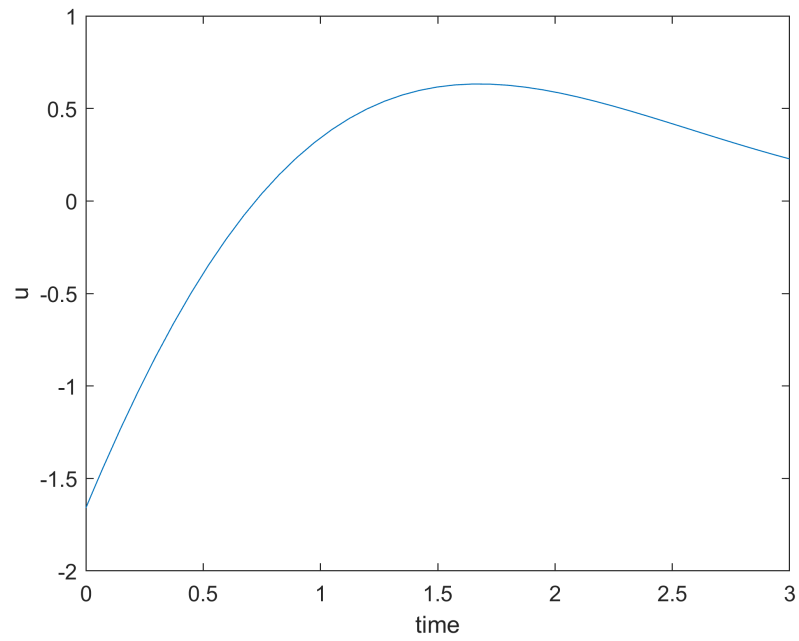
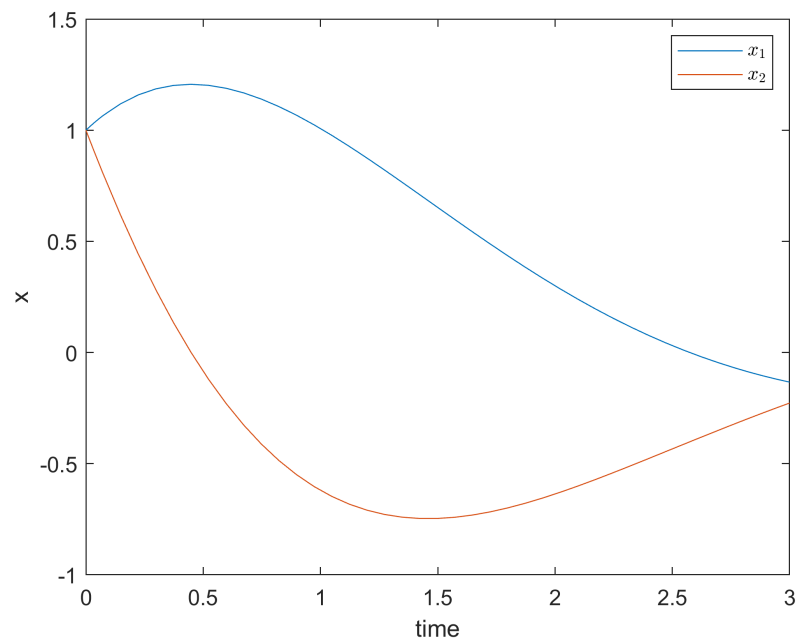


Figure 8:  $u(t)$  in  $t_f = 3$  secFigure 9: System States  $\vec{x}(t)$  in  $t_f = 3$  sec

- $t_f = 5$  sec

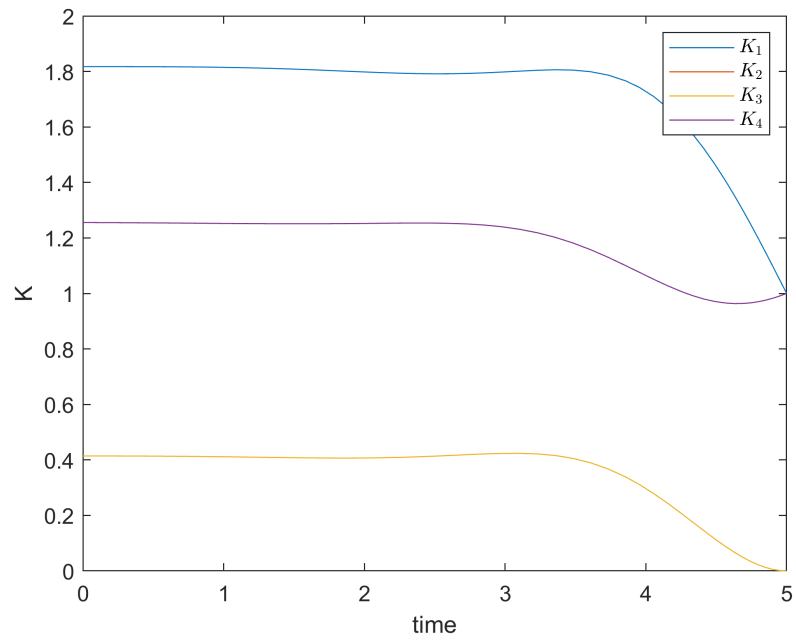
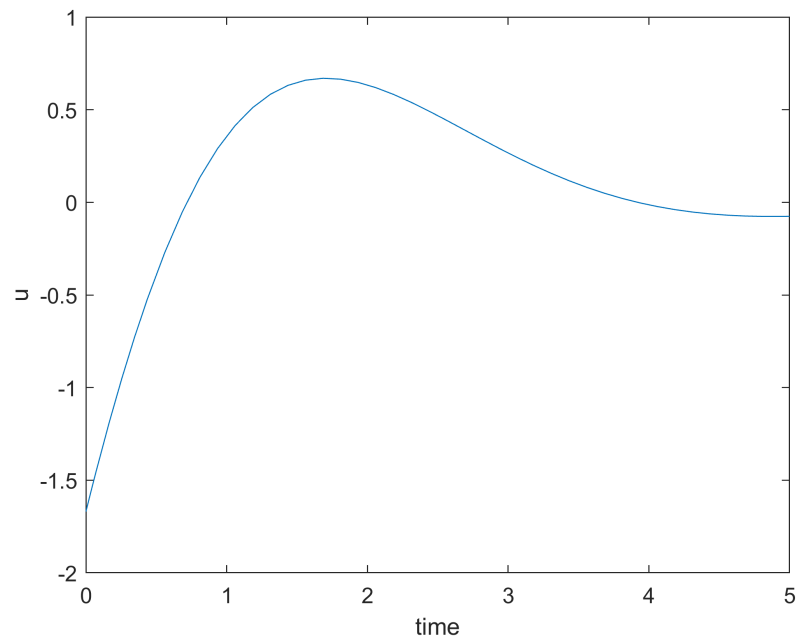
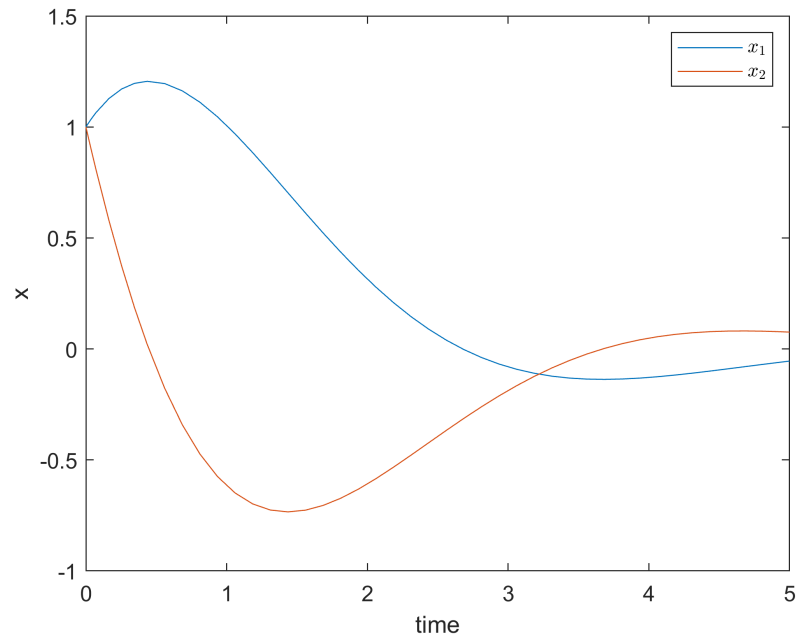
Figure 10:  $K(t)$  in  $t_f = 5$  secFigure 11:  $u(t)$  in  $t_f = 5$  sec

Figure 12: System States  $\vec{x}(t)$  in  $t_f = 5$  sec

- $t_f = 10$  sec

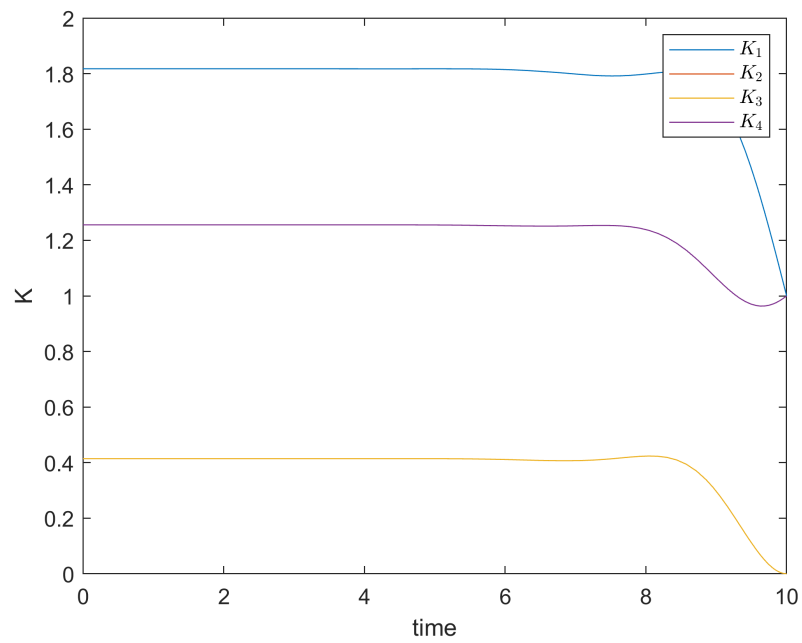
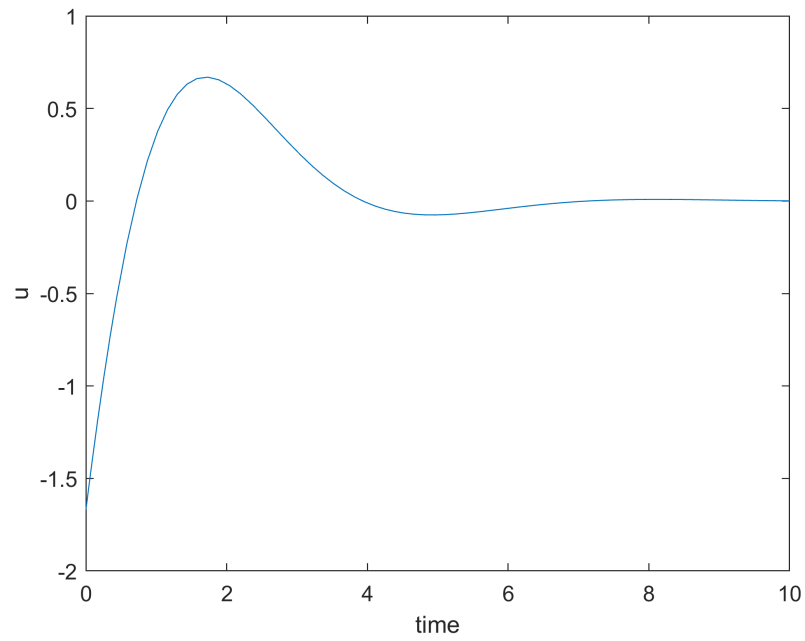
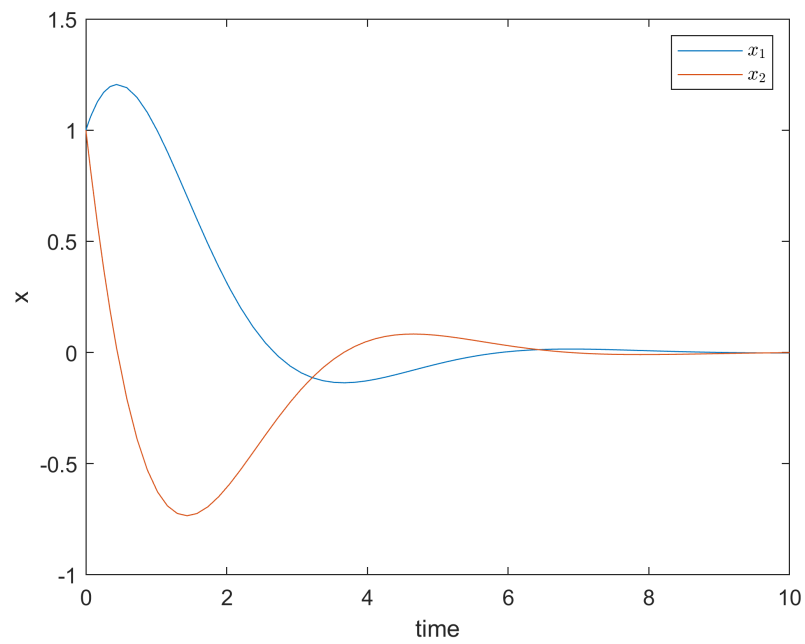
Figure 13:  $K(t)$  in  $t_f = 10$  sec

Figure 14:  $u(t)$  in  $t_f = 10$  secFigure 15: System States  $\vec{x}(t)$  in  $t_f = 10$  sec

- $t_f = 15$  sec



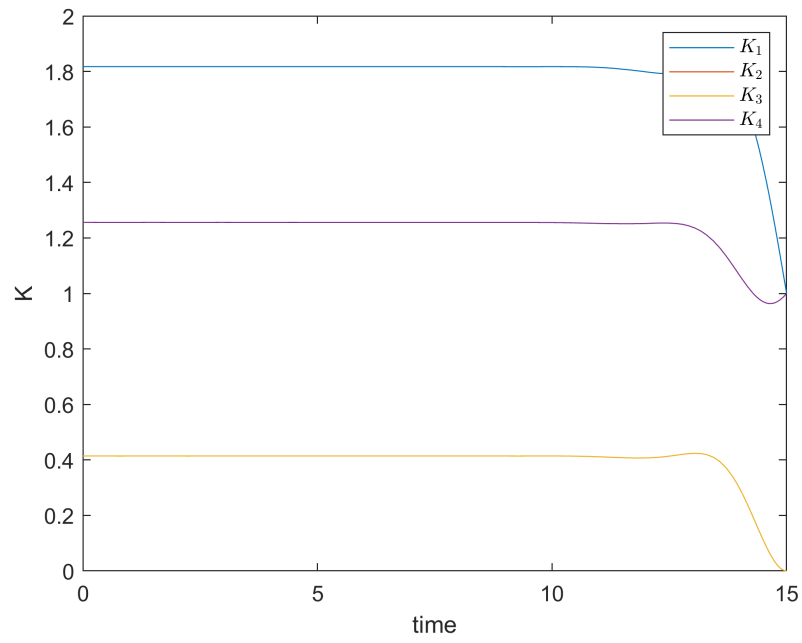
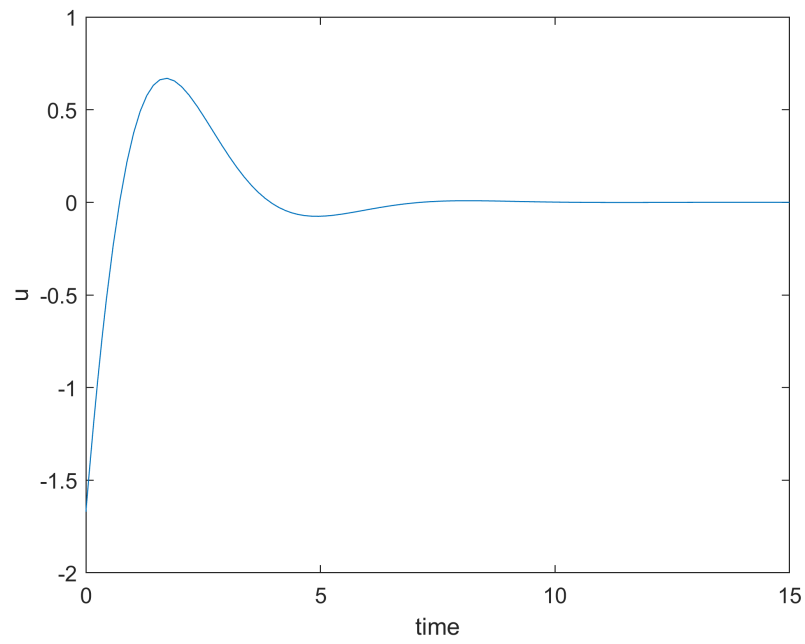
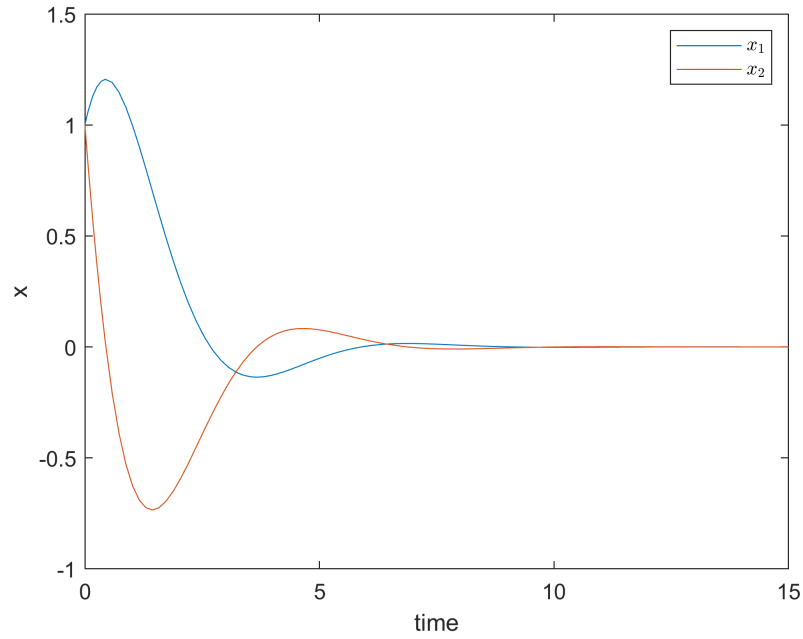
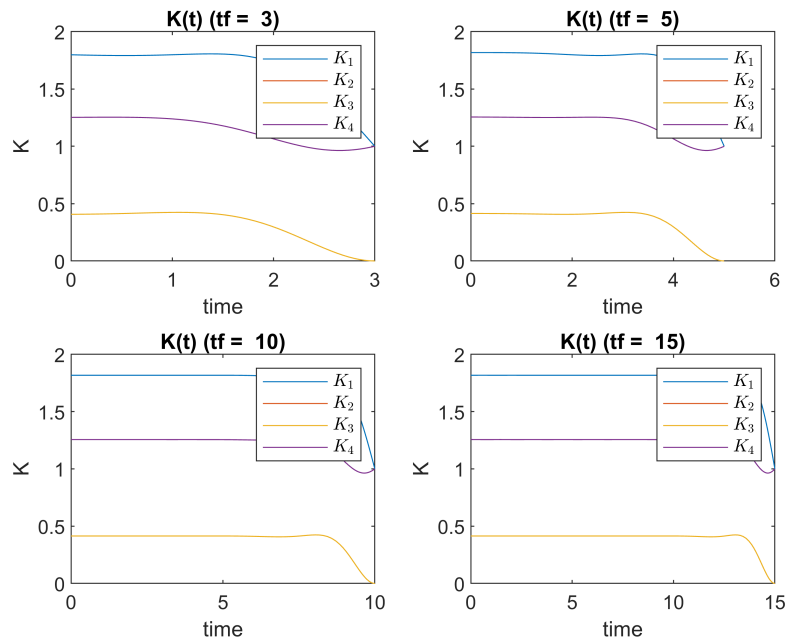
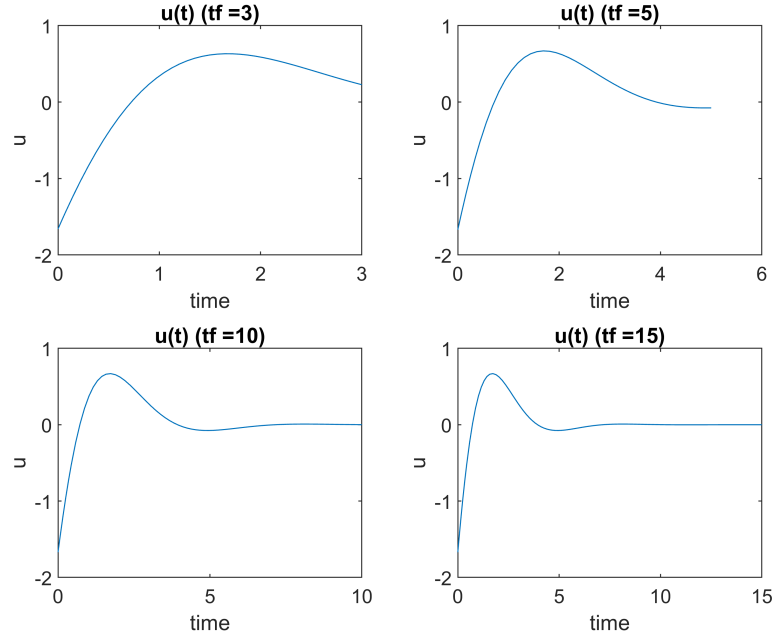
Figure 16:  $K(t)$  in  $t_f = 15$  secFigure 17:  $u(t)$  in  $t_f = 15$  sec

Figure 18: System States  $\vec{x}(t)$  in  $t_f = 15$  sec

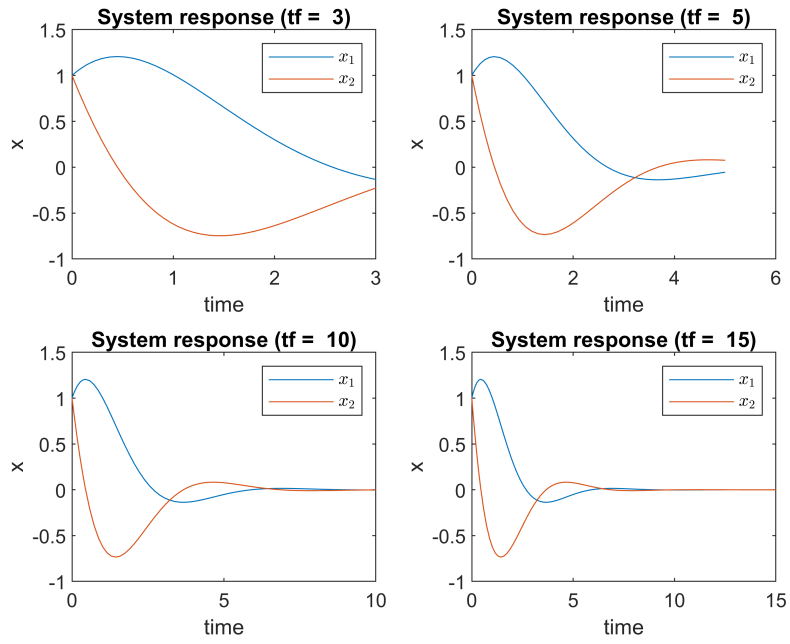
- $K(t)$  for all simulated  $t_f$

Figure 19:  $K(t)$  for all simulated  $t_f$ 

- $u(t)$  for all simulated  $t_f$

Figure 20:  $u(t)$  for all simulated  $t_f$ 

- System States  $\vec{x}(t)$  for all simulated  $t_f$

Figure 21: System States  $\vec{x}(t)$  for all simulated  $t_f$ 

### 3.3.2 II

$\alpha = \beta = 1$  and  $t_f = 0$  Now we simulate our system for  $H = 1I, 10I, 100I$  and plot  $K(t)$  matrix,  $u(t)$  and states of system.

- $H = 1I$

Figure 22:  $K(t)$  in  $H = 1I$

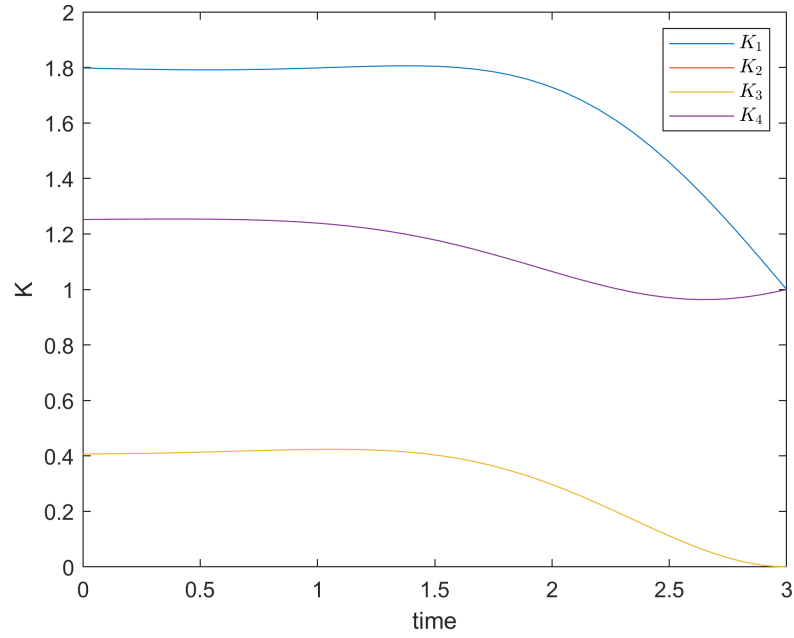
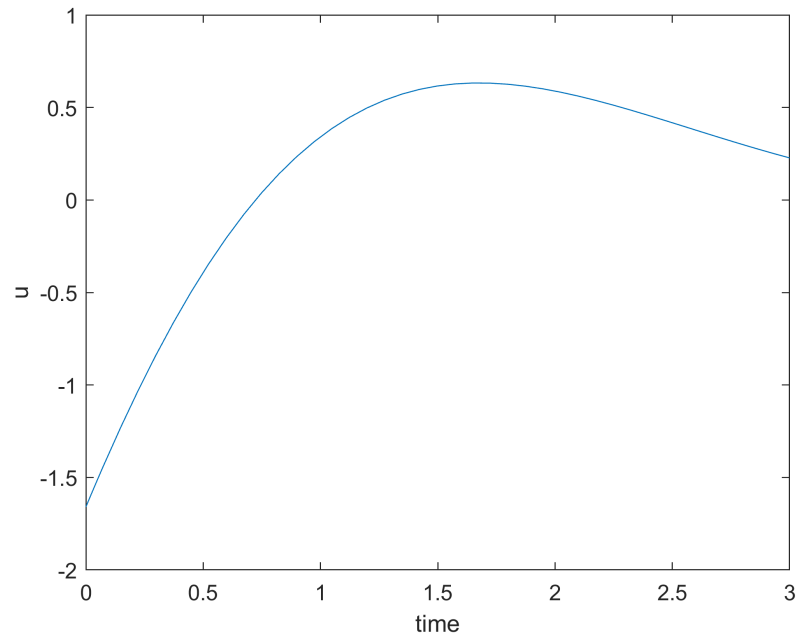
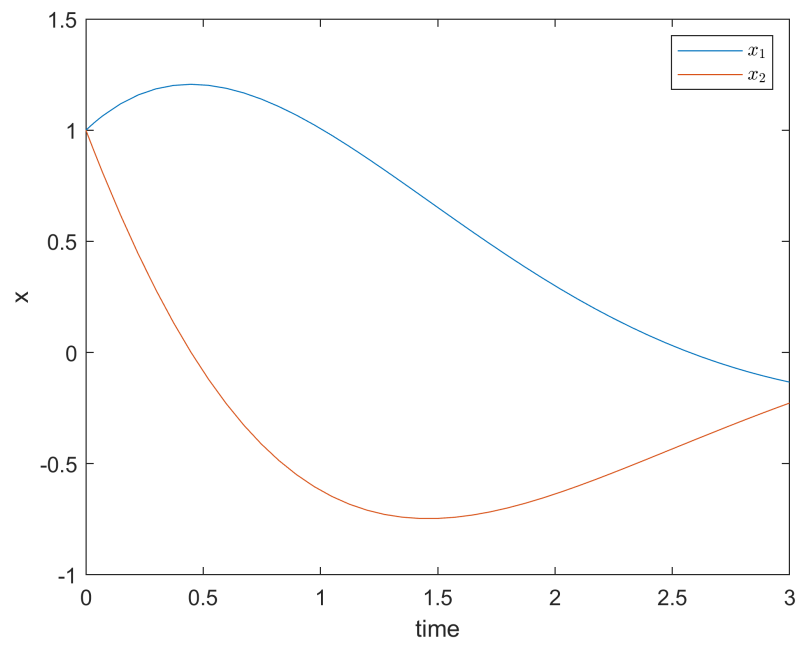


Figure 23:  $u(t)$  in  $H = 1I$ Figure 24: System States  $\vec{x}(t)$  in  $H = 1I$ 

- $H = 10I$

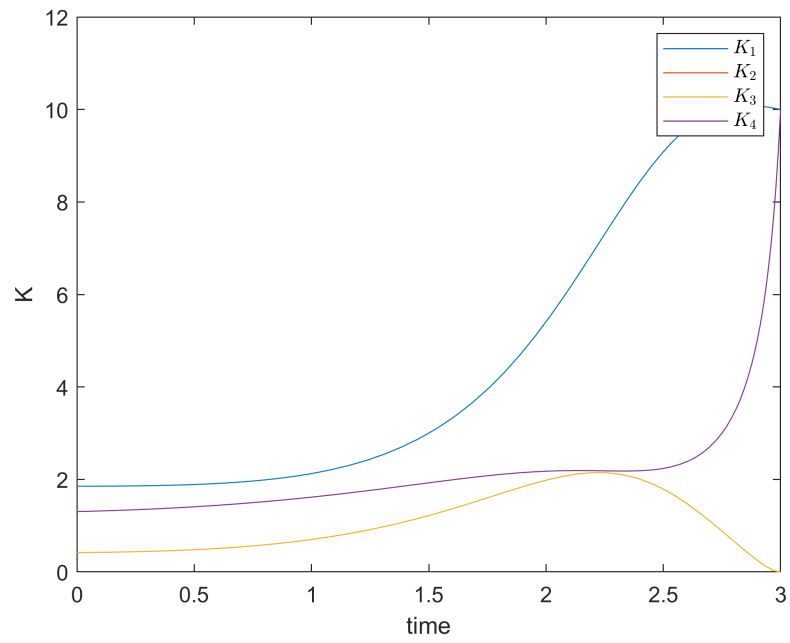
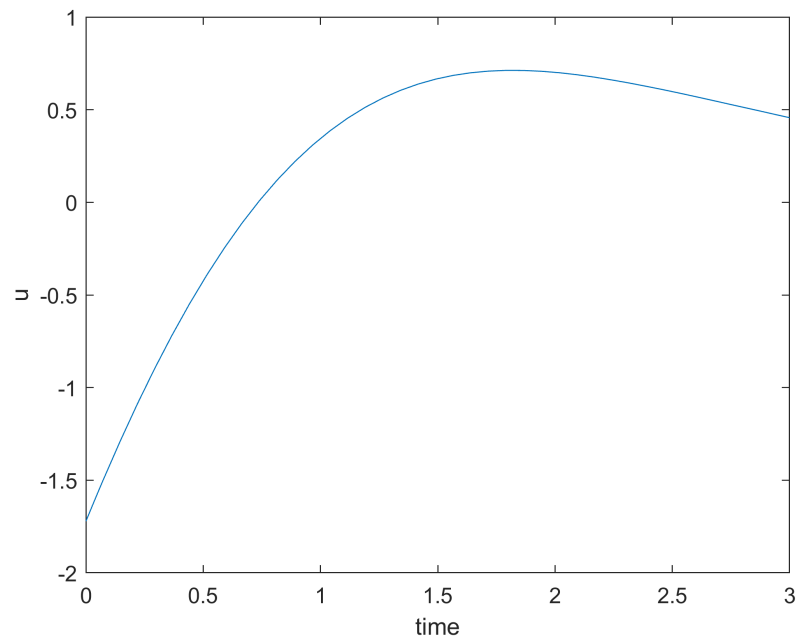
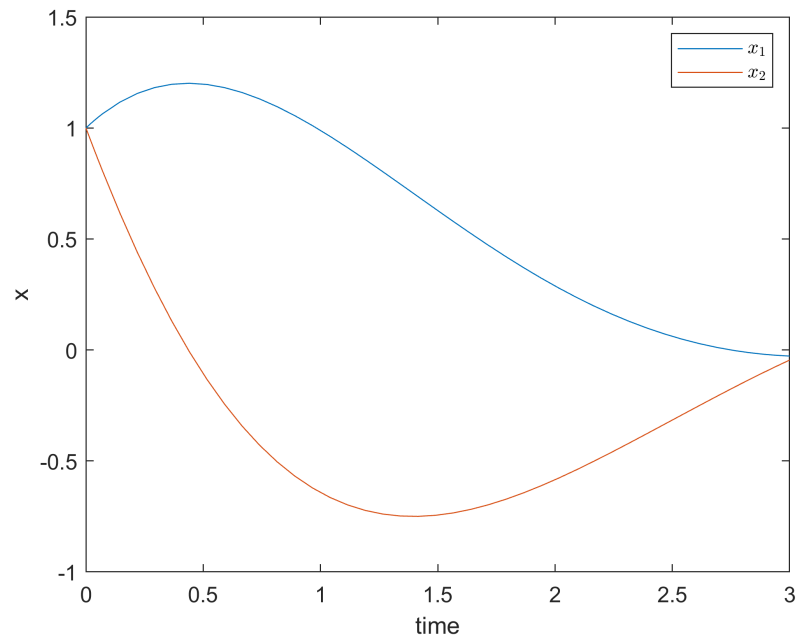
Figure 25:  $K(t)$  in  $H = 10I$ Figure 26:  $u(t)$  in  $H = 10I$ 

Figure 27: System States  $\vec{x}(t)$  in  $H = 10I$ 

- $H = 100I$

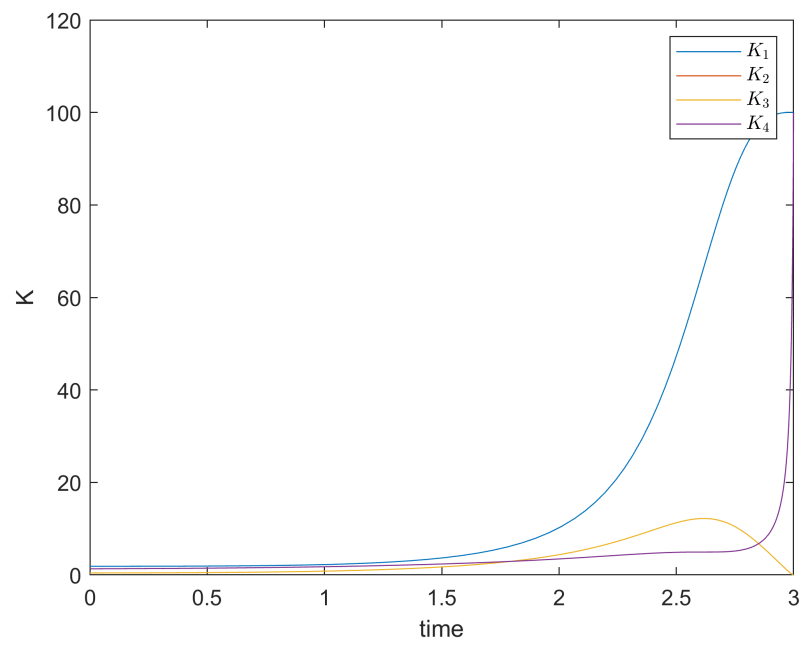
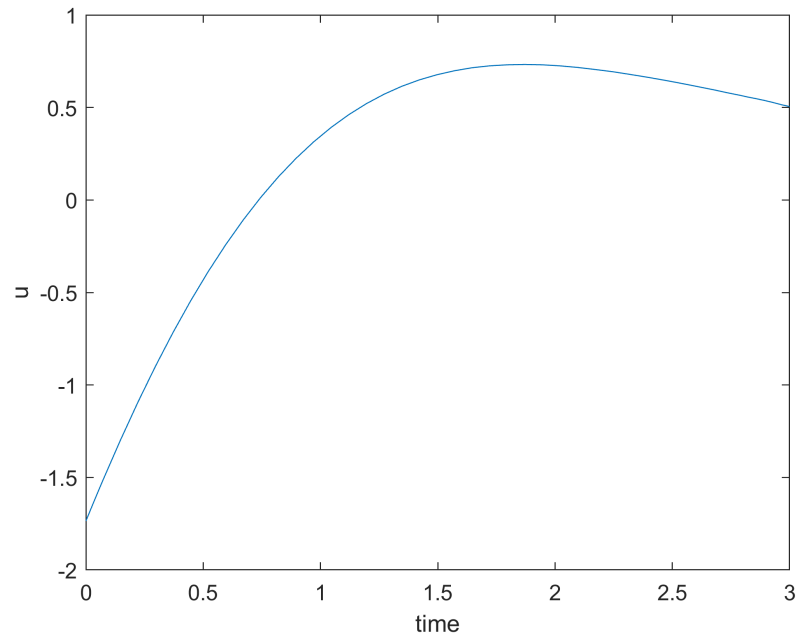
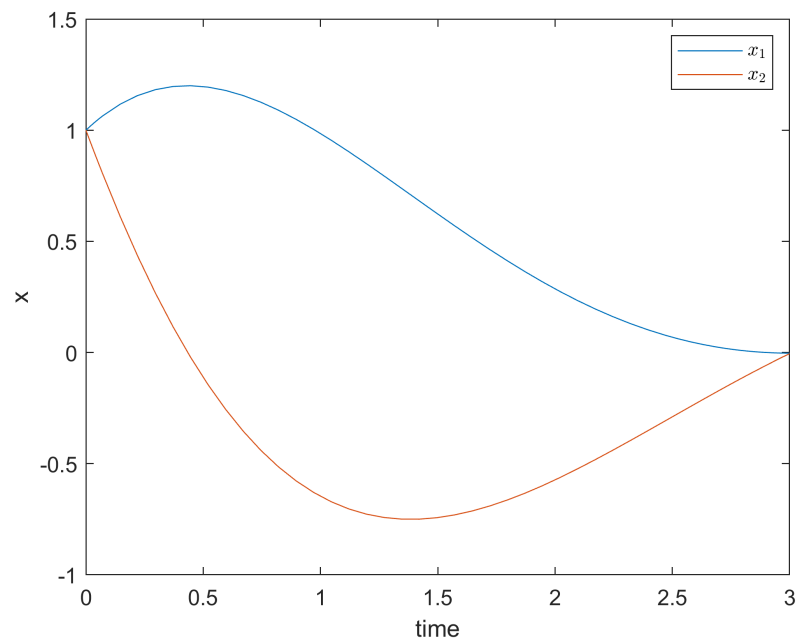
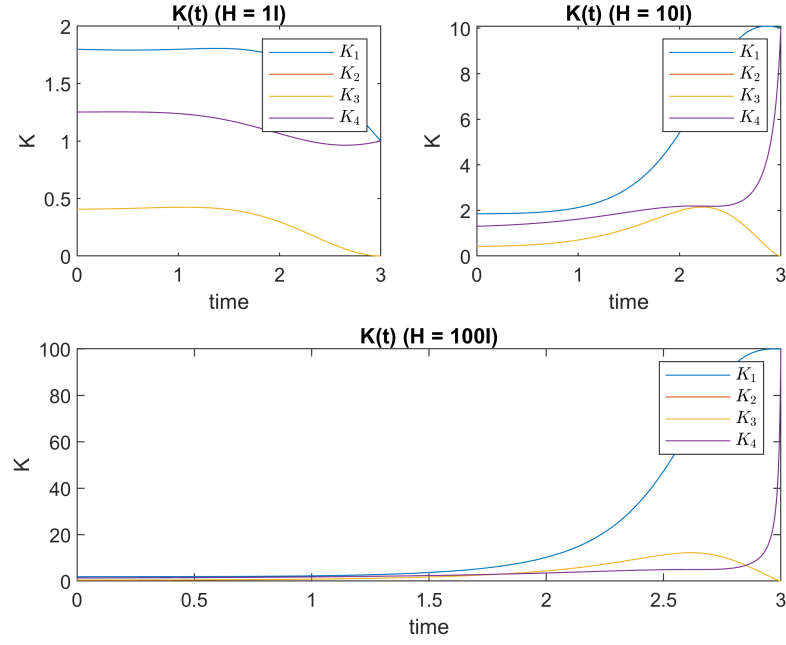
Figure 28:  $K(t)$  in  $H = 100I$ 


Figure 29:  $u(t)$  in  $H = 100I$ Figure 30: System States  $\vec{x}(t)$  in  $H = 100I$ 

- $K(t)$  for all simulated  $H$




Figure 31:  $K(t)$  for all simulated  $H$ 

- $u(t)$  for all simulated  $H$

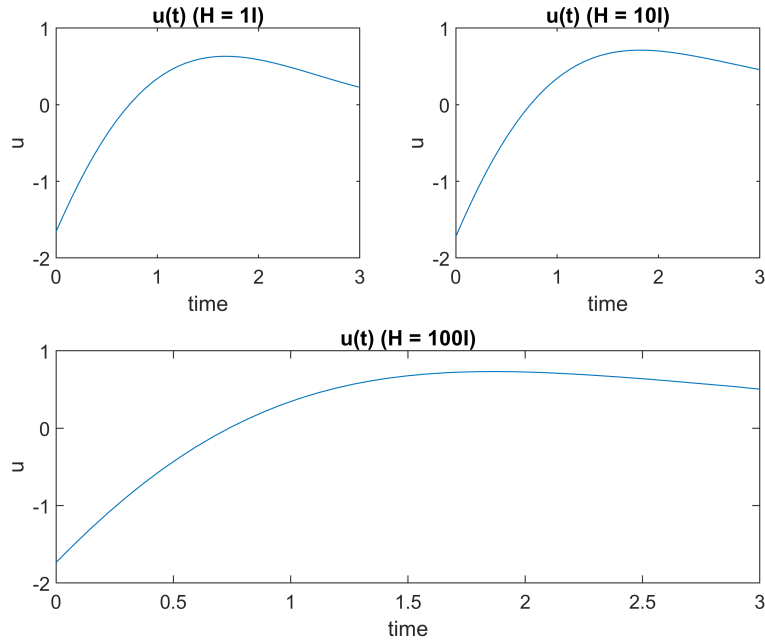Figure 32:  $u(t)$  for all simulated  $H$ 

- System States  $\vec{x}(t)$  for all simulated  $H$

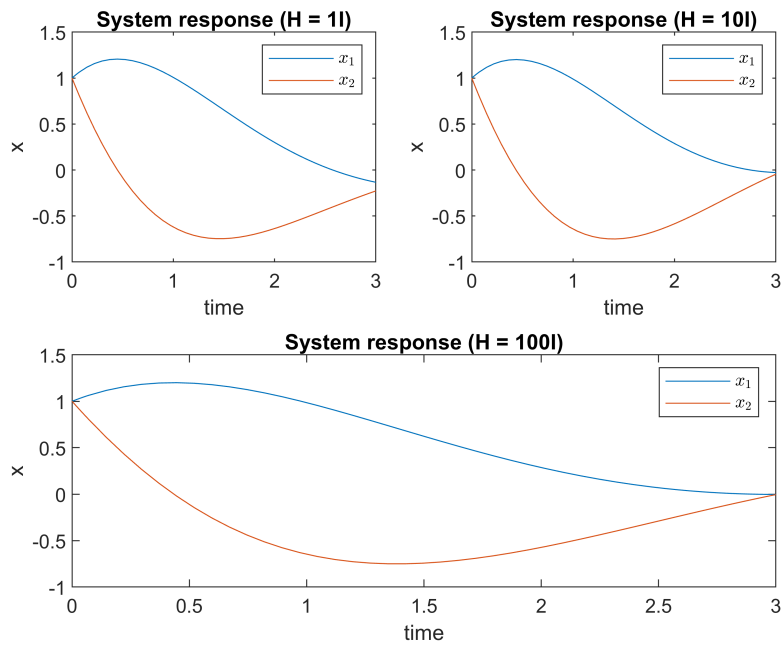Figure 33: System States  $\vec{x}(t)$  for all simulated  $H$ 

## Contents

<b>1</b>	<b>Question 1</b>	<b>1</b>
1.1	part a . . . . .	1
1.2	part b . . . . .	2
1.3	part c . . . . .	3
<b>2</b>	<b>Question 2</b>	<b>4</b>
2.1	part a . . . . .	4
2.2	part b . . . . .	4
2.3	part c . . . . .	5
2.4	part d . . . . .	6
<b>3</b>	<b>Question 3</b>	<b>7</b>
3.1	part a . . . . .	7
3.2	part b . . . . .	10
	3.2.1 I . . . . .	10
	3.2.2 II . . . . .	11
3.3	part c . . . . .	12
	3.3.1 I . . . . .	12
	3.3.2 II . . . . .	20

## List of Figures

1	System simulation with $K_1$ matrix . . . . .	8
2	System simulation with $K_2$ matrix . . . . .	9
3	System effort $u(t)$ . . . . .	9
4	System simulation for $\beta = 1000$ . . . . .	10
5	$u(t)$ cost in different $\beta$ . . . . .	11
6	$x^2 + \dot{x}^2$ cost in different $\beta$ . . . . .	11
7	$K(t)$ in $t_f = 3$ sec . . . . .	12
8	$u(t)$ in $t_f = 3$ sec . . . . .	13
9	System States $\vec{x}(t)$ in $t_f = 3$ sec . . . . .	13
10	$K(t)$ in $t_f = 5$ sec . . . . .	14
11	$u(t)$ in $t_f = 5$ sec . . . . .	14
12	System States $\vec{x}(t)$ in $t_f = 5$ sec . . . . .	15
13	$K(t)$ in $t_f = 10$ sec . . . . .	15
14	$u(t)$ in $t_f = 10$ sec . . . . .	16
15	System States $\vec{x}(t)$ in $t_f = 10$ sec . . . . .	16
16	$K(t)$ in $t_f = 15$ sec . . . . .	17
17	$u(t)$ in $t_f = 15$ sec . . . . .	17
18	System States $\vec{x}(t)$ in $t_f = 15$ sec . . . . .	18
19	$K(t)$ for all simulated $t_f$ . . . . .	18
20	$u(t)$ for all simulated $t_f$ . . . . .	19
21	System States $\vec{x}(t)$ for all simulated $t_f$ . . . . .	19
22	$K(t)$ in $H = 1I$ . . . . .	20
23	$u(t)$ in $H = 1I$ . . . . .	21
24	System States $\vec{x}(t)$ in $H = 1I$ . . . . .	21
25	$K(t)$ in $H = 10I$ . . . . .	22
26	$u(t)$ in $H = 10I$ . . . . .	22
27	System States $\vec{x}(t)$ in $H = 10I$ . . . . .	23
28	$K(t)$ in $H = 100I$ . . . . .	23
29	$u(t)$ in $H = 100I$ . . . . .	24
30	System States $\vec{x}(t)$ in $H = 100I$ . . . . .	24
31	$K(t)$ for all simulated $H$ . . . . .	25
32	$u(t)$ for all simulated $H$ . . . . .	25
33	System States $\vec{x}(t)$ for all simulated $H$ . . . . .	26

## List of Tables