

Home Work #2

Ali BaniAsad 96108378

May 19, 2021

1 Question 1

System:

$$\dot{x}(t) = -0.1x(t) + u(t)$$

Subjected to $0 \leq u(t) \leq M$

1.1 part a

$$J = \int_0^{100} -x(t) dt$$

Hamiltonian matrix:

$$\begin{aligned}\mathcal{H} &= g(\vec{x}(t), u(t), t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t) \\ \mathcal{H} &= -x(t) - 0.1p(t)x(t) + p(t)u(t)\end{aligned}\tag{1}$$

Euler-Lagrange equation:

$$\dot{\vec{x}} = \frac{\partial \mathcal{H}}{\partial \vec{p}} = a(\vec{x}(t), u(t), t)\tag{2}$$

$$\dot{\vec{p}} = -\frac{\partial \mathcal{H}}{\partial \vec{x}}\tag{3}$$

Now we use above equation for solve problem.

$$-\frac{\partial \mathcal{H}}{\partial x} = 1 + 0.1p$$

There is two differential equation and two unknowns.

$$\dot{x} = -x(t) - 0.1px + pu\tag{4}$$

$$\dot{p} = 1 + 0.1p\tag{5}$$

Equation 5 solved in MATLAB(Q1_a.m) and code attached to file.

$$p(t) = C_1 \exp(t/10) - 10\tag{6}$$

Final $x(t)$ is free so:

$$h_{\vec{x}} - \vec{p} = \vec{0} \Big|_{*, t_f} \rightarrow p(t_f) = 0$$

Use new boundry condition($p(t_f) = 0$) in equation 6 to find p function($p(t)$).

$$p(100) = C_1 \exp(100/10) - 10 = 0 \rightarrow C_1 = 10 \exp(-10)$$

$$p(t) = 10 \exp(0.1(t - 100)) - 10 \quad (7)$$

We know that $u(t)$ has limit so for optimization we have another condition to select $u(t)$ for every time.

$$u(t) = \begin{cases} \frac{\partial \mathcal{H}}{\partial u} < 0 & u(t) = M \\ \frac{\partial \mathcal{H}}{\partial u} = 0 & \mathcal{H} \text{ is not a function of } u(t) \\ \frac{\partial \mathcal{H}}{\partial u} > 0 & u(t) = 0 \end{cases} \quad (8)$$

From equation 1 we calculate $\frac{\partial \mathcal{H}}{\partial u}$.

$$\frac{\partial \mathcal{H}}{\partial u} = p(t)$$

From equation 7 we know that at $t_0 \rightarrow t_f$ $p(t)$ is less than zero ($p(t) < 0$), so $u(t)$ for every time is M .

1.2 part b

$$J = \int_0^{100} -x(t) dt$$

Subjected to:

$$\int_0^{100} u(t) dt = K (\text{a known constant})$$

$z(t)$ is new state:

$$z(t) = \int_0^t u(t) dt \rightarrow \frac{dz}{dt} = u(t)$$

New differential constraints:

$$\begin{aligned} \frac{dz}{dt} - u(t) &= 0 \\ g_a(x, \dot{x}, \dot{z}, t, \lambda) &= g(x, \dot{x}, t) + \lambda(t)f(x, \dot{x}, \dot{z}, t) \\ g_a &= -x(t) + \lambda(\dot{z}(t) - u(t)) \end{aligned}$$

Hamiltonian matrix:

$$\mathcal{H} = g_a(\vec{x}(t), u(t), z(t), \lambda, t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t)$$

We assume $p_2 = \lambda$

$$\mathcal{H} = -x(t) - 0.1p_1(t)x(t) + p_1(t)u(t) + p_2(t)(\dot{z}(t) - u(t)) \quad (9)$$

$$\begin{aligned} \dot{\vec{p}} &= -\frac{\partial \mathcal{H}}{\partial \vec{x}} = \begin{bmatrix} -\frac{\partial \mathcal{H}}{\partial x} \\ -\frac{\partial \mathcal{H}}{\partial z} \end{bmatrix} = \begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \end{bmatrix} \\ \begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \end{bmatrix} &= \begin{bmatrix} 0.1p_1 + 1 \\ 0 \end{bmatrix} \end{aligned}$$

Above equation solved in previous part.

$$\begin{bmatrix} p_1(t) \\ p_2(t) \end{bmatrix} = \begin{bmatrix} 10 \exp(0.1(t - 100)) - 10 \\ C_1 \end{bmatrix} \quad (10)$$

In this part we have the same condition that described in previous in equation 8. From equation 9 we calculate $\frac{\partial \mathcal{H}}{\partial u}$.

$$\frac{\partial \mathcal{H}}{\partial u} = p_1 - p_2 = (10 \exp(0.1(t - 100)) - 10) - C_1$$

From equation 10 we know that C_1 is constant.

There is four scenario for this problem.

1. For all the time($t_0 \rightarrow t_f$) $\frac{\partial \mathcal{H}}{\partial u} > 0$ so $u(t) = 0$, this scenario maybe possible if $K = 0$.
2. For all the time($t_0 \rightarrow t_f$) $\frac{\partial \mathcal{H}}{\partial u} < 0$ so $u(t) = M$, this scenario maybe possible if $K = M \times t_f$.
3. For time($t_0 \rightarrow t$) $\frac{\partial \mathcal{H}}{\partial u} < 0$ and for time($t \rightarrow t_f$) $\frac{\partial \mathcal{H}}{\partial u} > 0$ so for time($t_0 \rightarrow t$), $u(t) = M$ and for time($t \rightarrow t_f$), $u(t) = 0$ and this scenario maybe possible for $0 \leq K \leq M \times t_f$.
4. For time($t_0 \rightarrow t$) $\frac{\partial \mathcal{H}}{\partial u} > 0$ and for time($t \rightarrow t_f$) $\frac{\partial \mathcal{H}}{\partial u} < 0$ so for time($t_0 \rightarrow t$), $u(t) = 0$ and for time($t \rightarrow t_f$), $u(t) = M$ and this scenario is not possible because p_1 is growing by the time and p_2 is constant all the time.

1.3 part c

$$J = -x(100)$$

Subjected to:

$$\int_0^{100} u(t)dt = K(\text{a known constant})$$

$z(t)$ is new state:

$$z(t) = \int_0^t u(t)dt \rightarrow \frac{dz}{dt} = u(t)$$

New differential constraints:

$$\begin{aligned} \frac{dz}{dt} - u(t) &= 0 \\ g_a(x, \dot{x}, \dot{z}, t, \lambda) &= g(x, \dot{x}, t) + \lambda(t)f(x, \dot{x}, \dot{z}, t) \\ g_a &= -x(t) + \lambda(\dot{z}(t) - u(t)) \end{aligned}$$

Hamiltonian matrix:

$$\mathcal{H} = g_a(\vec{x}(t), u(t), z(t), \lambda, t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t)$$

We assume $p_2 = \lambda$

$$\mathcal{H} = -0.1p_1(t)x(t) + p_1(t)u(t) + p_2(t)(\dot{z}(t) - u(t)) \quad (11)$$

$$\begin{aligned} \dot{\vec{p}} &= -\frac{\partial \mathcal{H}}{\partial \vec{x}} = \begin{bmatrix} -\frac{\partial \mathcal{H}}{\partial x} \\ -\frac{\partial \mathcal{H}}{\partial z} \end{bmatrix} = \begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \end{bmatrix} \\ \begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \end{bmatrix} &= \begin{bmatrix} 0.1p_1 \\ 0 \end{bmatrix} \\ \begin{bmatrix} p_1(t) \\ p_2(t) \end{bmatrix} &= \begin{bmatrix} C_1 \exp(t/10) \\ C_2 \end{bmatrix} \end{aligned} \quad (12)$$

Final $x(t)$ is free so:

$$h_{\vec{x}} - \vec{p} = \vec{0} \Big|_{*, t_f} \rightarrow p_1(t_f) = -1 \quad (13)$$

From equation 12 and 13 we can find $p_1(t)$ function.

$$p_1(100) = C_1 \exp(100/10) = -1 \rightarrow C_1 = -\exp(-10)$$

$$p_1(t) = -\exp(0.1(t - 100))$$

This problem is like section 1.2 and have the same scenarios.

2 Question 2

2.1 part a

Dynamic of system:

$$\ddot{x}(t) = \frac{T}{M} \cos(\beta(t)), \quad \ddot{y}(t) = \frac{T}{M} \sin(\beta(t))$$

Now we define new states:

$$x_1(t) = x(t), \quad x_2(t) = \dot{x}_1(t), \quad x_3(t) = y(t), \quad x_4(t) = \dot{x}_3(t), \quad u(t) = \beta(t)$$

New dynamic of system:

$$a(\vec{x}(t), u, t) = \begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \\ \dot{x}_4(t) \end{bmatrix} = \begin{bmatrix} x_2(t) \\ \frac{T}{M} \cos(u(t)) \\ x_4(t) \\ \frac{T}{M} \sin(u(t)) \end{bmatrix}$$

2.2 part b

For minimum time:

$$J = t_f - t_0 = \int_{t_0}^{t_f} dt$$

Hamiltonian matrix:

$$\mathcal{H} = g(\vec{x}(t), u(t), t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t)$$

$$\mathcal{H} = 1 + \begin{bmatrix} p_1(t) & p_2(t) & p_3(t) & p_4(t) \end{bmatrix} \begin{bmatrix} x_2(t) \\ \frac{T}{M} \cos(u(t)) \\ x_4(t) \\ \frac{T}{M} \sin(u(t)) \end{bmatrix}$$

$$\mathcal{H} = 1 + p_1(t)x_2(t) + \frac{T}{M}p_2(t)\cos(u(t)) + p_3(t)x_4(t) + \frac{T}{M}p_4(t)\sin(u(t)) \quad (14)$$

Euler–Lagrange equation:

$$\dot{\vec{x}} = \frac{\partial \mathcal{H}}{\partial \vec{p}} = a(\vec{x}(t), u(t), t) \quad (15)$$

$$\dot{\vec{p}} = -\frac{\partial \mathcal{H}}{\partial \vec{x}} \quad (16)$$

$$\vec{0} = \frac{\partial \mathcal{H}}{\partial \vec{u}} \quad (17)$$

Now we use equation 14 to solve Euler-Lagrange equation.

$$\begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \\ \dot{p}_3 \\ \dot{p}_4 \end{bmatrix} = \begin{bmatrix} -\frac{\partial \mathcal{H}}{\partial x_1} \\ -\frac{\partial \mathcal{H}}{\partial x_2} \\ -\frac{\partial \mathcal{H}}{\partial x_3} \\ -\frac{\partial \mathcal{H}}{\partial x_4} \end{bmatrix} = \begin{bmatrix} 0 \\ -p_1 \\ 0 \\ -p_3 \end{bmatrix} \quad (18)$$

Answer of equation 18 is:

$$\begin{bmatrix} p_1(t) \\ p_2(t) \\ p_3(t) \\ p_4(t) \end{bmatrix} = \begin{bmatrix} C_1 \\ -C_1 t + C_2 \\ C_3 \\ -C_3 t + C_4 \end{bmatrix} \quad (19)$$

From Euler-Lagrange equation:

$$\vec{0} = \frac{\partial \mathcal{H}}{\partial \vec{u}} \rightarrow p_4 \cos(u) = p_2 \sin(u) \rightarrow u(t) = \tan^{-1} \left(\frac{p_4(t)}{p_2(t)} \right) \quad (20)$$

Boundary conditions:

$$t_0 = 0, \quad t_f = \text{free}$$

$$\vec{x}(0) = \begin{bmatrix} x_1(0) \\ x_2(0) \\ x_3(0) \\ x_4(0) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \quad \vec{x}(t_f) = \begin{bmatrix} x_1(t_f) \\ x_2(t_f) \\ x_3(t_f) \\ x_4(t_f) \end{bmatrix} = \begin{bmatrix} \text{Free} \\ V \\ D \\ 0 \end{bmatrix} \quad (D, V \text{ Are known constant})$$

Final time is free so:

$$(\mathcal{H} + h_t)|_{*,t_f} = 0 \rightarrow \mathcal{H}|_{*,t_f} = 0 \quad (21)$$

Final x_1 is free so:

$$\left(\frac{\partial h}{\partial x_1} - p_1 \right) \Big|_{*,t_f} = 0 \rightarrow p_1(t_f) = 0 \quad (22)$$

2.3 part c

There is $11(2n+3)$ equation and 11 unknowns.

Unknowns:

$$\vec{x}(t)|_{4 \times 1}, \quad \vec{p}(t)|_{4 \times 1}, \quad t_f, \quad x_1(t_f), \quad u(t)$$

Now use previous equation to find unknowns. From equation 22 and 19 we can find out:

$$p_1(t) = C_1 = 0, \quad p_2(t) = 0t + C_2 = C_2 \quad (23)$$

Now we use equation 23, 19, 20 and 14 to have new equation and put parameters in equation 21.

$$\mathcal{H}|_{*,t_f} = 1 + 0 \times x_2(t_f) + \frac{T}{M} C_2 \cos \left(\tan^{-1} \left(\frac{-C_3 t + C_4}{C_2} \right) \right) + p_3(t_f) \times 0 + \frac{T}{M} p_4(t) \sin \left(\tan^{-1} \left(\frac{-C_3 t + C_4}{C_2} \right) \right)$$

$$\mathcal{H}|_{*,t_f} = 1 + \frac{T}{M} C_2 \cos \left(\tan^{-1} \left(\frac{-C_3 t + C_4}{C_2} \right) \right) + \frac{T}{M} p_4(t) \sin \left(\tan^{-1} \left(\frac{-C_3 t + C_4}{C_2} \right) \right) = 0 \quad (24)$$

This far i could go to solve problem analytically. :)

2.4 part d

For maximize horizontal range we must change cost function.

$$J = -x_1(t_f)$$

Hamiltonian matrix:

$$\begin{aligned} \mathcal{H} &= g(\vec{x}(t), u(t), t) + \vec{p}(t)^T a(\vec{x}(t), u(t), t) \\ \mathcal{H} &= \begin{bmatrix} p_1(t) & p_2(t) & p_3(t) & p_4(t) \end{bmatrix} \begin{bmatrix} x_2(t) \\ \frac{T}{M} \cos(u(t)) \\ x_4(t) \\ \frac{T}{M} \sin(u(t)) \end{bmatrix} \\ \mathcal{H} &= p_1(t)x_2(t) + \frac{T}{M}p_2(t) \cos(u(t)) + p_3(t)x_4(t) + \frac{T}{M}p_4(t) \sin(u(t)) \end{aligned} \quad (25)$$

Euler–Lagrange equation:

$$\dot{\vec{x}} = \frac{\partial \mathcal{H}}{\partial \vec{p}} = a(\vec{x}(t), u(t), t) \quad (26)$$

$$\dot{\vec{p}} = -\frac{\partial \mathcal{H}}{\partial \vec{x}} \quad (27)$$

$$\vec{0} = \frac{\partial \mathcal{H}}{\partial \vec{u}} \quad (28)$$

In this problem like previous we must satisfy Euler–Equation equation. Now we use equation 25 to solve Euler–Lagrange equation.

$$\begin{bmatrix} \dot{p}_1 \\ \dot{p}_2 \\ \dot{p}_3 \\ \dot{p}_4 \end{bmatrix} = \begin{bmatrix} -\frac{\partial \mathcal{H}}{\partial x_1} \\ -\frac{\partial \mathcal{H}}{\partial x_2} \\ -\frac{\partial \mathcal{H}}{\partial x_3} \\ -\frac{\partial \mathcal{H}}{\partial x_4} \end{bmatrix} = \begin{bmatrix} 0 \\ -p_1 \\ 0 \\ -p_3 \end{bmatrix} \quad (29)$$

Answer of equation 18 is:

$$\begin{bmatrix} p_1(t) \\ p_2(t) \\ p_3(t) \\ p_4(t) \end{bmatrix} = \begin{bmatrix} C_1 \\ -C_1 t + C_2 \\ C_3 \\ -C_3 t + C_4 \end{bmatrix} \quad (30)$$

Boundary conditions:

$$\begin{aligned} t_0 &= 0, \quad t_f = t_1 \\ \vec{x}(0) &= \begin{bmatrix} x_1(0) \\ x_2(0) \\ x_3(0) \\ x_4(0) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \quad \vec{x}(t_f) = \begin{bmatrix} x_1(t_f) \\ x_2(t_f) \\ x_3(t_f) \\ x_4(t_f) \end{bmatrix} = \begin{bmatrix} \text{Free} \\ \text{Free} \\ D \\ \text{Free} \end{bmatrix} \quad (D \text{ is known constant}) \end{aligned}$$

Final x_1 , x_2 and x_4 are free so:

$$\left(\frac{\partial h}{\partial \vec{x}} - \vec{p} \right) \Big|_{*, t_f} = \vec{0} \rightarrow \left[\begin{array}{c} \frac{\partial h}{\partial \vec{x}_1} \\ \frac{\partial h}{\partial \vec{x}_2} \\ \frac{\partial h}{\partial \vec{x}_4} \end{array} \right] \Big|_{*, t_f} = \begin{bmatrix} -1 \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} p_1(t_f) \\ p_2(t_f) \\ p_4(t_f) \end{bmatrix} \quad (31)$$

Now we use equation 31 data to get 30 constants.

$$p_1(t_f) = C_1 = -1, \quad p_2(t_f) = -t_f + C_2 \Rightarrow C_2 = t_f, \quad p_4(t_f) = -C_3 t_f + {}^\circ C_4 = 0$$

Now we use other equation that described previous part to solve problem. This far i could go to solve problem analytically. :)

3 Question 3

$$\ddot{x}(t) = -x(t) - 0.1\dot{x}(t) + u(t), \quad x(0) = \dot{x}(0) = 1$$

Assume:

$$x_1(t) = x(t), \quad x_2(t) = \dot{x}(t) \rightarrow a(\vec{x}, u, t) = \begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \end{bmatrix} = \begin{bmatrix} x_2(t) \\ -x_1(t) - 0.1x_2(t) + u(t) \end{bmatrix}$$

$$\dot{\vec{x}} = A(t)\vec{x}(t) + B(t)\vec{u}(t) \quad (32)$$

$$\dot{\vec{x}} = \begin{bmatrix} 0 & 1 \\ -1 & -0.1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u \quad (33)$$

$$J = \frac{1}{2}x^T(t_f)Hx(t_f) + \frac{1}{2} \int_0^{t_f} (\alpha(x^2 + \dot{x}^2) + \beta u^2) dt$$

It's LQR problem.

$$J = \frac{1}{2}x^T(t_f)Hx(t_f) + \frac{1}{2} \int_0^{t_f} \left(\dot{\vec{x}}^T(t)Q(t)\dot{\vec{x}}(t) + \dot{\vec{u}}^T(t)R(t)\dot{\vec{u}}(t) \right) dt \quad (34)$$

$$Q(t) = \begin{bmatrix} \alpha & 0 \\ 0 & \alpha \end{bmatrix}, \quad R(t) = \beta$$

3.1 part a

$\alpha = \beta = 1$, $t_f \rightarrow \infty$ and $H = 0$

Riccati equation:

$$\dot{K} + KA + A^TK - KBR^{-1}B^TK + Q = 0 \quad (35)$$

$$u(t) = -R^{-1}B^TK(t)x(t); \quad (36)$$

$$\dot{x}(t) = Ax(t) + Bu(t) \quad (37)$$

Because of $t \rightarrow \infty$, $\dot{K} = 0$ so Differential riccati equation change to Algebraic riccati equation.

$$KA + A^TK - KBR^{-1}B^TK + Q = 0 \quad (38)$$

$$\begin{aligned}
& \begin{bmatrix} K_{11} & K_{12} \\ K_{21} & K_{22} \end{bmatrix} \begin{bmatrix} 0 & 1 \\ -1 & -0.1 \end{bmatrix} + \begin{bmatrix} 0 & -1 \\ 1 & -0.1 \end{bmatrix} \begin{bmatrix} K_{11} & K_{12} \\ K_{21} & K_{22} \end{bmatrix} + \\
& \begin{bmatrix} K_{11} & K_{12} \\ K_{21} & K_{22} \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} \begin{bmatrix} 1 \end{bmatrix} \begin{bmatrix} 0 & 1 \end{bmatrix} \begin{bmatrix} K_{11} & K_{12} \\ K_{21} & K_{22} \end{bmatrix} + \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix} \\
& \begin{bmatrix} 1 - K_{21} - K_{12}K_{21} - K_{12} & K_{11} - K_{12}/10 - K_{22} - K_{12}K_{22} \\ K_{11} - K_{21}/10 - K_{22} - K_{21}K_{22} & K_{22}^2 - K_{22}/5 + K_{12} + K_{21} + 1 \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix}
\end{aligned}$$

We know that $K_{12} = K_{21}$ Equation 3.1 solved in MATLAB(Q3_a.m). There is two answer in real numbers.

$$K_1 = \begin{bmatrix} -2.0175 & 0.4142 \\ 0.4142 & -1.4556 \end{bmatrix}, \quad K_2 = \begin{bmatrix} 1.8175 & 0.4142 \\ 0.4142 & 1.2558 \end{bmatrix}$$

Now we use equation 36 and 37 in MATLAB ode45(Q3_aODE.m) to simulate system and find out which K is appropriate for system.

Figure 1: System simulation with K_1 matrix

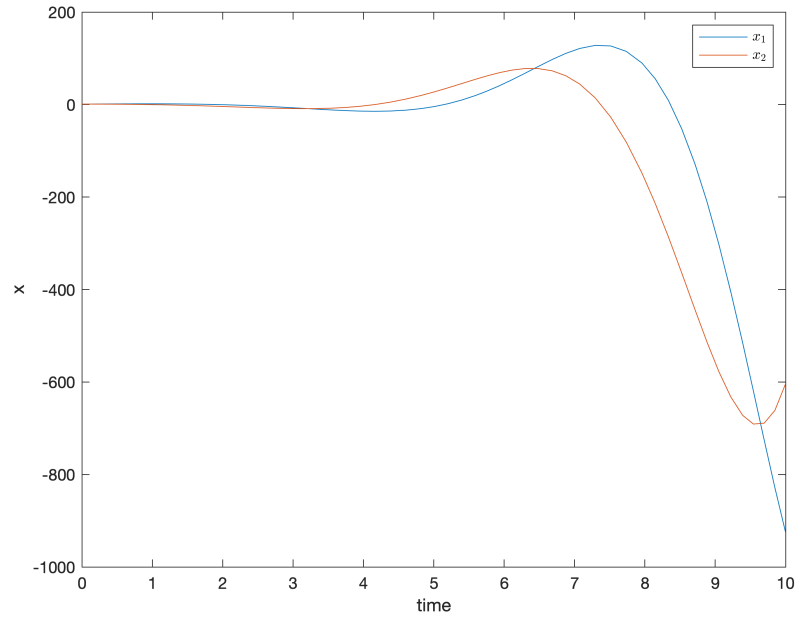
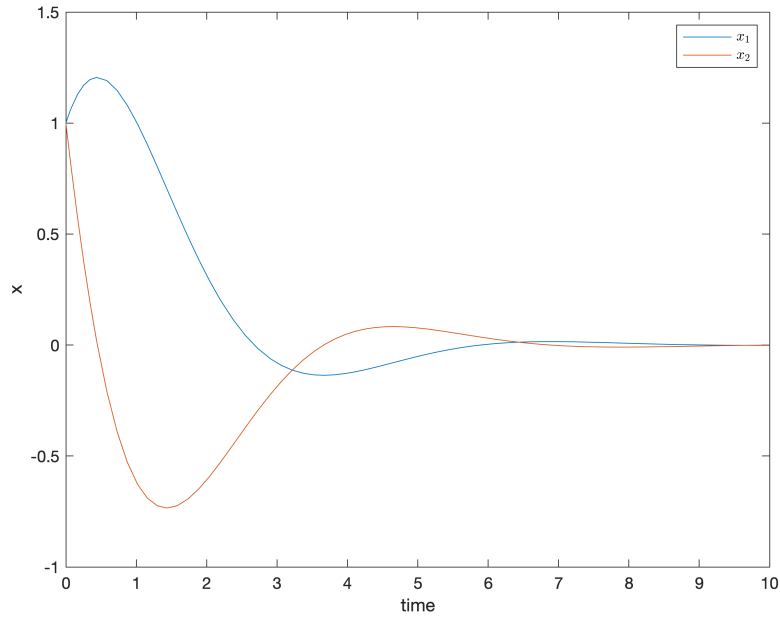
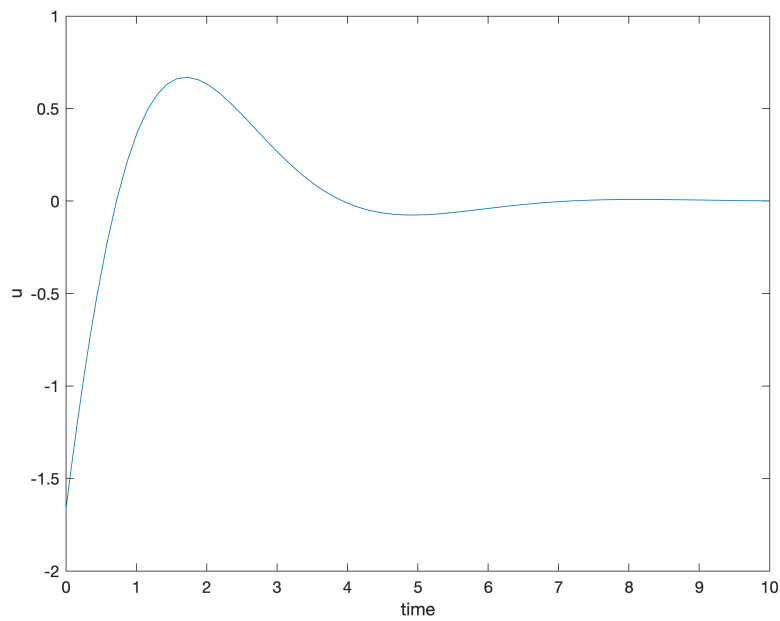


Figure 2: System simulation with K_2 matrix


From ode simulation we can find out that K_2 is appropriate for system. Figure of system state had plot in figure 2.

Figure 3: System effort $u(t)$ 

3.2 part b

Simulation and Code has attached to Homework(Q3_b.m). For this β we can find out that for 100 second all J costs are zero and very near to zero so we neglect time after that.


Figure 4: System simulation for $\beta = 1000$

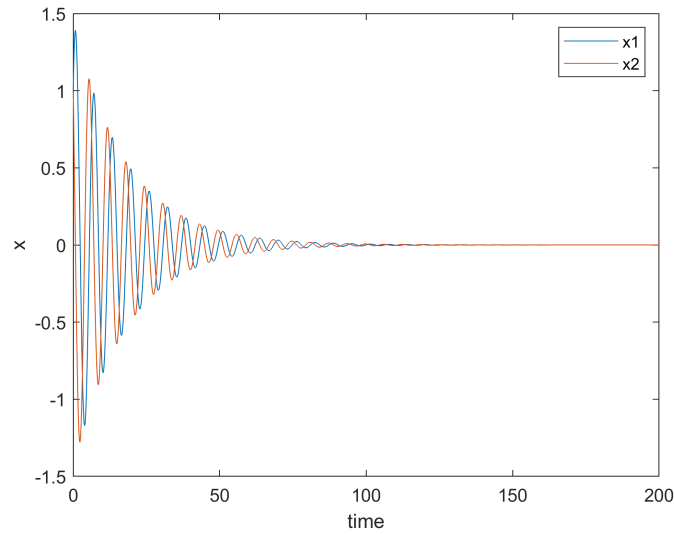


3.2.1 I

$u(t)$ Cost:

$$J_u = \int_0^{\infty} u(t)^2 dt$$

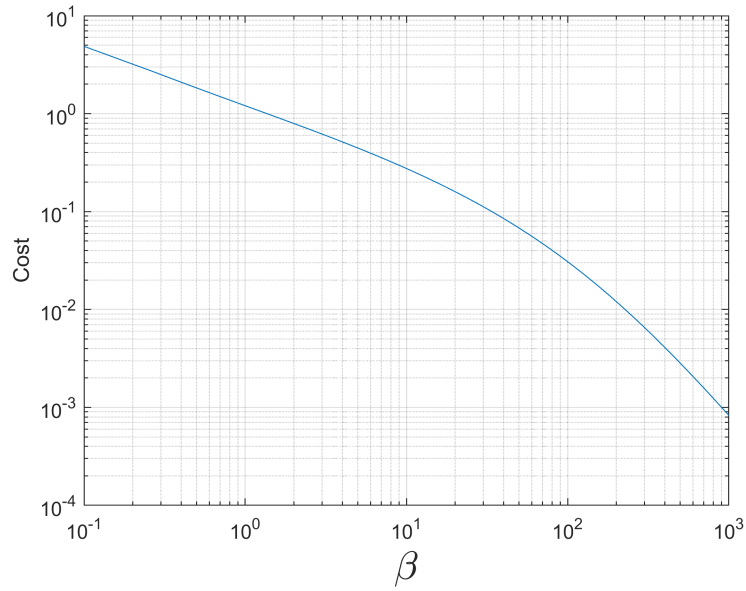Figure 5: $u(t)$ cost in different β **3.2.2 II** $x_1^2 + x_2^2$ Cost:

$$J_u = \int_0^\infty (x^2 + \dot{x}^2) d(t)$$

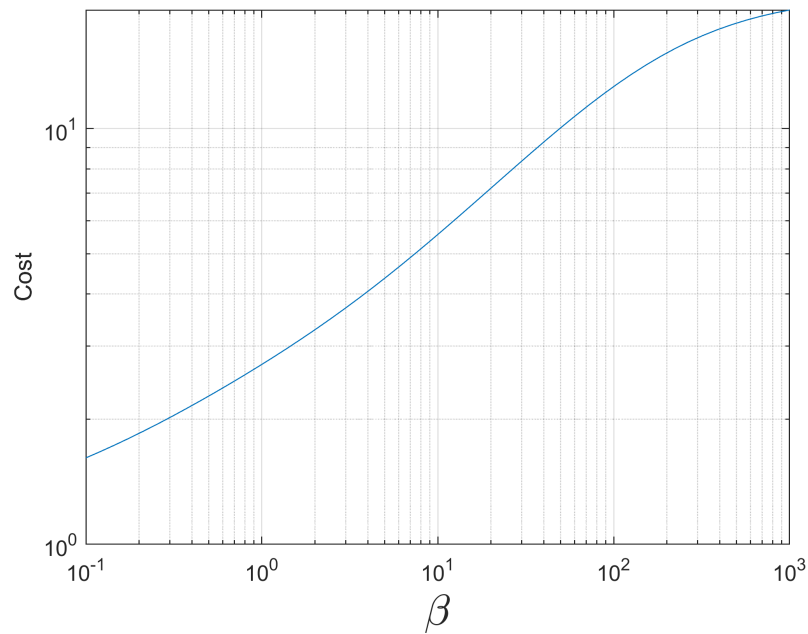Figure 6: $x^2 + \dot{x}^2$ cost in different β 

3.3 part d

$\beta = 1$, $H = 1$ and $t_f = 10$ sec. Now we simulate our system for $\alpha = 1, 5, 10$ and plot $K(t)$ matrix, $u(t)$ and states of system.

- $\alpha = 1$

Figure 7: $K(t)$ in $\alpha = 1$

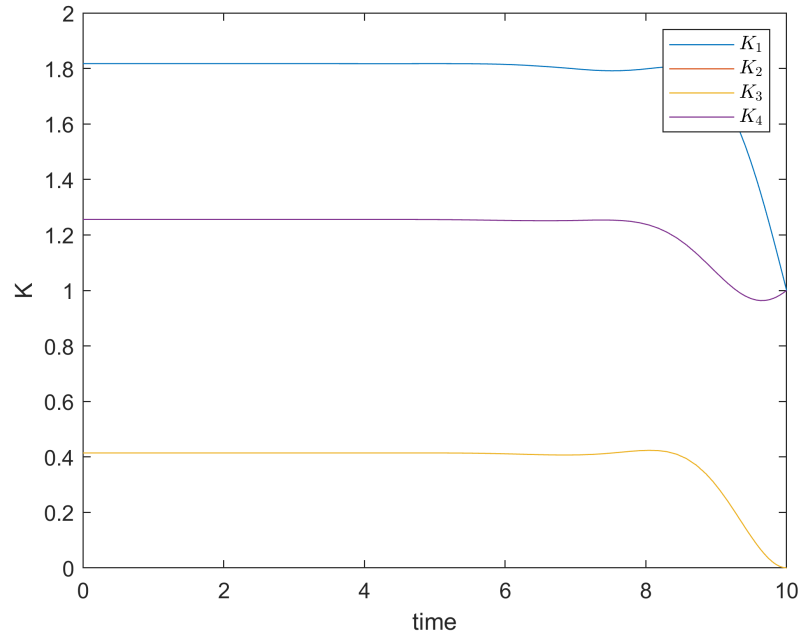
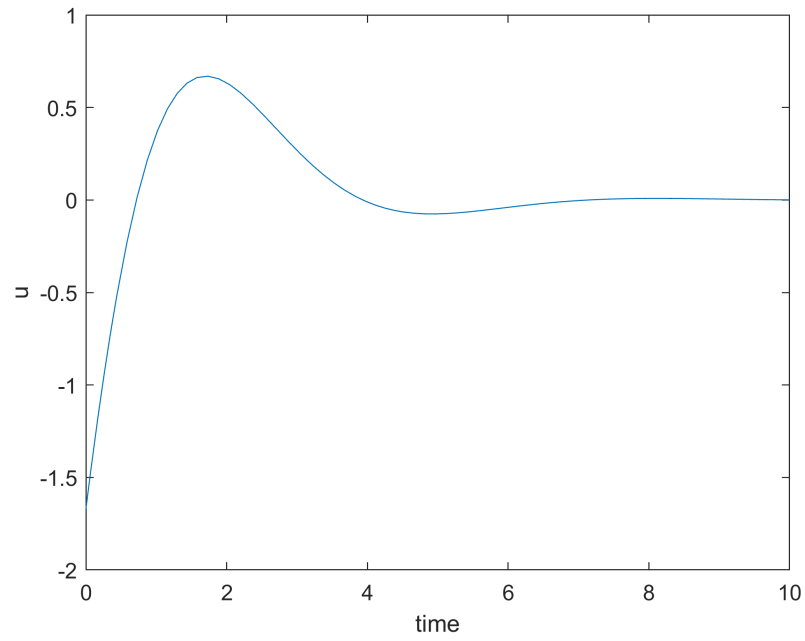
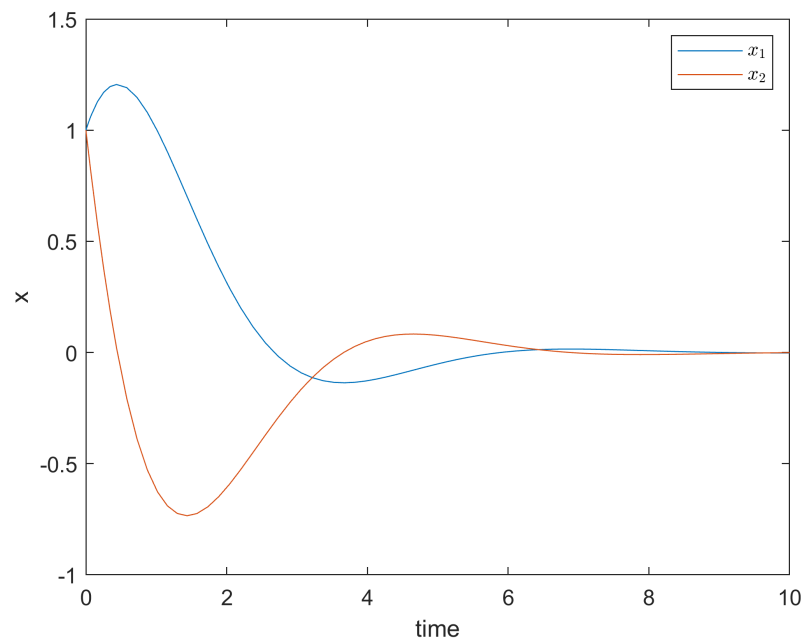


Figure 8: $u(t)$ in $\alpha = 1$ Figure 9: System States $\vec{x}(t)$ in $\alpha = 1$ 

- $\alpha = 5$

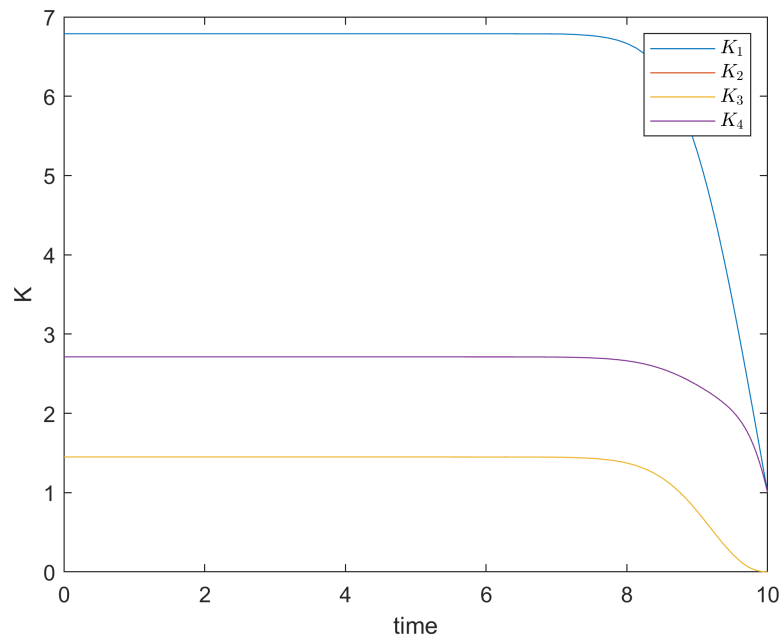
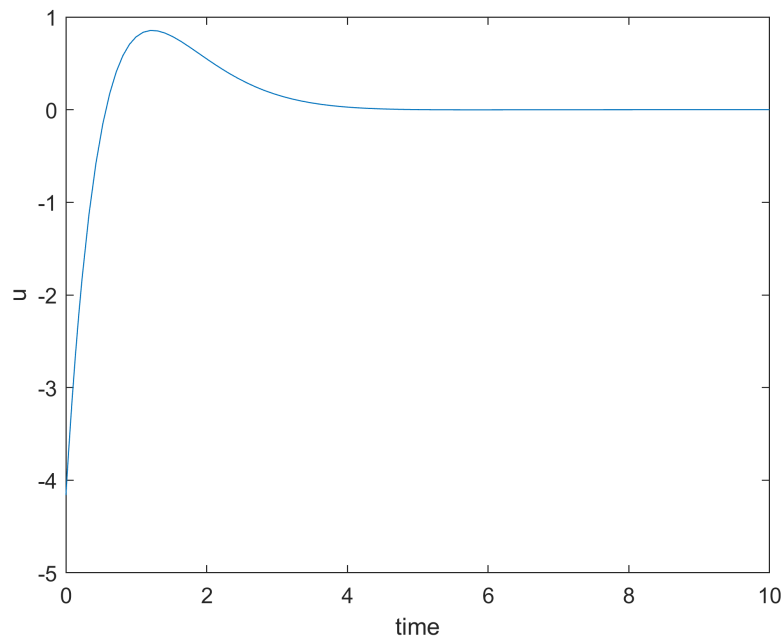
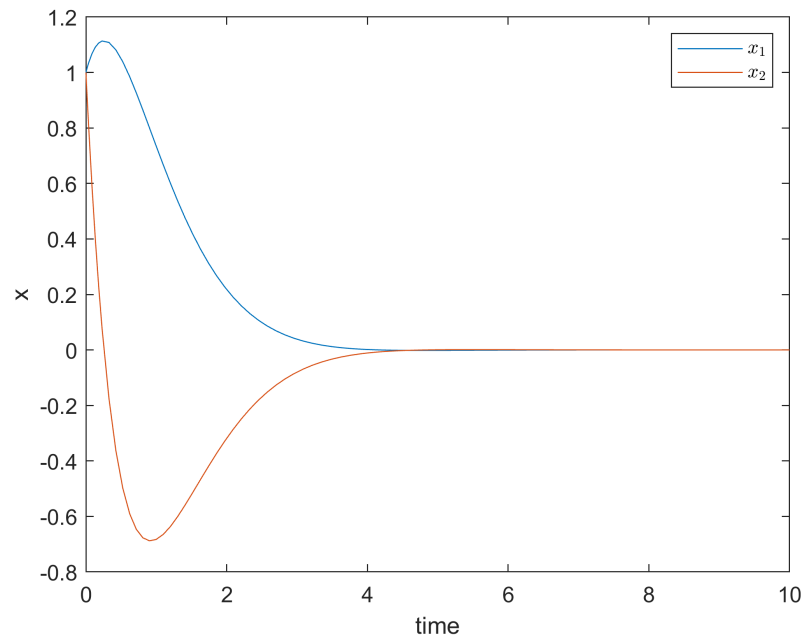
Figure 10: $K(t)$ in $\alpha = 5$ Figure 11: $u(t)$ in $\alpha = 5$ 

Figure 12: System States $\vec{x}(t)$ in $\alpha = 5$ 

- $\alpha = 10$

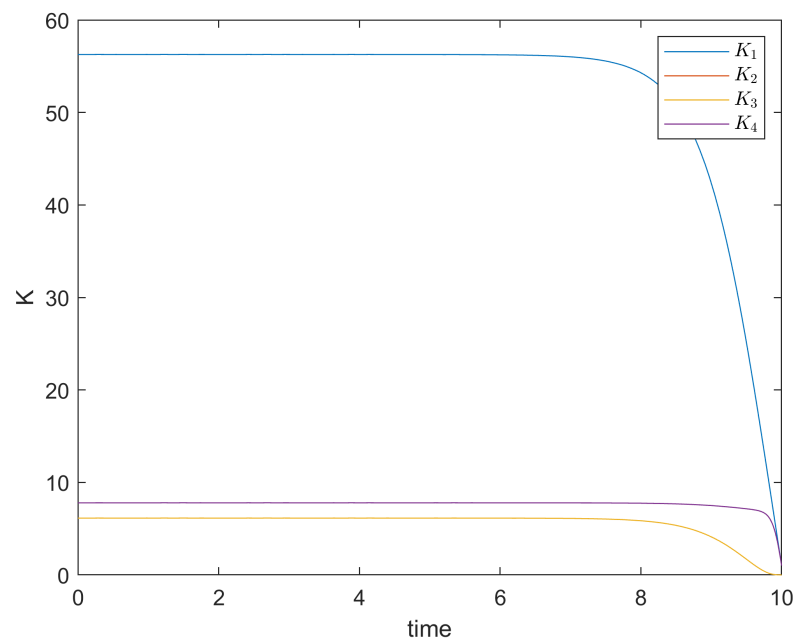
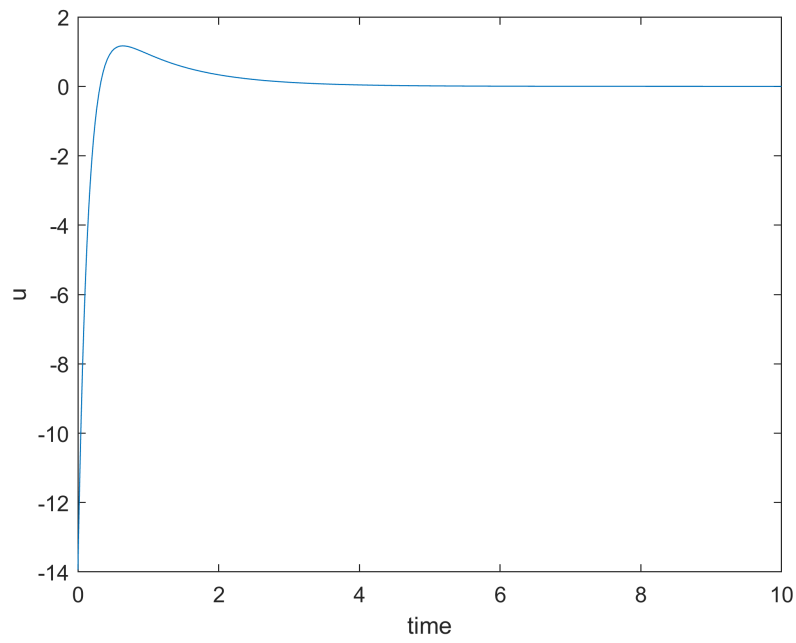
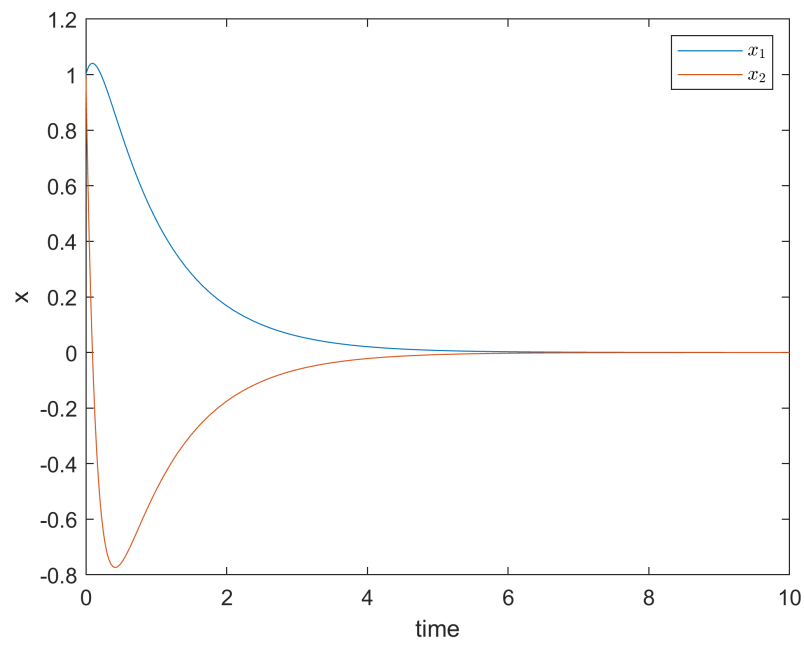
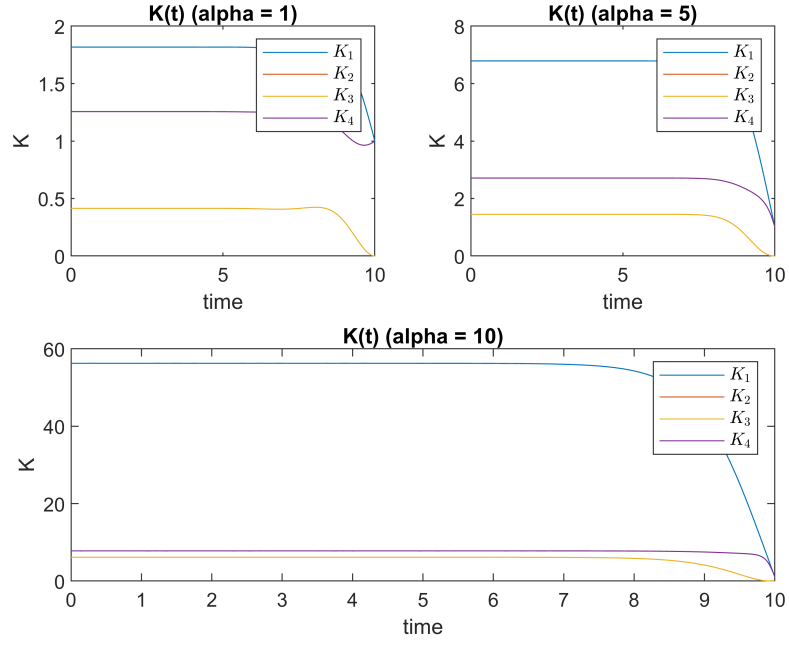
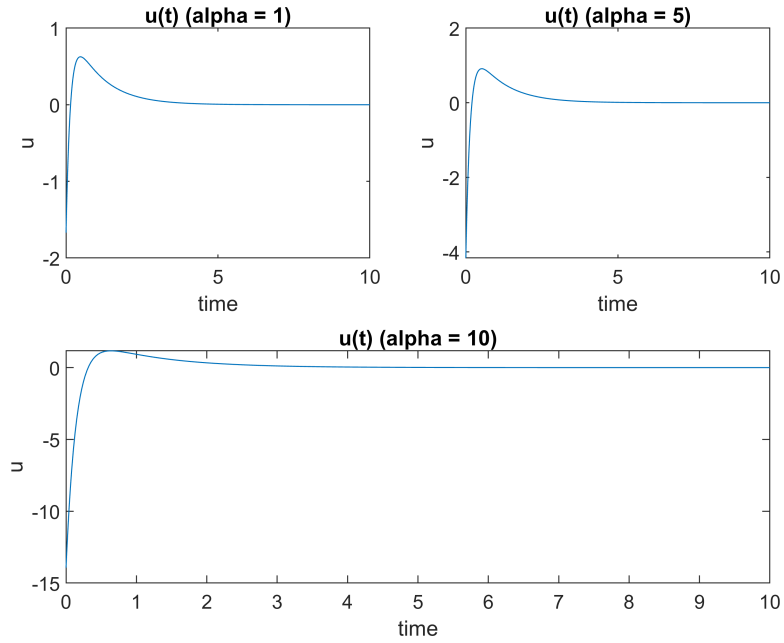
Figure 13: $K(t)$ in $\alpha = 10$ 

Figure 14: $u(t)$ in $\alpha = 10$ Figure 15: System States $\vec{x}(t)$ in $\alpha = 10$ 

- $K(t)$ for all simulated α


Figure 16: $K(t)$ for all simulated α 

- $u(t)$ for all simulated α

Figure 17: $u(t)$ for all simulated α 

- System States $\vec{x}(t)$ for all simulated α

Figure 18: System States $\vec{x}(t)$ for all simulated α

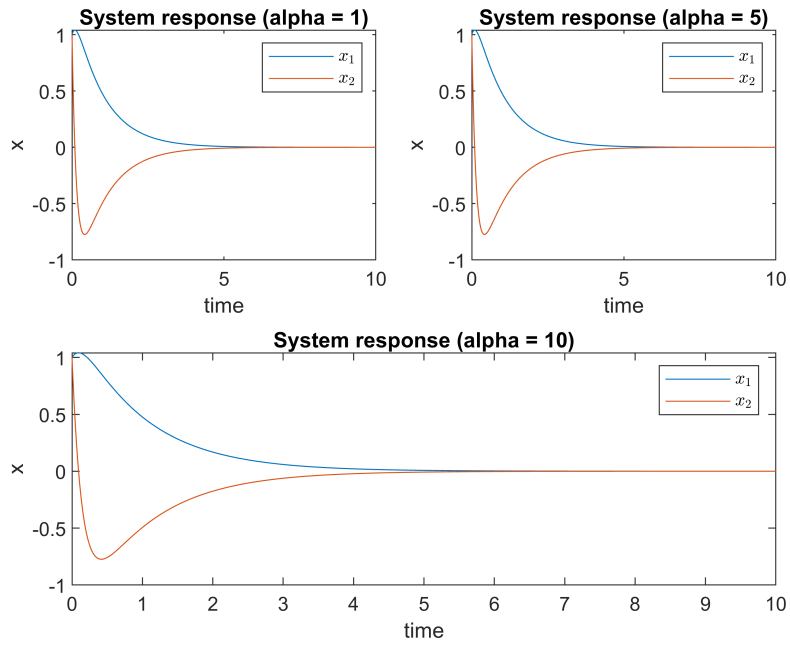

4 Question 4

new file

Contents

| | | |
|----------|--------------------|----------|
| 1 | Question 1 | 1 |
| 1.1 | part a | 1 |
| 1.2 | part b | 2 |
| 1.3 | part c | 3 |
| 2 | Question 2 | 4 |
| 2.1 | part a | 4 |
| 2.2 | part b | 4 |
| 2.3 | part c | 5 |
| 2.4 | part d | 6 |
| 3 | Question 3 | 7 |
| 3.1 | part a | 7 |
| 3.2 | part b | 10 |
| | 3.2.1 I | 10 |
| | 3.2.2 II | 11 |
| 3.3 | part d | 12 |

List of Figures

| | | |
|----|---|----|
| 1 | System simulation with K_1 matrix | 8 |
| 2 | System simulation with K_2 matrix | 9 |
| 3 | System effort $u(t)$ | 9 |
| 4 | System simulation for $\beta = 1000$ | 10 |
| 5 | $u(t)$ cost in different β | 11 |
| 6 | $x^2 + \dot{x}^2$ cost in different β | 11 |
| 7 | $K(t)$ in $\alpha = 1$ | 12 |
| 8 | $u(t)$ in $\alpha = 1$ | 13 |
| 9 | System States $\vec{x}(t)$ in $\alpha = 1$ | 13 |
| 10 | $K(t)$ in $\alpha = 5$ | 14 |
| 11 | $u(t)$ in $\alpha = 5$ | 14 |
| 12 | System States $\vec{x}(t)$ in $\alpha = 5$ | 15 |
| 13 | $K(t)$ in $\alpha = 10$ | 15 |
| 14 | $u(t)$ in $\alpha = 10$ | 16 |
| 15 | System States $\vec{x}(t)$ in $\alpha = 10$ | 16 |
| 16 | $K(t)$ for all simulated α | 17 |
| 17 | $u(t)$ for all simulated α | 17 |
| 18 | System States $\vec{x}(t)$ for all simulated α | 18 |