

Sublime Text 3 安裝流程

2016.02.18

Sublime Text 文字編輯器

- 下載Sublime Text 3 (Windows版本)





<https://www.sublimetext.com/3>




Download

Sublime Text 3 is currently in beta. The latest build is 3126.


- [OS X](#) (10.7 or later is required)
- [Windows](#) - also available as a [portable version](#)
- [Windows 64 bit](#) - also available as a [portable version](#)
- [Ubuntu 64 bit](#) - also available as a [tarball](#) for other Linux distributions
- [Ubuntu 32 bit](#) - also available as a [tarball](#) for other Linux distributions

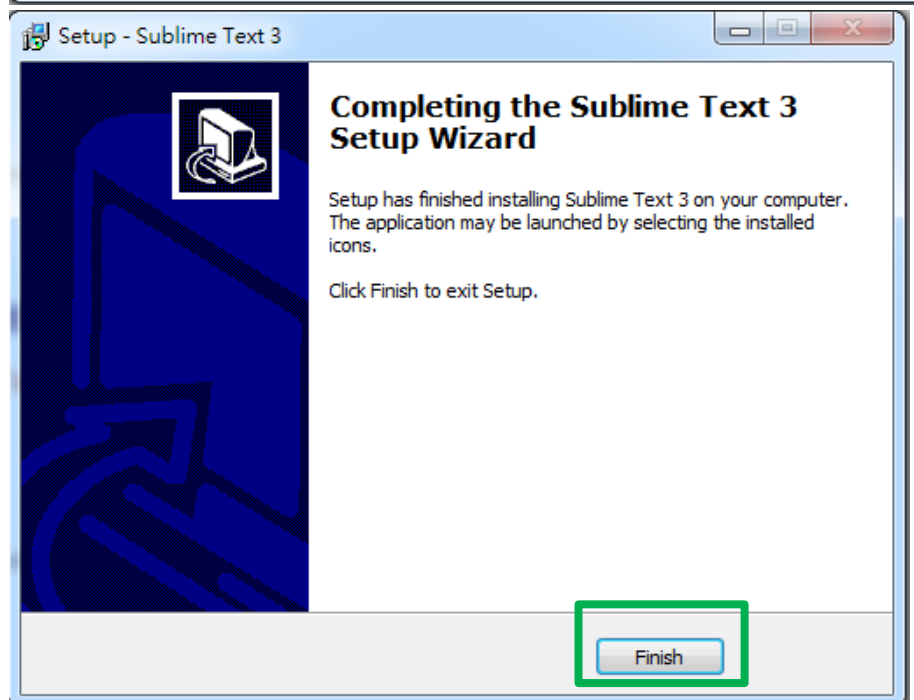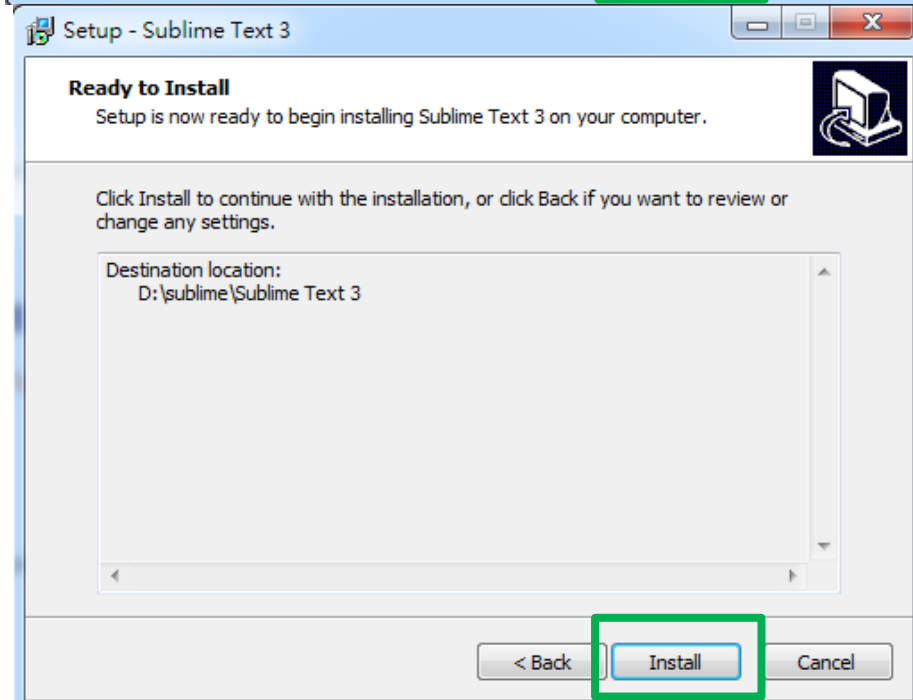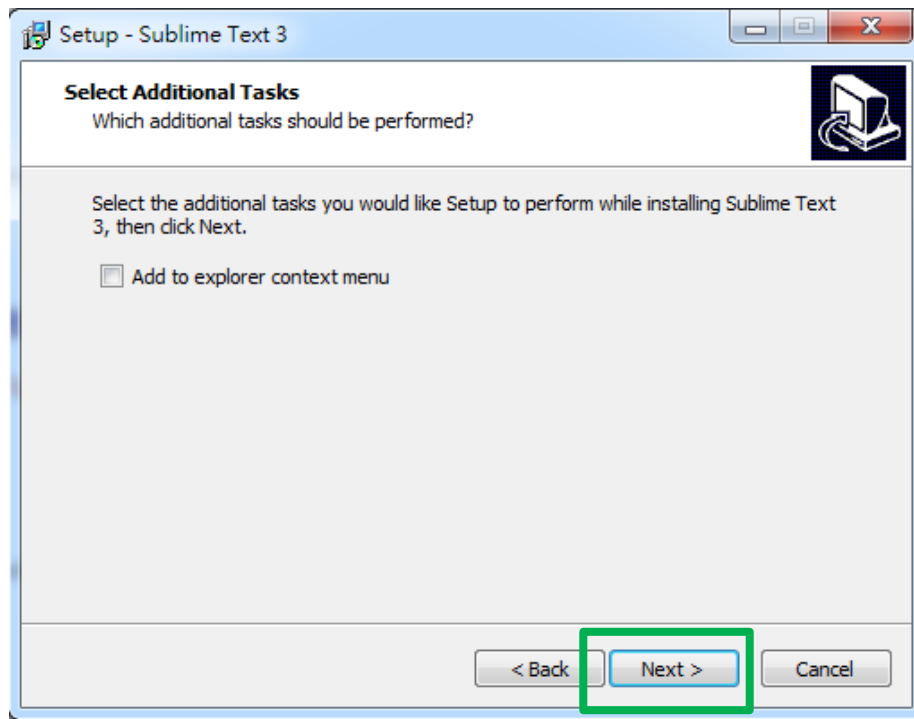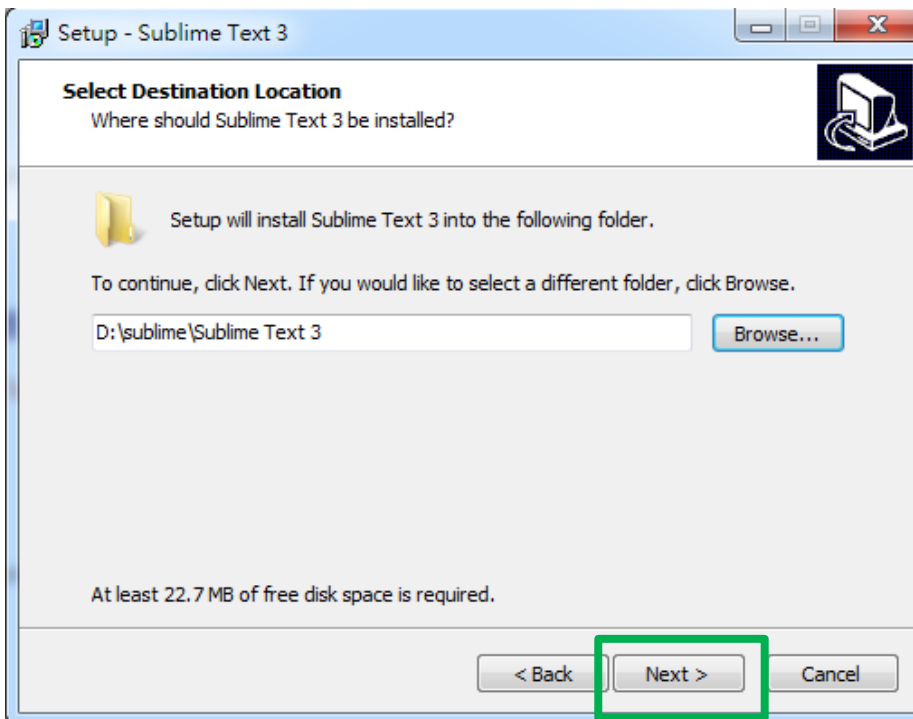

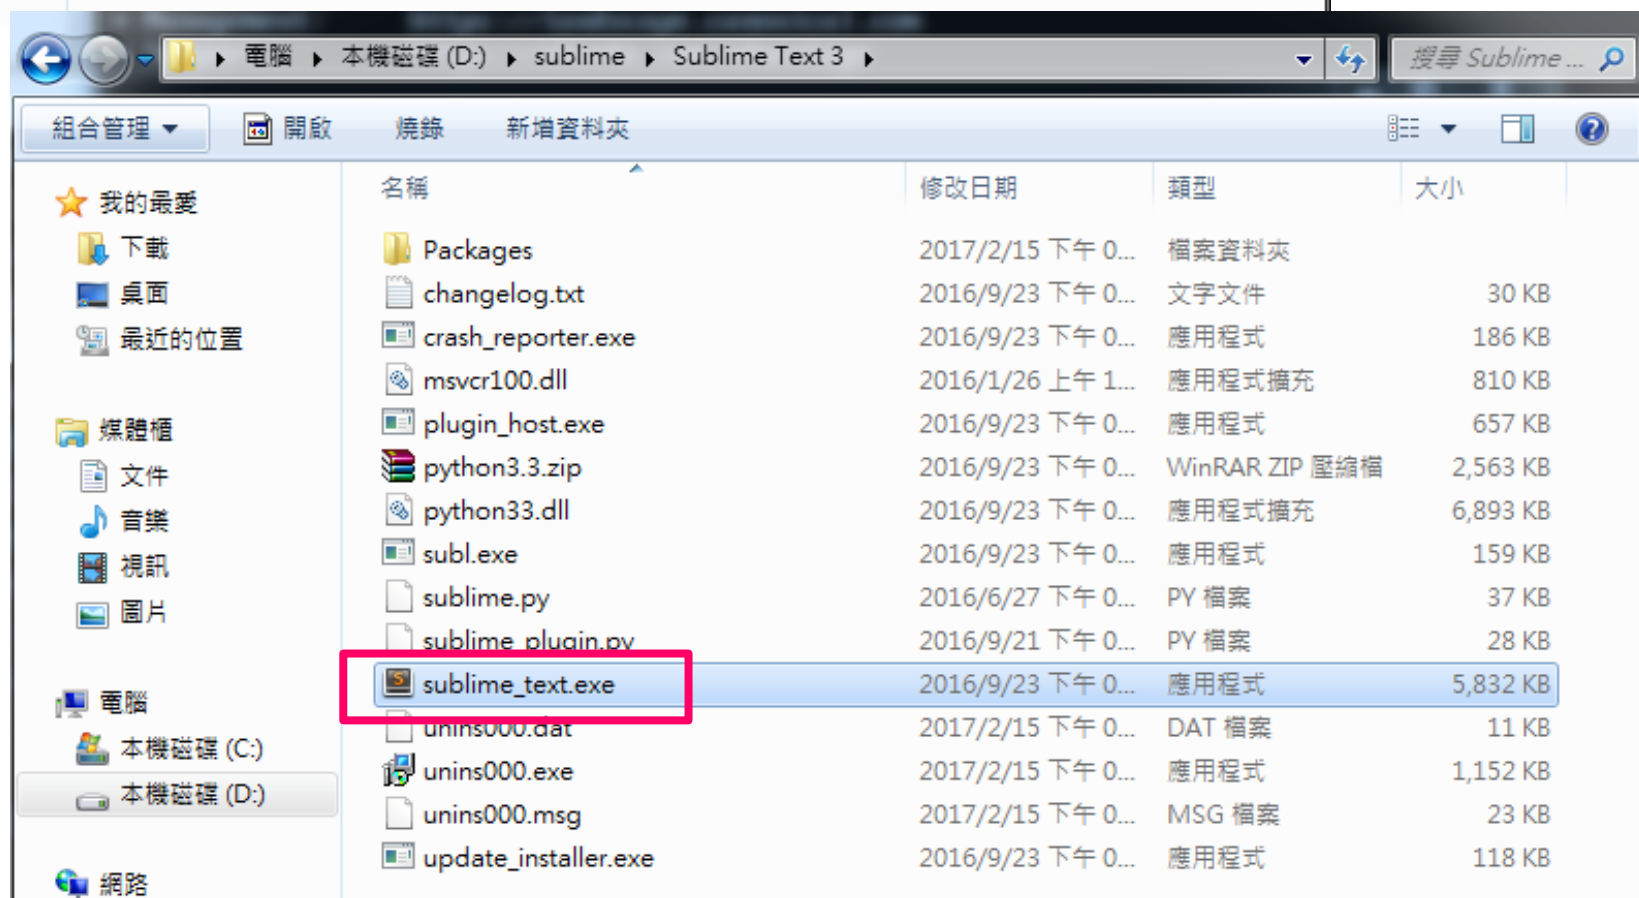

安裝Package Control套件

- 按下 **Ctrl** + ` 進入Console

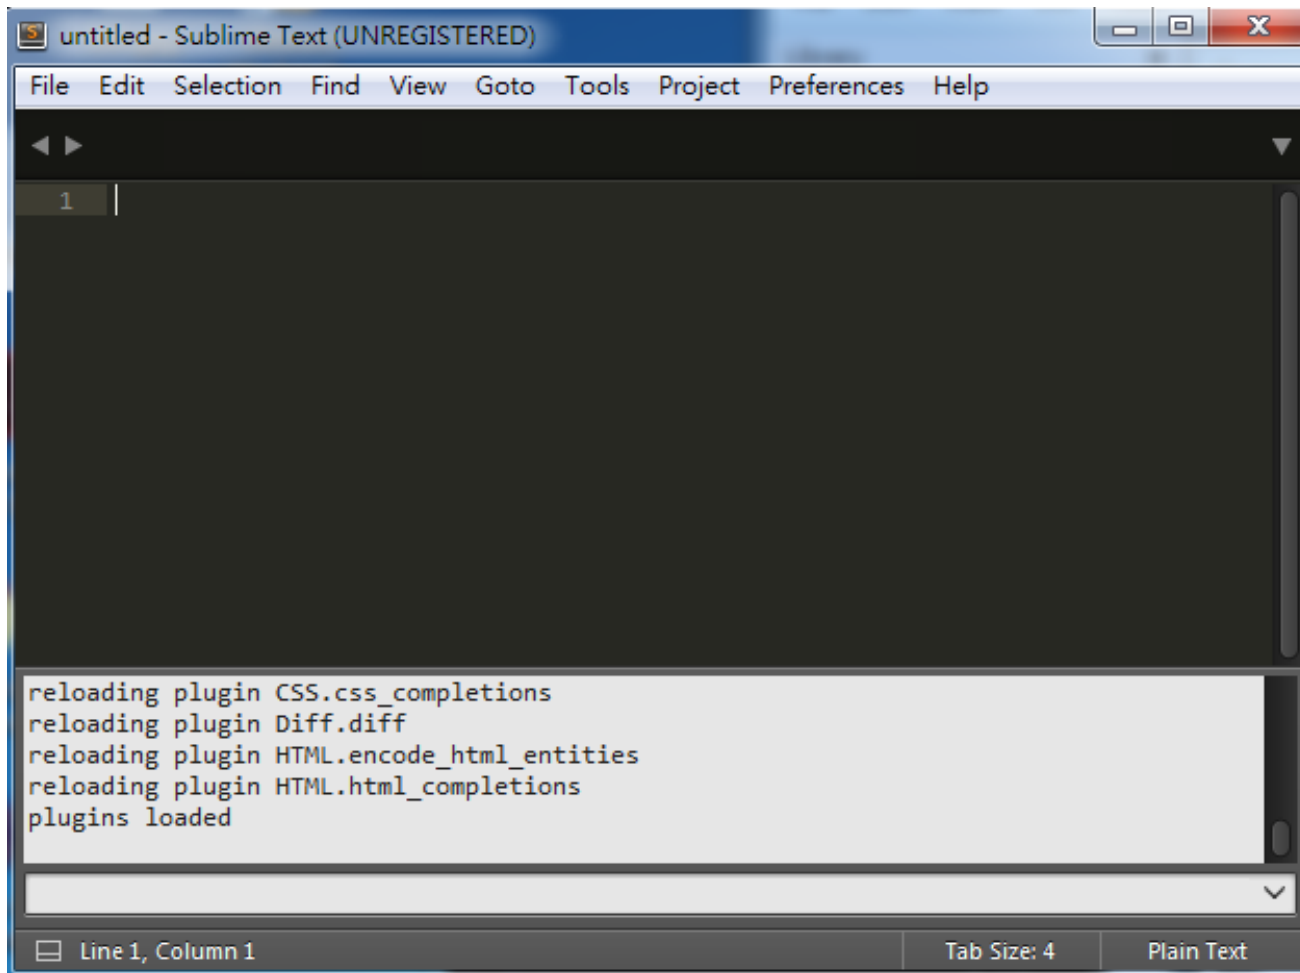

The screenshot shows the Sublime Text editor window titled "untitled - Sublime Text (UNREGISTERED)". The menu bar includes File, Edit, Selection, Find, View, Goto, Tools, Project, Preferences, and Help. The main text area is empty, with a cursor at line 1, column 1. The console at the bottom displays the following output:

```
reloading plugin CSS.css_completions
reloading plugin Diff.diff
reloading plugin HTML.encode_html_entities
reloading plugin HTML.html_completions
plugins loaded
```

The status bar at the bottom indicates "Line 1, Column 1", "Tab Size: 4", and "Plain Text".

安裝Package Control套件

- 貼上指令 <https://packagecontrol.io/installation#st3>

SUBLIME TEXT 3

SUBLIME TEXT 2

```
import urllib.request,os,hashlib; h =
'df21e130d211cfc94d9b0905775a7c0f' +
'1e3d39e33b79698005270310898eea76'; pf = 'Package Control.sublime-
package'; ipp = sublime.installed_packages_path();
urllib.request.install_opener( urllib.request.build_opener(
urllib.request.ProxyHandler()) ); by = urllib.request.urlopen(
'http://packagecontrol.io/' + pf.replace(' ', '%20')).read(); dh =
hashlib.sha256(by).hexdigest(); print('Error validating download
(got %s instead of %s), please try manual install' % (dh, h)) if
dh != h else open(os.path.join( ipp, pf), 'wb' ).write(by)
```

```
reloading plugin CSS.css_completions
reloading plugin Diff.diff
reloading plugin HTML.encode_html_entities
reloading plugin HTML.html_completions
plugins loaded
```

```
install' % (dh, h)) if dh != h else open(os.path.join( ipp, pf), 'wb' ).write(by)
```


Line 1, Column 1

Tab Size: 4

Plain Text


安裝Package

- 按下 **Ctrl + Shift + P** 進入Package Control
- 輸入 Install Package 以安裝套件

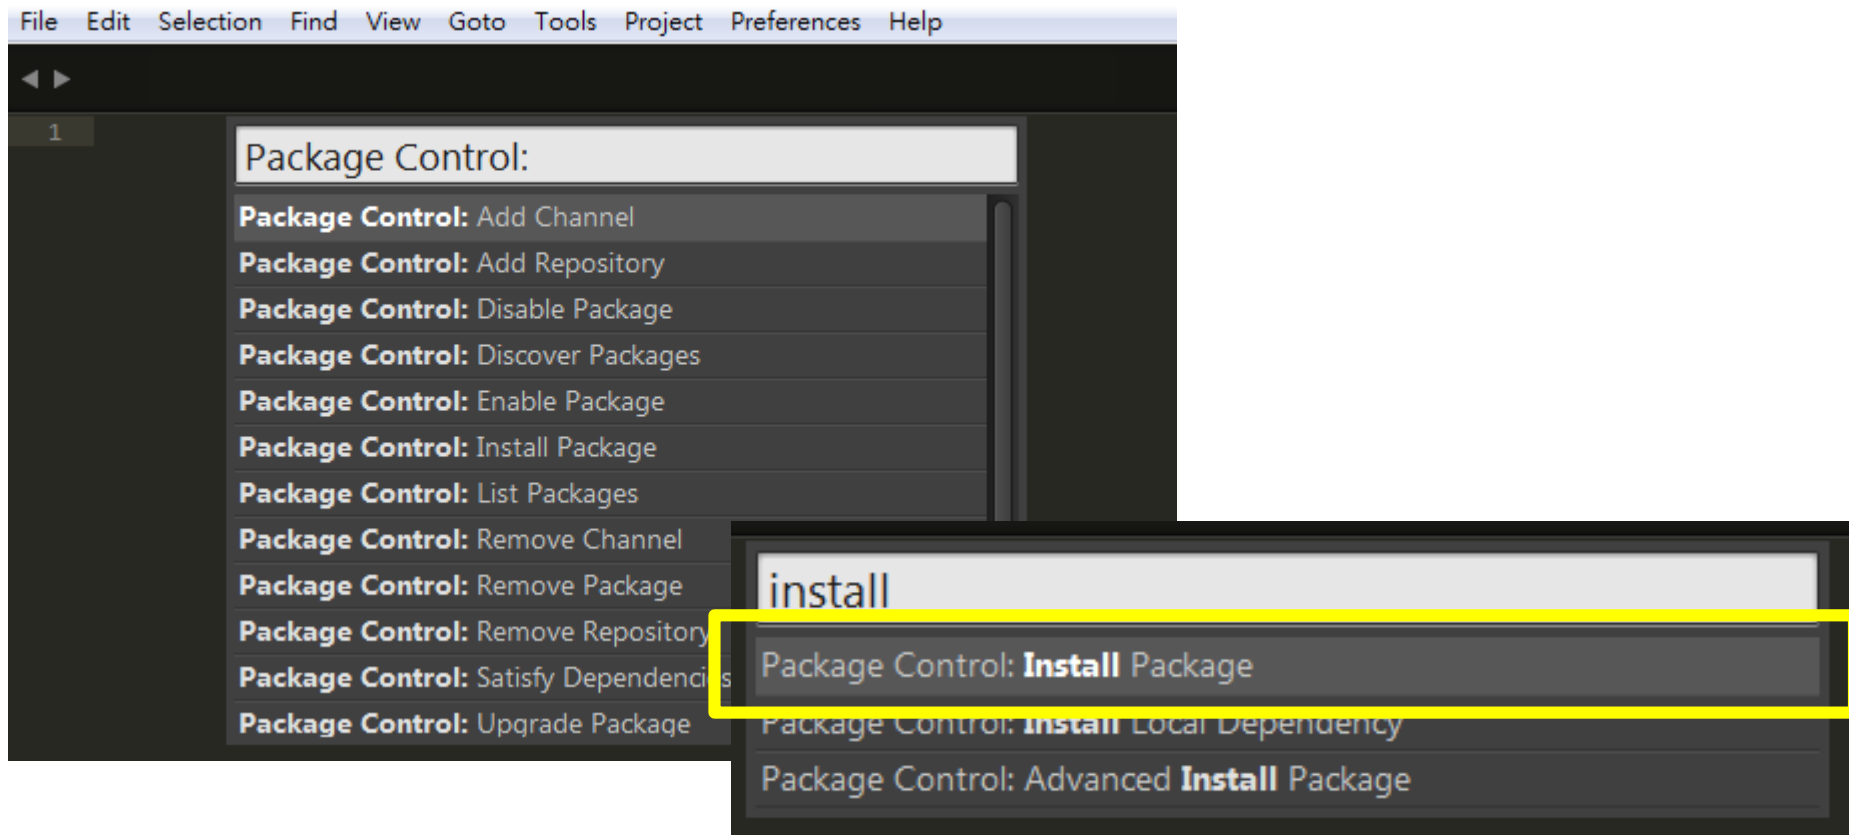


安裝SFTP

- 安裝完會出現套件列表，輸入 SFTP 選擇套件安裝

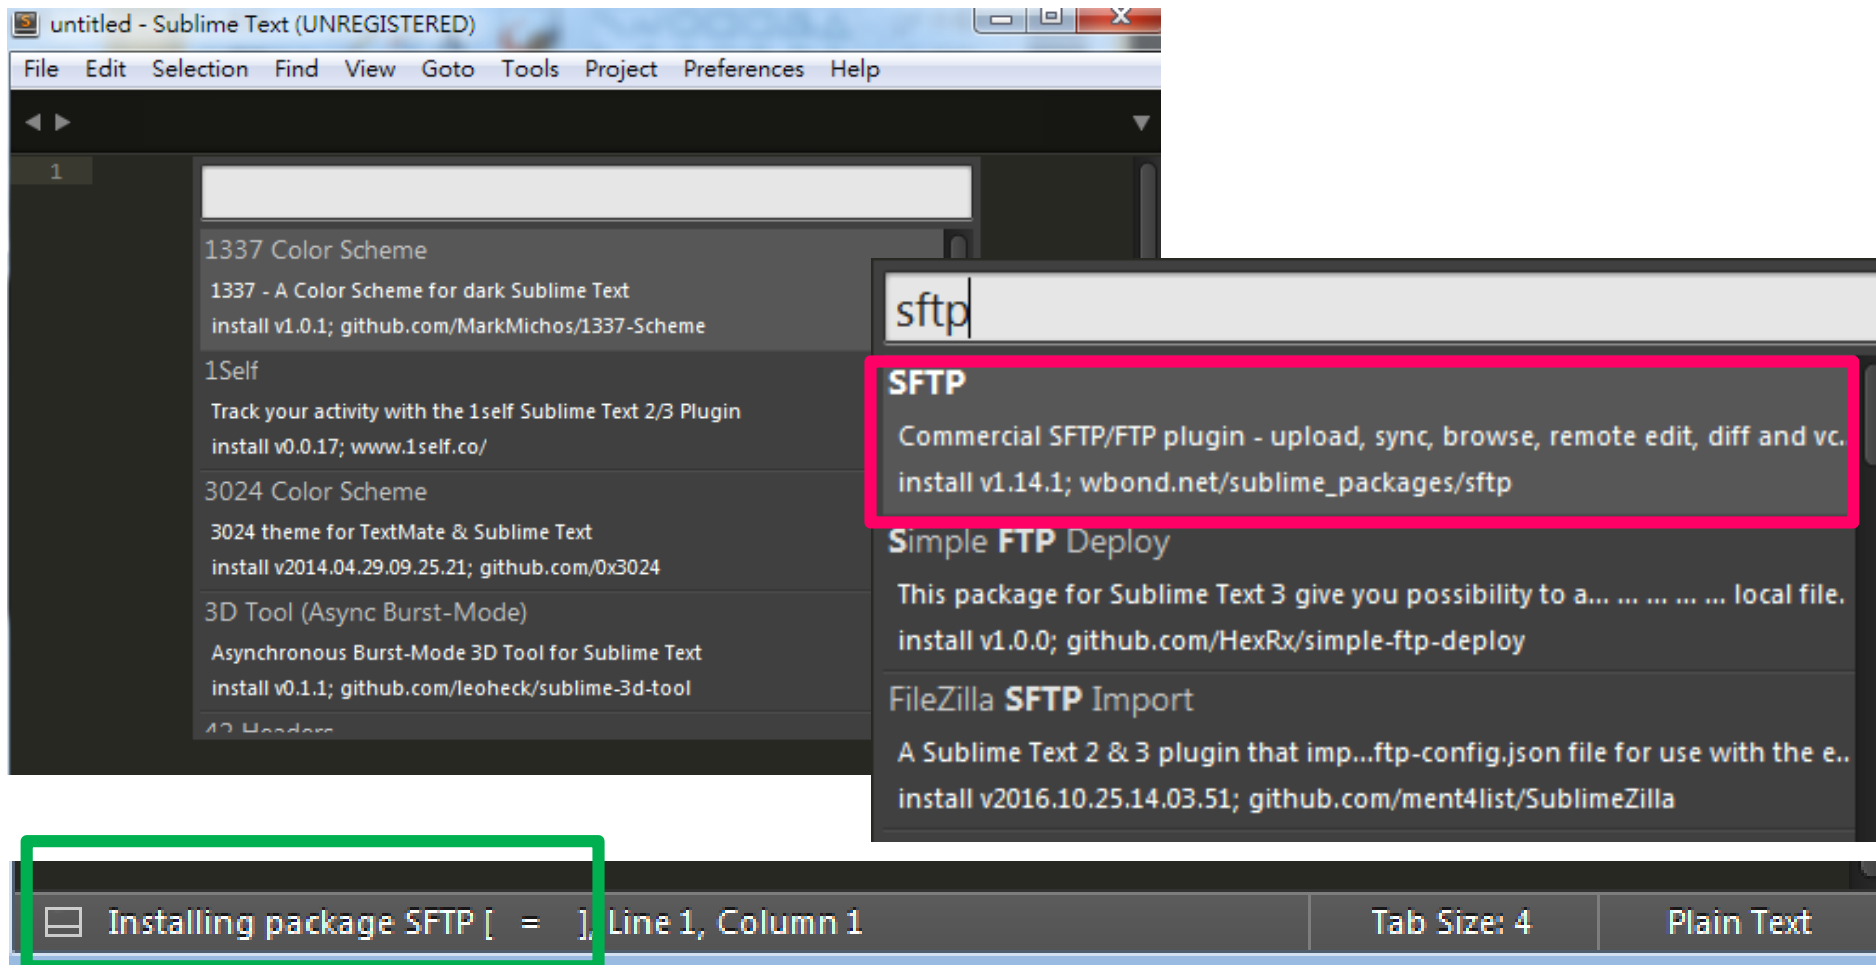

安裝SFTP

- 安裝完成顯示成功訊息

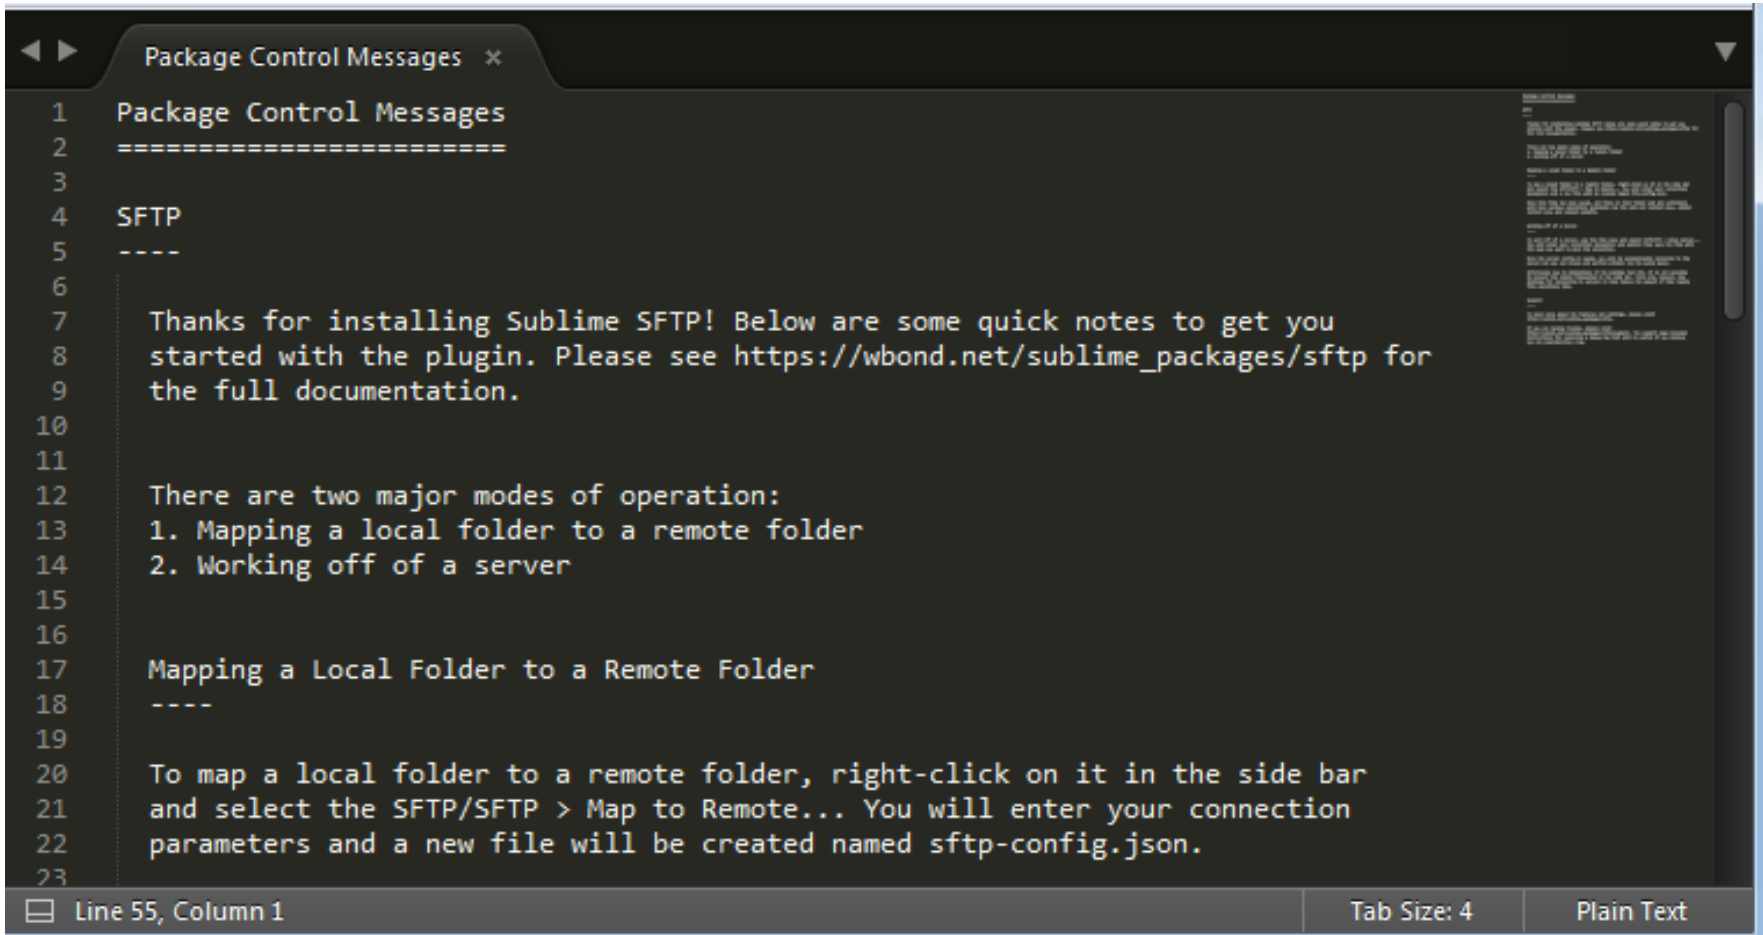

```
Package Control Messages x
1 Package Control Messages
2 =====
3
4 SFTP
5 ----
6
7 Thanks for installing Sublime SFTP! Below are some quick notes to get you
8 started with the plugin. Please see https://wbond.net/sublime\_packages/sftp for
9 the full documentation.
10
11
12 There are two major modes of operation:
13 1. Mapping a local folder to a remote folder
14 2. Working off of a server
15
16
17 Mapping a Local Folder to a Remote Folder
18 ----
19
20 To map a local folder to a remote folder, right-click on it in the side bar
21 and select the SFTP/SFTP > Map to Remote... You will enter your connection
22 parameters and a new file will be created named sftp-config.json.
23
```

Line 55, Column 1 Tab Size: 4 Plain Text