

Artificial Intelligence-Driven Malware Detection via Windows Event Log Engineering in Smart Grid Control Systems

Ali Daghighi Maya Altell Mhd Raja Abou Harb

2026

Department of Computer Engineering, Biruni University, Istanbul, Turkey

Agenda

Motivation

Related Work

Threat Model

Data and Features

Model

Results

Discussion

Motivation

Smart Grid Cyber Threat Landscape

- Smart grids integrate IT and OT —
expanding attack surface

Smart Grid Cyber Threat Landscape


- Smart grids integrate IT and OT — expanding attack surface
- High-profile incidents: Stuxnet [1], Ukrainian grid attacks (2015, 2016), Colonial Pipeline (2021)

Smart Grid Cyber Threat Landscape

- Smart grids integrate IT and OT — expanding attack surface
- High-profile incidents: Stuxnet [1], Ukrainian grid attacks (2015, 2016), Colonial Pipeline (2021)
- Regulatory mandates: NERC CIP-007 requires event logging; IEC 62351 specifies audit trails

Smart Grid Cyber Threat Landscape

- Smart grids integrate IT and OT — expanding attack surface
- High-profile incidents: Stuxnet [1], Ukrainian grid attacks (2015, 2016), Colonial Pipeline (2021)
- Regulatory mandates: NERC CIP-007 requires event logging; IEC 62351 specifies audit trails
- **Gap:** Windows Event Logs at the OT layer are untapped for intrusion detection



Related Work

Related Work: Log Anomaly Detection

- **Drain** [2] — online log parsing with fixed-depth tree
- **DeepLog** [3] — LSTM sequence modelling of log keys
- **LogAnomaly** [4] — semantic vector anomaly detection

Related Work: Log Anomaly Detection

- **Drain** [2] — online log parsing with fixed-depth tree
- **DeepLog** [3] — LSTM sequence modelling of log keys
- **LogAnomaly** [4] — semantic vector anomaly detection
- **Common limitation:** none applied to ICS/SCADA Windows hosts or ICS-specific event semantics

Related Work: ICS Intrusion Detection

- **Carcano et al.** [5] — critical-state analysis for SCADA command sequences
- **Goldenberg & Wool** [6] — Modbus/TCP protocol modelling
- **SWaT dataset** [7] — physical/network measurements, no host audit logs

Related Work: ICS Intrusion Detection

- **Carcano et al.** [5] — critical-state analysis for SCADA command sequences
- **Goldenberg & Wool** [6] — Modbus/TCP protocol modelling
- **SWaT dataset** [7] — physical/network measurements, no host audit logs
- **Mitchell & Chen** [8]: host-level IDS is rare in CPS literature
- **Our contribution:** first framework targeting Windows Event Logs at Purdue L1–L3

Threat Model

Adversary Goals

Gain persistence → escalate privileges → execute disruptive payload

Adversary Goals

Gain persistence → escalate privileges → execute disruptive payload

Adversary Capabilities

- Compromised Level 3 (IT) host or phishing foothold
- Valid or cracked domain credentials
- Network access across IT/OT boundary (misconfigured DMZ)

Adversary Goals

Gain persistence → escalate privileges → execute disruptive payload

Adversary Capabilities

- Compromised Level 3 (IT) host or phishing foothold
- Valid or cracked domain credentials
- Network access across IT/OT boundary (misconfigured DMZ)


4 Attack Patterns Modelled (MITRE ATT&CK ICS)

Lateral movement · Persistence · Privilege escalation · Reconnaissance

Data and Features

Synthetic Event Log Generator

- 6,000 sessions: 5,000 benign + 1,000 malicious (5:1 ratio)
- 89,288 total events
- 13 Windows Event IDs (4624, 4625, 4663, 7045, ...)

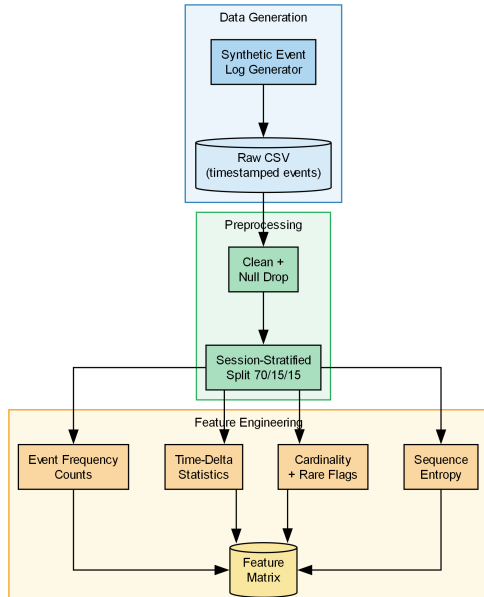

Session-Level Feature Engineering

Group	Features	Dim.
Event frequency counts	count per event ID + total	14
Time-delta statistics	mean, std, min, max gap	4
Host/user cardinality	unique sources, users, hosts	3
Rare-event flags	binary indicators	var
Sequence entropy	Shannon H over event IDs	1

Total: 24-dimensional feature vector per session

Model

Model: Random Forest

Why Random Forest?

- Handles mixed feature types (counts, stats, flags) without scaling

Model: Random Forest

Why Random Forest?

- Handles mixed feature types (counts, stats, flags) without scaling
- `class_weight=balanced` — robust to 5:1 imbalance

Why Random Forest?

- Handles mixed feature types (counts, stats, flags) without scaling
- `class_weight=balanced` — robust to 5:1 imbalance
- Feature importance ranking for academic interpretability

Model: Random Forest

Why Random Forest?

- Handles mixed feature types (counts, stats, flags) without scaling
- `class_weight=balanced` — robust to 5:1 imbalance
- Feature importance ranking for academic interpretability
- Sub-millisecond inference latency per session

Training Protocol

RandomizedSearchCV (20 configs) · 5-fold stratified CV · macro F1 objective



Results

Classification Results

Method	Prec.	Recall	F1 (macro)	ROC-AUC
IF (unsupervised)	0.611	0.594	0.601	0.735
LR	0.917	0.974	0.942	0.994
SVM (RBF)	0.818	0.881	0.844	0.951
Decision Tree	0.982	0.987	0.984	0.988
XGBoost	0.997	0.999	0.998	1.000
RF (proposed)	1.000	1.000	0.999	1.000

RF: mean $\pm$ std across 5 seeds = 0.999 ± 0.001

ROC Curve and Feature Importances

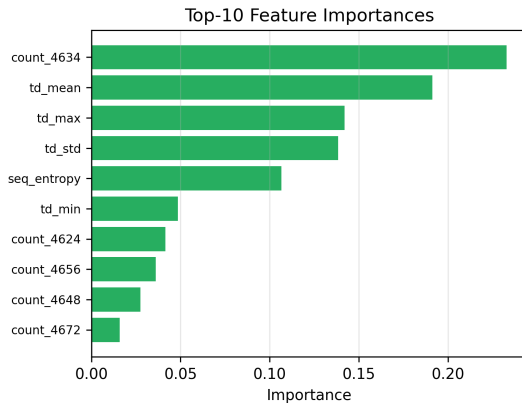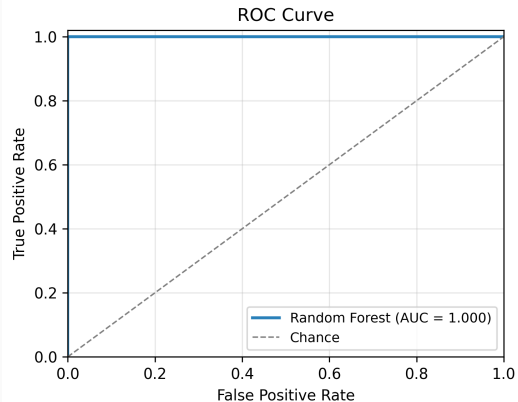

Ablation Study

Removed Feature Group	F1 (macro)	Δ F1
None (full)	1.000	—
Group 1: Event counts	0.944	−0.056
Group 2: Time-delta stats	0.972	−0.028
Group 3: Cardinality	1.000	0.000
Group 4: Rare-event flags	1.000	0.000
Group 5: Sequence entropy	1.000	0.000

Ablation Study

Removed Feature Group	F1 (macro)	Δ F1
None (full)	1.000	—
Group 1: Event counts	0.944	−0.056
Group 2: Time-delta stats	0.972	−0.028
Group 3: Cardinality	1.000	0.000
Group 4: Rare-event flags	1.000	0.000
Group 5: Sequence entropy	1.000	0.000

Event counts + timing sufficient; Groups 3–5 redundant (not useless).

Discussion

- **Class imbalance:** operational ratio may reach 500:1; consider SMOTE or anomaly-framing

Deployment Considerations

- **Class imbalance:** operational ratio may reach 500:1; consider SMOTE or anomaly-framing
- **Concept drift:** periodic retraining on sliding windows; ADWIN drift detector

Deployment Considerations

- **Class imbalance:** operational ratio may reach 500:1; consider SMOTE or anomaly-framing
- **Concept drift:** periodic retraining on sliding windows; ADWIN drift detector
- **GDPR:** pseudonymise usernames/hostnames at collection; align retention with NERC CIP 90-day requirement

Deployment Considerations

- **Class imbalance:** operational ratio may reach 500:1; consider SMOTE or anomaly-framing
- **Concept drift:** periodic retraining on sliding windows; ADWIN drift detector
- **GDPR:** pseudonymise usernames/hostnames at collection; align retention with NERC CIP 90-day requirement
- **Latency:** <0.5 s per 900-session batch on single CPU core — SIEM-compatible

Conclusion

Conclusion

- First open-source framework for Windows Event Log-based malware detection in smart grid ICS
- 24-feature session pipeline; Random Forest with class-imbalance compensation
- $F1 = 0.999 \pm 0.001$ (5-seed), ROC-AUC = 1.000; XGBoost competitive (0.998)
- Event counts most discriminative (ablation $\Delta F1 = -0.056$); evasive attacks reduce single-feature separability from $F1 = 1.0$ to 0.86
- Framework enables reproducible ICS security research without operational data

Conclusion

- First open-source framework for Windows Event Log-based malware detection in smart grid ICS
- 24-feature session pipeline; Random Forest with class-imbalance compensation
- $F1 = 0.999 \pm 0.001$ (5-seed), ROC-AUC = 1.000; XGBoost competitive (0.998)
- Event counts most discriminative (ablation $\Delta F1 = -0.056$); evasive attacks reduce single-feature separability from $F1 = 1.0$ to 0.86
- Framework enables reproducible ICS security research without operational data

Future Work

Real ICS logs · Multi-class ATT&CK attribution · Online learning · Adversarial robustness against evasive attackers on real logs

- [1] R. Langner, “**Stuxnet: Dissecting a cyberwarfare weapon,**” *IEEE Security & Privacy*, vol. 9, no. 3, pp. 49–51, 2011. DOI: 10.1109/MSP.2011.67
- [2] P. He, J. Zhu, Z. Zheng, and M. R. Lyu, “**Drain: An online log parsing approach with fixed depth tree,**” in *2017 IEEE International Conference on Web Services (ICWS)*, 2017, pp. 33–40. DOI: 10.1109/ICWS.2017.13
- [3] M. Du, F. Li, G. Zheng, and V. Srikumar, “**DeepLog: Anomaly detection and diagnosis from system logs through deep learning,**” in *Proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security*, 2017, pp. 1285–1298. DOI: 10.1145/3133956.3134015

- [4] S. Zhao et al., “**LogAnomaly: Unsupervised detection of sequential and quantitative anomalies in unstructured logs,**” in *Proceedings of the 28th International Joint Conference on Artificial Intelligence (IJCAI)*, 2019, pp. 4739–4745. DOI: 10.24963/ijcai.2019/658
- [5] A. Carcano, A. Coletta, M. Guglielmi, M. Masera, I. Nai Fovino, and A. Trombetta, “**A multidimensional critical state analysis for detecting intrusions in SCADA systems,**” *IEEE Transactions on Industrial Informatics*, vol. 7, no. 2, pp. 179–186, 2011. DOI: 10.1109/TII.2010.2100361

- [6] N. Goldenberg and A. Wool, **“Accurate modeling of Modbus/TCP for intrusion detection in SCADA systems,”** *International Journal of Critical Infrastructure Protection*, vol. 6, no. 2, pp. 63–75, 2013. DOI: 10.1016/j.ijcip.2013.05.001
- [7] J. Goh, S. Adepu, K. N. Junejo, and A. Mathur, **“A dataset to support research in the design of secure water treatment systems,”** in *Critical Infrastructure Protection X*, 2016, pp. 88–112. DOI: 10.1007/978-3-319-48737-3_5
- [8] R. Mitchell and I.-R. Chen, **“A survey of intrusion detection techniques for cyber-physical systems,”** *ACM Computing Surveys*, vol. 46, no. 4, pp. 1–29, 2014. DOI: 10.1145/2542049

Thank you.

Questions welcome.