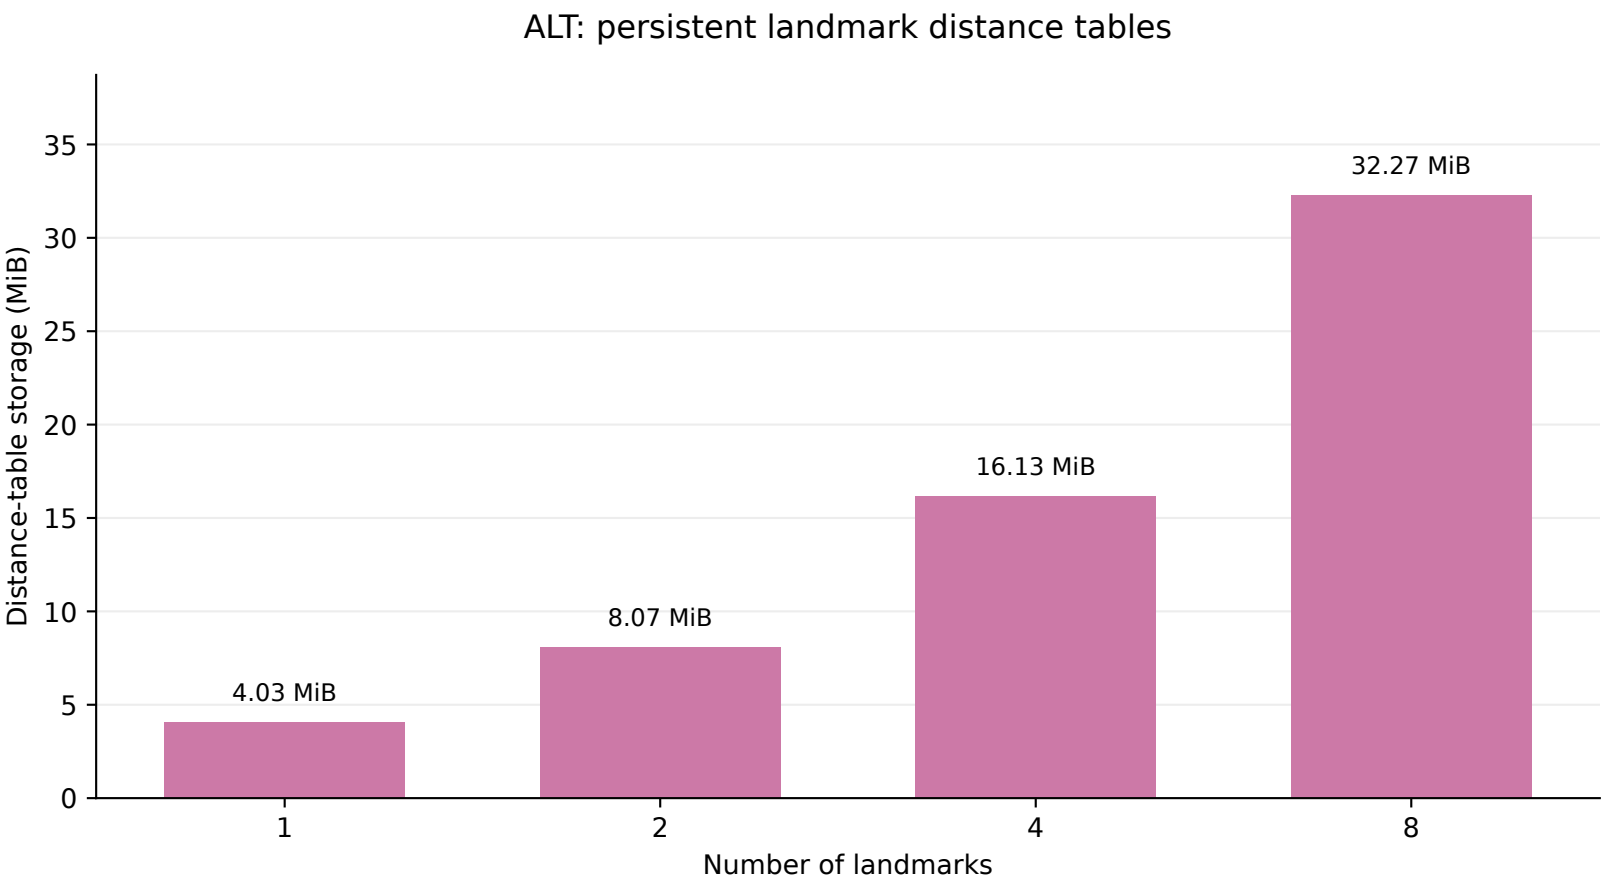

Payload of forward and reverse double-distance tables: 2 x landmarks x nodes x 8 bytes.
Excludes graph storage and object headers; 1 MiB = 1,048,576 bytes.