













2-dimensional vertex model \Rightarrow simulating epithelial tissue

```
In[ ]:= LaunchKernels[]
ParallelTable[$KernelID, {i, $KernelCount}]
```

```
Out[ ]:= {KernelObject[  Name: local KernelID: 1], KernelObject[  Name: local KernelID: 2],
KernelObject[  Name: local KernelID: 3], KernelObject[  Name: local KernelID: 4],
KernelObject[  Name: local KernelID: 5], KernelObject[  Name: local KernelID: 6]}
```

```
Out[ ]:= {6, 5, 4, 3, 2, 1}
```

geometrical f(x)s

```
In[ ]:= (*get vertex in the list by ccw order*)
Clear[getCounterClockwise];
getCounterClockwise[vertex_, vertices_] := Block[{pos, v},
  pos = First@@Position[vertices, vertex];
  If[pos == Length[vertices], pos = 1, pos += 1];
  vertices[[pos]]
];
```

```
In[ ]:= (*get vertex in the list by cw order*)
Clear[getClockwise];
getClockwise[vertex_, vertices_] := Block[{ls, pos},
  pos = First@@Position[vertices, vertex];
  If[pos == 1, pos = Length[vertices], pos -= 1];
  vertices[[pos]]
];
```

```
In[ ]:= getCounterClockwise[{xi, yi}, {{xi-1, yi-1}, {xi, yi}, {xi+1, yi+1}, d, e}]
```

```
Out[ ]:= {x1+i, y1+i}
```

```
In[ ]:= getClockwise[{xi, yi}, {{xi-1, yi-1}, {xi, yi}, {xi+1, yi+1}, d, e}]
```

```
Out[ ]:= {x-1+i, y-1+i}
```

```
In[ ]:= Clear[areaOfPolygon];
areaOfPolygon[cells_ /; Head[cells] == Association] :=
  Parallelize[Map[Area@*Polygon, cells]];
```

```
In[ ]:= Clear[areaPolygon];
areaPolygon[vertices_] := Block[{edges},
  edges = Partition[vertices, 2, 1, 1];
  0.5 Abs@Total[(#[[1, 1]] * #[[2, 2]]) - (#[[2, 1]] * #[[1, 2]]) & /@ edges]
]
```

```
In[ ]:= Clear[perimeterOfPolygon];
perimeterOfPolygon[cells_ /; Head[cells] === Association] :=
  Parallelize[(Perimeter@*Polygon) /@ cells];
```

```
In[ ]:= Clear[perimeterPolygon];
perimeterPolygon[vertices_] := Block[{edges},
  edges = Partition[vertices, 2, 1, 1];
  Total[Apply[EuclideanDistance] /@ edges]
]
```

```
In[ ]:= Clear[centroidPolygon];
centroidPolygon[vertices_] := Mean[vertices]
```

```
In[ ]:= (*counterclockwise polygonQ*)
Block[{signedarea = 0, j, vertlen = 5},
  Do[
    j = Mod[i, vertlen] + 1;
    signedarea += (xi yj - xj yi),
    {i, vertlen}];
  Echo[ $\frac{1}{2}$  (signedarea)]
];

$$\frac{1}{2} (-x_2 y_1 + x_5 y_1 + x_1 y_2 - x_3 y_2 + x_2 y_3 - x_4 y_3 + x_3 y_4 - x_5 y_4 - x_1 y_5 + x_4 y_5)$$

```

```
In[ ]:= Clear[polyCounterClockwiseQ];
polyCounterClockwiseQ[poly_] := Block[{area = 0, j, vertLength = Length[poly]},
  Do[
    j = Mod[i, vertLength] + 1;
    area += poly[[i, 1]] * poly[[j, 2]];
    area -= poly[[j, 1]] * poly[[i, 2]],
    {i, vertLength}
  ];
  (area / 2.) > 0
]
```

```

In[ ]:= (*Clear [sortCC];
sortCC[polyinds_, indTopts_, ptsToInds_] := Block[{cent, poly},
  poly = Lookup[indTopts, polyinds];
  Lookup[ptsToInds,
    DeleteDuplicates@
      Flatten[MeshPrimitives[ConvexHullMesh[poly], 1] /. Line -> Sequence, 1]
  ]
];*)

```

In[]:= (*sort points for a convex polygon in counter-clockwise direction*)

```

In[ ]:= Clear[sortPointsCC];
sortPointsCC[polyinds_, indTopts_, ptsToInds_] :=
  Block[{cent, ordering, polyPoints},
    polyPoints = Lookup[indTopts, polyinds];
    cent = Mean[polyPoints];
    ordering = Ordering[ArcTan[#[[1]], #[[2]]] & @ (# - cent) & /@ polyPoints];
    Lookup[ptsToInds, Part[polyPoints, ordering]]
  ]

```

```

In[ ]:= outeredges[indToPtsAssoc_, localtopology_] := Block[{k, temp, tcells, assoc},
  Reap[
    Scan[(k = #; temp = localtopology[k];
      tcells = temp[[2]];
      If[tcells != {},
        MapAt[Sow@Cases[Partition[#, 2, 1,
          1], OrderlessPatternSequence[{x : indToPtsAssoc[k], y : _}] ->
            {x, y}] &, temp[[1]], {Key[#]} & /@ tcells];
      ] &, Keys@indToPtsAssoc]
  ] [[2]] // Flatten[#, 2] &
];

```

mesh restructuring operations

simulation domain

```

In[ ]:= xLim = yLim = {-1, 1};
D = Rectangle[{First@xLim, First@yLim}, {Last@xLim, Last@yLim}];

```

local topology

```

In[ ]:= Clear@outerCellsFn;
outerCellsFn[faceListCoords_, vertexToCell_, ptsToIndAssoc_] :=
  With[{xlim1 = xLim[[1]], xlim2 = xLim[[2]], ylim1 = yLim[[1]], ylim2 = yLim[[2]]},
    Block[{boundaryCells, bcells, temp, res},
      temp = faceListCoords;
      boundaryCells =
        Union[First /@ Position[temp, {x_ /; x ≥ xlim2, _} | {x_ /; x ≤ xlim1, _} |
              {_, y_ /; y ≥ ylim2} | {_, y_ /; y ≤ ylim1}] /. Key[x_] => x];
      bcells = KeyTake[faceListCoords, boundaryCells];
      res = Union@
        (Flatten@Lookup[vertexToCell, Lookup[ptsToIndAssoc, DeleteDuplicates@Cases[
          bcells, {x_ /; x ≥ xlim2, _} {x_ /; x ≤ xlim1, _} {_, y_ /; y ≥ ylim2} {_,
            y_ /; y ≤ ylim1}, {3}] /. periodicRules]] ~Join~ boundaryCells);
      res
    ]
  ];

```

```

In[ ]:= ClearAll[periodicRules, transformRules];
periodicRules::Information =
  "shift the points outside the simulation domain to inside the domain";
transformRules::Information =
  "vector that shifts the point outside the simulation domain back inside";
With[{xlim1 = xLim[[1]], xlim2 = xLim[[2]],
      ylim1 = yLim[[1]], ylim2 = yLim[[2]], dstep = 2},
  periodicRules = Dispatch[{
    {x_ /; x ≥ xlim2, y_ /; y ≤ ylim1} => SetPrecision[{x - dstep, y + dstep}, 10],
    {x_ /; x ≥ xlim2, y_ /; ylim1 < y < ylim2} => SetPrecision[{x - dstep, y}, 10],
    {x_ /; xlim1 < x < xlim2, y_ /; y ≤ ylim1} => SetPrecision[{x, y + dstep}, 10],
    {x_ /; x ≤ xlim1, y_ /; y ≤ ylim1} => SetPrecision[{x + dstep, y + dstep}, 10],
    {x_ /; x ≤ xlim1, y_ /; ylim1 < y < ylim2} => SetPrecision[{x + dstep, y}, 10],
    {x_ /; x ≤ xlim1, y_ /; y ≥ ylim2} => SetPrecision[{x + dstep, y - dstep}, 10],
    {x_ /; xlim1 < x < xlim2, y_ /; y ≥ ylim2} => SetPrecision[{x, y - dstep}, 10],
    {x_ /; x ≥ xlim2, y_ /; y ≥ ylim2} => SetPrecision[{x - dstep, y - dstep}, 10]
  }];

  transformRules = Dispatch[{
    {x_ /; x ≥ xlim2, y_ /; y ≤ ylim1} => {-dstep, dstep} ~SetPrecision~10,
    {x_ /; x ≥ xlim2, y_ /; ylim1 < y < ylim2} => {-dstep, 0} ~SetPrecision~10,
    {x_ /; xlim1 < x < xlim2, y_ /; y ≤ ylim1} => {0, dstep} ~SetPrecision~10,
    {x_ /; x ≤ xlim1, y_ /; y ≤ ylim1} => {dstep, dstep} ~SetPrecision~10,
    {x_ /; x ≤ xlim1, y_ /; ylim1 < y < ylim2} => {dstep, 0} ~SetPrecision~10,
    {x_ /; x ≤ xlim1, y_ /; y ≥ ylim2} => {dstep, -dstep} ~SetPrecision~10,
    {x_ /; xlim1 < x < xlim2, y_ /; y ≥ ylim2} => {0, -dstep} ~SetPrecision~10,
    {x_ /; x ≥ xlim2, y_ /; y ≥ ylim2} => {-dstep, -dstep} ~SetPrecision~10,
    {___Real} => {0, 0} ~SetPrecision~10];
];

```

```

In[ ]:= Clear@getLocalTopology;
getLocalTopology[ptsToIndAssoc_, indToPtsAssoc_, vertexToCell_,
  cellVertexGrouping_, wrappedMat_, faceListCoords_] [vertices_] :=

```

```

Block[{localtopology = <|>, wrappedcellList = {}, vertcellconns,
  localcellunion, v, wrappedcellpos, vertcs = vertices, r11, r12,
  transVector, wrappedcellCoords, wrappedcells, vertOutOfBounds,
  shiftedPt, transvecList = {}, $faceListCoords = faceListCoords,
  vertexQ, boundsCheck, rules, extractcellkeys, vertind,
  cellsconnected, wrappedcellsrem},
vertexQ = MatchQ[vertices, {__?NumberQ}];
If[vertexQ,
  (vertcellconns =
    AssociationThread[{#}, {vertexToCell[ptsToIndAssoc[#]]}] &@vertices;
    vertcs = {vertices};
    localcellunion = Flatten[Values@vertcellconns]),
  (vertcellconns = AssociationThread[#,
    Lookup[vertexToCell, Lookup[ptsToIndAssoc, #]]] &@vertices;
    localcellunion = Union@Flatten[Values@vertcellconns])
];
If[localcellunion != {},
  AppendTo[localtopology,
    Thread[localcellunion →
      Map[Lookup[indToPtsAssoc, #] &, cellVertexGrouping /@ localcellunion, {2}]]
  ];
(* condition to be an internal edge: both vertices should have 3 neighbours *)
(* if a vertex has 3 cells in its local neighbourhood then the entire
  network topology about the vertex is known → no wrapping required *)
(* else we need to wrap around the vertex because other cells
  are connected to it → periodic boundary conditions *)
With[{vert = #},
  vertind = ptsToIndAssoc[vert];
  cellsconnected = vertexToCell[vertind];
  If[Length[cellsconnected] != 3,
    If[(D~RegionMember~vert),
      v = vert;
      With[{x = v[[1]], y = v[[2]]}, boundsCheck =
        (x == xLim[[1]] || x == xLim[[2]] || y == yLim[[1]] || y == yLim[[2]])];
      extractcellkeys = If[boundsCheck,
        {r11, r12} = {v, v /. periodicRules};
        rules = Block[{x$},
          With[{r = r11, s = r12},
            DeleteDuplicates[
              HoldPattern[SameQ[x$, r]] || HoldPattern[SameQ[x$, s]]]
          ]
        ];
      Position@@
        With[{rule = rules}, Hold[wrappedMat, x_ /; ReleaseHold@rule, {2}]],
        Position[wrappedMat, x_ /; SameQ[x, v], {2}]
    ];
    (* find cell indices that are attached to the vertex in wrappedMat *)
    wrappedcellpos = DeleteDuplicatesBy[
      Cases[extractcellkeys,
        {Key[p : Except[Alternatives@@Join[localcellunion,
          Flatten@wrappedcellList]]], y__} :> {p, y}],
      First];
    (*wrappedcellpos = wrappedcellpos/.
      {Alternatives@@Flatten[wrappedcellList],__} :> Sequence[];*)
  ]

```

```

(* if a wrapped cell has not been considered earlier (i.e. is new)
then we translate it to the position of the vertex *)
If[wrappedcellpos ≠ {},
  If[vertexQ,
    transVector = SetPrecision[(v - Extract[$faceListCoords,
      Replace[#, {p_, q_} => {Key[p], q}]]] & /@ wrappedcellpos, 10],
    (* call to function is enquiring an edge and not a vertex*)
    transVector = SetPrecision[(v - Extract[$faceListCoords,
      Replace[#, {p_, q_} => {Key[p], q}]]] & /@ wrappedcellpos, 10]
  ];
wrappedcellCoords = MapThread[#1 -> Map[Function[x,
  SetPrecision[x + #2, 10]], $faceListCoords[[Key@#1]], {1}] &,
  {First /@ wrappedcellpos, transVector}];
wrappedcells = Keys@wrappedcellCoords;
AppendTo[wrappedcellList, Flatten@wrappedcells];
AppendTo[transvecList, transVector];
AppendTo[localtopology, wrappedcellCoords];
],
(* the else clause: vertex is out of bounds *)
vertOutOfBounds = vert;
(* translate the vertex back into mesh *)
transVector = vertOutOfBounds /. transformRules;
shiftedPt = SetPrecision[vertOutOfBounds + transVector, 10];
(* ----- CORE B ----- *)
(* find which cells the
shifted vertex is a part of in the wrapped matrix *)
wrappedcells = Complement[
  Union@Cases[Position[wrappedMat, x_ /; SameQ[x, shiftedPt], {2}],
    x_Key => Sequence@@x, {2}] /.
  Alternatives@@localcellunion -> Sequence[],
  Flatten@wrappedcellList];
(*forming local topology now that we know the wrapped cells *)
If[wrappedcells ≠ {},
  AppendTo[wrappedcellList, Flatten@wrappedcells];
  wrappedcellCoords = AssociationThread[wrappedcells,
    Map[Lookup[indToPtsAssoc, #] &,
      cellVertexGrouping[#] & /@ wrappedcells, {1}]];
  With[{opt = (vertOutOfBounds /. periodicRules)},
    Block[{pos, vertref, transvec},
      Do[
        With[{cellcoords = wrappedcellCoords[cell]},
          pos = FirstPosition[cellcoords /. periodicRules, opt];
          vertref = Extract[cellcoords, pos];
          transvec = SetPrecision[vertOutOfBounds - vertref, 10];
          AppendTo[transvecList, transvec];
          AppendTo[localtopology,
            cell -> Map[SetPrecision[# + transvec, 10] &, cellcoords]];
        ], {cell, wrappedcells}
      ];
    ];
  ];
(* to detect wrapped cells not detected by CORE B*)
(* ----- CORE C ----- *)
Block[{pos, celllocs, ls, transvec, assoc, tvecList = {}, ckey},
  ls = Union@Flatten@Join[cellsconnected, wrappedcells];

```

```

If[Length[ls] ≠ 3,
  pos = Position[$faceListCoords, x_ /; SameQ[x, shiftedPt], {2}];
  celllocs = DeleteDuplicatesBy[Cases[pos, Except[{Key[Alternatives@@ls],
    __}]], First] /. {Key[x_], z__} => {Key[x], {z}};
  If[celllocs ≠ {},
    celllocs = Transpose@celllocs;
    assoc = <|
      MapThread[
        (transvec = SetPrecision[vertOutofBounds -
          Extract[$faceListCoords[Sequence@@#1], #2], 10];
          ckey = Identity@@#1;
          AppendTo[tvecLs, transvec];
          ckey → Map[SetPrecision[Lookup[indToPtsAssoc, #] + transvec,
            10] &, cellVertexGrouping[Sequence@@#1], {1}]
        ) &, celllocs]
      |>;
    AppendTo[localtopology, assoc];
    AppendTo[wrappedcellList, Keys@assoc];
    AppendTo[transvecList, tvecLs];
  ];
];
];
];
];
];
] & /@ vertcs;
transvecList = Which[
  MatchQ[transvecList, {{__?NumberQ}}], First[transvecList],
  MatchQ[transvecList, {{__?NumberQ} ..}], transvecList,
  True, transvecList /. {x____, {p: {__?NumberQ} ..}, y____} => {x, p, y}
];
{localtopology, Flatten@wrappedcellList, transvecList}
];

```

T1 transition

In[]:= (*find edge function*)

In[]:= bagged = CreateDataStructure["DynamicArray"];

find edges

In[]:=

```

Clear@edgesforT1;
edgesforT1[edgesLs_, indToPts_, threshLength_ : 0.0015] :=
  Block[{edges, dist, sel, filt, b, cand, sameedg2Q, del},
    edges = Lookup[indToPts, #] & /@ edgesLs;
    dist = EuclideanDistance @@ # & /@ edges;
    sel = Pick[edges, Thread[dist ≤ threshLength], True];
    If[Length[sel] == 1,
      Nothing,
      filt = sel /. periodicRules;
      b = MapThread[SameQ, {filt, sel}];
      cand = Pick[filt, b, False];
      sameedg2Q = MemberQ[sel, {OrderlessPatternSequence @@ #}] & /@ cand;
      del = (OrderlessPatternSequence @@@ Pick[cand, sameedg2Q]);
      If[Length[cand] > 1, del = Alternatives @@ del];
      sel = DeleteCases[sel, {del}]
    ];
    sel
  ];

```

T1

In[]:=

```

Clear@T1transitionFn;
T1transitionFn[edges_, indToPtsAssoc_, ptsToIndAssoc_, vertexToCellG_,
  cellToVertexG_, wrappedMat_, faceListCoords_, dSep_ : 0.01] :=
  Block[{edgeind, connectedcellKeys, edge, newpts, cellvertices, pos,
    cellpolys, memF, keyscellP, selcellKeys, ptToCell, newptsindices,
    indToPts = indToPtsAssoc, ptsToInds = ptsToIndAssoc, PtIndToCell,
    keysToMap, f1, otherkeys, f2, bag = bagged, vertToCellG = vertexToCellG,
    cellToVertG = cellToVertexG, testpts, localtopology, translCells, transVector,
    edgepts, celltopo, polysharingEdge, ls, cs, cc, ccw, trimmedtopo, ordering,
    edgeordered, topotransl, newtransvert, findEdges, $wrappedMat = wrappedMat,
    $faceListCoords = faceListCoords, cellToVertGC, dropinds, bagopen, maxlab},
    findEdges = edgesforT1[edges, indToPts];
    (* finding all possible edges for T1 transition *)
    If[findEdges ≠ {},
      (*run if there are any edges for T1*)
      Scan[
        (
          edge = #;
          cellToVertGC = cellToVertG;
          edgeind = Lookup[ptsToInds, edge];
          If[ContainsAll[Keys[indToPts], edgeind],
            (* should be an edge not
              connected to an edge that has already undergone a T1 *)
            (* let us get the local network topology *)
            {localtopology, translCells, transVector} =
              getLocalTopology[ptsToInds, indToPts, vertToCellG,
                cellToVertG, $wrappedMat, $faceListCoords] [#] & [edge];

```



```

If[! DuplicateFreeQ[translCells],
  {translCells, transVector} =
    DeleteDuplicates[Transpose[{translCells, transVector}]]^T
];
connectedcellKeys = Keys@localtopology;
celltopo = Values@localtopology;
(*Print[Show[pvor,Graphics[{Polygon/@celltopo,Red,Line@edge}]]];*)
newpts = With[{midPt = Mean@edge},
  SetPrecision[midPt + dSep Normalize[(# - midPt)], 10] & /@
  Flatten[RotationTransform[- $\frac{\pi}{2}$ , midPt] /@ {edge}, 1]
];
testpts = With[{midPt = Mean@edge},
  midPt + 0.00001 Normalize[(# - midPt)] & /@ newpts];
(*plt1=Graphics[{FaceForm[LightGray],EdgeForm[{Thick,Black}],
  Polygon/@celltopo},{Red,Line@edge,Orange,
  Point@newpts,Green,Point@testpts}],ImageSize→Tiny];
Print@plt1;*)
(*which cells contain both vertices*)
pos = Position[celltopo, {OrderlessPatternSequence[
  ___, First[edge], ___, Last[edge], ___]}, {1}];
polysharingEdge = Extract[celltopo, pos];
(* the edge should not be part of any  $\Delta$  *)
bagopen = Union@*Flatten@*Normal@bag;
(*Print[Show[Graphics[{Polygon/@Values@$faceListCoords}],plt1]]];*)
If[(AllTrue[polysharingEdge, Length[#] ≠ 3 &]) && ContainsNone[edgeind,
  bagopen] && ContainsNone[edge /. periodicRules, bagopen],
  cellvertices = celltopo;
  cellpolys = Polygon /@ cellvertices;
  memF = Function[x, RegionMember@x, Listable][Extract[cellpolys, pos]];
  keyscellP = Extract[connectedcellKeys, pos];
  selcellKeys = Thread[keyscellP → memF];
  ptToCell = Quiet[# → First@@Select[selcellKeys, Function[x,
    Last[x][#]]] & /@ testpts /. HoldPattern[_ → First[]] → Nothing];
  (* testpt to cell *)
  ptToCell = ptToCell /. Thread[testpts → newpts];
  newptsindices = Range[# + 1, # + 2] &[Max@Keys@indToPts];
  KeyDropFrom[indToPts, edgeind];
  AppendTo[indToPts, Thread[newptsindices → newpts]];
  bag["Append", Lookup[ptsToInds, edge /. periodicRules]];
  ptsToInds = AssociationMap[Reverse, indToPts];
  bag["Append", edgeind];
  PtIndToCell = MapAt[ptsToInds, ptToCell, {All, 1}] /. Rule → List;
  (*index to cell*)
  keysToMap = Map[{Lookup[indToPts, #][1]], Key@#[2]} &, PtIndToCell];
  f1 = Fold[
    MapAt[Function[x, DeleteDuplicates@Replace[x, (Alternatives@@edge) →
      #2[[1]], {1}]], #1, #2[[-1]]] &, localtopology, keysToMap];
  otherkeys = List@*Key /@ Complement[connectedcellKeys, keyscellP];
  ls = Lookup[localtopology, First@@otherkeys];
  cs = FirstCase[ls, Alternatives@@edge];
  cc = getClockwise[cs, ls];
  ccw = getCounterClockwise[cs, ls];
  trimmedtopo =

```

```

KeyDrop[localtopology, connectedcellKeys~Complement~keyscellP];
ordering = {FirstCase[Position[trimmedtopo, cc],
  x : {Key[First@keyscellP], _} | {Key[Last@keyscellP], _} => First @@ x],
  FirstCase[Position[trimmedtopo, ccw],
  x : {Key[First@keyscellP], _} | {Key[Last@keyscellP], _} => First @@ x ]};
edgeordered = ordering /. Reverse[ptToCell, 2];
f2 = MapAt[Replace[#, Alternatives @@ edge => Splice[edgeordered], {1}] &,
  f1, First@otherkeys];
f2 = MapAt[Replace[#, Alternatives @@ edge => Splice[Reverse[edgeordered]],
  {1}] &, f2, Last@otherkeys];
(*plt2=Values@f2//Map[Polygon]//Graphics[{FaceForm[LightGray],
  EdgeForm[{Thin,Red}],#},ImageSize->Tiny]&*)
(* once we make the transition, we translate the cell back and
add the shifted vertex into the indtopts and ptstoinds *)
If[translCells != {},
  f2 =
    Fold[MapAt[Function[x, Function[y, SetPrecision[y - #2[[2]], 10]] /@ x],
      #1, {#2[[1]]}] &, f2, Thread[{Key /@ translCells, transVector}]];
  newtransvert = Complement[Flatten[Values@f2, 1],
    Values@indToPts, SameTest -> (#1 == #2 &)];
  If[newtransvert != {},
    newptsindices =
      Range[# + 1, # + Length@newtransvert] &[Max[Keys@indToPts]];
    AppendTo[indToPts, Thread[newptsindices -> newtransvert]];
    AppendTo[ptsToInds, Thread[newtransvert -> newptsindices]];
  ];
];
(*plt3=Values@f2//Map[Polygon]//Graphics[
  {FaceForm[LightGray],EdgeForm[{Thin,Red}],#},ImageSize->Tiny]&*)
f2 = Lookup[ptsToInds, #] & /@ f2;
AppendTo[cellToVertG, f2];
];
cellToVertG = KeySort@cellToVertG;
dropinds =
  Flatten@Map[Complement[cellToVertGC[#], cellToVertG[#]] &, translCells];
KeyDropFrom[indToPts, dropinds];
ptsToInds = AssociationMap[Reverse, indToPts];
vertToCellG = KeySort@GroupBy[Flatten[
  (Reverse[#, 2] &) @* Thread /@ Normal@cellToVertG], First -> Last];
$faceListCoords = Lookup[indToPts, #] & /@ cellToVertG;
$wrappedMat = Map[# /. periodicRules &, $faceListCoords];
(*Print[{plt1,plt2};*)
]) &, findEdges]
];
bagged["DropAll"];
{indToPts, vertToCellG, cellToVertG, $wrappedMat, $faceListCoords}
];

```

T2 transition

find cells for T2

T2

In[]:=

```

Clear@T2TransitionFn;
T2TransitionFn[removeelem_, indToPtsAssoc_, ptsToIndAssoc_,
  vertexCellAssoc_, cellVertexGrouping_, wrappedMat_, faceListCoords_] :=
Block[{assoc, translC, transVec, ptsToInds = ptsToIndAssoc, indToPts = indToPtsAssoc,
  vertCellAssoc = vertexCellAssoc, cvG = cellVertexGrouping,
  $wrappedMat = wrappedMat, $faceListCoords = faceListCoords, cellkey,
  res, mergedtopo, vertinds, vertpts, mean, ruletrans, changedtopo,
  transtopo, ckeys, pos, newpt, maxlab, newind, vertinddrop, oldptind, re},
re = Replace[removeelem, x_Integer >=> {x}];
If[removeelem != {},
  Scan[
    (cellkey = #;
    {assoc, translC, transVec} =
      getLocalTopology[ptsToInds, indToPts, vertCellAssoc, cvG, $wrappedMat,
        $faceListCoords][#] & /@ Lookup[indToPts, cvG[cellkey]] // Transpose;
    res = DeleteDuplicates[Flatten[{translC, transVec}, {3, 2}] // .
      {p___, x: {}, q___} >=> {p, q}];
    mergedtopo = KeySort[Join@@assoc];
    vertinds = cvG[cellkey];
    vertpts = Lookup[indToPts, vertinds];
    mean = SetPrecision[Mean@vertpts, 10];
    ruletrans = Flatten[Thread[{# -> mean}] & /@ vertpts];
    (*Print[Values@mergedtopo//Graphics[{FaceForm[LightBlue],
      EdgeForm[Black], Map[Polygon][#]}, ImageSize->Small]&];*)
    If[res == {}, KeyDropFrom[mergedtopo, cellkey]];
    changedtopo = (mergedtopo /. ruletrans);
    (*Print[Values@changedtopo//Graphics[{FaceForm[LightBlue],
      EdgeForm[Black], Map[Polygon][#]}, ImageSize->Small]&];*)
    If[res != {},
      transtopo = Fold[MapAt[Function[x, Function[y, SetPrecision[y - #2[[-1]],
        10]] /@ x], #1, Key@#2[[1]]] &, changedtopo, res];
      ckeys = res[[All, 1]];
      pos = Cases[Position[<|Thread[ckey -> Lookup[mergedtopo, ckeys]]|>,
        Alternatives@@vertpts], {Key[Alternatives@@ckey], _}];
      newpt = DeleteDuplicates@Extract[transtopo, pos];
      oldptind = Extract[<|Thread[ckey -> Lookup[cvG, ckeys]]|>, pos];
      newpt = Join[{mean}, newpt];
      maxlab = Max[Keys@indToPts];
      newind = Range[maxlab + 1, maxlab + Length[newpt]];
      vertinddrop = Join[oldptind, vertinds];
      AppendTo[indToPts, Thread[newind -> newpt]],
      newind = Max[Keys@indToPts] + 1;
      newpt = mean;
      vertinddrop = vertinds;
      AppendTo[indToPts, newind -> newpt];
    ];
    ptsToInds = AssociationMap[Reverse, indToPts];
    If[res != {},
      AppendTo[cvG, DeleteDuplicates@Lookup[ptsToInds, #] & /@ transtopo],
      AppendTo[cvG, DeleteDuplicates@Lookup[ptsToInds, #] & /@ changedtopo]

```

```

];
cvG = KeySort@cvG;
KeyDropFrom[indToPts, vertinddrop];
ptsToInds = AssociationMap[Reverse, indToPts];
KeyDropFrom[cvG, cellkey];
vertCellAssoc = GroupBy[Flatten[
  (Reverse[#, 2] &) @* Thread /@ Normal@cvG], First → Last] // KeySort;
$wrappedMat = AssociationThread[Keys[cvG] → Map[
  Lookup[indToPts, #] /. periodicRules &, Lookup[cvG, Keys[cvG]], {2}]];
$faceListCoords = Map[Lookup[indToPts, #] &, cvG, {2}]
(*$wrappedMat= Map[#/.periodicRules&,$faceListCoords]*) &, re];
];
(*Print@Graphics[{EdgeForm[Black],FaceForm[LightBlue],
  Polygon/@Values@Map[Lookup[indToPts,#]&,cvG,{2}]],ImageSize→Medium];*)
{indToPts, ptsToInds, vertCellAssoc, cvG, $wrappedMat, $faceListCoords}
];

```

cell division

Difference from Farahdifar's paper: in his article he dilates the cells before dividing them. Here I randomly select a cell and divide it into two. This does not really matter

```

In[ ]:= Clear[selectDivCells];
selectDivCells[areaPolygon_, areathresh_ : 2.2, thresh_ : 0.0025] :=
  Block[{candidates, pos},
    candidates = Normal@Select[areaPolygon / Mean[areaPolygon], # > areathresh &];
    pos = Position[0.1 RandomReal[1, Length@candidates], x_ /; x < thresh];
    Keys@Extract[candidates, pos]
  ];

```

In[]:= (* division events more random *)

```

In[ ]:= Clear[pickcellsDiv];
pickcellsDiv[cellToVertG_, areaAssoc_] := Block[{pickcells, selcells, pos},
  pickcells = Keys@Select[Pick[areaAssoc,
    Thread[RandomReal[{0, 1}, Length[areaAssoc]] < 0.001], True], # > 0.005 &];
  pos = Position[Lookup[cellToVertG, pickcells], x_ /; Length[x] > 3, {1}];
  Extract[pickcells, pos]
];

```

```

In[ ]:= Clear[cellDivision, i];
cellDivision[polygonind_, indToPoints_, areaAssoc_, perimAssoc_, cellToVertG_] :=
  Block[{x, y, num, matrix, xx, xy, yy, eigvals, eigVecs, maxeigpos, cent, edges, edgesL,
    intersects, intersectionPts, posIntersections, repPart,  $\alpha$ ,  $\beta$ , polygonPts,
    newkeys = Range[#+1, #+2] &[Max@Keys[indToPoints]], newPtToInds, indtoPtAssoc =
    indToPoints, ptToIndAssoc, edgeinds, contour, poly1, poly2, res, seq,
    newcells = Range[#+1, #+2] &[Max@Keys[areaAssoc]], CVG = cellToVertG,
    addcellsRule, polygonPtsInds, VCG, polygonptsTrans},
    VCG = GroupBy[Flatten[(Reverse[#, 2] &) @* Thread /@ Normal@CVG], First → Last];
    polygonPtsInds = CVG[polygonind];
    num = Length@polygonPtsInds;

```

```

ptToIndAssoc = AssociationMap[Reverse, indToPoints];
polygonPts = Lookup[indToPoints, polygonPtsInds];
polygonptsTrans = TranslationTransform[-Mean[polygonPts]]@polygonPts;
Evaluate[Table[{xi, yi}, {i, num + 1}]] =
  Append[polygonptsTrans, First@polygonptsTrans];


$$I_{xx} = \left(\frac{1}{12}\right) \sum_{i=1}^{\text{num}} (x_i y_{i+1} - x_{i+1} y_i) (y_i^2 + y_i y_{i+1} + y_{i+1}^2);$$



$$I_{yy} = \left(\frac{1}{12}\right) \sum_{i=1}^{\text{num}} (x_i y_{i+1} - x_{i+1} y_i) (x_i^2 + x_i x_{i+1} + x_{i+1}^2);$$



$$I_{xy} = \left(\frac{1}{24}\right) \sum_{i=1}^{\text{num}} (x_i y_{i+1} - x_{i+1} y_i) (x_i y_{i+1} + 2 x_i y_i + 2 x_{i+1} y_{i+1} + x_{i+1} y_i);$$


Table[{Unevaluated[Subscript[x, j]] = .,
  Unevaluated[Subscript[y, j]] = .}, {j, num + 1}];
matrix =  $\begin{pmatrix} I_{xx} & -I_{xy} \\ -I_{xy} & I_{yy} \end{pmatrix};$ 
{eigvals, eigVecs} = Eigensystem@matrix;
maxeigpos = Position[eigvals, Max@eigvals];
{edges, edgeinds} = Partition[#, 2, 1, 1] & /@ {polygonPts, polygonPtsInds};
edgesL = Line /@ edges;
cent = centroidPolygon[polygonPts];
intersects = RegionIntersection[
  InfiniteLine[{cent, cent + Extract[eigVecs, maxeigpos][[1]]}], #] & /@ edgesL;
intersectionPts = Cases[intersects, {(_Real | _Integer) ..}, {3}];
newPtToInds = Thread[intersectionPts → newkeys];
posIntersections = Flatten@Position[intersects, _Point, {1}];
MapThread[
  (res = Complement[Intersection@@Lookup[CVG, #2], {polygonind}];
  If[res ≠ {},
    seq = Partition[CVG[First@res], 2, 1, 1];
    AppendTo[CVG,
      First@res → DeleteDuplicates@
        Flatten@SequenceSplit[seq, {x___, p : {OrderlessPatternSequence[
          #2[[1]], #2[[-1]]}], y___} ⇒ {x, Insert[p, #1, 2], y}}
    ];
  ] &, {newkeys, edgeinds[[posIntersections]]}];

repPart =
  Thread[{Thread[{ReverseSort@posIntersections, 2}], Reverse[intersectionPts]}];
{α, β} = intersectionPts;
AppendTo[ptToIndAssoc, newPtToInds];
AppendTo[indtoPtAssoc, Reverse[newPtToInds, 2]];
contour = DeleteDuplicates@
  Flatten[Fold[Insert[#1, #2[[2]], #2[[1]]] &, edges, repPart], 1];
poly1 = Join @@ SequenceCases[contour, {___, α} | {β, ___}];
poly2 = Join @@ SequenceCases[contour, {α, __, β}];
KeyDropFrom[CVG, polygonind];
addcellsRule = Thread[newcells → {poly1, poly2}];
AppendTo[CVG, addcellsRule /. ptToIndAssoc];
{indtoPtAssoc, CVG, Append[KeyDrop[areaAssoc, polygonind],
  MapAt[Area@*Polygon, addcellsRule, {All, 2}]],
  Append[KeyDrop[perimAssoc, polygonind],
  MapAt[Perimeter@*Polygon, addcellsRule, {All, 2}]]}

```

```
];
```

computing forces

```
In[ ]:= ka = 1000;
A0 = 0.01;
γ = 0.04 * ka * A0;
P0 = 0;
κ = 0.025;
δt = 0.001;
```

```
In[ ]:= {γ / (ka * A0), κ / (ka * A03/2)}
```

```
Out[ ]:= {0.04, 0.025}
```

area elasticity

```
In[ ]:= FAreaElasticity[indTopts_, localtopo_, areaPolygonAssoc_] :=
Block[{assoc, cellinds, force, vertKeys = Keys[indTopts],
vertLs, vertex, gc, gcc, diffVec, grad, coeff},
First@*Last@Reap@Do[
  assoc = First@Lookup[localtopo, i];
  cellinds = Keys[assoc];
  force = {0, 0};
  vertex = indTopts[i];
  Do[
    vertLs = assoc[j];
    gcc = getCounterClockwise[vertex, vertLs];
    gc = getClockwise[vertex, vertLs];
    diffVec = SetPrecision[gcc - gc, 10];
    grad = SetPrecision[ $\frac{1}{2} \begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix} \cdot \text{diffVec}$ , 10];
    coeff = SetPrecision[2 ka (areaPolygonAssoc[j] - A0), 10];
    force += SetPrecision[coeff * grad, 10], {j, cellinds}
  ];
  Sow@force, {i, vertKeys}
]
```

```
In[ ]:=  $\begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix} \cdot (\text{getCounterClockwise}[\{x_i, y_i\}, \{\{x_{i-1}, y_{i-1}\}, \{x_i, y_i\}, \{x_{i+1}, y_{i+1}\}\}] -$ 
 $\text{getClockwise}[\{x_i, y_i\}, \{\{x_{i-1}, y_{i-1}\}, \{x_i, y_i\}, \{x_{i+1}, y_{i+1}\}\}])$  // MatrixForm
```

```
Out[ ]//MatrixForm=
 $\begin{pmatrix} -y_{-1+i} + y_{1+i} \\ x_{-1+i} - x_{1+i} \end{pmatrix}$ 
```

```
In[ ]:= MatrixForm[ $\begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix} \cdot (\{x_{i+1}, y_{i+1}\} - \{x_{i-1}, y_{i-1}\})$ ]
```

```
Out[ ]//MatrixForm=
```

$$\begin{pmatrix} -y_{-1+i} + y_{1+i} \\ x_{-1+i} - x_{1+i} \end{pmatrix}$$

perimeter elasticity

```
In[ ]:= FPerimeterElasticity[indTopts_, localtopo_, periPolygonAssoc_] :=
Block[{assoc, cellinds, force, vertKeys = Keys[indTopts],
vertLs, vertex, gc, gcc, v1, v2, coeff, grad},
First@*Last@Reap@Do[
  assoc = First@Lookup[localtopo, i];
  cellinds = Keys@assoc;
  force = {0, 0};
  vertex = indTopts[i];
  Do[
    vertLs = assoc[j];
    gc = getClockwise[vertex, vertLs];
    v1 = Normalize[vertex - gc] ~SetPrecision~10;
    gcc = getCounterClockwise[vertex, vertLs];
    v2 = Normalize[gcc - vertex] ~SetPrecision~10;
    grad = SetPrecision[v1 - v2, 10];
    coeff = SetPrecision[2 γ (periPolygonAssoc[j] - P0), 10];
    force += SetPrecision[coeff * grad, 10], {j, cellinds}
  ];
  Sow@force, {i, vertKeys}
]
```

```
In[ ]:= MatrixForm@Normalize[{xi, yi} - {xj, yj}]
```

```
Out[ ]//MatrixForm=
```

$$\begin{pmatrix} \frac{x_i - x_j}{\sqrt{\text{Abs}[x_i - x_j]^2 + \text{Abs}[y_i - y_j]^2}} \\ \frac{y_i - y_j}{\sqrt{\text{Abs}[x_i - x_j]^2 + \text{Abs}[y_i - y_j]^2}} \end{pmatrix}$$

line tension

```
In[ ]:= FLineTension[indTopts_, ptsToInd_, edges_] :=
Block[{vertKeys = Keys@indTopts, $v1, $v2, v1, force, uv},
  force = AssociationThread[vertKeys → 0.];
  Do[
    {$v1, $v2} = i;
    uv = Normalize[$v1 - $v2] ~SetPrecision~10;
    v1 = ptsToInd[$v1];
    force[v1] += SetPrecision[κ * uv, 10],
    {i, edges}];
  Values[force]
]
```

ΣF

```

In[ ]:= F_T[indTopts_, ptsToInds_, localTopology_,
  areaPolygonAssoc_, periPolygonAssoc_, edges_] :=
  - (F_AreaElasticity[indTopts, localTopology, areaPolygonAssoc]
    + F_PerimeterElasticity[indTopts, localTopology, periPolygonAssoc] +
    F_LineTension[indTopts, ptsToInds, edges]);

```

generating mesh

```

In[ ]:= (* ensure PBC logically integrates with the rest of the code *)

```

```

In[ ]:= SeedRandom[1];
pts = RandomReal[{-1, 1}, {200, 2}];

```

```


In[ ]:= pts2 = Flatten[Table[TranslationTransform[{2 i, 2 j}][pts], {i, -1, 1}, {j, -1, 1}], 2];
vor = VoronoiMesh[pts2, {{-3, 3}, {-3, 3}}]

```

```

Out[ ]:=

```

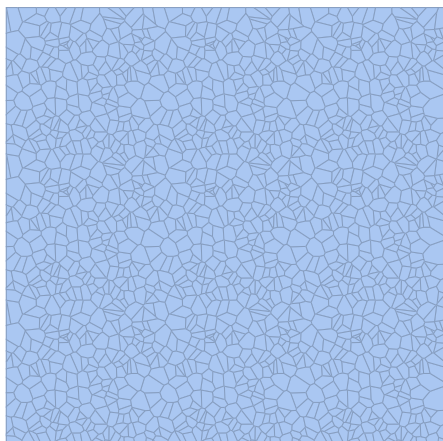

```

In[ ]:= vcells = Catenate[NearestMeshCells[{vor, 2}, #] & /@ pts];
pvor = MeshRegion[MeshCoordinates[vor], MeshCells[vor, vcells]];

```



```

In[ ]:= Show[Table[MeshRegion[TransformedRegion[pvor, TranslationTransform[{2 i, 2 j}]]],
  MeshCellStyle -> {1 -> Black, 2 -> ColorData[2, 7 i + j + 25]}], {i, -3, 3}, {j, -3, 3}]

```

Out[]:=



```

In[ ]:= vpts = Extract[MeshCoordinates[vor],
  Union@Flatten[MeshCells[vor, vcells] /. Polygon[x_] -> x] ~Partition~1];


```

```

In[ ]:= Show[pvor, Graphics[
  {{EdgeForm[{Thick, Dashed, Black}], FaceForm[None], Rectangle[{-1, -1}, {1, 1}]},
  Red, PointSize[0.01], Point@vpts}]]

```


Out[]:=

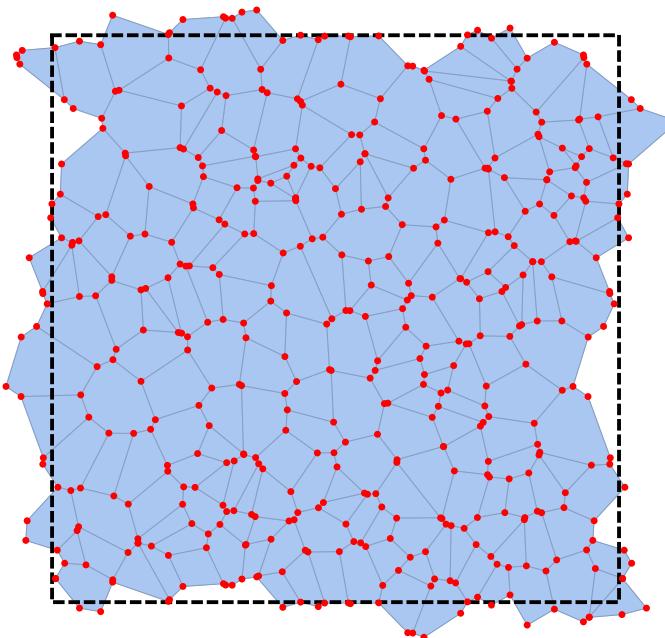

```

In[ ]:= len = Length[pts];
C22 = #.Transpose[#] &@vor["ConnectivityMatrix"[2, 1]];
cells = Region`Mesh`MeshMemberCellIndex[vor, pts2][[All, 2]];
C22perm = C22[[cells, cells]];
pC22 = SparseArray[Unitize[Total[Partition[Unitize[C22perm], {len, len}], 2]]];
pC22 -= IdentityMatrix[len, SparseArray];
Show[pvor, Graph[AdjacencyGraph[pC22, VertexCoordinates → pts],
  VertexStyle → Red, EdgeStyle → Black]]

```

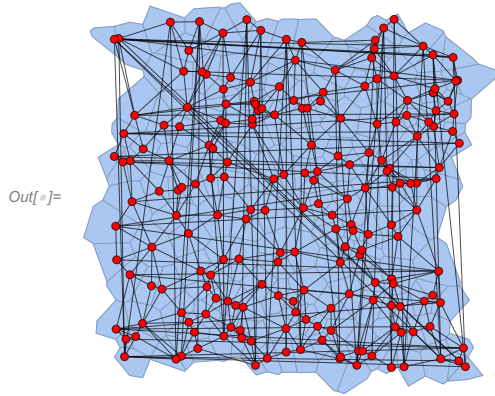

```

In[ ]:= indToPtsAssoc = AssociationThread[
  Replace[First@MeshCells[pvor], Point[x_] => x, {1}] →
  Replace[MeshPrimitives[pvor, 0], Point → Sequence, {2}, Heads → True]
];

```

```

In[ ]:= ptsToIndAssoc = <|Reverse[Normal@indToPtsAssoc, 2]|>;

```

```

In[ ]:= cellVertexGrouping = AssociationThread[Range@Length[#] → #] &@
  Replace[MeshCells[pvor, 2], x_Polygon → Sequence@@x, {1}, Heads → True];

```

```

In[ ]:= vertexCellAssoc = KeySort@GroupBy[
  Flatten[Thread[#] & /@ Reverse[Normal@cellVertexGrouping, 2]], First → Last];

```

```

In[ ]:= wrappedMat = AssociationThread[
  Keys[cellVertexGrouping] → Map[Lookup[indToPtsAssoc, #] /. periodicRules &,
  Lookup[cellVertexGrouping, Keys[cellVertexGrouping]], {2}]];

```

```

In[ ]:= faceListCoords = AssociationThread[Keys[cellVertexGrouping] →
  Map[Lookup[indToPtsAssoc, #] &, Values@Normal@cellVertexGrouping]];

```

```

In[ ]:= ptsToIndAssoc = KeyMap[SetPrecision[#, 10] &, ptsToIndAssoc];
indToPtsAssoc = SetPrecision[#, 10] & /@ indToPtsAssoc;
wrappedMat = SetPrecision[#, 10] & /@ wrappedMat;
faceListCoords = SetPrecision[#, 10] & /@ faceListCoords;

```

Main()

```

In[ ]:= indTopts = indToPtsAssoc;
ptsToInd = ptsToIndAssoc;

```

```

cellToVertexG = cellVertexGrouping;
vertexToCell = vertexCellAssoc;
$wrappedMat = wrappedMat;
$wrappedMatTrim =
  KeyTake[wrappedMat, outerCellsFn[faceListCoords, vertexCellAssoc, ptsToIndAssoc]];
$faceListCoords = faceListCoords;
areaPolygonAssoc = areaOfPolygon@faceListCoords;
periPolygonAssoc = perimeterOfPolygon@faceListCoords;

SeedRandom[1];
cj = 0;
Tmax = 4000;
t = 0;
tt = {};

Module[{cellsToRemove, edgechanged, polydiv, findEdges},
  saveres = First@Last@Reap@Monitor[
    While[t ≤ Tmax * δt,
      cj = Round[t / δt];

      (* T2 transitions *)
      cellsToRemove = cellsforT2[areaPolygonAssoc, cellToVertexG];
      If[cellsToRemove ≠ {},
        {indTopts, ptsToInd, vertexToCell, cellToVertexG, $wrappedMat,
          $faceListCoords} = T2TransitionFn[cellsToRemove, indTopts, ptsToInd,
            vertexToCell, cellToVertexG, $wrappedMatTrim, $faceListCoords];
        bcells = outerCellsFn[$faceListCoords, vertexToCell, ptsToInd];
        $wrappedMatTrim = KeyTake[$wrappedMat, bcells];
      ];

      (* T1 transitions *)
      edges = DeleteDuplicatesBy[
        Flatten[Map[Partition[#, 2, 1, 1] &, Values[cellToVertexG]], 1], Sort];
      {indTopts, vertexToCell, cellToVertexG, $wrappedMat, $faceListCoords} =
        T1transitionFn[edges, indTopts, ptsToInd, vertexToCell,
          cellToVertexG, $wrappedMatTrim, $faceListCoords];
      bcells = outerCellsFn[$faceListCoords, vertexToCell, ptsToInd];
      $wrappedMatTrim = KeyTake[$wrappedMat, bcells];
      ptsToInd = AssociationMap[Reverse, indTopts];
      areaPolygonAssoc = areaPolygon /@ $faceListCoords;
      periPolygonAssoc = perimeterPolygon /@ $faceListCoords;

      (* cell divisions *)
      polydiv = selectDivCells[areaPolygonAssoc];
      If[polydiv ≠ {},
        Scan[({indTopts, cellToVertexG, areaPolygonAssoc, periPolygonAssoc} =
          cellDivision[#, indTopts, areaPolygonAssoc,
            periPolygonAssoc, cellToVertexG]) &, polydiv];
        vertexToCell = KeySort@GroupBy[Flatten[(Reverse[#, 2] &)]@*
          Thread /@ Normal@cellToVertexG, First → Last];
        $faceListCoords = Lookup[indTopts, #] & /@ cellToVertexG;
        $wrappedMat = Map[# /. periodicRules &, $faceListCoords];
        bcells = outerCellsFn[$faceListCoords, vertexToCell, ptsToInd];
        $wrappedMatTrim = KeyTake[$wrappedMat, bcells];
      ];
    ]
  ];

```

```

ptsToInd = AssociationMap[Reverse, indTopts];

(* update positions *)
localtopo = getLocalTopology[ptsToInd, indTopts, vertexToCell,
    cellToVertexG, $wrappedMatTrim, $faceListCoords][#] & /@ indTopts;
edgeLst = SortBy[Flatten[Map[Partition[#, 2, 1, 1] &,
    Values[$faceListCoords]], 1], First];
externedges = outeredges[indTopts, localtopo];
edgeLst = Join[edgeLst, externedges];
(*capture the first and the last output for the magnitude of force*)
If[cj == 3 || (cj + 1) == Tmax, AppendTo[tt, FT[indTopts, ptsToInd,
    localtopo, areaPolygonAssoc, periPolygonAssoc, edgeLst] δt]];

indTopts = AssociationThread[
    Keys[indTopts] → SetPrecision[(Values[indTopts] + FT[indTopts, ptsToInd,
    localtopo, areaPolygonAssoc, periPolygonAssoc, edgeLst] δt), 10]];

ptsToInd = AssociationMap[Reverse, indTopts];
$faceListCoords = Lookup[indTopts, #] & /@ cellToVertexG;
areaPolygonAssoc = areaPolygon /@ $faceListCoords;
periPolygonAssoc = perimeterPolygon /@ $faceListCoords;
vertexToCell = GroupBy[Flatten[
    (Reverse[#, 2] &) @* Thread /@ Normal@cellToVertexG], First → Last];
$wrappedMat = Map[#, /. periodicRules &, $faceListCoords];
bcells = outerCellsFn[$faceListCoords, vertexToCell, ptsToInd];
$wrappedMatTrim = KeyTake[$wrappedMat, bcells];


(*plt=
    Graphics[{ColorData[1][1], Thick, Values@Map[Line[Join[##, {First@#}]] &@
        Lookup[indTopts, #] &, cellToVertexG], ImageSize → Medium]; *)
plt = Graphics[{FaceForm[LightBlue], EdgeForm[{Black}], Values[
    Polygon@Lookup[indTopts, #] & /@ cellToVertexG], ImageSize → Medium];
(*plt=Graphics[{■, Thick, Values@Map[Line[Join[##, {First@#}]] &@
    Lookup[indTopts, #] &, cellToVertexG], ImageSize → Medium]; *)
If[Mod[cj, 2] == 0, Sow[plt]];
t += δt;
], {cj, plt}
]
]; // AbsoluteTiming

```


Out[#]= {1423.85, Null}

In[]:= plt

Out[]:=

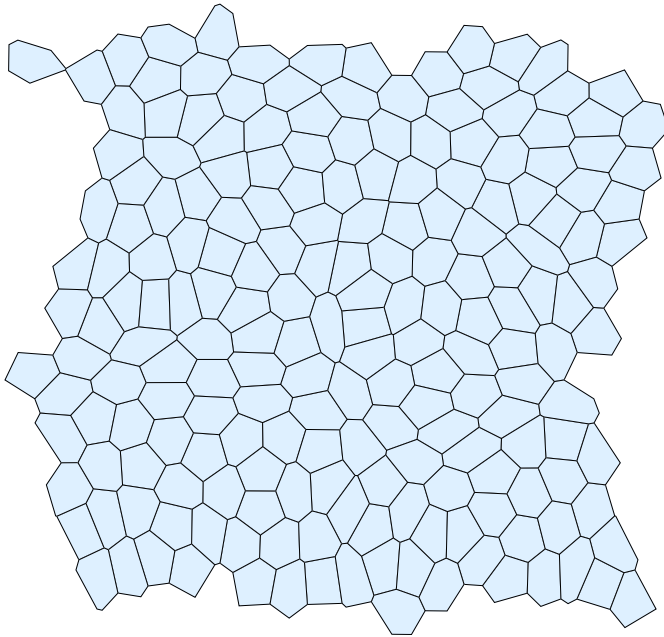

In[]:= (ListLinePlot[#, PlotStyle → {{Thickness[0.01], Red}, {Thickness[0.01], Darker@Blue}},
PlotLabel → "force"] &) @* Transpose /@ tt

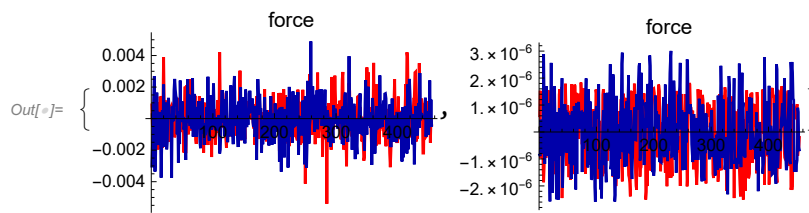

miscellaneous

```

In[ ]:= localtopotemp =
  getLocalTopology[ptsToIndAssoc, indToPtsAssoc, vertexCellAssoc, cellVertexGrouping,
    wrappedMat, faceListCoords][#] & /@ indToPtsAssoc;
edgeLsttemp = SortBy[Flatten[Map[Partition[#, 2, 1, 1] &, Values[faceListCoords]], 1],
  First];
externedgestemp = outeredges[indToPtsAssoc, localtopotemp];
Show[pvor, Graphics[{{Thin, Black, Arrowheads[Small], Arrow /@ edgeLsttemp},
  {Thin, Red, Arrowheads[Small], Arrow /@ externedgestemp}}, ImageSize -> Medium]

```

Out[]:=

