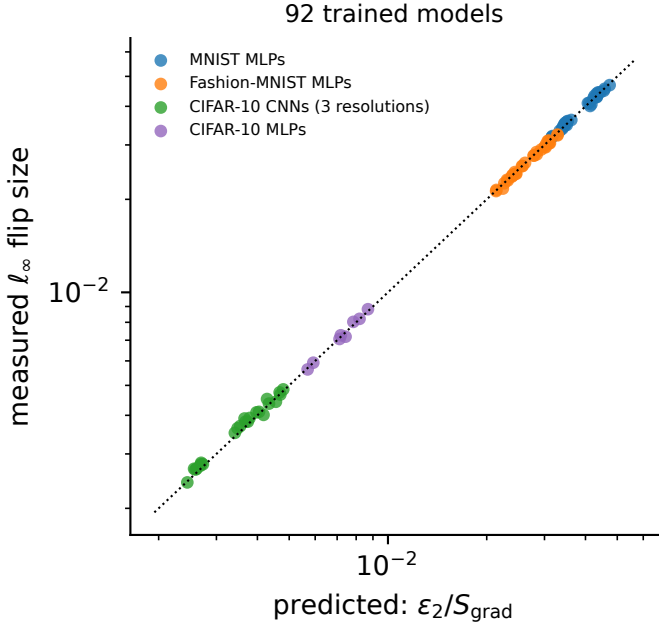
92 trained models
MNIST MLPs
Fashion-MNIST MLPs
CIFAR-10 CNNs (3 resolutions)
CIFAR-10 MLPs
measured ℓ_∞ flip size
10^{-2}
10^{-2}
predicted: $\varepsilon_2/S_{\text{grad}}$

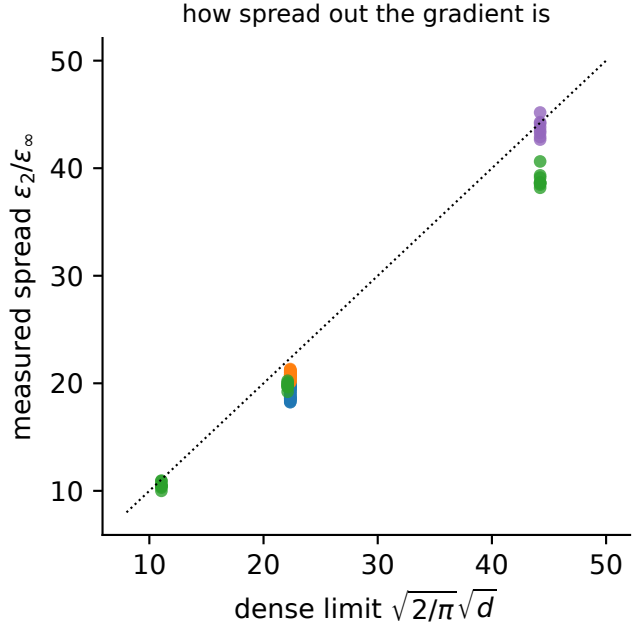
how spread out the gradient is
measured spread $\varepsilon_2/\varepsilon_\infty$
50
40
30
20
10
10
20
30
40
50
dense limit $\sqrt{2/\pi}\sqrt{d}$

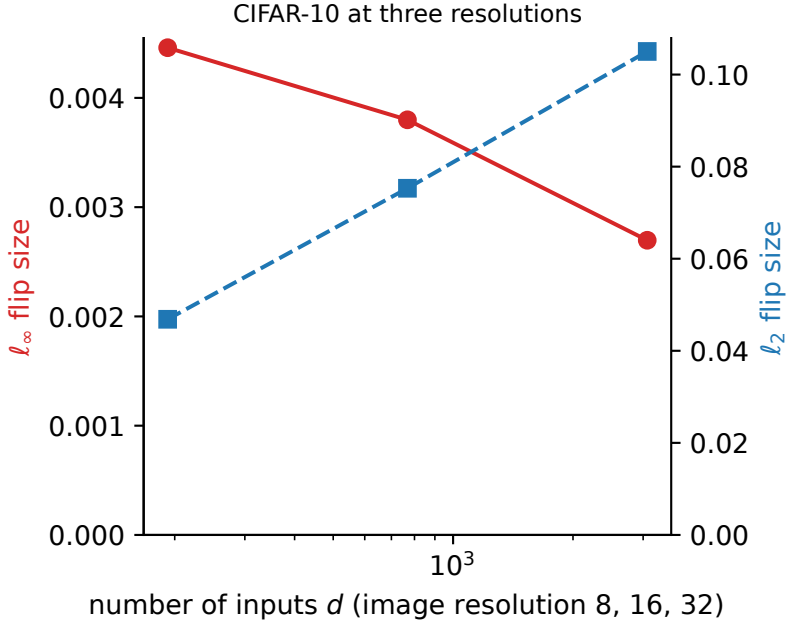
CIFAR-10 at three resolutions
ℓ_∞ flip size
0.004
0.003
0.002
0.001
0.000
ℓ_2 flip size
0.10
0.08
0.06
0.04
0.02
0.00
10^3
number of inputs d (image resolution 8, 16, 32)