


# Initial Performance

*Prabhakaran, Sergio, Ales*

*28 April 2016*









## Performance

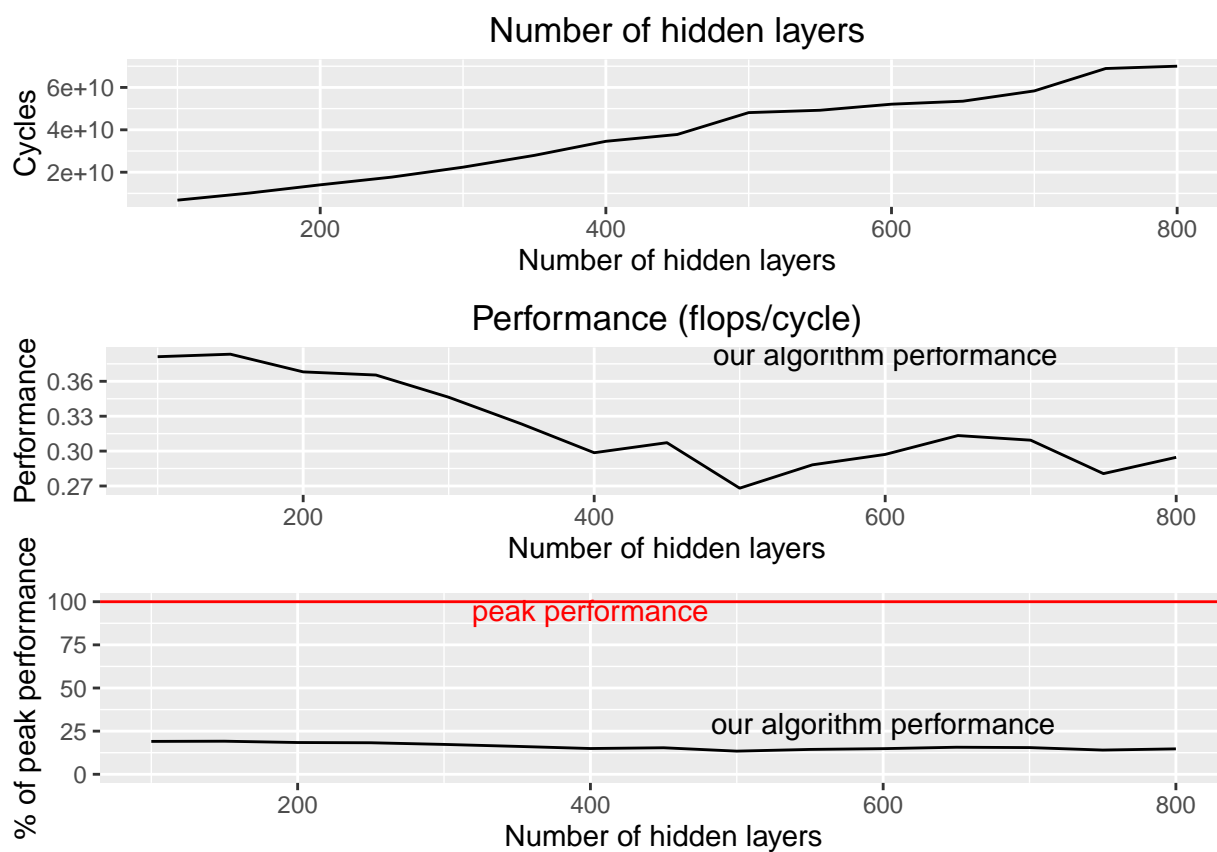


Note: The peak performance is just a little bit over 2 flops/cycle but that is not significant.

## Functions Performance

```
## Warning: Removed 1 rows containing missing values (geom_text).
```

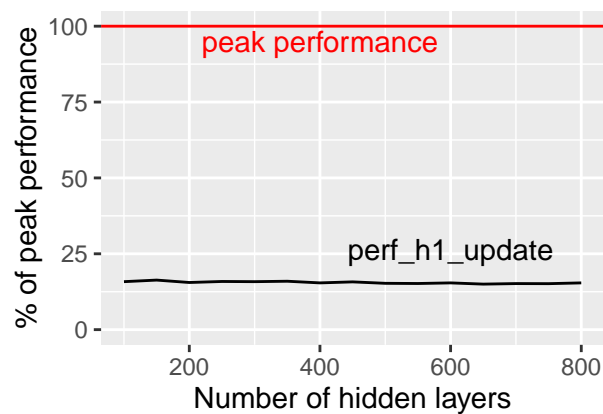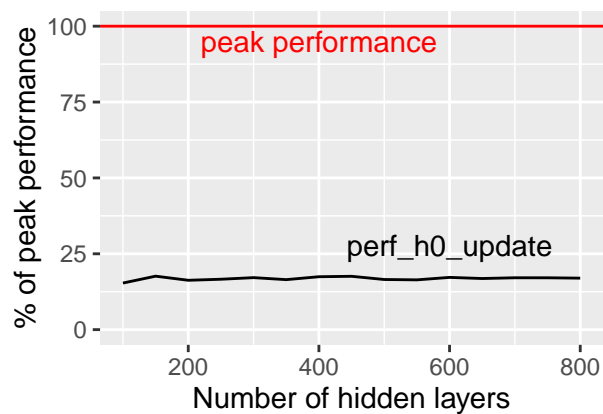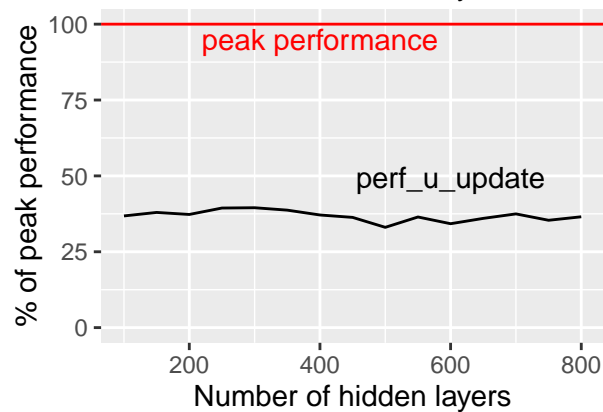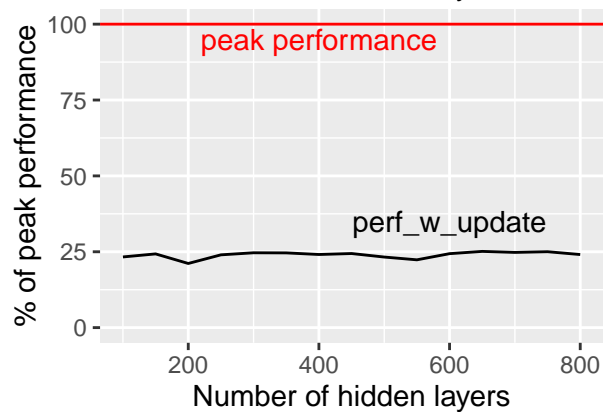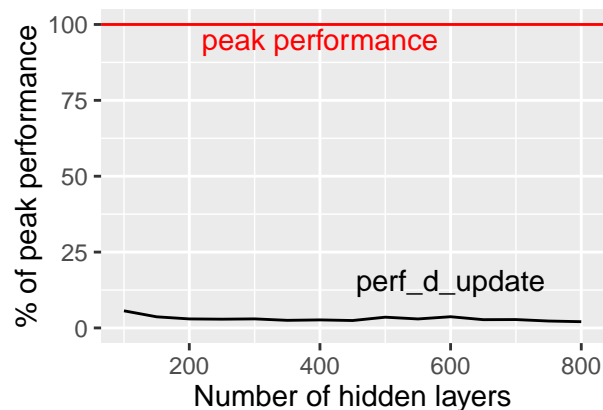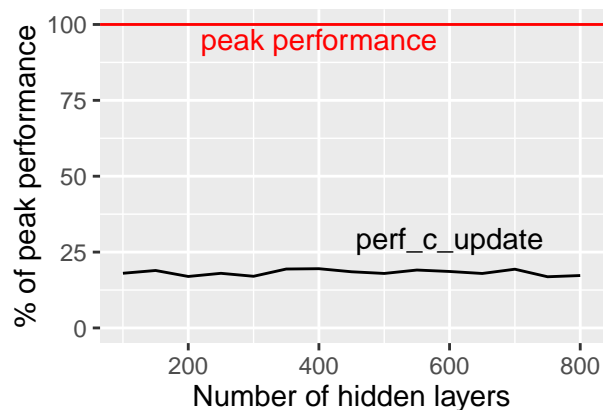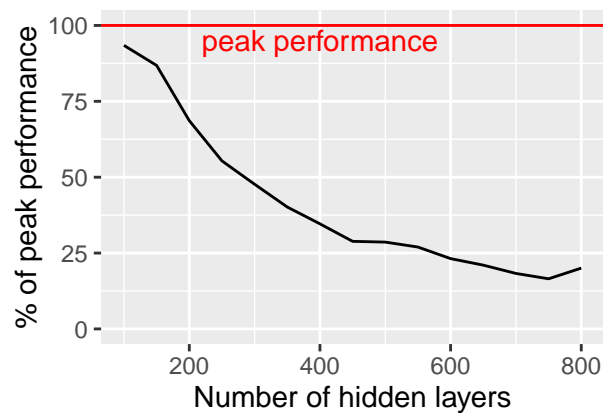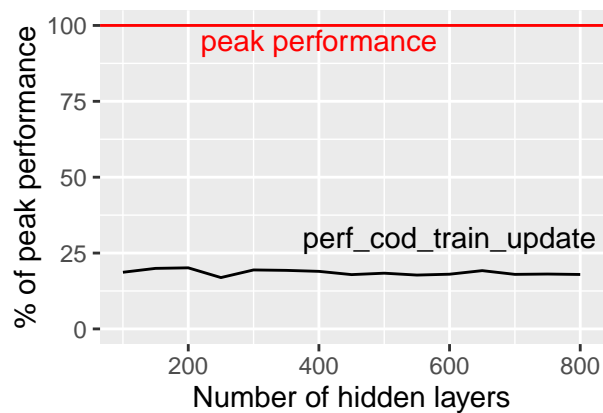

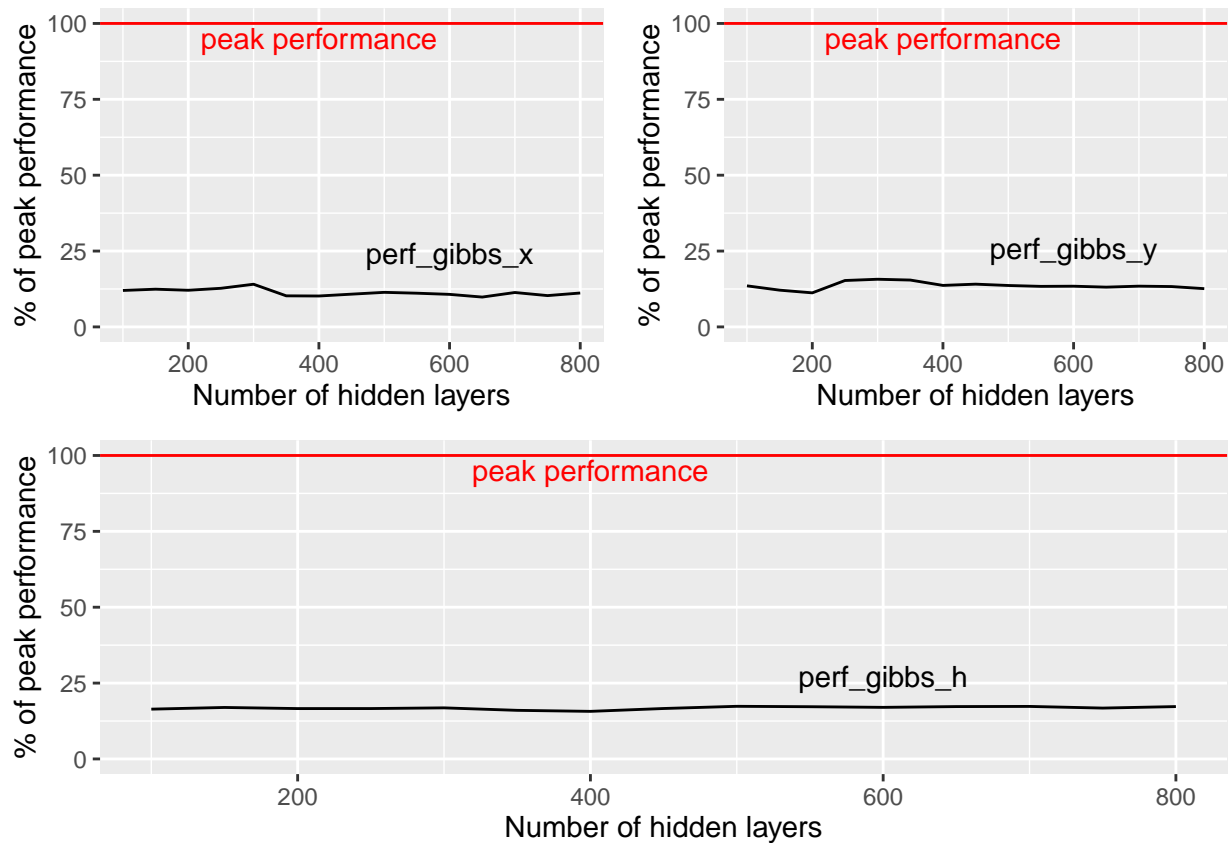

## Operations Counts and Optimization Ideas

```
H_update:
  adds:    n 794
  mults:   n 784
  sigmoid: n 4
  reads:   n 1579
  writes:  n
  if:      n 10 (should we count them???)

All: 1582 n

Comment: 1st inner loop: loop unrolling + scalar replacement
        2nd inner loop: full unrolling (K = 10)
        outer loop: unrolling + scalar replacement
        vector SIMD
        consider cache misses (blocking?, ...)
        if vs mask???
```

```
sigmoid:
  adds:    2
  mults:
  div:     1
  exp:     1
```

```

All: 4

W_update:
  adds:   n 2*786
  mults:  n 3*786
  reads:  n 5*786
  writes: n 786

All: 3930 n

Comment: loop unrolling + scalar replacement to rearrange adds and mults
        SIMD instructions

b_update:
  adds:   2*786
  mults:  786
  read:   3*786
  writes: 786

All: 2358

Comment: loop unrolling
        SIMD instructions

c_update:
  adds:   2n
  mults:  n
  reads:  3n
  writes: n

All: 3n

Comment: loop unrolling
        SIMD instructions

d_update:
  adds:   bound at most 20
  mults:  0
  reads:  20
  writes: 20

All: 20

Comment: is it possible to do sth with IFs???

U_update:
  adds:   20 n
  mults:  20 n
  reads:  30 n
  writes: 20 n

All of them upper bound

```

```

All: 40 n

Comment: IFs???

gibbs_H:
  adds:      n 787
  mults:     n 786
  sigmoid:   4n
  uniform:   2n
  reads:     n(2 + 2*786)
  writes:    n
  ifs:       n

All: 1579 n

Comment: inner loop - loop unrolling + scalar replacement
        outer loop - loop unrolling
        SIMD instructions

gibbs_Y:
  adds:      10n + 11
  mults:     10n
  divs:      10
  uniform:   2
  reads:     20n + 40
  writes:    20
  ifs:       10
  allocation: 10 doubles

All: 20 n + 23

Comment: loop unrolling
        full unrolling of K-loops
        SIMD instructions

gibbs_X:
  adds:      n 786
  mults:     n 786
  sigmoid:   4*786
  uniform:   2*786
  reads:     786 + 2*n*786
  writes:    786
  ifs:       786

All: 1572 n + 4716

Comment: loop unrolling + sc. replacement
        SIMD instructions

uniform:
  rand: 1
  div: 1

```

```

All: 2

COD_training_update:
  h_update
  allocations: n ints, 786 ints, n doubles
  gibbs_H
  ...

All flops: 10308 n + 7117

COD_train:
  All: 2500*(10308 n + 7117)

Predict:
  adds:    n 786 + n + 3Kn + K
  mults:   n 786
  log:     n 10
  exp:     n 10
  reads:   2n786 + n + 20n + 20
  writes:  n + 10
  ifs:     10

  allocations: n doubles, 10 doubles,

```

## Questions

Q: add:1, mult:1, div:39, exp:?, random:?

Q: Should we count IFs or not? I think that they don't impact floating operations

Q: Measuring - I think we should measure with exactly the same input and average it

Q: Measuring over unittests with smaller matrices and other input things? Yes/No?

Q: Validation - are unittests enough? To test it in details is quite hard.

Q: Input size: Can we take subset of data for faster computation?