filament v3.x

Blade UI Components

a Filament Blade Component starts with x-filament::

```
<x-filament::component>
</x-filament::component>
```

Section

`<x-filament::section>`

`<x-slot name="heading">`

User details

The Section content here
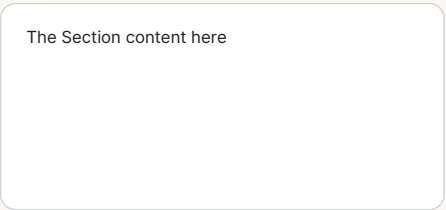
```
icon="heroicon-o-user"
icon-color="info"
icon-size="sm"
```
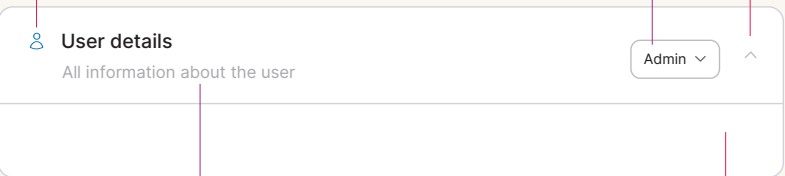
`<x-slot name="headerEnd">`

`collapsible`

User details
All information about the user

Admin

`<x-slot name="description">`

`collapsed`

The Section content here

User details
All information
about the user

`aside`
`content-before`

User details
All information
about the user

The Section content here

`aside`

```
<x-filament::section
    icon="heroicon-o-user"      add an icon to the header
    icon-color="info"
    icon-size="sm"

    collapsible                  make section collapsible
    collapsed                    section collapsed by default
    persist-collapsed            persist if section is collapsed in local storage
    id="user-details"            unique id to identify section in local storage

    aside                        section header aside the content
    content-before               content before the header
>
    <x-slot name="heading">
        User details
    </x-slot>

    <x-slot name="description">
        All information about the user
    </x-slot>

    The Section content here

    <x-slot name="headerEnd">     add content to the end of the header
        {{-- Input to select the user's ID --}}
    </x-slot>

</x-filament::section>
```
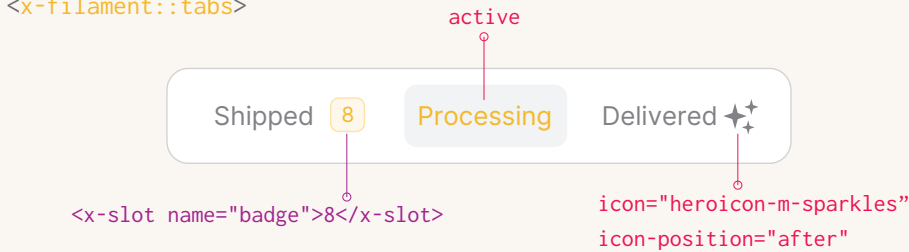
Tabs

`<x-filament::tabs>`

active

Shipped 8   Processing   Delivered ✨

`<x-slot name="badge">8</x-slot>`

`icon="heroicon-m-sparkles"`
`icon-position="after"`

```
<x-filament::tabs label="Content tabs">
    <x-filament::tabs.item
        :active="$activeTab === 'tab1'"       condition to make
        wire:click="$set('activeTab', 'tab1')"   tab active
    >
        Shipped
        <x-slot name="badge">
            8
        </x-slot>
    </x-filament::tabs.item>

    <x-filament::tabs.item
        active
        :href="route('notifications')"   html link instead of button
        tag="a"
    >
        Processing
    </x-filament::tabs.item>

    <x-filament::tabs.item
        icon="heroicon-m-sparkles"   add icon to tab
        icon-position="after"        icon position after the label
    >
        Delivered
    </x-filament::tabs.item>
</x-filament::tabs>
```

Using AlpinjeJS to make tab active

```
<x-filament::tabs
    x-data="{ activeTab: 'tab1' }">
    <x-filament::tabs.item
        alpine-active="activeTab === 'tab1'"
        x-on:click="activeTab = 'tab1'"
    >
```

Breadcrumbs

`<x-filament::breadcrumbs>`

Dashboard > Users > Create User

```
<x-filament::breadcrumbs :breadcrumbs="[
    '/' => 'Dashboard',
    '/dashboard/users' => 'Users',
    '/dashboard/users/create' => 'Create User',
]" />
```

keys are URLs

values are the text to be displayed for each link

Loading Indicator

`<x-filament::loading-indicator>`

```
<x-filament::loading-indicator
    class="h-5 w-5"
/>
```

Badge

`<x-filament::badge>`

color="success"

icon-position="after"

✨ New   New ✨

icon="heroicon-m-sparkles"

```
<x-filament::badge
    color="success"
    icon="heroicon-m-sparkles"
    icon-position="after"
>
    New
</x-filament::badge>
```

possible colors:
danger, gray, info,
success, warning

Avatar

`:circular="false"`

`<x-filament::avatar>`

```
<x-filament::avatar
    src="https://nasa.gov/saturn.jpg"
    alt="Saturn"
    :circular="false"    square avatar
    size="lg"
/>
```

size can also be custom classes:
w-12 h-12