


Modal

<x-filament::modal> open a dialog window or slide-over

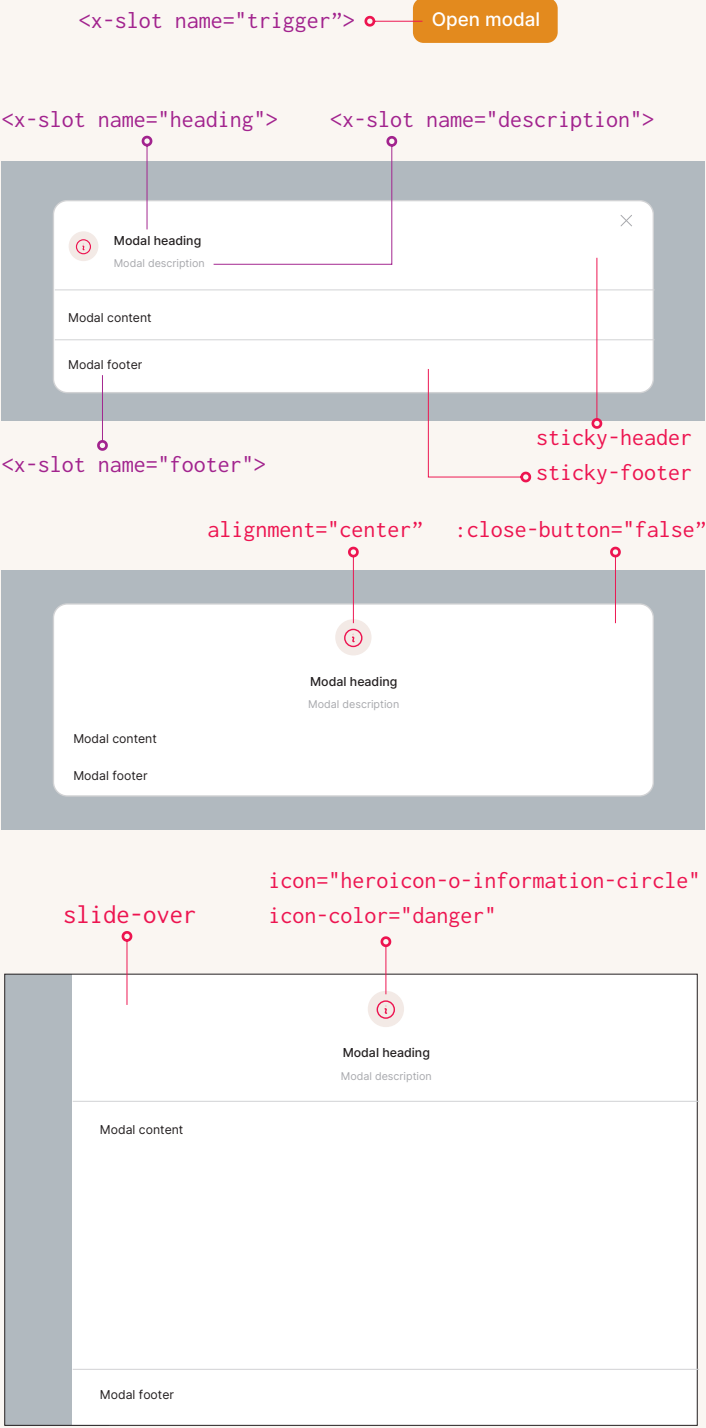

```
<x-filament::modal
  id="edit-user"      id used to reference the modal
  icon="heroicon-o-information-circle"
  icon-color="danger"
  alignment="center"  modal content aligment (start or center)
  slide-over
  sticky-header
  sticky-footer
  width="5xl"         xs, sm, md, lg, xl, 2xl, 3xl, 4xl, 5xl, 6xl, 7xl, screen
  :close-by-clicking-away="false"
  :close-button="false"
>
  render a button that opens the modal:      or      dispatch open-modal or close-modal
  browser event, passing the modal's ID:

  <x-slot name="trigger">
    <x-filament::button>
      Open modal
    </x-filament::button>
  </x-slot>

  From Livewire component:
  $this->dispatch('open-modal', id: 'edit-user');

  From Alpine.js:
  $dispatch('open-modal', { id: 'edit-user' })

  <x-slot name="heading">
    Modal heading
  </x-slot>

  <x-slot name="description">
    Modal description
  </x-slot>

  Modal content

  <x-slot name="footer">
    Modal footer
  </x-slot>

  <x-slot name="footerActions">
    {{-- Footer actions --}}
  </x-slot>
</x-filament::modal>
```

Dropdown

<x-filament::dropdown>




Icon Button

<x-filament::icon-button>



Button

<x-filament::button>

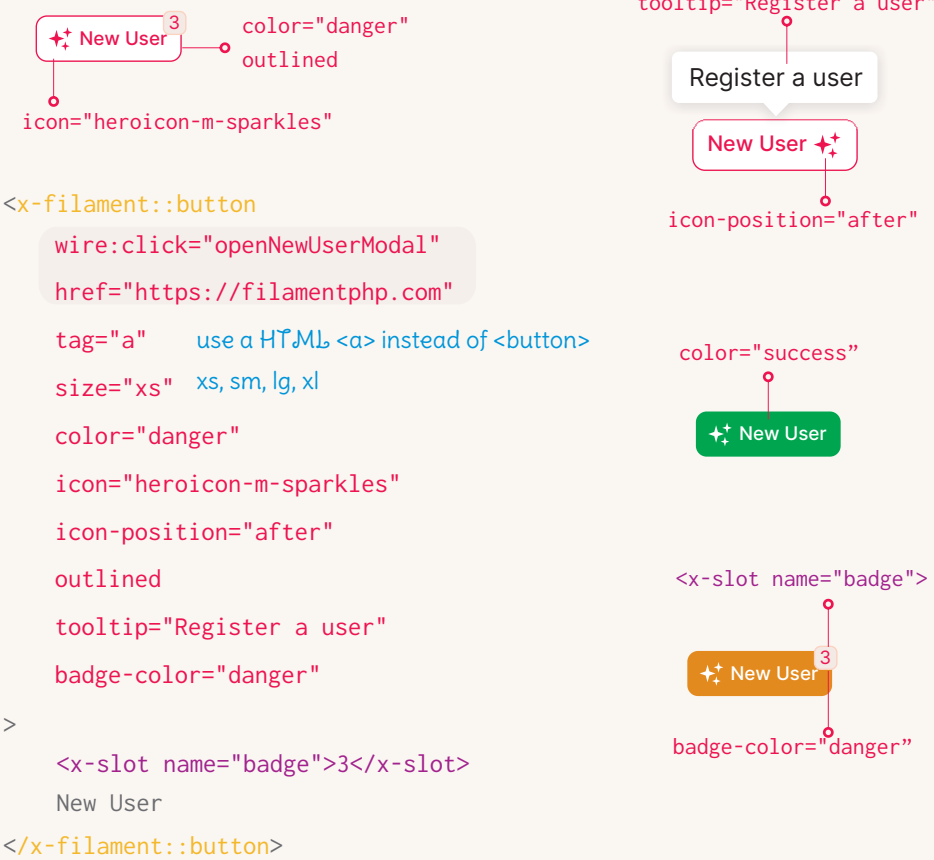

Link

<x-filament::link>

