


Boss

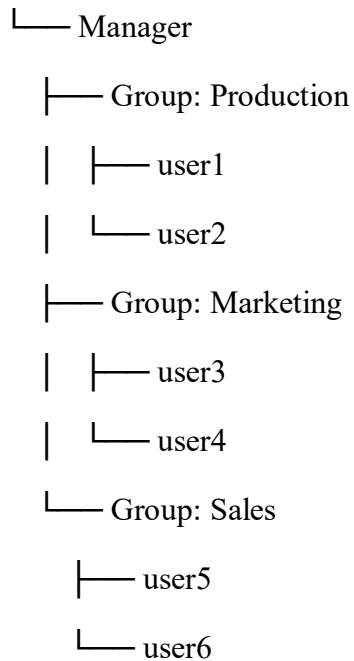


A. Create a group for each department

Command: - groupadd production

– groupadd marketing

– groupadd sales

– cat /etc/group | grep -E “production|marketing|sales”

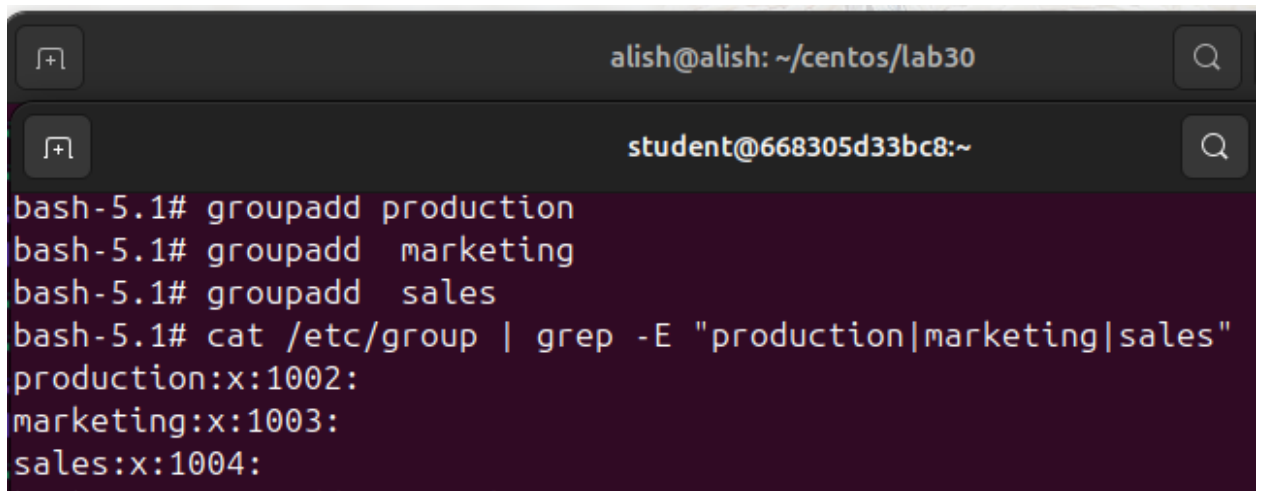

```
alish@alish: ~/centos/lab30
student@668305d33bc8:~
bash-5.1# groupadd production
bash-5.1# groupadd marketing
bash-5.1# groupadd sales
bash-5.1# cat /etc/group | grep -E "production|marketing|sales"
production:x:1002:
marketing:x:1003:
sales:x:1004:
```

B. Create user account (user1 to user 6, boss, manager) for each employee assigning them respective group

Command : – useradd –g production user1

– useradd –g production user2

– useradd –g marketing user3


– useradd –g marketing user4

– useradd –g sales user5

– useradd –g sales user6


– useradd boss

– useradd manager

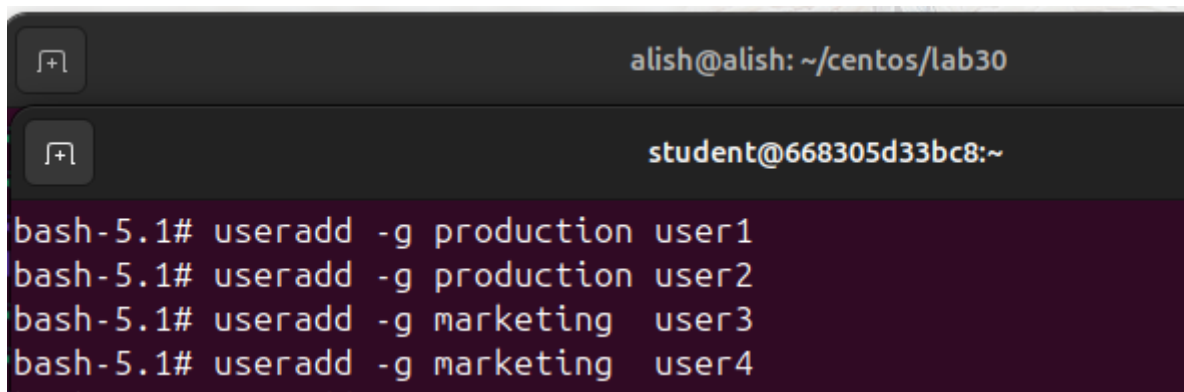

A terminal window with a dark background. The title bar shows 'alish@alish: ~/centos/lab30'. Below the title bar, the prompt 'student@668305d33bc8:~' is visible. The terminal contains the following commands and their outputs:

```
bash-5.1# useradd -g production user1
bash-5.1# useradd -g production user2
bash-5.1# useradd -g marketing user3
bash-5.1# useradd -g marketing user4
```

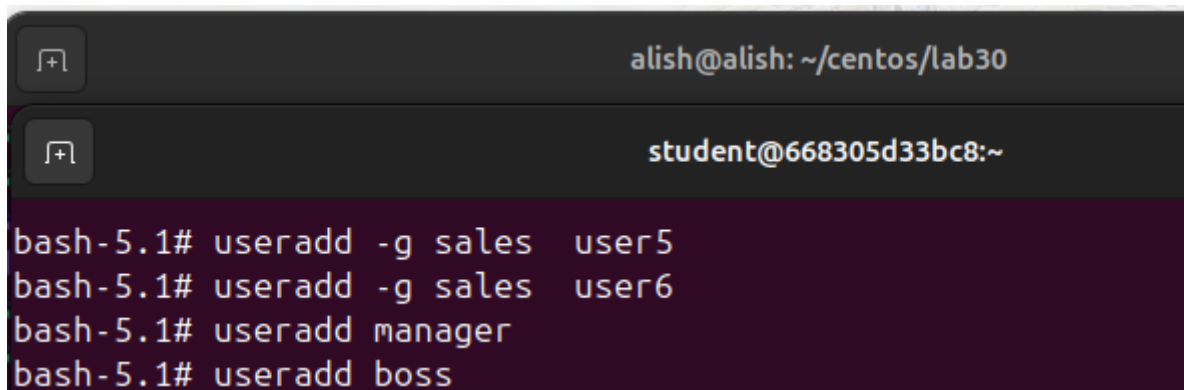

A terminal window with a dark background. The title bar shows 'alish@alish: ~/centos/lab30'. Below the title bar, the prompt 'student@668305d33bc8:~' is visible. The terminal contains the following commands and their outputs:

```
bash-5.1# useradd -g sales user5
bash-5.1# useradd -g sales user6
bash-5.1# useradd manager
bash-5.1# useradd boss
```

To check the user added is successful or not,

Command : - id user1

- id user2

- id user3

- id user4

- id user5

- id user6

```
alish@alish: ~/centos/lab30
student@668305d33bc8:~

bash-5.1# id user1
uid=1002(user1) gid=1002(production) groups=1002(production)
bash-5.1# id user2
uid=1003(user2) gid=1002(production) groups=1002(production)
bash-5.1# id user3
uid=1004(user3) gid=1003(marketing) groups=1003(marketing)
bash-5.1# id user3
uid=1004(user3) gid=1003(marketing) groups=1003(marketing)
bash-5.1# id user4
uid=1005(user4) gid=1003(marketing) groups=1003(marketing)
bash-5.1# id user5
uid=1006(user5) gid=1004(sales) groups=1004(sales)
bash-5.1# id user6
uid=1007(user6) gid=1004(sales) groups=1004(sales)
```

C. Create common directory (/root/production,/root/marketing and /root/sales) for each department.

Command: – mkdir /root/production

- mkdir /root/marketing

– mkdir /root/sales

```
alish@alish: ~/centos/lab30
student@668305d33bc8:~

bash-5.1# mkdir /root/production
bash-5.1# mkdir /root/marketing
bash-5.1# mkdir /root/sales
bash-5.1# ls /root/
anaconda-ks.cfg      anaconda-post.log  original-ks.cfg  sales
anaconda-post-nochroot.log  marketing          production
```

D. Change ownership of group directories such that boss will become the owner and respective group will get group ownership

Command : – chown boss production /root/production

– chown boss marketing /root/marketing

– chown boss sales /root/sales

```
alish@alish: ~/centos/lab30
student@668305d33bc8:~
bash-5.1# chown boss:production /root/production/
bash-5.1# chown boss:marketing /root/marketing/
bash-5.1# chown boss:sales /root/sales/
bash-5.1# ls -ld /root/production/ /root/marketing/ /root/sales/
drwxr-xr-x 2 boss marketing 4096 Mar 16 01:44 /root/marketing/
drwxr-xr-x 2 boss production 4096 Mar 16 01:44 /root/production/
drwxr-xr-x 2 boss sales 4096 Mar 16 01:45 /root/sales/
```

E. Change the permission of the group directories such that only the owner and owned group member will get the full permission and other will get no permission

Command :- `chmod 770 /root/production`

– `chmod 770 /root/marketing`

- `chmod 770 /root/sales`

To check whether then permission is changed or not

- `ls -ld /root/production/ /root/marketing/ /root /sales`

```
alish@alish: ~/centos/lab30
student@668305d33bc8:~
bash-5.1# chmod 770 /root/production/
bash-5.1# chmod 770 /root/marketing/
bash-5.1# chmod 770 /root/sales
bash-5.1# ls -ld /root/production/ /root/marketing/ /root/sales/
drwxrwx--- 2 boss marketing 4096 Mar 16 01:44 /root/marketing/
drwxrwx--- 2 boss production 4096 Mar 16 01:44 /root/production/
drwxrwx--- 2 boss sales 4096 Mar 16 01:45 /root/sales/
bash-5.1#
```