


Title: Configure SSH Server to allow/deny login for selected host only


A. Allow User

Command : – nano /etc/ssh/ssh_config

- Go to the last line and add “AllowUsers alish@127.0.0.1”
- pkill sshd
- /usr/sbin/sshd

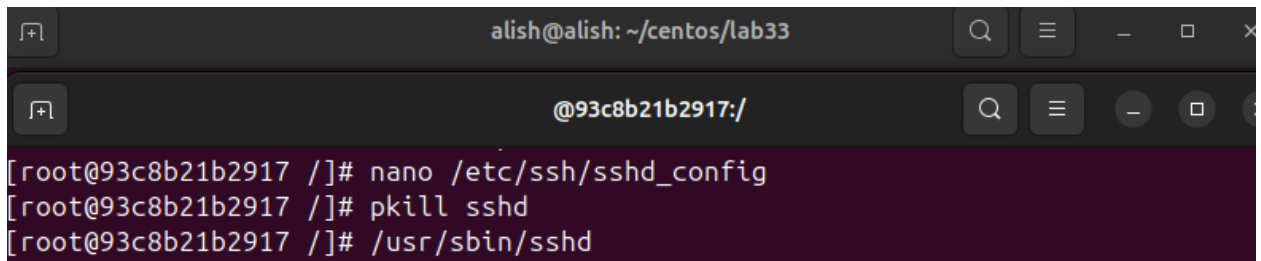

```
alish@alish: ~/centos/lab33
@93c8b21b2917:/
[root@93c8b21b2917 /]# nano /etc/ssh/sshd_config
[root@93c8b21b2917 /]# pkill sshd
[root@93c8b21b2917 /]# /usr/sbin/sshd
```

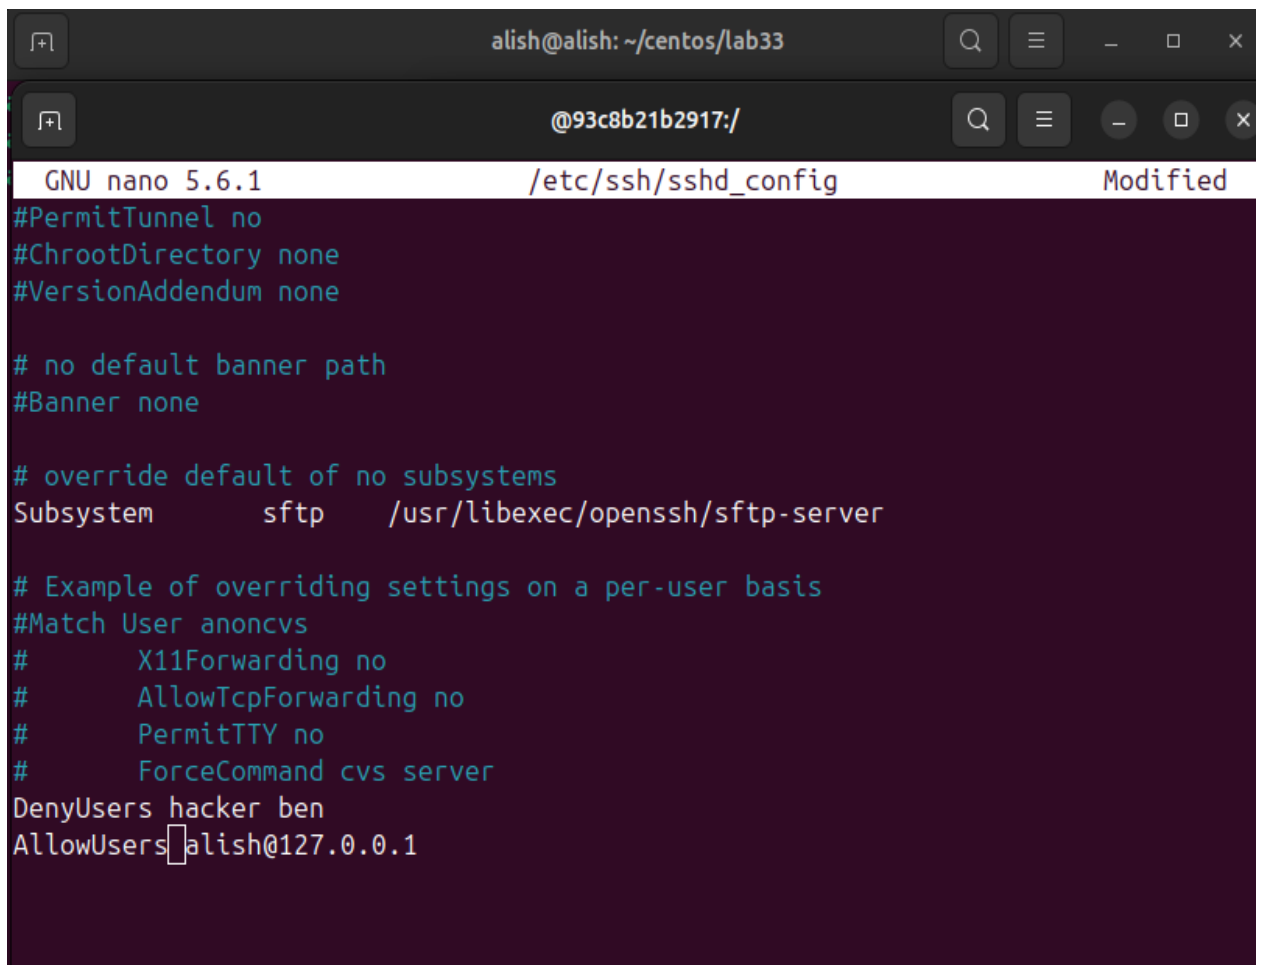

```
alish@alish: ~/centos/lab33
@93c8b21b2917:/
GNU nano 5.6.1 /etc/ssh/sshd_config Modified
#PermitTunnel no
#ChrootDirectory none
#VersionAddendum none

# no default banner path
#Banner none


# override default of no subsystems
Subsystem sftp /usr/libexec/openssh/sftp-server

# Example of overriding settings on a per-user basis
#Match User anoncvs
#    X11Forwarding no
#    AllowTcpForwarding no
#    PermitTTY no
#    ForceCommand cvs server
DenyUsers hacker ben
AllowUsers alish@127.0.0.1
```

Now, check whether a host alish with ip we set can enter through ssh or not,

Command: – ssh [alish@127.0.0.1](#)

– enter a passwd and you should be allowed to enter

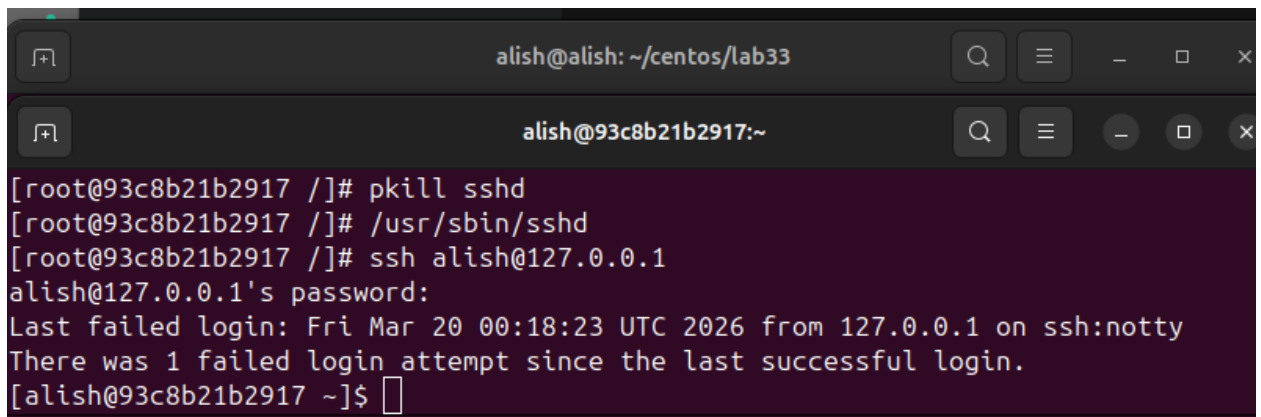

```
alish@alish: ~/centos/lab33
alish@93c8b21b2917:~
[root@93c8b21b2917 /]# pkill sshd
[root@93c8b21b2917 /]# /usr/sbin/sshd
[root@93c8b21b2917 /]# ssh alish@127.0.0.1
alish@127.0.0.1's password:
Last failed login: Fri Mar 20 00:18:23 UTC 2026 from 127.0.0.1 on ssh:notty
There was 1 failed login attempt since the last successful login.
[alish@93c8b21b2917 ~]$
```


B. Deny User

Command: – nano /etc/ssh/sshd


- Go to the last line and add “DenyUsers hacker@127.0.0.1”

– pkill sshd

- /usr/sbin/sshd

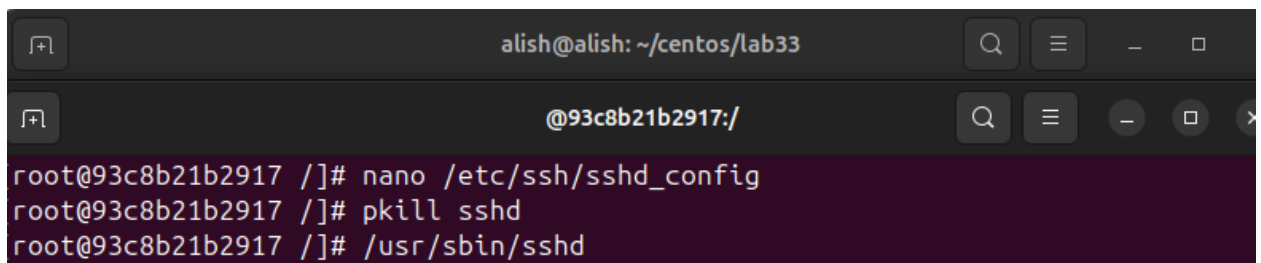

```
alish@alish: ~/centos/lab33
@93c8b21b2917:/
root@93c8b21b2917 /]# nano /etc/ssh/sshd_config
root@93c8b21b2917 /]# pkill sshd
root@93c8b21b2917 /]# /usr/sbin/sshd
```

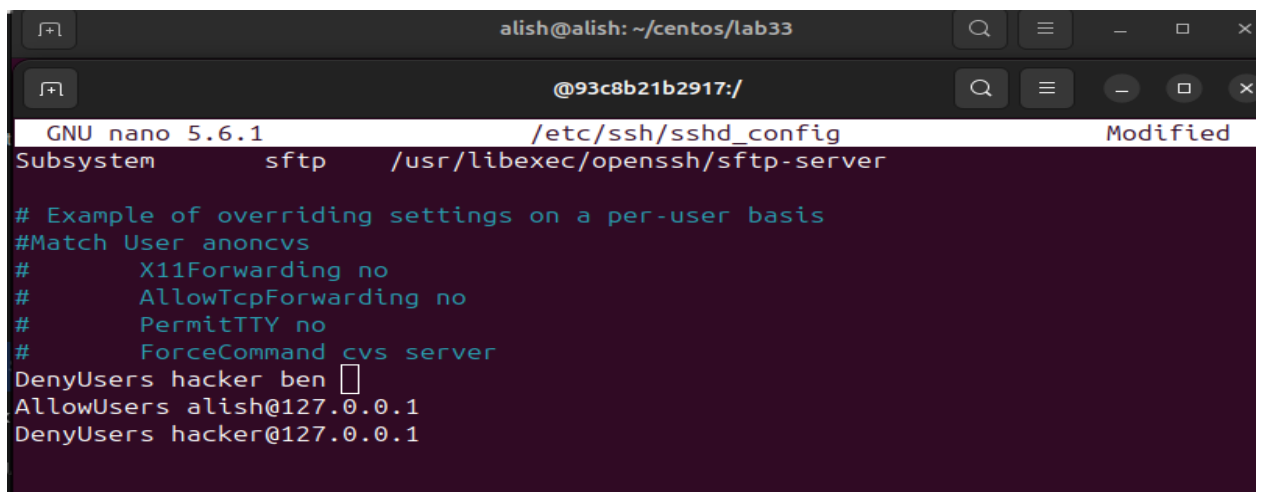


```
alish@alish: ~/centos/lab33
@93c8b21b2917:/
GNU nano 5.6.1 /etc/ssh/sshd_config Modified
Subsystem sftp /usr/libexec/openssh/sftp-server

# Example of overriding settings on a per-user basis
#Match User anoncvs
#    X11Forwarding no
#    AllowTcpForwarding no
#    PermitTTY no
#    ForceCommand cvs server
DenyUsers hacker ben
AllowUsers alish@127.0.0.1
DenyUsers hacker@127.0.0.1
```

Now, check where the host hacker can enter through ssh from that particular ip we denied

Command : – ssh [hacker@127.0.0.1](#)

Even with correct passwd hacker can't enter as we have denied in our ssh configuration

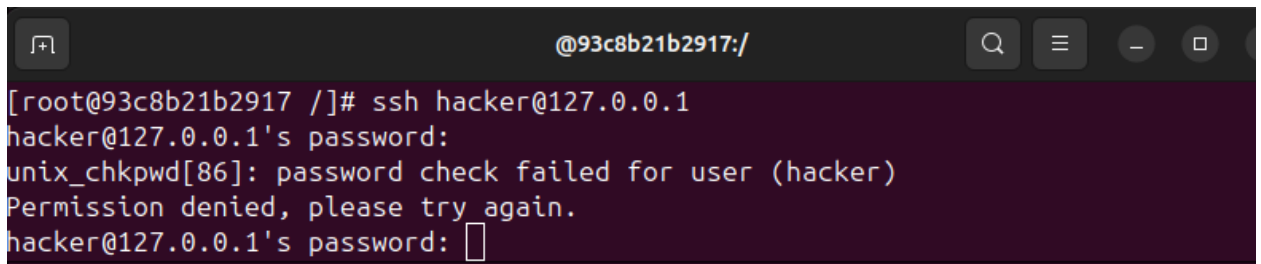A terminal window with a dark background. The title bar shows a window icon, the text '@93c8b21b2917:/', a search icon, a menu icon, and window control buttons. The terminal content shows a root user at 93c8b21b2917 running 'ssh hacker@127.0.0.1'. It prompts for the password, then displays the error 'unix_chkpwd[86]: password check failed for user (hacker)' and 'Permission denied, please try again.' before showing the password prompt again with a cursor.

```
[root@93c8b21b2917 /]# ssh hacker@127.0.0.1
hacker@127.0.0.1's password:
unix_chkpwd[86]: password check failed for user (hacker)
Permission denied, please try again.
hacker@127.0.0.1's password: 
```