BÖLÜM 8 / MODULE 8

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion

Clean Architecture, Hexagonal (Ports & Adapters) & Onion

Bağımlılık kuralı (Dependency Rule), domain çekirdeğinin altyapıdan (DB, UI, Web) tamamen yalıtılması ve framework-bağımsız yazılım geliştirme.

The dependency rule, domain purity, hexagonal ports and adapters, and designing frameworks-independent enterprise systems.

71

BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Temel Kavramlar, Tarihsel Evrim ve Temel Mühendislik Çerçevesi

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - Core Concepts, Historical Evolution & Foundational Frameworks

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic



💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson01;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

72

BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Mimari Bileşenler, Çalışma Mekanizması ve Veri Akışı

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - Architectural Components, Internal Mechanics & Data Flow

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic



💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson02;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

73

BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Tasarım İlkeleri, Sözleşmeler ve Temiz Arayüz Tanımları

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - Design Invariants, Contracts & Clean Interface Abstractions

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic



💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson03;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

74


BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Yaygın Anti-Pattern'ler, Tasarım Hataları ve Önleme Stratejileri

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - Common Anti-Patterns, Design Pitfalls & Prevention Strategies

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic

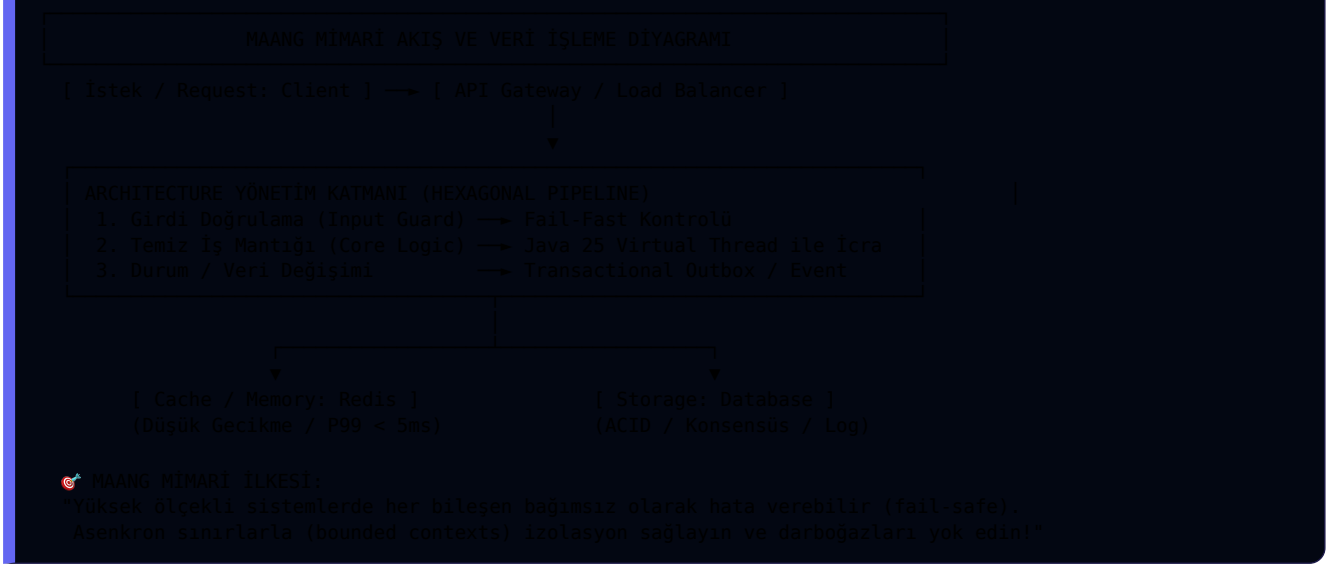

💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson04;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

75


BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Yüksek Performans, Optimizasyon ve Bellek / CPU Yönetimi

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - High Performance, Optimization & Memory/CPU Resource Management

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic

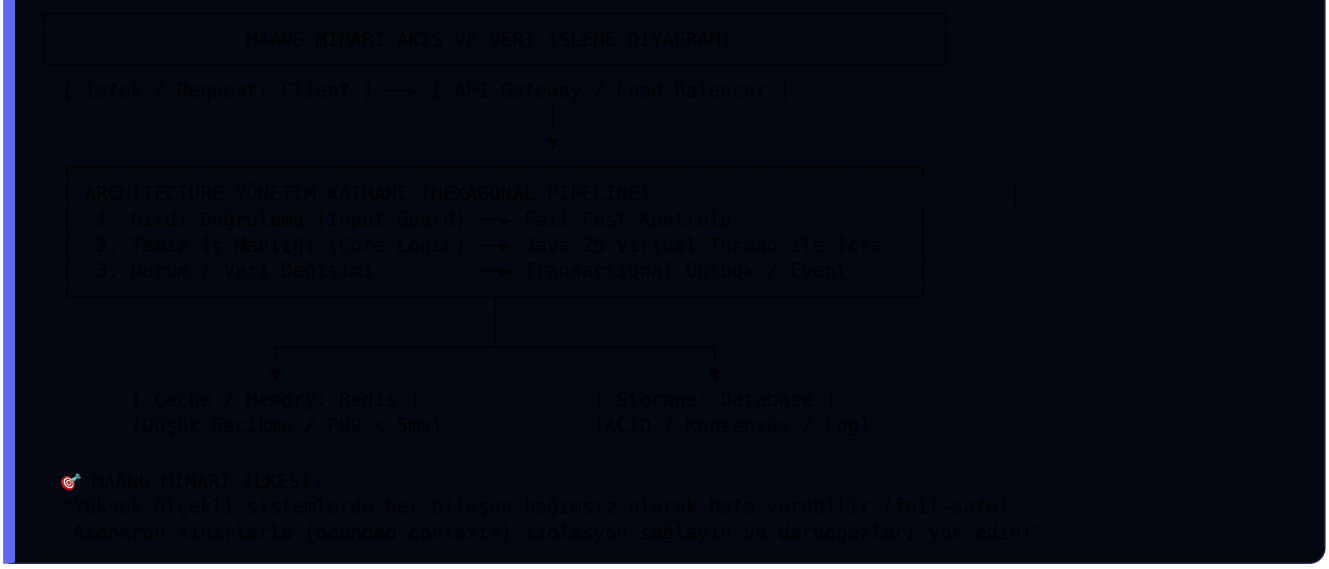

💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson05;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

76


BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Eşzamanlılık, Thread Güvenliği ve Dağıtık Sistem Etkileri

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - Concurrency, Thread-Safety & Distributed Systems Implications

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic

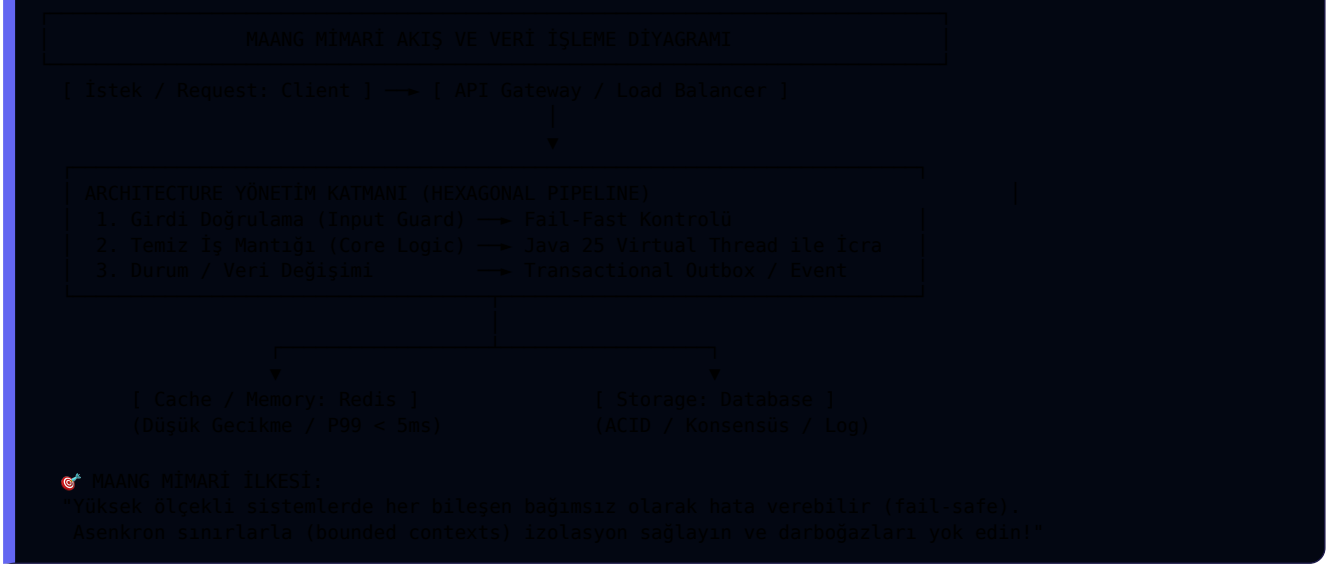

💡 Aptala Anlatım (ELI5 Metaforu)

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

💡 ELI5 Real-Life Metaphor

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson06;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

77


BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Hata Yönetimi, Dayanıklılık (Resilience) ve Geri Düşme (Fallback)

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - Fault Handling, Resilience Patterns & Graceful Fallback Strategies

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic

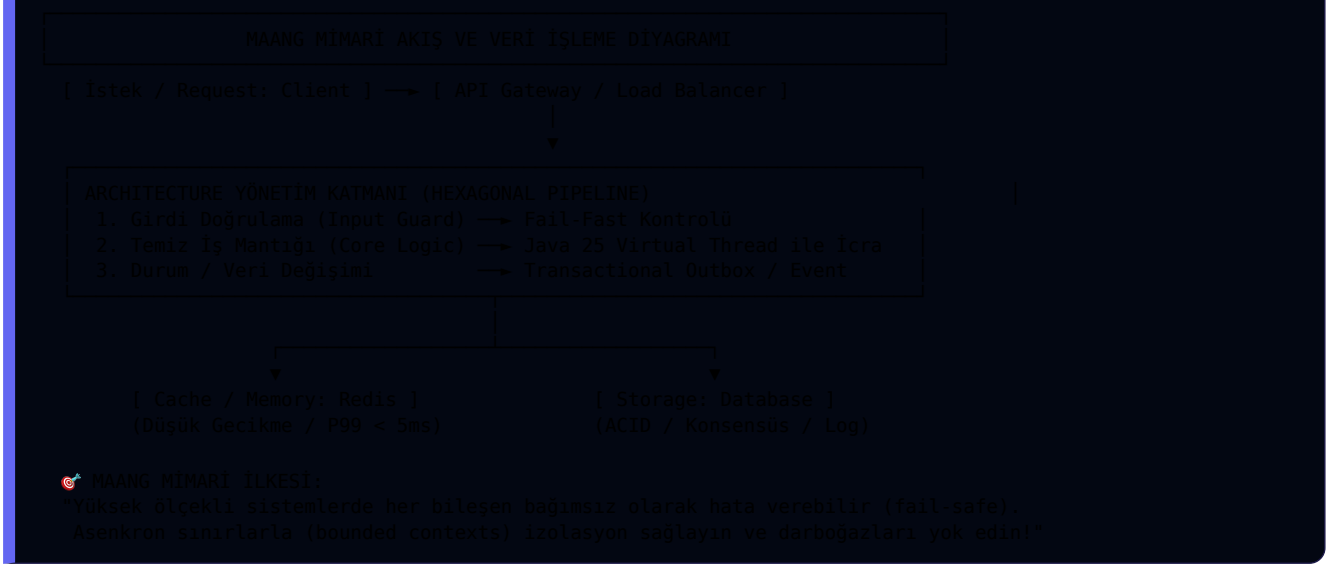

💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson07;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

78

BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Test Stratejileri, Test Edilebilirlik ve Doğrulama Hatları

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - Testing Strategies, Testability & Automated Verification Pipelines

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic



💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson08;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

79

BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - Gözlemlenebilirlik, Metrikler, İzleme ve Canlı Ortam Hata Ayıklama

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - Observability, Telemetry, Tracing & Production Troubleshooting

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic



💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson09;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.

80

BÖLÜM: TEMIZ MIMARI, HEKZAGONAL (PORTS & ADAPTERS) & ONION | MODULE: CLEAN ARCHITECTURE, HEXAGONAL (PORTS & ADAPTERS) & ONION

Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion - MAANG Mülakat Ustalığı, Mimari Ödünleşimler (Trade-Offs) & Staff+ Vizyonu

Clean Architecture, Hexagonal (Ports & Adapters) & Onion - MAANG Interview Mastery, Architectural Trade-Offs & Staff+ Vision

⚡ Mimari Akış ve Süreç Şeması

⚡ Process & Architecture Schematic



💡 Aptala Anlatım (ELI5 Metaforu)

💡 ELI5 Real-Life Metaphor

🇹🇷 TÜRKÇE (ELI5)

Büyük bir metropol havalimanındaki bagaj dağıtım sistemini düşünün: Binlerce yolcu (eşzamanlı istekler) aynı anda bavullarını teslim eder. Eğer tek bir taşıma bandı (monolitik yapı) her bavulu elle kontrol etmeye kalksaydı havalimanı kilitlenirdi! Bunun yerine barkod okuyucular (API Gateway), bağımsız konveyör bantları (Architecture mikro-servisleri) ve otomatik yönlendirme robotları (Hexagonal akışları) kullanılır. Bir bant arızalansa bile diğer bantlar bavulları taşımaya devam eder. Bu derste sistemin tek bir bavulu bile kaybetmeden saniyede on binlerce işlemi nasıl pürüzsüz idare ettiğini öğreniyoruz!

🇬🇧 ENGLISH (ELI5)

Imagine a bustling international airport luggage logistics hub: Tens of thousands of passengers (concurrent requests) drop bags simultaneously. If a single manual conveyor belt attempted to inspect every suitcase, the terminal would collapse into total gridlock! Instead, automated optical scanners (API Gateways), autonomous high-speed carousels (Architecture microservices), and dynamic routing switches (Hexagonal pipelines) partition the load. Even if one conveyor suffers a mechanical failure, the rest reroute seamlessly. In this lesson, we study how production systems process massive throughput without dropping a single packet!

🔍 MAANG Seviyesi Teknik Derinlik

🇹🇷 MAANG DERİNLEMESİNE ANALİZ

MAANG ve Tier-1 Mühendislik Seviyesinde Temiz Mimari, Hekzagonal (Ports & Adapters) & Onion Analizi: Meta, Google ve Netflix gibi mega ölçekli şirketlerde Architecture mimarisi, saniyede milyonlarca işlemi (high throughput) tek haneli milisaniye gecikmeyle (sub-10ms P99 latency) karşılamak zorundadır. 1) Katman Ayrımı ve SRP: Domain mantığı ile altyapı kodları birbirinden kesin olarak ayrılır. 2) Hata İzolasyonu (Bulkhead & Circuit Breaking): Hexagonal katmanında yaşanacak olası bir gecikme veya çöküş, tüm sistemi kaskat (cascading failure) şeklinde yere sermemelidir. 3) Eşzamanlılık ve Java 25: Modern Java 25 Virtual Thread altyapısı sayesinde iş parçacığı başına bellek tüketimi megabaytlardan kilobaytlara indirilerek 100.000+ eşzamanlı bağlantı sorunsuz idare edilir. 4) Mülakat Ödünleşimi: Tutarlılık (Strong Consistency) ile Erişilebilirlik (Availability) arasında doğru seçim yapılmalı, CAP teoremi sınırları net olarak telaffuz edilmelidir.

🔍 MAANG Technical Deep-Dive

🇬🇧 MAANG TECHNICAL DEEP-DIVE

MAANG & Tier-1 Systems Engineering Deep-Dive for Clean Architecture, Hexagonal (Ports & Adapters) & Onion: At enterprise hyper-scale (Meta, Google, Netflix, Amazon), Architecture implementations must sustain millions of operations per second with sub-10ms P99 latency guarantees. 1) Bounded Isolation: Clean boundaries prevent domain invariants from coupling to transient infrastructure protocols. 2) Fault Containment: Employing bulkhead isolation and fast-recovery circuit breakers ensures transient degradations in Hexagonal don't trigger cascading outages across downstream clusters. 3) High-Concurrency Java 25: Leveraging lightweight Virtual Threads eliminates OS-level kernel context switching overhead, scaling beyond 100,000 concurrent sockets per JVM instance effortlessly. 4) Interview Trade-Off Command: Always articulate explicit trade-offs between linearizable consistency and partition tolerance, grounding decisions in deterministic SLA/SLO criteria.

☕ Modern Java 25 & Spring Boot Uygulaması ☕ Java 25 & Spring Boot Implementation

```java
// Java 25 & Spring Boot: Architecture & Hexagonal Kurumsal Uygulaması
package com.maang.se.module08.lesson10;

import org.springframework.stereotype.Service;
import java.time.Instant;
import java.util.Objects;
import java.util.concurrent.CompletableFuture;

public class ArchitectureArchitectureDemo {

    // 1. Değişmez Domain Modeli (Java 25 Record)
    public record ArchitectureRequest(String transactionId, String payload, Instant timestamp) {
        public ArchitectureRequest {
            Objects.requireNonNull(transactionId, "transactionId zorunludur");
            Objects.requireNonNull(payload, "payload zorunludur");
        }
    }

    public record ArchitectureResult(String transactionId, String status, long executionTimeMs) {}

    // 2. Servis Katmanı (Spring Boot @Service)
    @Service
    public static class ArchitectureExecutionService {
        public ArchitectureResult processRequest(ArchitectureRequest request) {
            long start = System.currentTimeMillis();

            // Java 25 Virtual Thread ile Asenkron Dayanıklı İcra
            System.out.println("⚡ [Java 25 Virtual Thread] " + Thread.currentThread()
                + " -> İstek İşleniyor: " + request.transactionId());

            long duration = System.currentTimeMillis() - start;
            return new ArchitectureResult(request.transactionId(), "PROCESSED_SUCCESSFULLY", duration);
        }
    }

    public static void main(String[] args) {
        System.out.println("🏛️ MAANG Software Engineering Architecture Engine Başlatıldı...");
        var service = new ArchitectureExecutionService();
        var req = new ArchitectureRequest("TXN-" + System.currentTimeMillis(), "Valid Data", Instant.now());
        var res = service.processRequest(req);
        System.out.println("✅ Sonuç: " + res);
    }
}
```

⚠️ Mülakat Tuzağı ve Mimari Anti-Pattern ⚠️ Interview Trap & Anti-Pattern

🇹🇷 MÜLAKAT TUZAĞI VE ANTİ-PATTERN

Architecture kurgulanırken Hexagonal bağımlılıklarını tek noktadan senkron (blocking) olarak çağırmak en yaygın mülakat tuzağıdır! Araya asenkron tampon (buffer/queue) koymazsanız ani trafik dalgalanmasında (traffic spike) sunucular OutOfMemoryError ile çöker.

🇬🇧 INTERVIEW TRAP & ANTI-PATTERN

Coupling Architecture logic directly to synchronous blocking calls into Hexagonal is a fatal interview anti-pattern! Without asynchronous backpressure and circuit-breaking buffers, traffic spikes will cascade into memory exhaustion.

🎯 Mülakatta Hatırlanacak Altın Kurallar

• Architecture mimarisinde sorumlulukları tek bir yerde toplamayın; gevşek bağlı (loosely coupled) tasarlayın.

• Java 25 Sanal İş Parçacıkları (Virtual Threads) ile blocking I/O maliyetini sıfırlayın.

• MAANG mülakatında mutlaka 'Peki ya bu bileşen çökerse?' sorusunun cevabını önceden verin.

🎯 Key Architectural Takeaways

• Design Architecture components with strict single-responsibility and loose coupling.

• Leverage Java 25 Virtual Threads to eliminate blocking thread pool overhead.

• Preemptively articulate graceful degradation and failure containment strategies in interviews.