Entity relationship diagram

PK = primary key • FK = foreign key • UQ = unique • 1:M = one-to-many

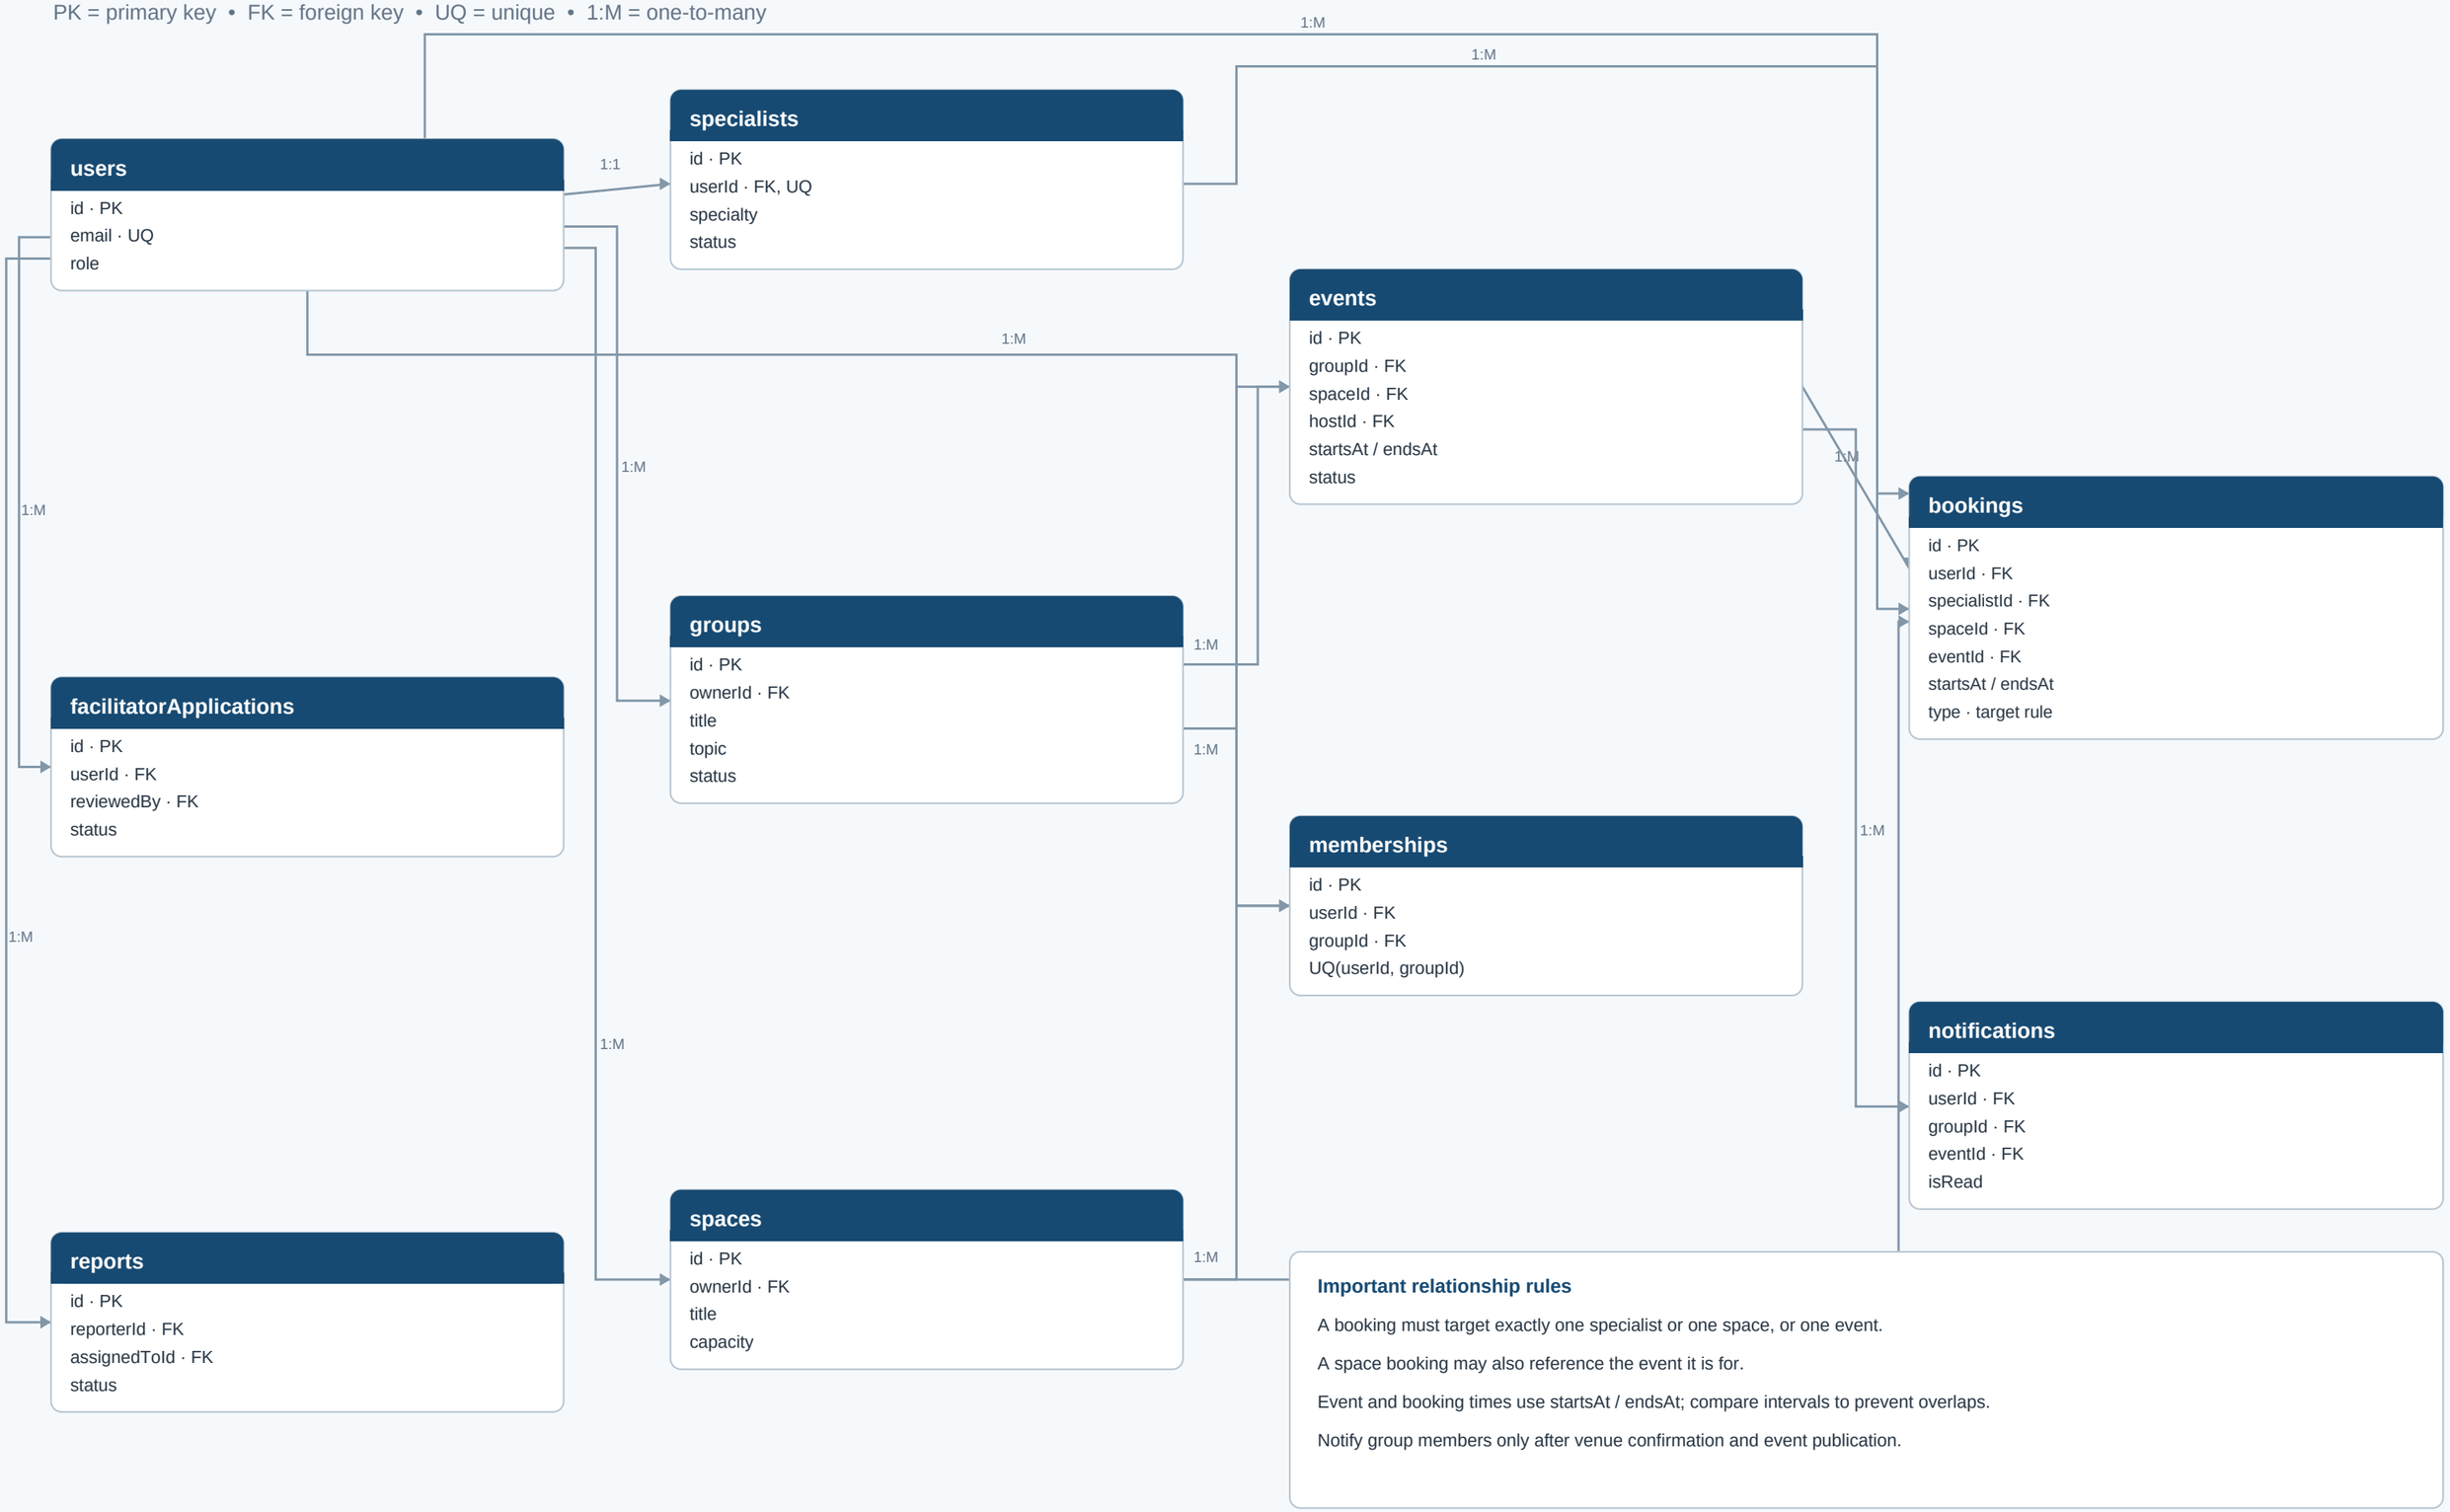

Schema reference · core tables

Column names and types below match create.sql. FK targets are shown after the arrow.

users

id	INT · PK · AUTO_INCREMENT
name	VARCHAR(100) · NOT NULL
email	VARCHAR(255) · UQ
passwordHash	VARCHAR(255) · NOT NULL
role	ENUM(admin, member, facilitator, specialist, owner)
status	ENUM(Pending, Active, Suspended, Inactive)
createdAt	TIMESTAMP
updatedAt	TIMESTAMP
deletedAt	TIMESTAMP · NULL

groups

id	INT · PK · AUTO_INCREMENT
ownerId	INT · FK → users.id
title	VARCHAR(150) · NOT NULL
topic	VARCHAR(50) · NOT NULL
description	TEXT
city	VARCHAR(50) · NOT NULL
lastActivityAt	TIMESTAMP · NULL
status	ENUM(Healthy, Review, Archived)
createdAt	TIMESTAMP
updatedAt	TIMESTAMP
deletedAt	TIMESTAMP · NULL

specialists

id	INT · PK · AUTO_INCREMENT
userId	INT · FK → users.id · UQ
role	VARCHAR(100) · NOT NULL
topics	VARCHAR(255)
specialty	ENUM of supported specialties
availability	ENUM(Today, This week, Next week, Not set)
status	ENUM(Pending, Review, Verified)
price	DECIMAL(10,2) · >= 0
createdAt	TIMESTAMP
updatedAt	TIMESTAMP
deletedAt	TIMESTAMP · NULL

spaces

id	INT · PK · AUTO_INCREMENT
ownerId	INT · FK → users.id
title	VARCHAR(150) · NOT NULL
type	ENUM of supported space types
description	TEXT
city	VARCHAR(50) · NOT NULL
address	VARCHAR(255) · NOT NULL
capacity	INT · > 0
pricePerHour	DECIMAL(10,2) · >= 0
openHours	VARCHAR(100)
amenities	JSON
createdAt	TIMESTAMP
updatedAt	TIMESTAMP
deletedAt	TIMESTAMP · NULL

events

id	INT · PK · AUTO_INCREMENT
groupId	INT · FK → groups.id · NULL
spaceId	INT · FK → spaces.id · NULL
hostId	INT · FK → users.id · NULL
title	VARCHAR(200) · NOT NULL
type	ENUM of supported event types
startsAt	DATETIME · NOT NULL
endsAt	DATETIME · > startsAt
timeZone	VARCHAR(64) · default Asia/Amman
status	5 lifecycle values; see create.sql
createdAt	TIMESTAMP
updatedAt	TIMESTAMP
deletedAt	TIMESTAMP · NULL

Schema reference · workflow tables

Counts such as members, attendees, and sessions are derived from related records, not stored.

memberships

id	INT · PK · AUTO_INCREMENT
userId	INT · FK → users.id
groupId	INT · FK → groups.id
createdAt	TIMESTAMP
unique_membership	UQ(userId, groupId)

notifications

id	INT · PK · AUTO_INCREMENT
userId	INT · FK → users.id
groupId	INT · FK → groups.id · NULL
eventId	INT · FK → events.id · NULL
type	VARCHAR(50) · NOT NULL
message	TEXT · NOT NULL
link	VARCHAR(100)
isRead	BOOLEAN · default false
createdAt	TIMESTAMP

facilitatorApplications

id	INT · PK · AUTO_INCREMENT
userId	INT · FK → users.id
reviewedBy	INT · FK → users.id · NULL
proposedTopic	VARCHAR(200) · NOT NULL
reason	TEXT · NOT NULL
experience	TEXT
status	ENUM(Pending, Approved, Rejected)
submittedAt	TIMESTAMP
reviewedAt	TIMESTAMP · NULL
updatedAt	TIMESTAMP
deletedAt	TIMESTAMP · NULL

bookings

id	INT · PK · AUTO_INCREMENT
userId	INT · FK → users.id
type	ENUM(specialist, space, event)
specialistId	INT · FK → specialists.id · NULL
spaceId	INT · FK → spaces.id · NULL
eventId	INT · FK → events.id · NULL
startsAt	DATETIME · NOT NULL
endsAt	DATETIME · > startsAt
timeZone	VARCHAR(64) · default Asia/Amman
duration	INT · NULL or > 0
people	INT · NULL or > 0
note	TEXT
status	ENUM(Pending, Confirmed, Declined, Cancelled, Completed)
amount	DECIMAL(10,2) · >= 0
commissionRate	DECIMAL(4,3) · 0 to 1
platformCommission	DECIMAL(10,2) · >= 0
providerAmount	DECIMAL(10,2) · >= 0
createdAt	TIMESTAMP
updatedAt	TIMESTAMP
deletedAt	TIMESTAMP · NULL

reports

id	INT · PK · AUTO_INCREMENT
reporterId	INT · FK → users.id · NULL
assignedToId	INT · FK → users.id · NULL
code	VARCHAR(20) · UQ
category	ENUM of report categories
description	TEXT
status	ENUM(Open, Investigating, Resolved, Dismissed)
resolvedAt	TIMESTAMP · NULL
createdAt	TIMESTAMP
updatedAt	TIMESTAMP
deletedAt	TIMESTAMP · NULL

Backend rules to implement

Booking target
CHECK constraint matches type to target FK; space bookings may also have eventId.

Duplicate event signup
Unique (userId, type, eventId); reactivate the prior row on a rebooking.

Overlapping slots
Check interval overlap in a transaction while locking the specialist/space row.

Notifications
Create them only after venue confirmation and event publication.

API field mapping
isRead → read; target IDs → targetId; join to display targetName and host.

DB version
MySQL 8.0.16+ to enforce CHECK constraints.