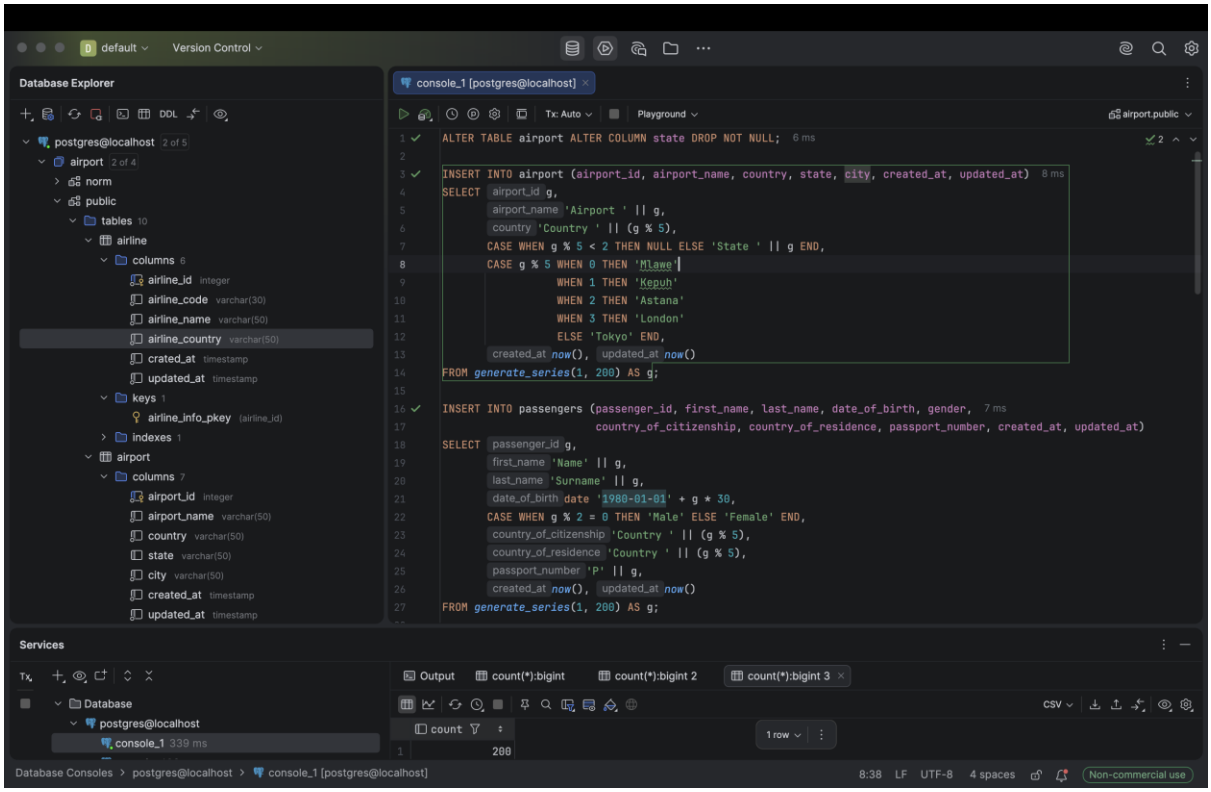
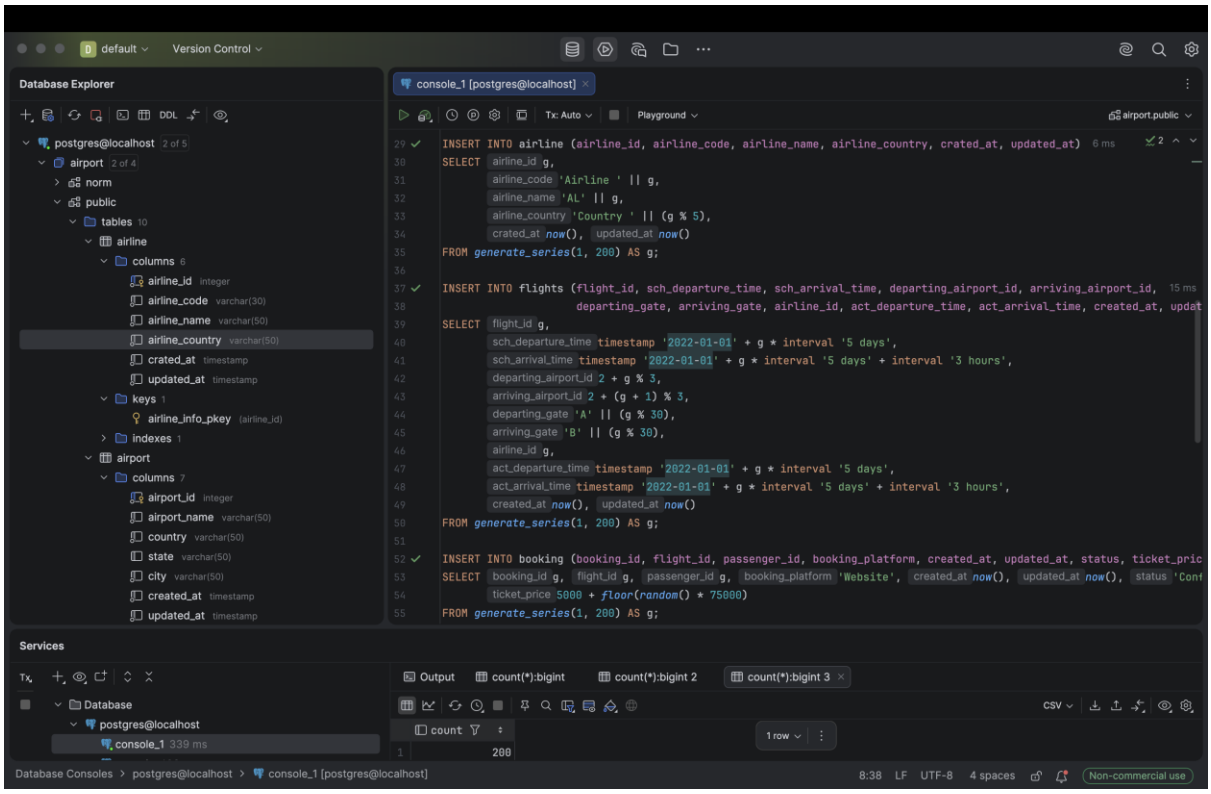
1.



```
ALTER TABLE airport ALTER COLUMN state DROP NOT NULL;

INSERT INTO airport (airport_id, airport_name, country, state, city, created_at, updated_at)
SELECT g,
       'Airport ' || g,
       'Country ' || (g % 5),
       CASE WHEN g % 5 < 2 THEN NULL ELSE 'State ' || g END,
       CASE g % 5 WHEN 0 THEN 'Млаве'
                  WHEN 1 THEN 'Керуи'
                  WHEN 2 THEN 'Astana'
                  WHEN 3 THEN 'London'
                  ELSE 'Tokyo' END,
       now(), now()
FROM generate_series(1, 200) AS g;

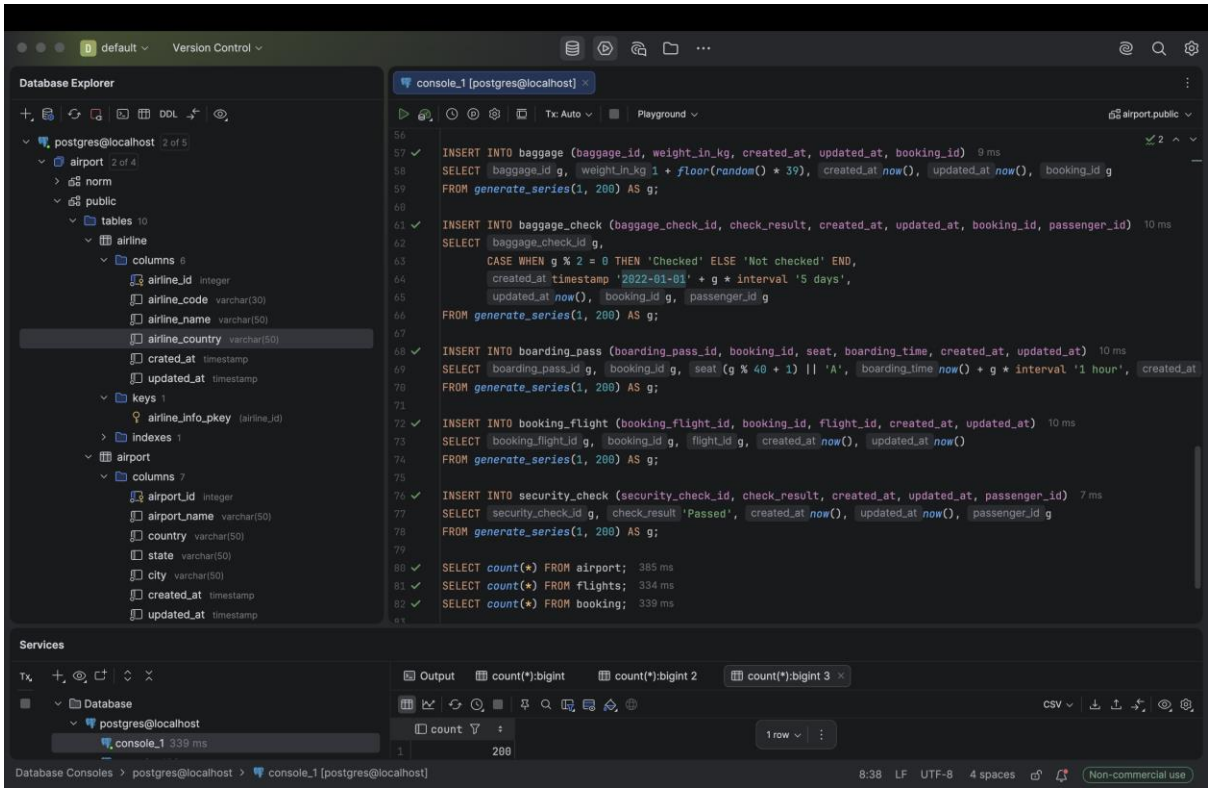
INSERT INTO passengers (passenger_id, first_name, last_name, date_of_birth, gender,
                        country_of_citizenship, country_of_residence, passport_number, created_at, updated_at)
SELECT g,
       'Name' || g,
       'Surname' || g,
       '1980-01-01' + g * 30,
       CASE WHEN g % 2 = 0 THEN 'Male' ELSE 'Female' END,
       'Country ' || (g % 5),
       'Country ' || (g % 5),
       'P' || g,
       now(), now()
FROM generate_series(1, 200) AS g;
```



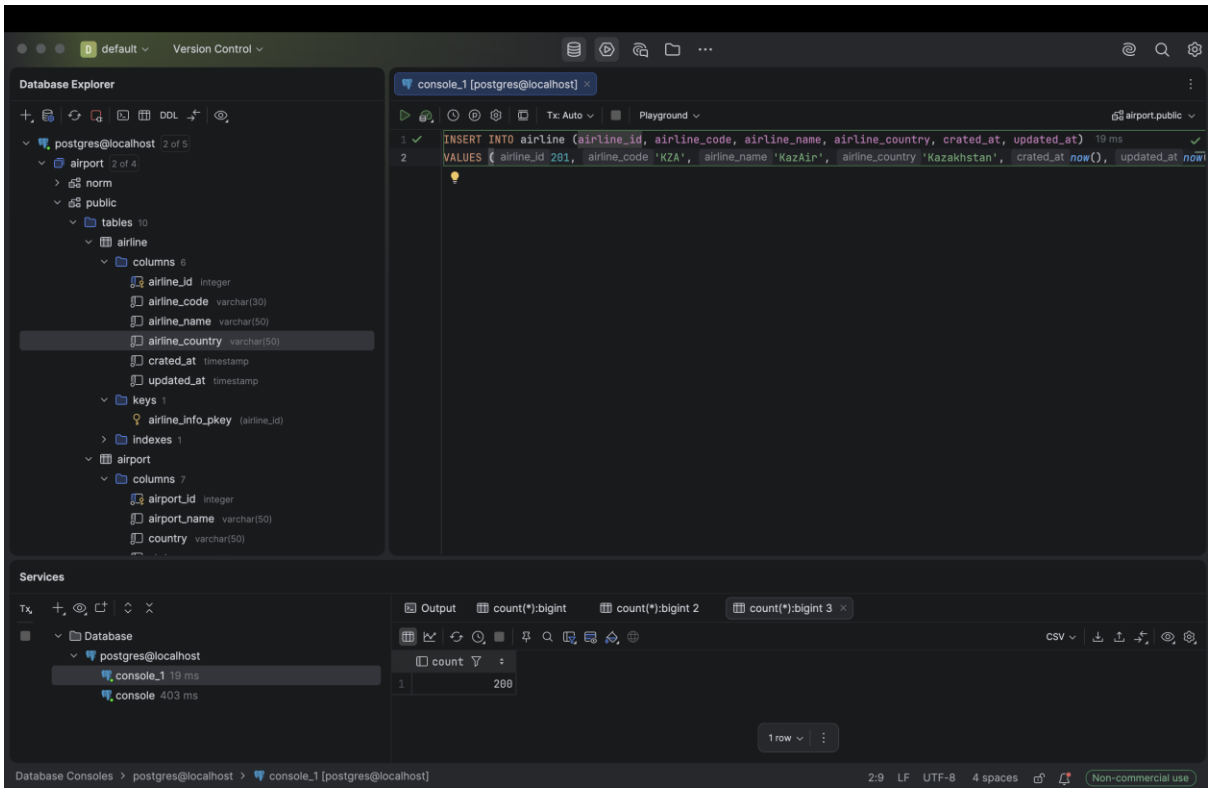
```
INSERT INTO airline (airline_id, airline_code, airline_name, airline_country, crated_at, updated_at)
SELECT g,
       'Airline ' || g,
       'AL' || g,
       'Country ' || (g % 5),
       now(), now()
FROM generate_series(1, 200) AS g;

INSERT INTO flights (flight_id, sch_departure_time, sch_arrival_time, departing_airport_id, arriving_airport_id,
                     departing_gate, arriving_gate, airline_id, act_departure_time, act_arrival_time, created_at, updat
SELECT g,
       '2022-01-01' + g * interval '5 days',
       '2022-01-01' + g * interval '5 days' + interval '3 hours',
       2 + g % 3,
       2 + (g + 1) % 3,
       'A' || (g % 30),
       'B' || (g % 30),
       g,
       '2022-01-01' + g * interval '5 days',
       '2022-01-01' + g * interval '5 days' + interval '3 hours',
       now(), now()
FROM generate_series(1, 200) AS g;

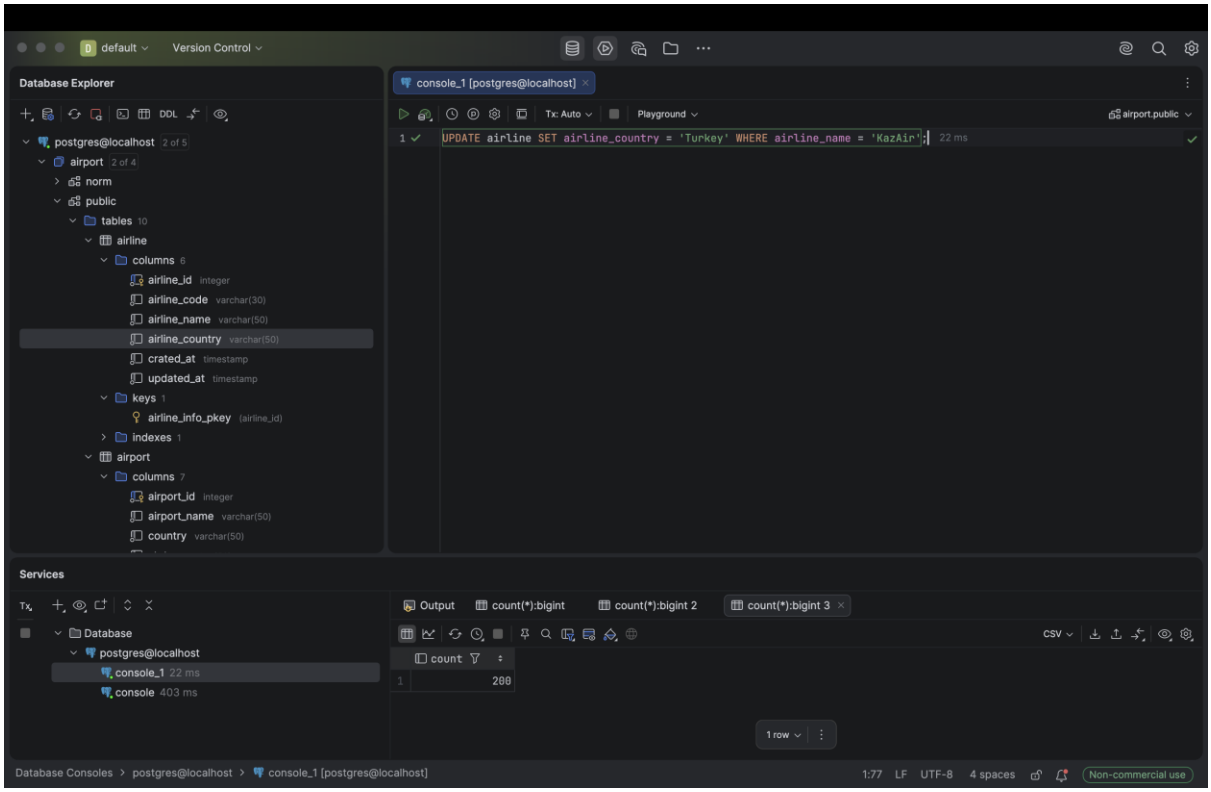
INSERT INTO booking (booking_id, flight_id, passenger_id, booking_platform, created_at, updated_at, status, ticket_pric
SELECT g, g, g, 'Website', now(), now(), 'Conf
       5000 + floor(random() * 75000)
FROM generate_series(1, 200) AS g;
```


default
Version Control
Database Explorer
console_1 [postgres@localhost]
Tx: Auto
Playground
airport.public
postgres@localhost 2 of 5
airport 2 of 4
norm
public
tables 10
airline
columns 6
airline_id integer
airline_code varchar(30)
airline_name varchar(50)
airline_country varchar(50)
crated_at timestamp
updated_at timestamp
keys 1
airline_info_pkey (airline_id)
indexes 1
airport
columns 7
airport_id integer
airport_name varchar(50)
country varchar(50)
state varchar(50)
city varchar(50)
created_at timestamp
updated_at timestamp
INSERT INTO baggage (baggage_id, weight_in_kg, created_at, updated_at, booking_id) 9 ms
SELECT baggage_id g, weight_in_kg 1 + floor(random() * 39), created_at now(), updated_at now(), booking_id g
FROM generate_series(1, 200) AS g;
INSERT INTO baggage_check (baggage_check_id, check_result, created_at, updated_at, booking_id, passenger_id) 10 ms
SELECT baggage_check_id g,
CASE WHEN g % 2 = 0 THEN 'Checked' ELSE 'Not checked' END,
created_at timestamp '2022-01-01' + g * interval '5 days',
updated_at now(), booking_id g, passenger_id g
FROM generate_series(1, 200) AS g;
INSERT INTO boarding_pass (boarding_pass_id, booking_id, seat, boarding_time, created_at, updated_at) 10 ms
SELECT boarding_pass_id g, booking_id g, seat (g % 40 + 1) || 'A', boarding_time now() + g * interval '1 hour', created_at
FROM generate_series(1, 200) AS g;
INSERT INTO booking_flight (booking_flight_id, booking_id, flight_id, created_at, updated_at) 10 ms
SELECT booking_flight_id g, booking_id g, flight_id g, created_at now(), updated_at now()
FROM generate_series(1, 200) AS g;
INSERT INTO security_check (security_check_id, check_result, created_at, updated_at, passenger_id) 7 ms
SELECT security_check_id g, check_result 'Passed', created_at now(), updated_at now(), passenger_id g
FROM generate_series(1, 200) AS g;
SELECT count(*) FROM airport; 385 ms
SELECT count(*) FROM flights; 334 ms
SELECT count(*) FROM booking; 339 ms
Services
Database
postgres@localhost
console_1 339 ms
Output
count(*):bigint
count(*):bigint 2
count(*):bigint 3
CSV
count
1
200
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
8:38 LF UTF-8 4 spaces
Non-commercial use

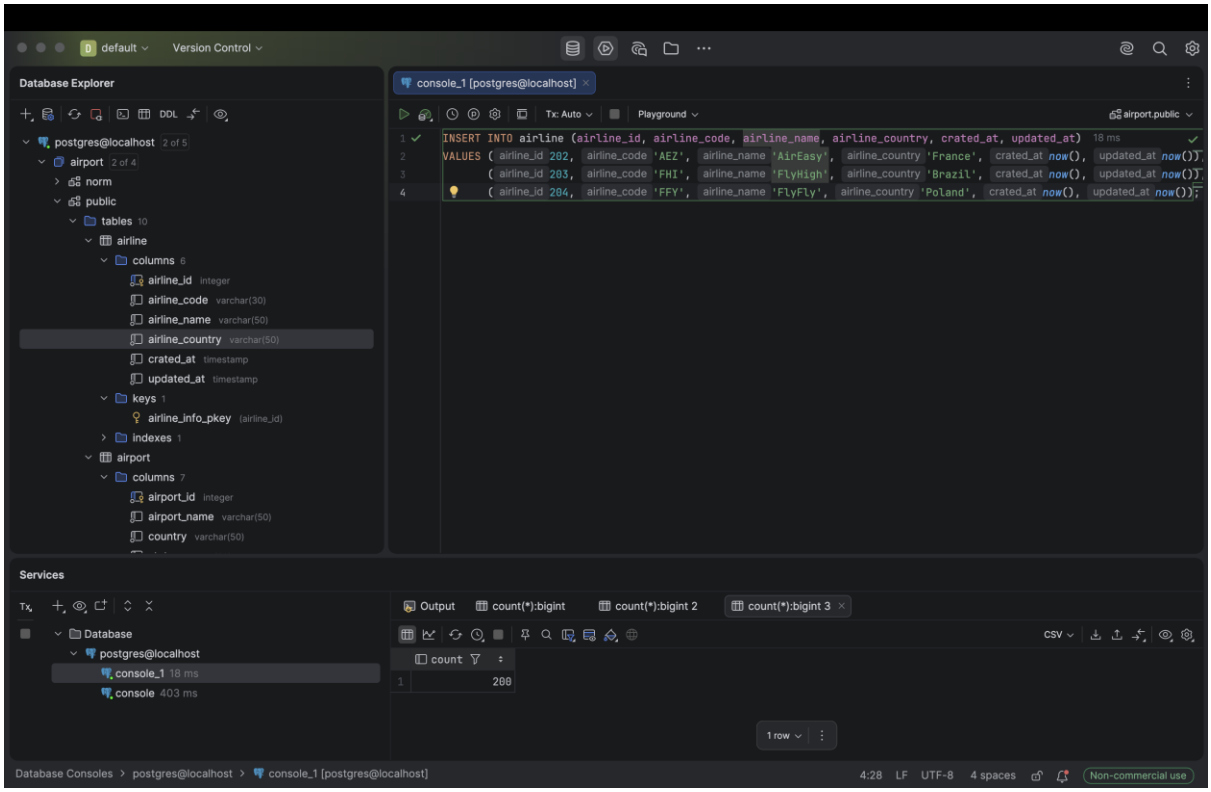
2.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
Tx: Auto
Playground
airport.public
postgres@localhost 2 of 5
airport 2 of 4
norm
public
tables 10
airline
columns 6
airline_id integer
airline_code varchar(30)
airline_name varchar(50)
airline_country varchar(50)
crated_at timestamp
updated_at timestamp
keys 1
airline_info_pkey (airline_id)
indexes 1
airport
columns 7
airport_id integer
airport_name varchar(50)
country varchar(50)
INSERT INTO airline (airline_id, airline_code, airline_name, airline_country, crated_at, updated_at) 19 ms
VALUES (airline_id 201, airline_code 'KZA', airline_name 'KazAir', airline_country 'Kazakhstan', crated_at now(), updated_at now
Services
Database
postgres@localhost
console_1 19 ms
console 403 ms
Output
count(*):bigint
count(*):bigint 2
count(*):bigint 3
CSV
count
1
200
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
2:9 LF UTF-8 4 spaces
Non-commercial use

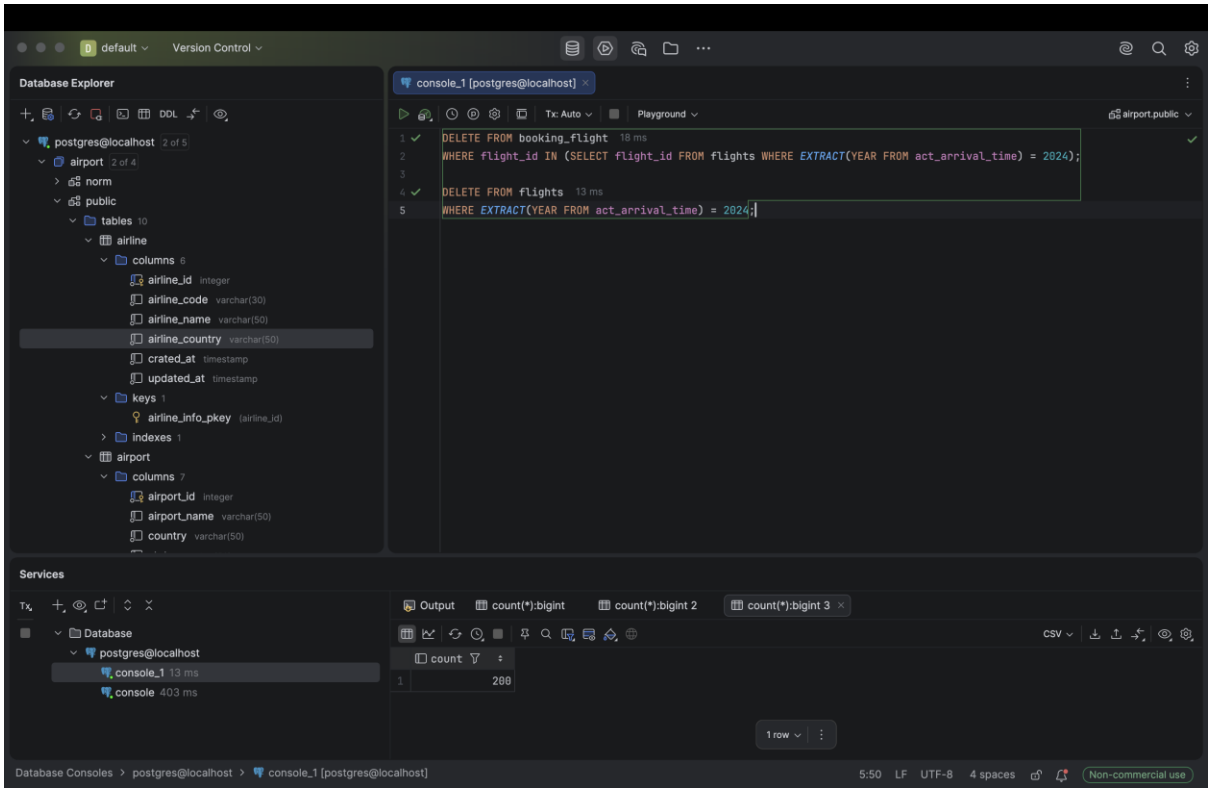
3.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
UPDATE airline SET airline_country = 'Turkey' WHERE airline_name = 'KazAir';
22 ms
postgres@localhost 2 of 5
airport 2 of 4
norm
public
tables 10
airline
columns 6
airline_id integer
airline_code varchar(30)
airline_name varchar(50)
airline_country varchar(50)
crated_at timestamp
updated_at timestamp
keys 1
airline_info_pkey (airline_id)
indexes 1
airport
columns 7
airport_id integer
airport_name varchar(50)
country varchar(50)
Services
Output
count(*):bigint
count(*):bigint 2
count(*):bigint 3
Database
postgres@localhost
console_1 22 ms
console 403 ms
count
200
1 row
Database Consoles
postgres@localhost
console_1 [postgres@localhost]
1:77
LF
UTF-8
4 spaces
Non-commercial use

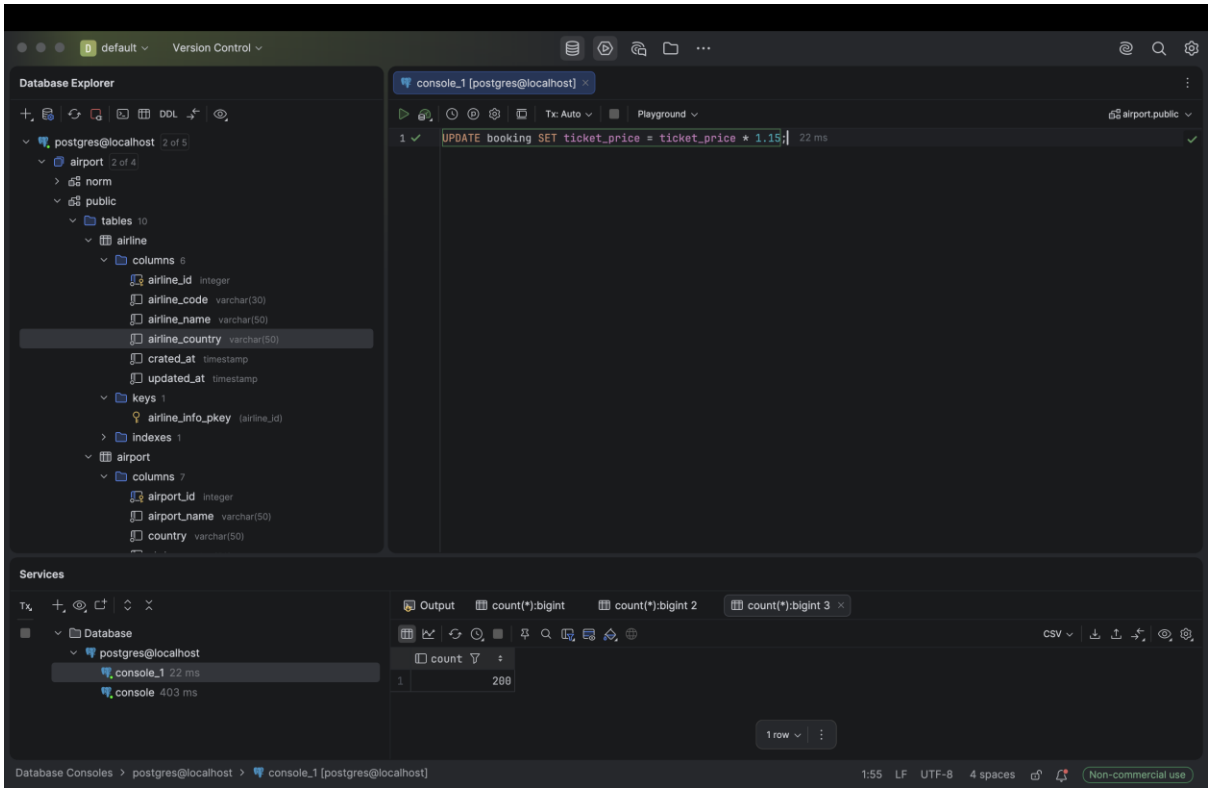
4.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
INSERT INTO airline (airline_id, airline_code, airline_name, airline_country, crated_at, updated_at)
18 ms
VALUES (airline_id 202, airline_code 'AEZ', airline_name 'AirEasy', airline_country 'France', crated_at now(), updated_at now())
(airline_id 203, airline_code 'FHI', airline_name 'FlyHigh', airline_country 'Brazil', crated_at now(), updated_at now())
(airline_id 204, airline_code 'FFY', airline_name 'FlyFly', airline_country 'Poland', crated_at now(), updated_at now());
postgres@localhost 2 of 5
airport 2 of 4
norm
public
tables 10
airline
columns 6
airline_id integer
airline_code varchar(30)
airline_name varchar(50)
airline_country varchar(50)
crated_at timestamp
updated_at timestamp
keys 1
airline_info_pkey (airline_id)
indexes 1
airport
columns 7
airport_id integer
airport_name varchar(50)
country varchar(50)
Services
Output
count(*):bigint
count(*):bigint 2
count(*):bigint 3
Database
postgres@localhost
console_1 18 ms
console 403 ms
count
200
1 row
Database Consoles
postgres@localhost
console_1 [postgres@localhost]
4:28
LF
UTF-8
4 spaces
Non-commercial use

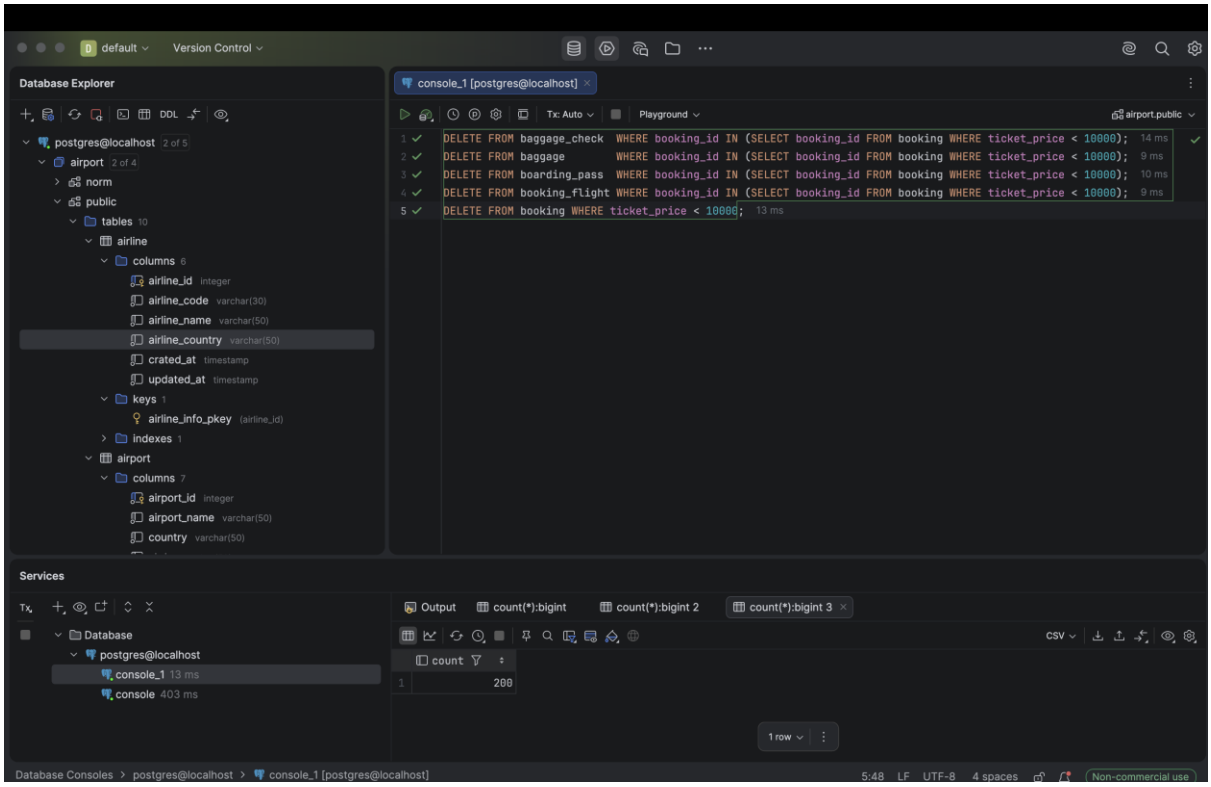
5.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
DELETE FROM booking_flight 18 ms
WHERE flight_id IN (SELECT flight_id FROM flights WHERE EXTRACT(YEAR FROM act_arrival_time) = 2024);
DELETE FROM flights 13 ms
WHERE EXTRACT(YEAR FROM act_arrival_time) = 2024;
Services
count(*):bigint 3
count
200
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
5:50 LF UTF-8 4 spaces
Non-commercial use

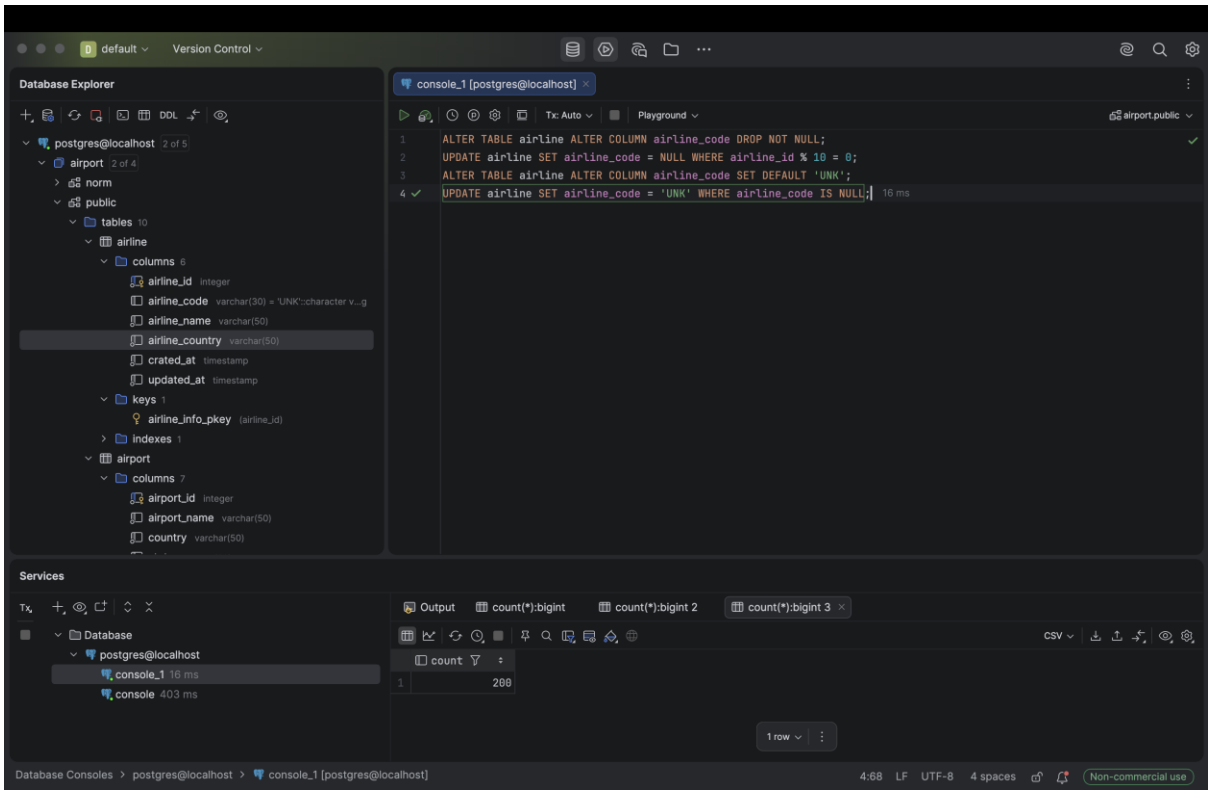
6.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
UPDATE booking SET ticket_price = ticket_price * 1.15; 22 ms
Services
count(*):bigint 3
count
200
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
1:55 LF UTF-8 4 spaces
Non-commercial use

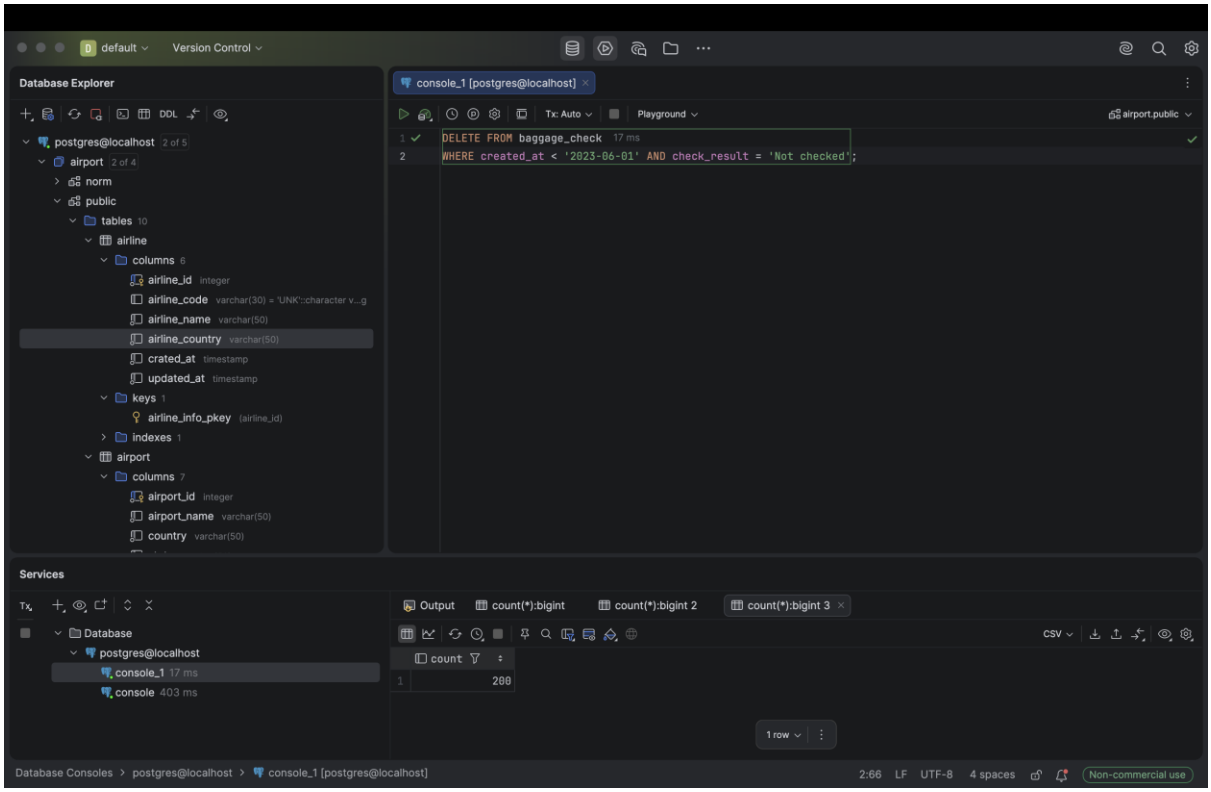
7.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
DELETE FROM baggage_check WHERE booking_id IN (SELECT booking_id FROM booking WHERE ticket_price < 10000); 14 ms
DELETE FROM baggage WHERE booking_id IN (SELECT booking_id FROM booking WHERE ticket_price < 10000); 9 ms
DELETE FROM boarding_pass WHERE booking_id IN (SELECT booking_id FROM booking WHERE ticket_price < 10000); 10 ms
DELETE FROM booking_flight WHERE booking_id IN (SELECT booking_id FROM booking WHERE ticket_price < 10000); 9 ms
DELETE FROM booking WHERE ticket_price < 10000; 13 ms
Services
Output
count(*):bigint
count(*):bigint 2
count(*):bigint 3
count
200
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
5:48 LF UTF-8 4 spaces
Non-commercial use

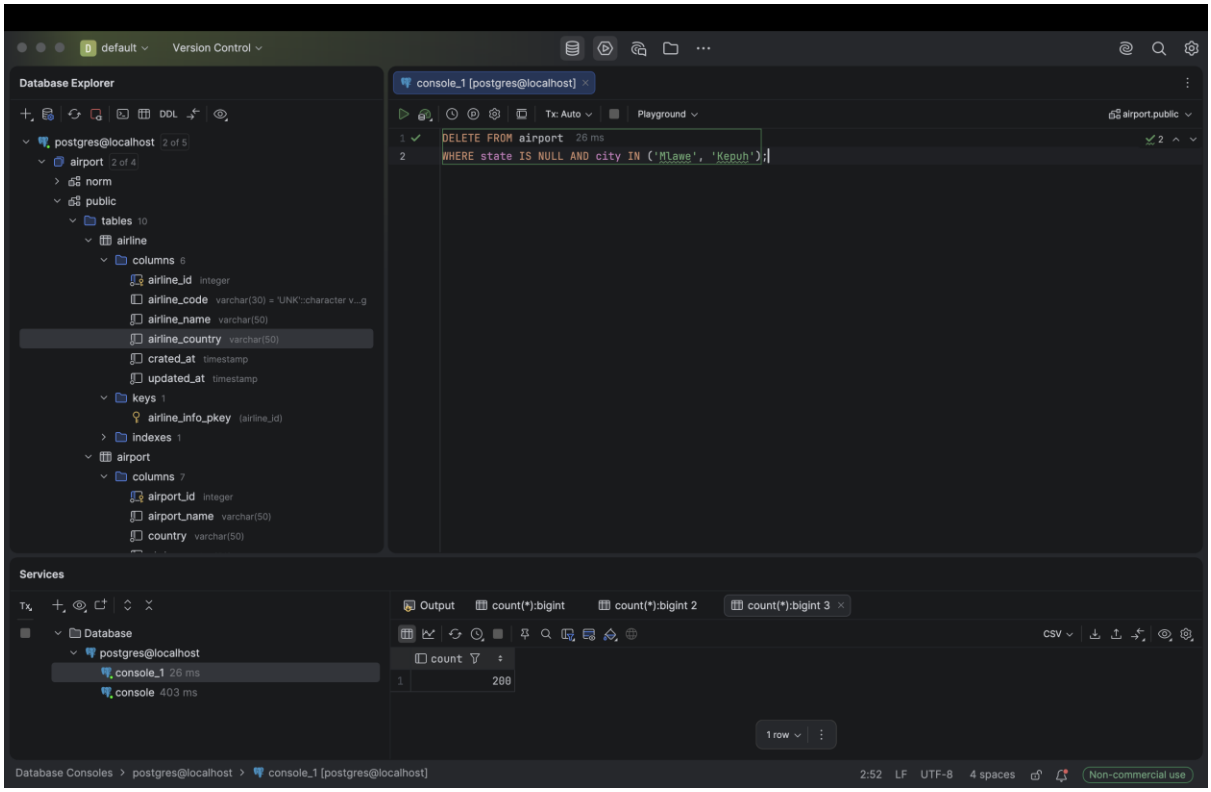
8.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
ALTER TABLE airline ALTER COLUMN airline_code DROP NOT NULL;
UPDATE airline SET airline_code = NULL WHERE airline_id % 10 = 0;
ALTER TABLE airline ALTER COLUMN airline_code SET DEFAULT 'UNK';
UPDATE airline SET airline_code = 'UNK' WHERE airline_code IS NULL; 16 ms
Services
Output
count(*):bigint
count(*):bigint 2
count(*):bigint 3
count
200
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
4:68 LF UTF-8 4 spaces
Non-commercial use

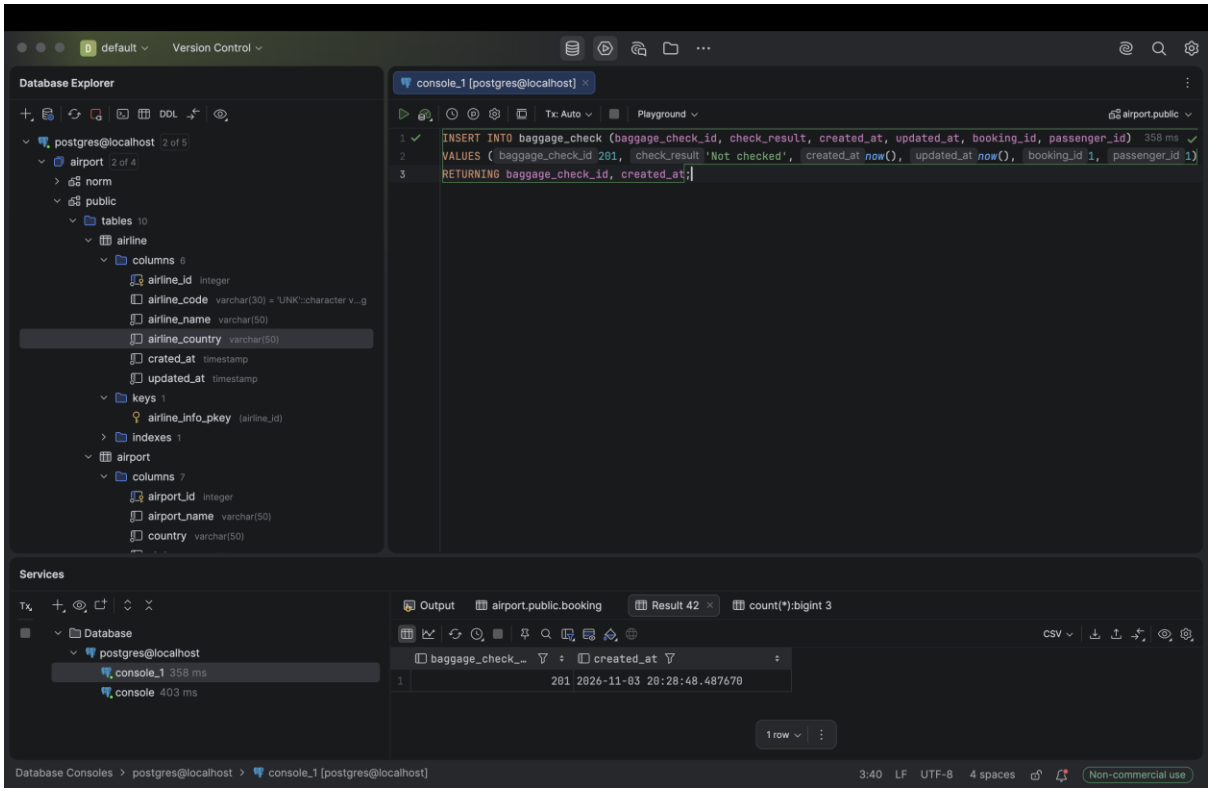
9.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
DELETE FROM baggage_check 17 ms
WHERE created_at < '2023-06-01' AND check_result = 'Not checked';
Services
Output
count(*):bigint
count(*):bigint 2
count(*):bigint 3
count
200
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
2:66 LF UTF-8 4 spaces
Non-commercial use

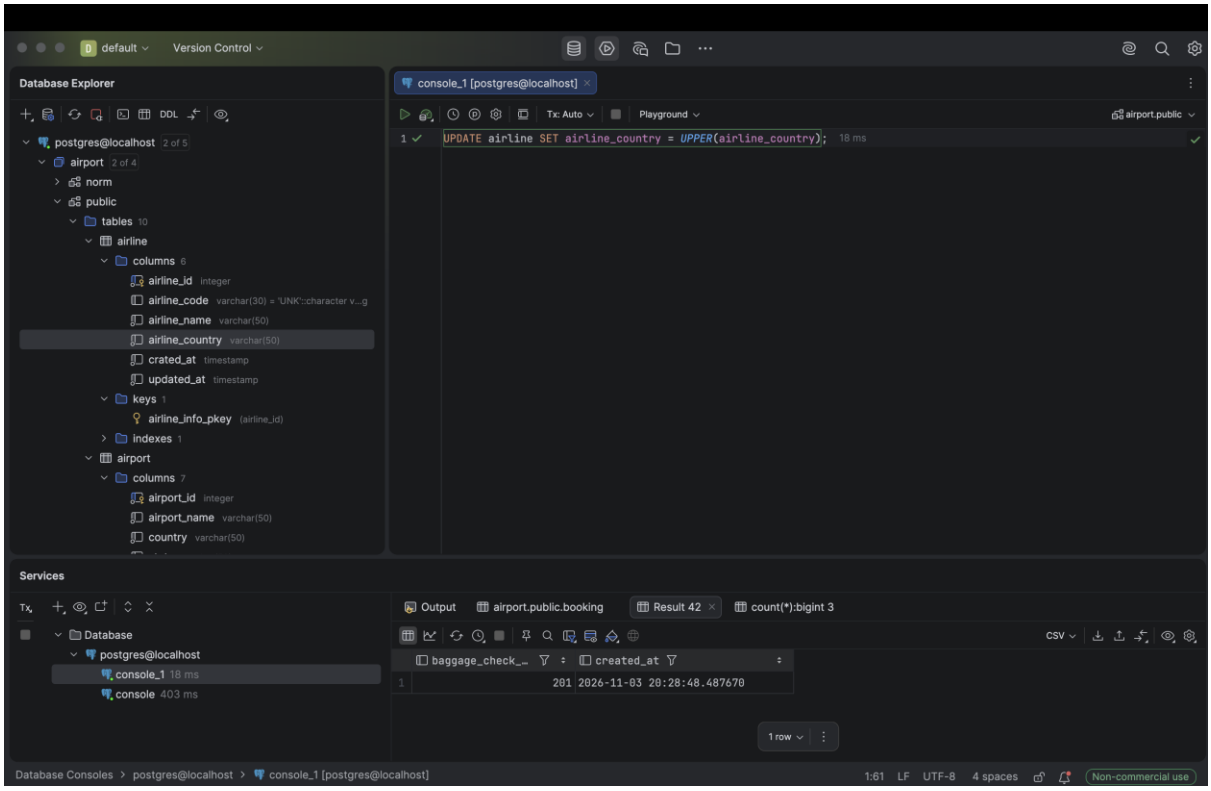
10.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
DELETE FROM airport 26 ms
WHERE state IS NULL AND city IN ('Mlawe', 'Kepuh');
Services
Output
count(*):bigint
count(*):bigint 2
count(*):bigint 3
count
200
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
2:52 LF UTF-8 4 spaces
Non-commercial use

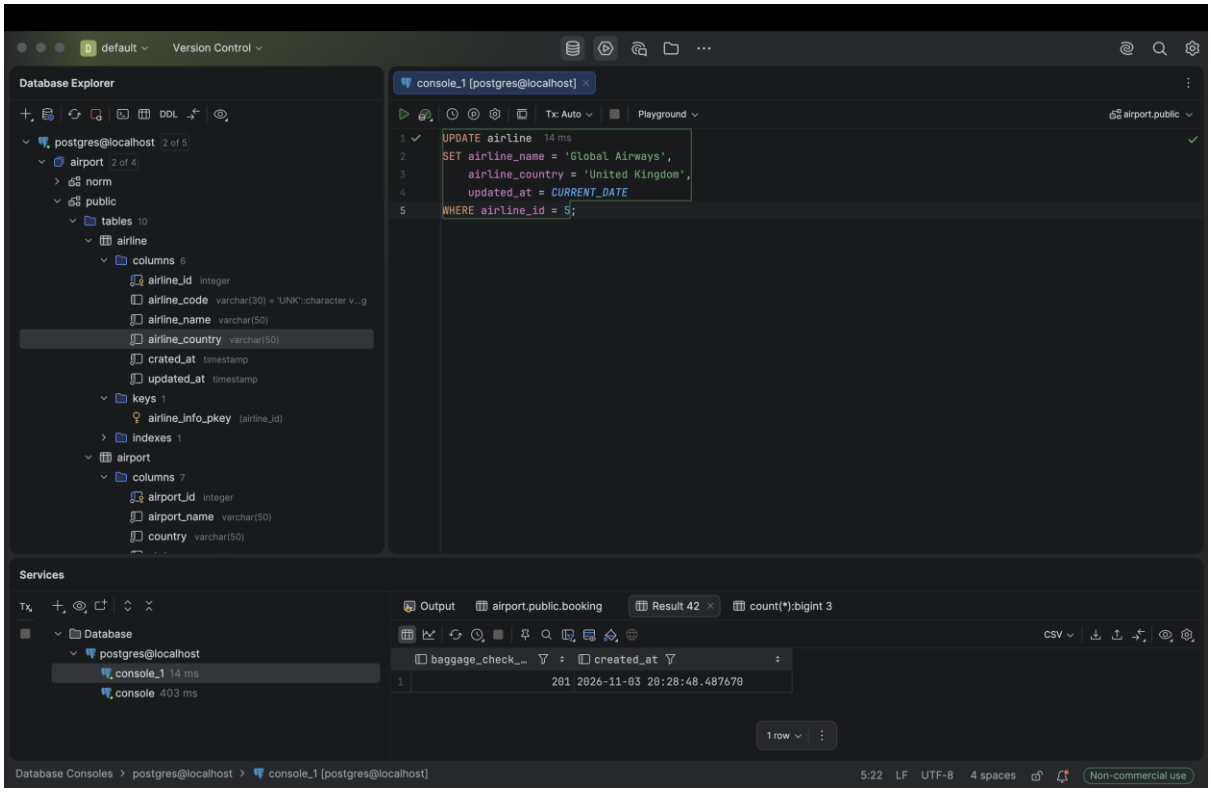
11.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
INSERT INTO baggage_check (baggage_check_id, check_result, created_at, updated_at, booking_id, passenger_id)
VALUES (baggage_check_id 201, check_result 'Not checked', created_at now(), updated_at now(), booking_id 1, passenger_id 1)
RETURNING baggage_check_id, created_at;
Services
Output
airport.public.booking
Result 42
count(*):bigint 3
baggage_check_...
created_at
201 2026-11-03 20:28:48.487670
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
Non-commercial use

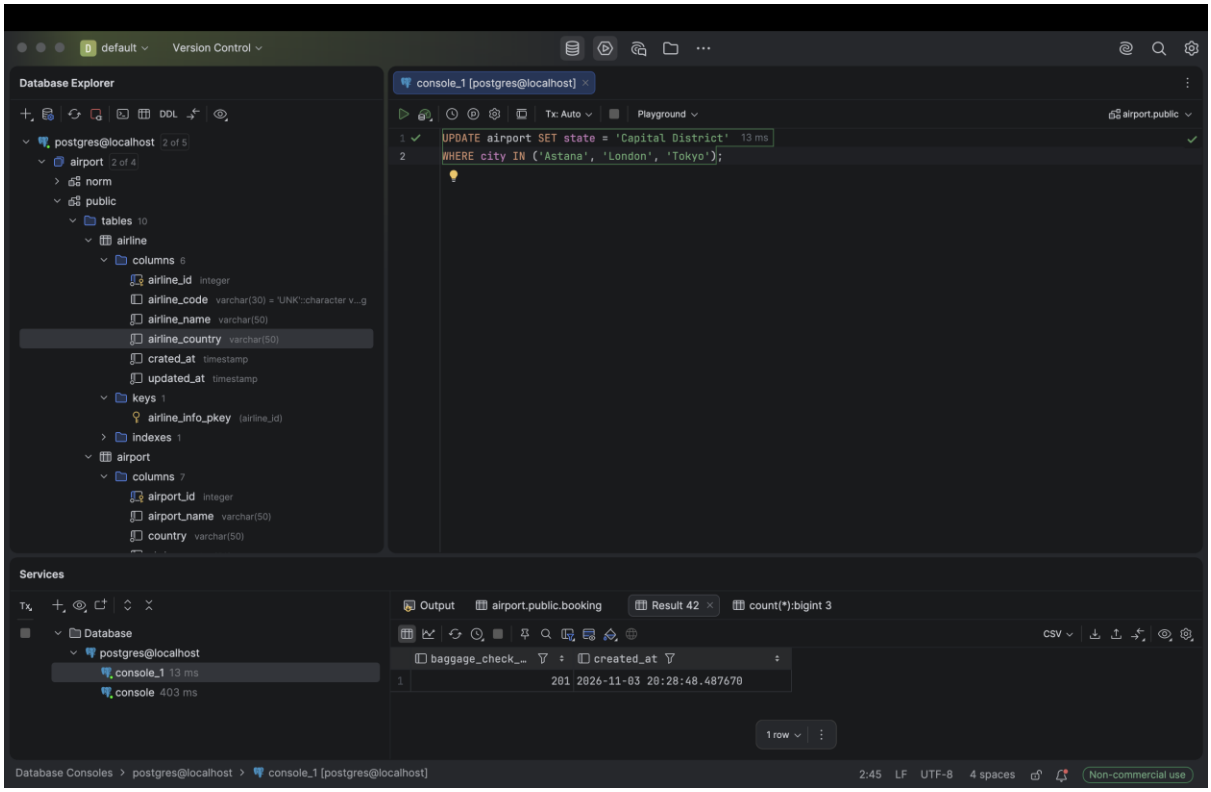
12.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
UPDATE airline SET airline_country = UPPER(airline_country);
Services
Output
airport.public.booking
Result 42
count(*):bigint 3
baggage_check_...
created_at
201 2026-11-03 20:28:48.487670
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
Non-commercial use

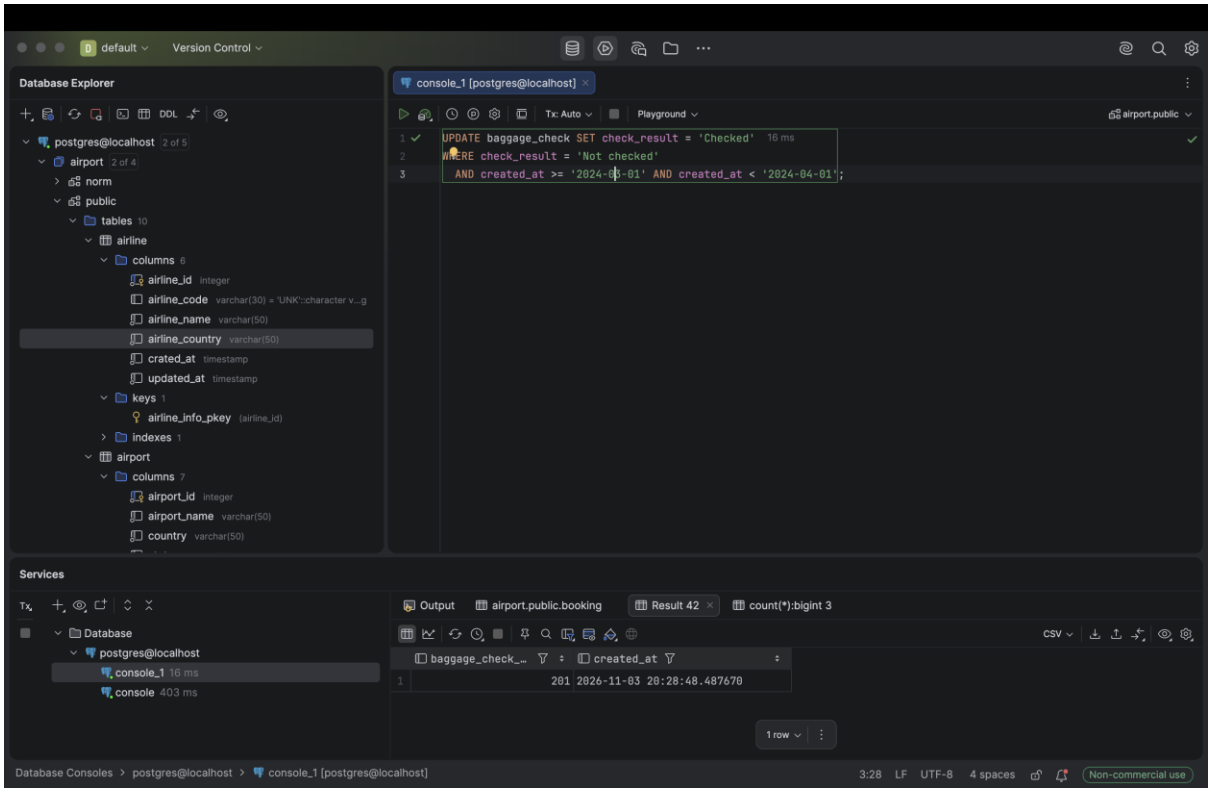
13.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
Tx: Auto
Playground
airport.public
UPDATE airline 14 ms
SET airline_name = 'Global Airways',
airline_country = 'United Kingdom',
updated_at = CURRENT_DATE
WHERE airline_id = 5;
postgres@localhost 2 of 5
airport 2 of 4
norm
public
tables 10
airline
columns 6
airline_id integer
airline_code varchar(30) = 'UNK'::character v...g
airline_name varchar(50)
airline_country varchar(50)
crated_at timestamp
updated_at timestamp
keys 1
airline_info_pkey (airline_id)
indexes 1
airport
columns 7
airport_id integer
airport_name varchar(50)
country varchar(50)
Services
Output
airport.public.booking
Result 42
count(*):bigint 3
Database
postgres@localhost
console_1 14 ms
console 403 ms
CSV
baggage_check_...
created_at
1
201 2026-11-03 20:28:48.487670
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
5:22 LF UTF-8 4 spaces
Non-commercial use

14.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
Tx: Auto
Playground
airport.public
UPDATE airport SET state = 'Capital District' 13 ms
WHERE city IN ('Astana', 'London', 'Tokyo');
postgres@localhost 2 of 5
airport 2 of 4
norm
public
tables 10
airline
columns 6
airline_id integer
airline_code varchar(30) = 'UNK'::character v...g
airline_name varchar(50)
airline_country varchar(50)
crated_at timestamp
updated_at timestamp
keys 1
airline_info_pkey (airline_id)
indexes 1
airport
columns 7
airport_id integer
airport_name varchar(50)
country varchar(50)
Services
Output
airport.public.booking
Result 42
count(*):bigint 3
Database
postgres@localhost
console_1 13 ms
console 403 ms
CSV
baggage_check_...
created_at
1
201 2026-11-03 20:28:48.487670
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
2:45 LF UTF-8 4 spaces
Non-commercial use

15.


default
Version Control
Database Explorer
console_1 [postgres@localhost]
UPDATE baggage_check SET check_result = 'Checked' 16 ms
WHERE check_result = 'Not checked'
AND created_at >= '2024-04-01' AND created_at < '2024-04-01';
postgres@localhost 2 of 5
airport 2 of 4
norm
public
tables 10
airline
columns 6
airline_id integer
airline_code varchar(30) = 'UNK'::character v...g
airline_name varchar(50)
airline_country varchar(50)
crated_at timestamp
updated_at timestamp
keys 1
airline_info_pkey (airline_id)
indexes 1
airport
columns 7
airport_id integer
airport_name varchar(50)
country varchar(50)
Services
Output
airport.public.booking
Result 42
count(*):bigint 3
Database
postgres@localhost
console_1 16 ms
console 403 ms
baggage_check_...
created_at
201 2026-11-03 20:28:48.487670
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
3:28 LF UTF-8 4 spaces
Non-commercial use