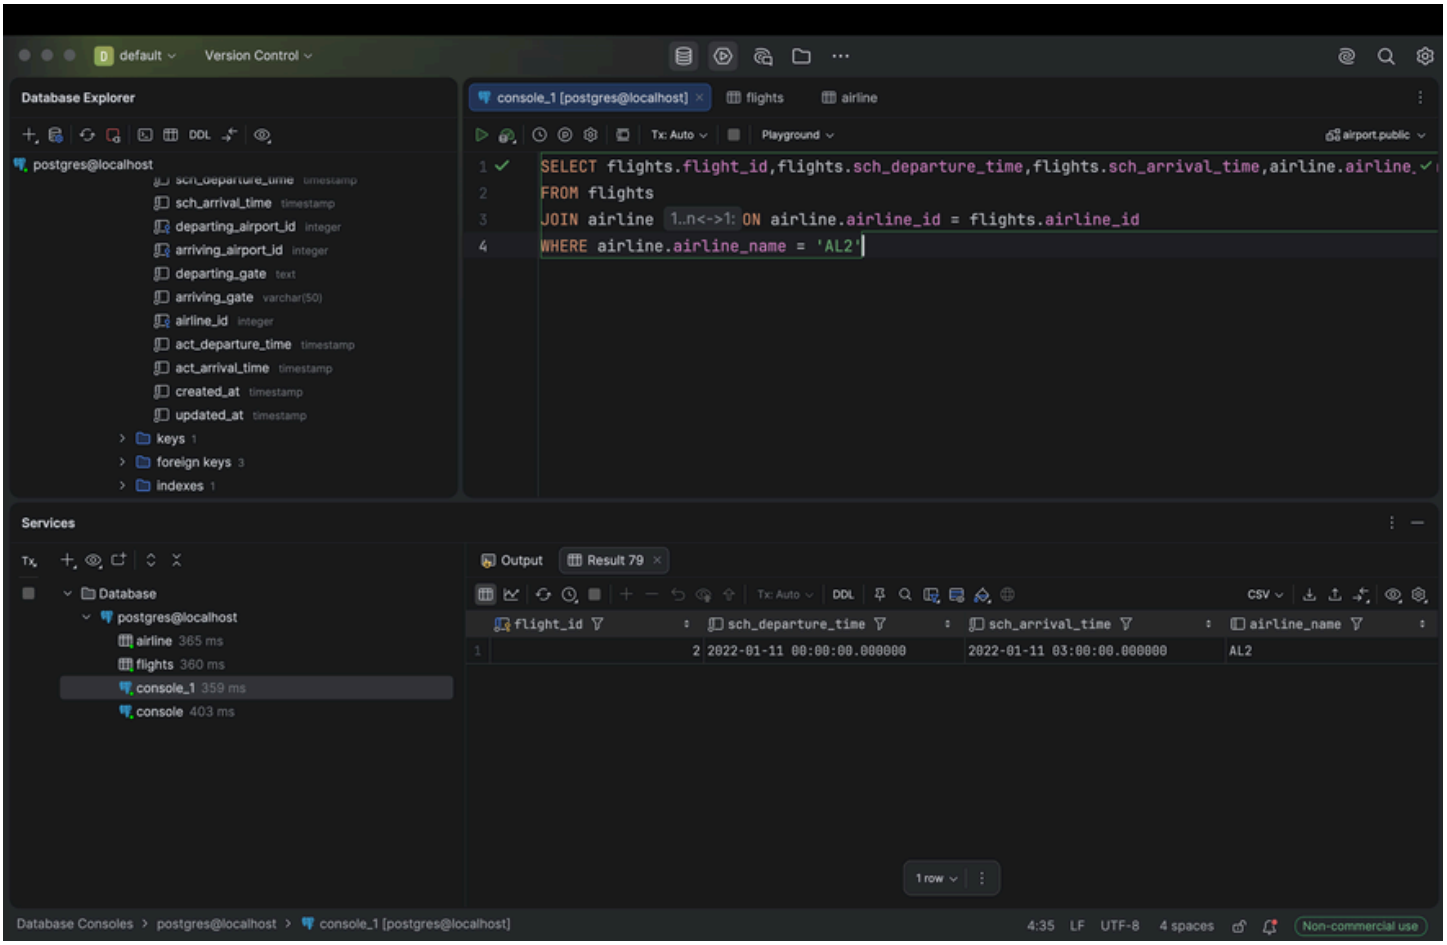
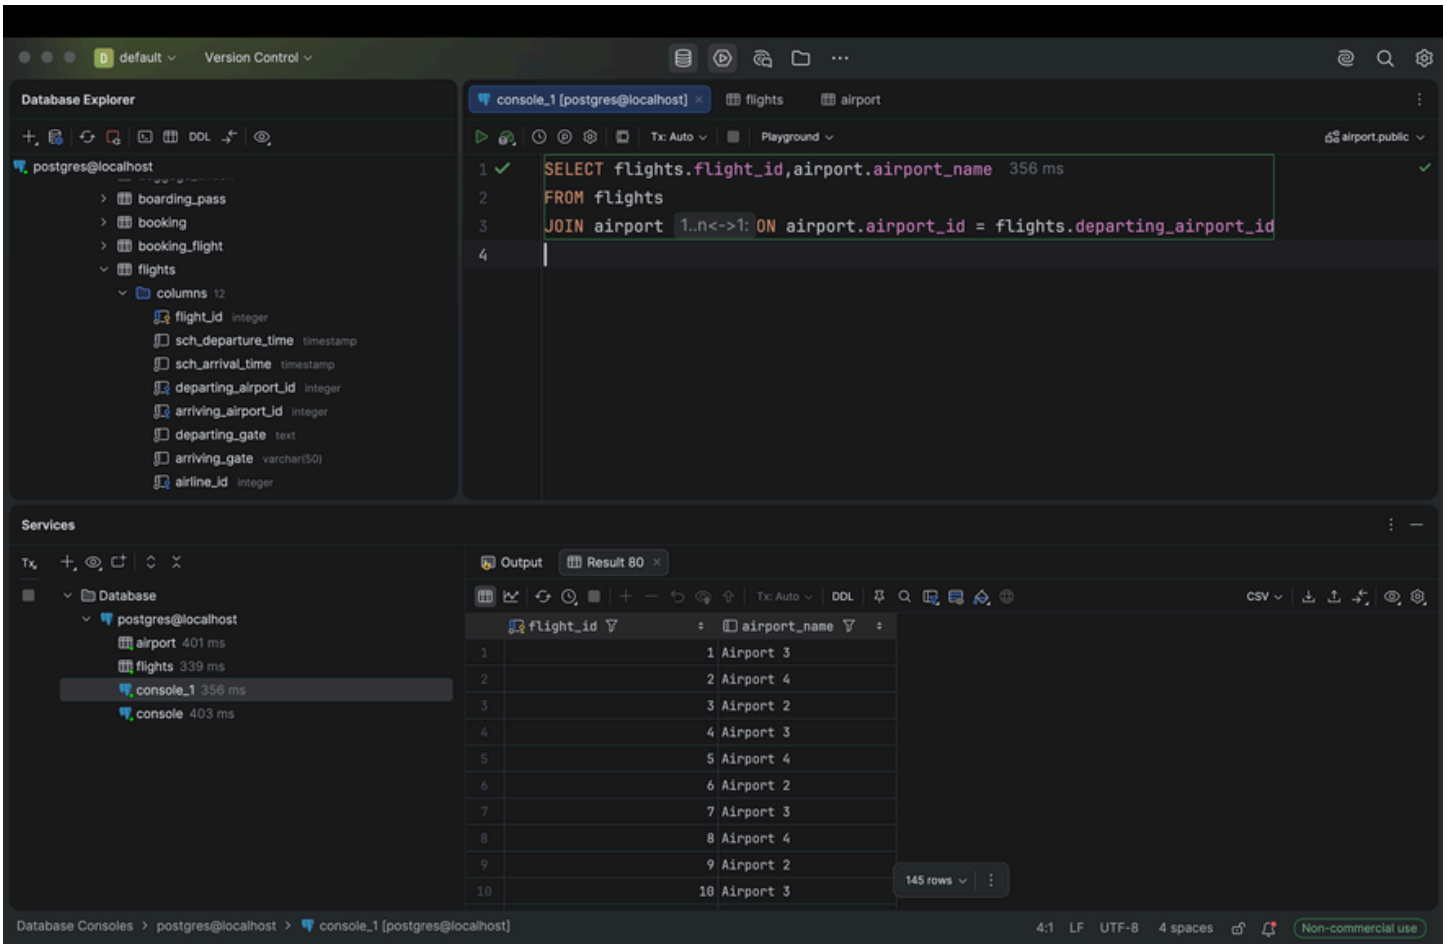
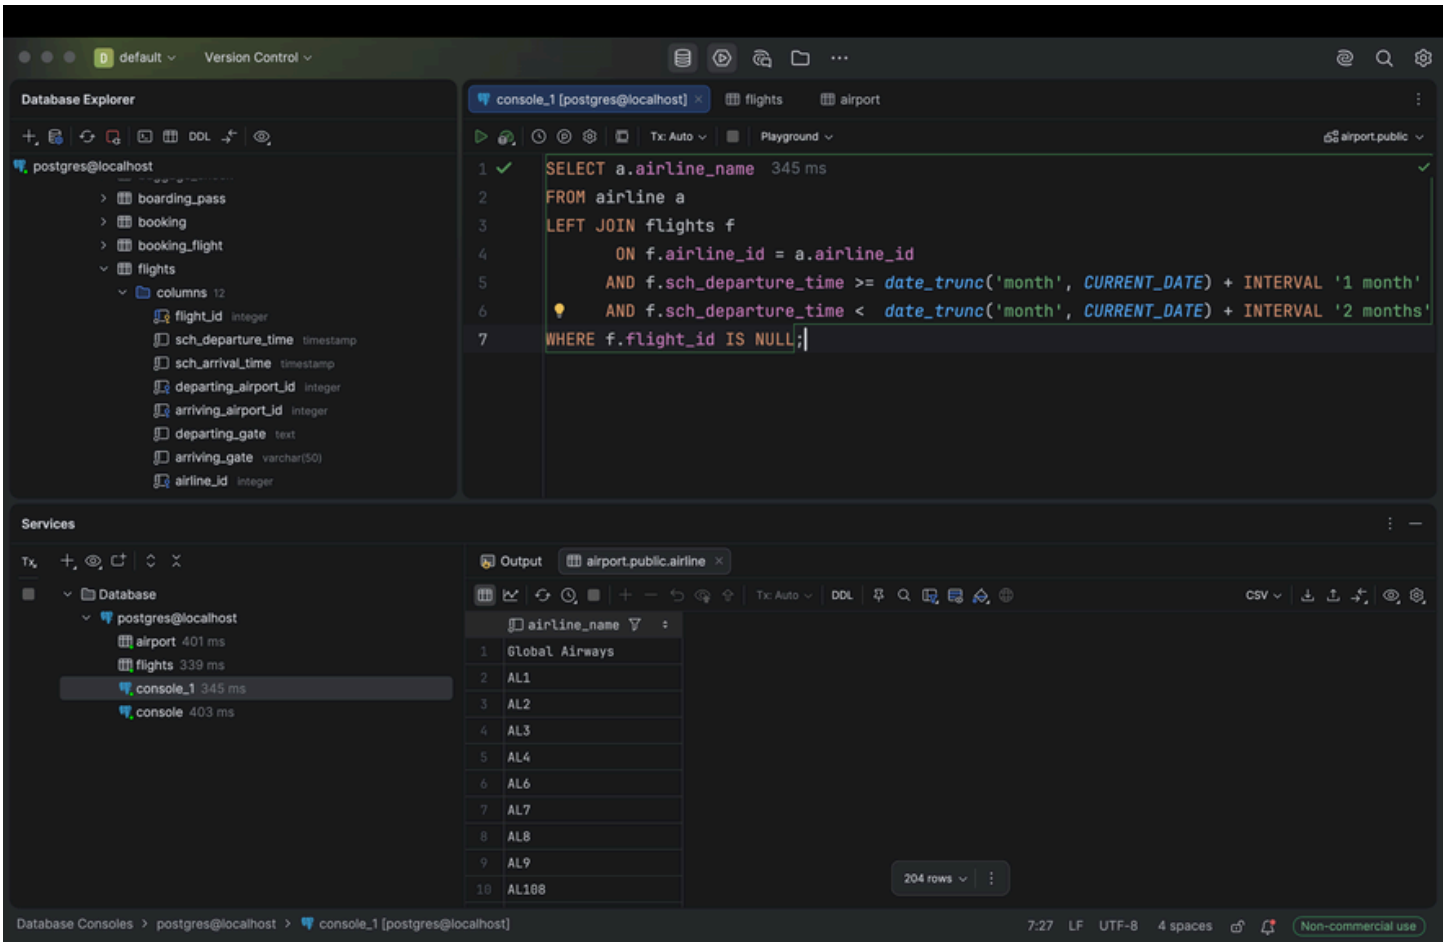
1.


default
Version Control
Database Explorer
DDL
postgres@localhost
sch_arrival_time timestamp
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate varchar(50)
airline_id integer
act_departure_time timestamp
act_arrival_time timestamp
created_at timestamp
updated_at timestamp
keys 1
foreign keys 3
indexes 1
console_1 [postgres@localhost]
flights
airline
Tx: Auto
Playground
airport.public
SELECT flights.flight_id,flights.sch_departure_time,flights.sch_arrival_time,airline.airline_
FROM flights
JOIN airline 1..n<->1: ON airline.airline_id = flights.airline_id
WHERE airline.airline_name = 'AL2'
Services
Database
postgres@localhost
airline 365 ms
flights 360 ms
console_1 359 ms
console 403 ms
Output
Result 79
Tx: Auto
DDL
CSV
flight_id
sch_departure_time
sch_arrival_time
airline_name
1
2
2022-01-11 00:00:00.000000
2022-01-11 03:00:00.000000
AL2
1 row
Database Consoles
postgres@localhost
console_1 [postgres@localhost]
4:35
LF
UTF-8
4 spaces
Non-commercial use

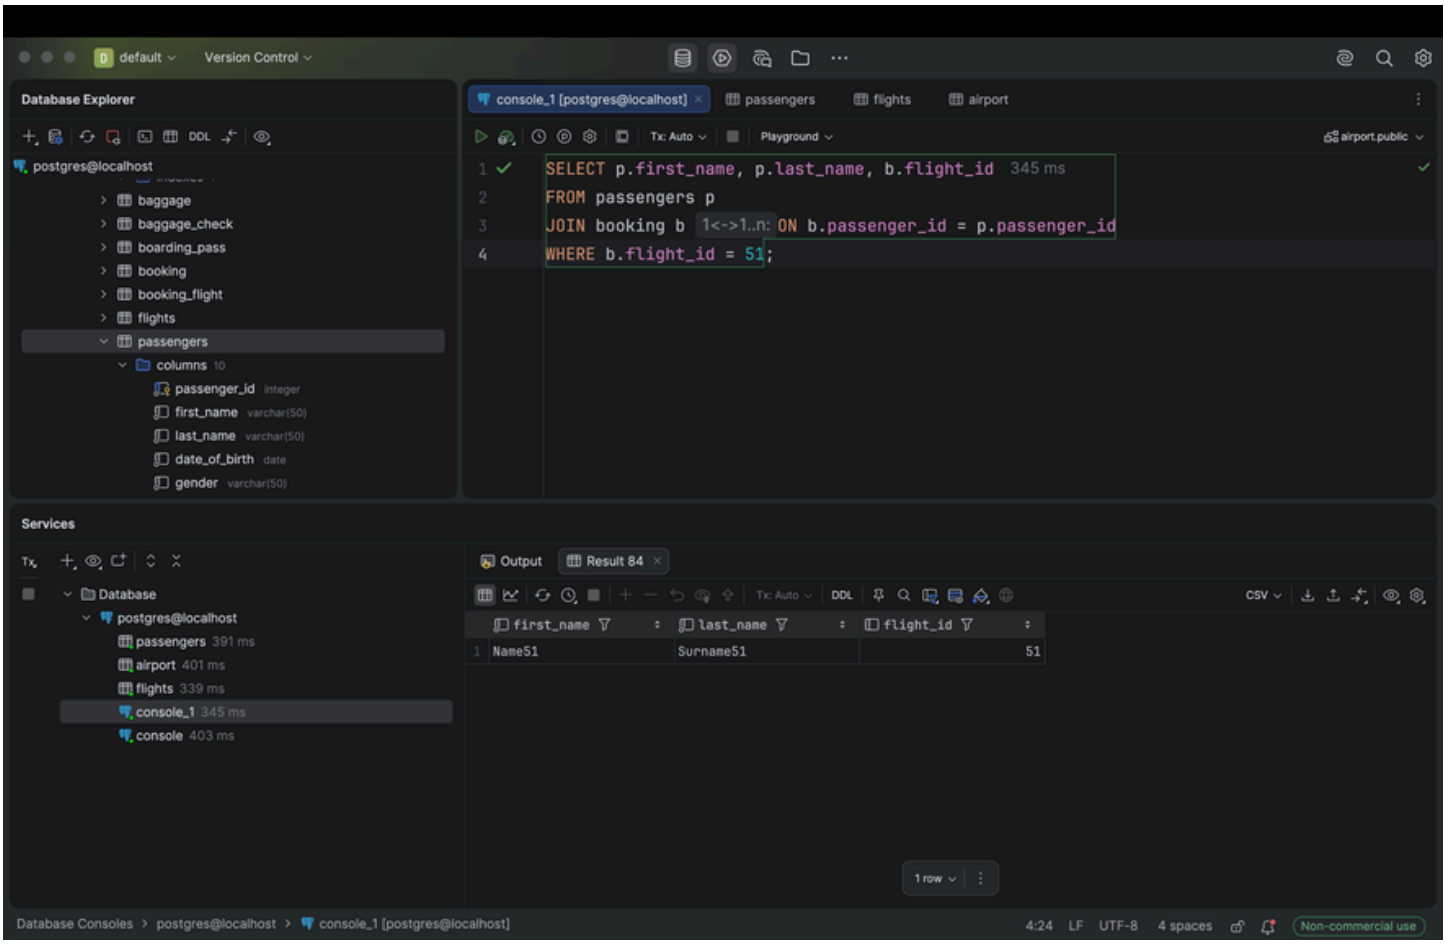
2.


default
Version Control
Database Explorer
DDL
postgres@localhost
boarding_pass
booking
booking_flight
flights
columns 12
flight_id integer
sch_departure_time timestamp
sch_arrival_time timestamp
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate varchar(50)
airline_id integer
console_1 [postgres@localhost]
flights
airport
Tx: Auto
Playground
airport.public
1 SELECT flights.flight_id,airport.airport_name 356 ms
2 FROM flights
3 JOIN airport 1..n<->1: ON airport.airport_id = flights.departing_airport_id
4
Services
Database
postgres@localhost
airport 401 ms
flights 339 ms
console_1 356 ms
console 403 ms
Output
Result 80
Tx: Auto
DDL
CSV
flight_id
airport_name
1 1 Airport 3
2 2 Airport 4
3 3 Airport 2
4 4 Airport 3
5 5 Airport 4
6 6 Airport 2
7 7 Airport 3
8 8 Airport 4
9 9 Airport 2
10 10 Airport 3
145 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
4:1 LF UTF-8 4 spaces
Non-commercial use

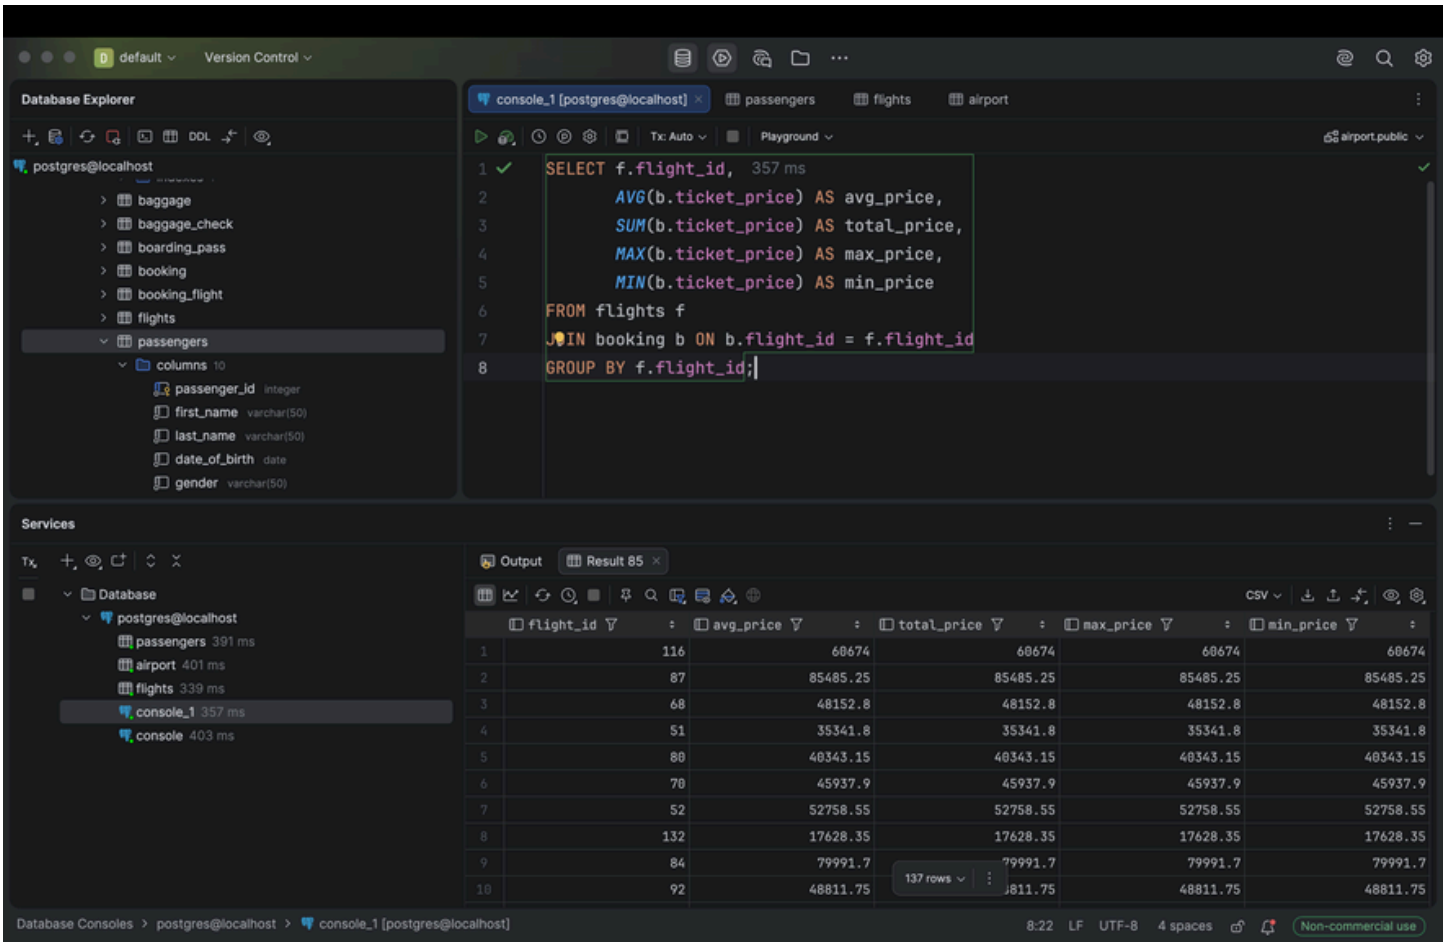
3.


default
Version Control
Database Explorer
DDL
postgres@localhost
boarding_pass
booking
booking_flight
flights
columns 12
flight_id integer
sch_departure_time timestamp
sch_arrival_time timestamp
departing_airport_id integer
arriving_airport_id integer
departing_gate text
arriving_gate varchar(50)
airline_id integer
console_1 [postgres@localhost]
flights
airport
Tx: Auto
Playground
airport.public
SELECT a.airline_name 345 ms
FROM airline a
LEFT JOIN flights f
ON f.airline_id = a.airline_id
AND f.sch_departure_time >= date_trunc('month', CURRENT_DATE) + INTERVAL '1 month'
AND f.sch_departure_time < date_trunc('month', CURRENT_DATE) + INTERVAL '2 months'
WHERE f.flight_id IS NULL;
Services
Database
postgres@localhost
airport 401 ms
flights 339 ms
console_1 345 ms
console 403 ms
Output
airport.public.airline
Tx: Auto
DDL
CSV
airline_name
Global Airways
AL1
AL2
AL3
AL4
AL6
AL7
AL8
AL9
AL108
204 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
7:27 LF UTF-8 4 spaces
Non-commercial use

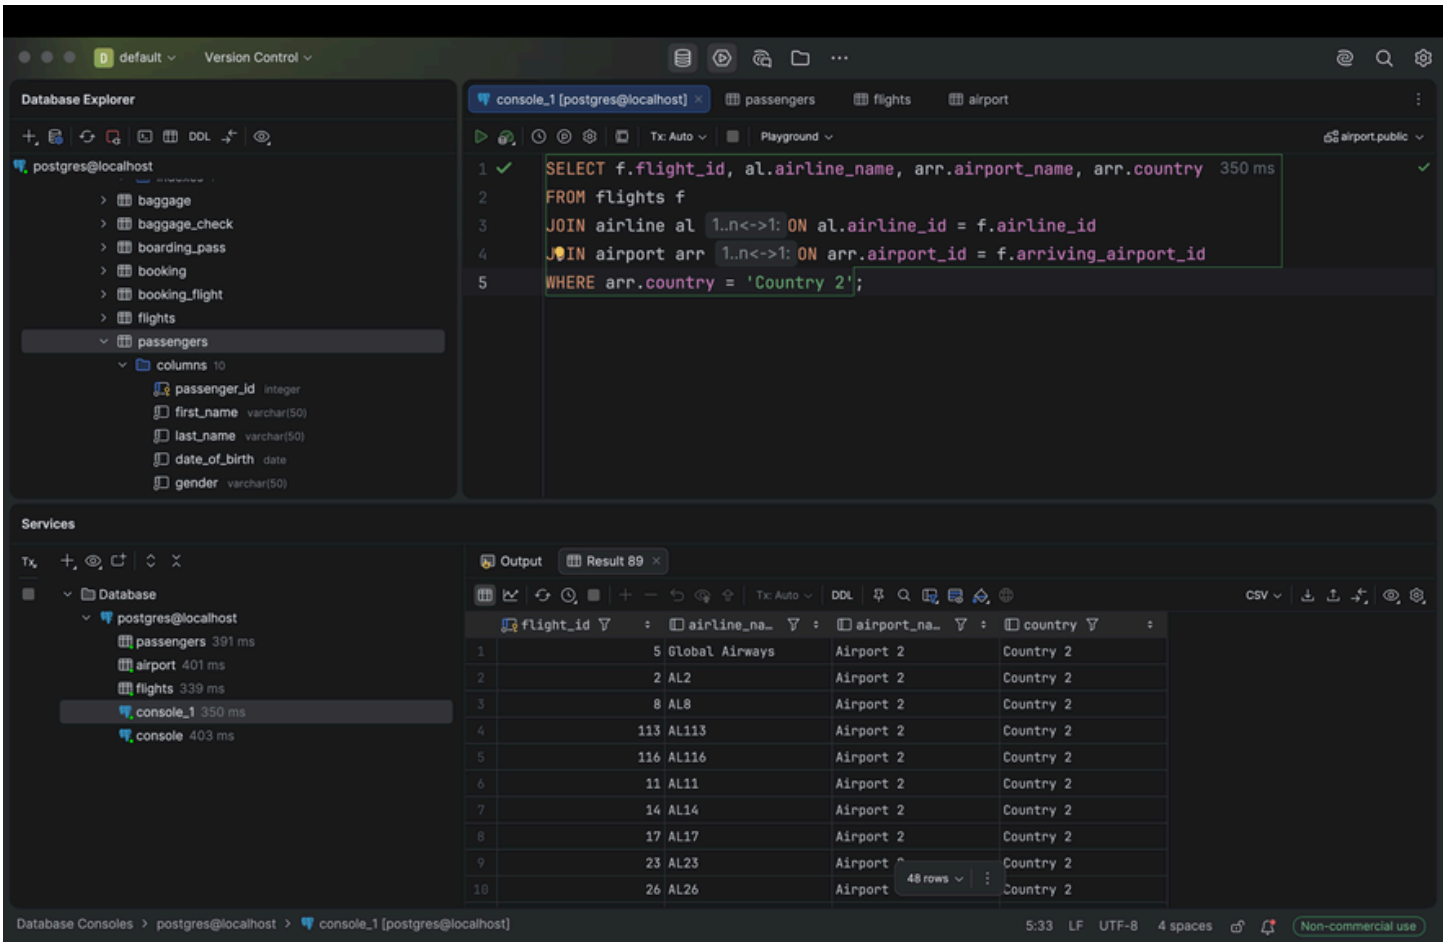
4.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
1 SELECT p.first_name, p.last_name, b.flight_id 345 ms
2 FROM passengers p
3 JOIN booking b 1<->1..n: ON b.passenger_id = p.passenger_id
4 WHERE b.flight_id = 51;
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 345 ms
console 403 ms
Output
Result 84
Tx: Auto
DDL
CSV
first_name
last_name
flight_id
1 Name51
Surname51
51
1 row
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
4:24 LF UTF-8 4 spaces
Non-commercial use

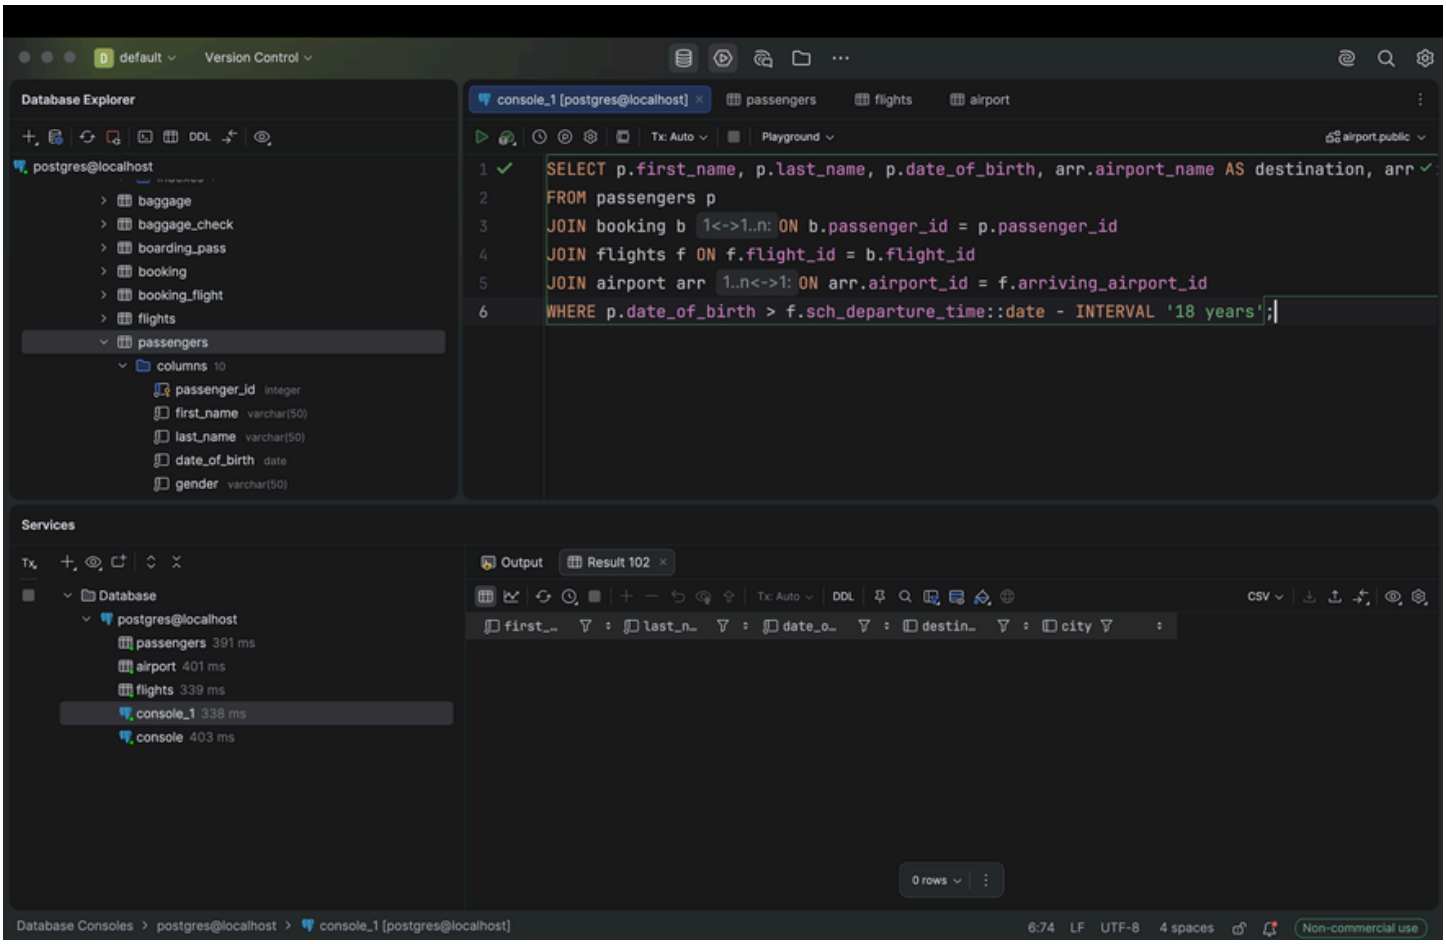
5.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT f.flight_id, 357 ms
AVG(b.ticket_price) AS avg_price,
SUM(b.ticket_price) AS total_price,
MAX(b.ticket_price) AS max_price,
MIN(b.ticket_price) AS min_price
FROM flights f
JOIN booking b ON b.flight_id = f.flight_id
GROUP BY f.flight_id;
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 357 ms
console 403 ms
Output
Result 85
CSV
flight_id
avg_price
total_price
max_price
min_price
1 116 60674 60674 60674 60674
2 87 85485.25 85485.25 85485.25 85485.25
3 68 48152.8 48152.8 48152.8 48152.8
4 51 35341.8 35341.8 35341.8 35341.8
5 80 40343.15 40343.15 40343.15 40343.15
6 70 45937.9 45937.9 45937.9 45937.9
7 52 52758.55 52758.55 52758.55 52758.55
8 132 17628.35 17628.35 17628.35 17628.35
9 84 79991.7 79991.7 79991.7 79991.7
10 92 48811.75 48811.75 48811.75 48811.75
137 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
8:22 LF UTF-8 4 spaces
Non-commercial use

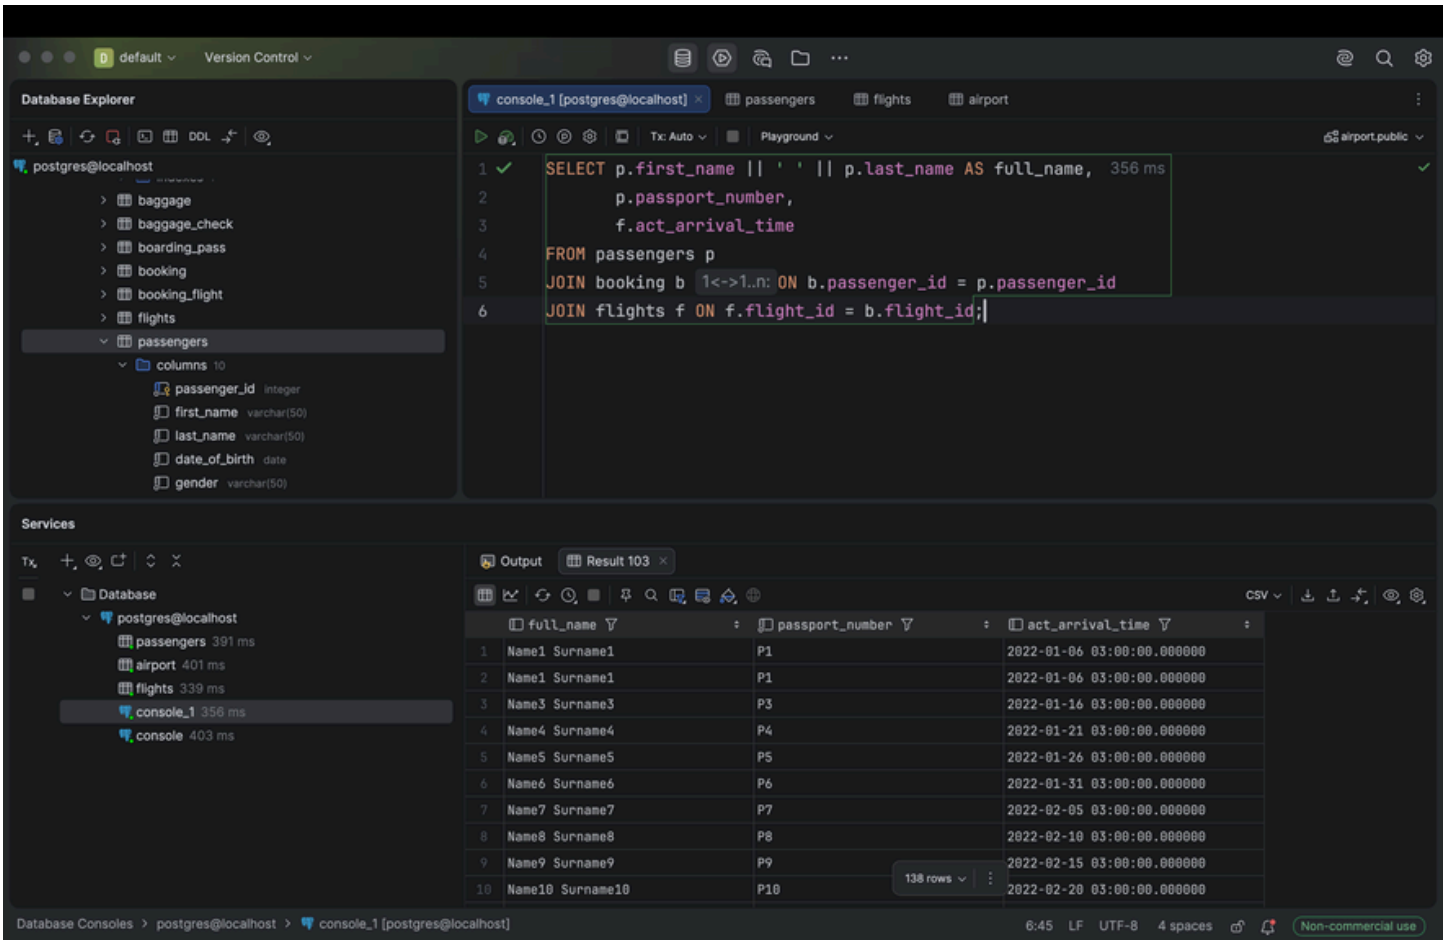
6.


default
Version Control
Database Explorer
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT f.flight_id, al.airline_name, arr.airport_name, arr.country 350 ms
FROM flights f
JOIN airline al 1..n<->1: ON al.airline_id = f.airline_id
JOIN airport arr 1..n<->1: ON arr.airport_id = f.arriving_airport_id
WHERE arr.country = 'Country 2';
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 350 ms
console 403 ms
Output
Result 89
DDL
CSV
flight_id
airline_na...
airport_na...
country
5 Global Airways Airport 2 Country 2
2 AL2 Airport 2 Country 2
8 AL8 Airport 2 Country 2
113 AL113 Airport 2 Country 2
116 AL116 Airport 2 Country 2
11 AL11 Airport 2 Country 2
14 AL14 Airport 2 Country 2
17 AL17 Airport 2 Country 2
23 AL23 Country 2
26 AL26 Country 2
48 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
5:33 LF UTF-8 4 spaces
Non-commercial use

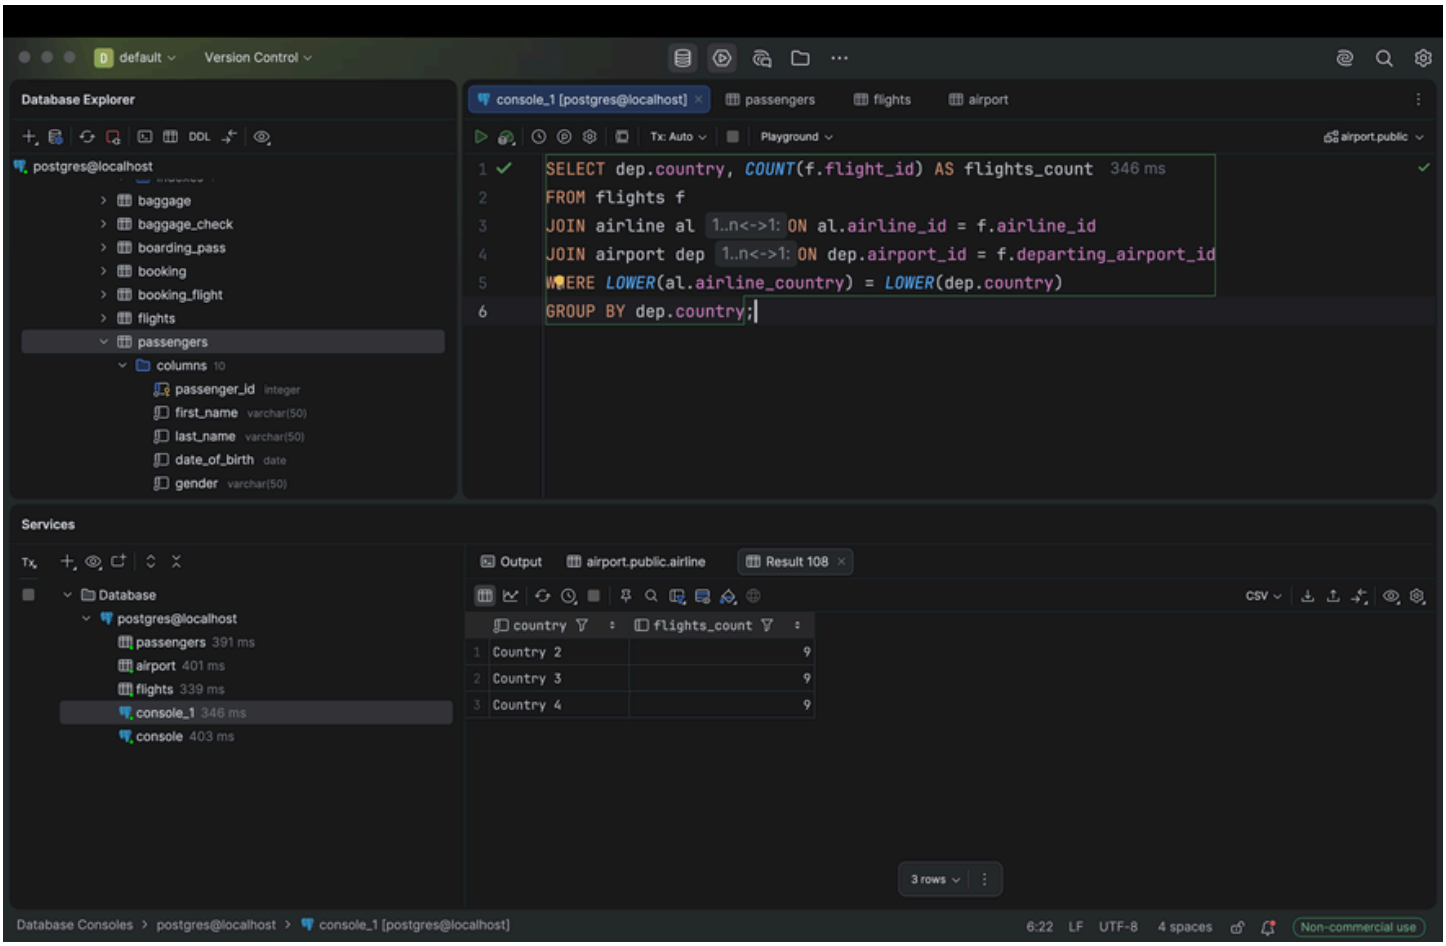
7.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT p.first_name, p.last_name, p.date_of_birth, arr.airport_name AS destination, arr
FROM passengers p
JOIN booking b 1<->1..n: ON b.passenger_id = p.passenger_id
JOIN flights f ON f.flight_id = b.flight_id
JOIN airport arr 1..n<->1: ON arr.airport_id = f.arriving_airport_id
WHERE p.date_of_birth > f.sch_departure_time::date - INTERVAL '18 years';
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 338 ms
console 403 ms
Output
Result 102
Tx: Auto
DDL
CSV
first_...
last_n...
date_o...
destin...
city
0 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
6:74
LF
UTF-8
4 spaces
Non-commercial use

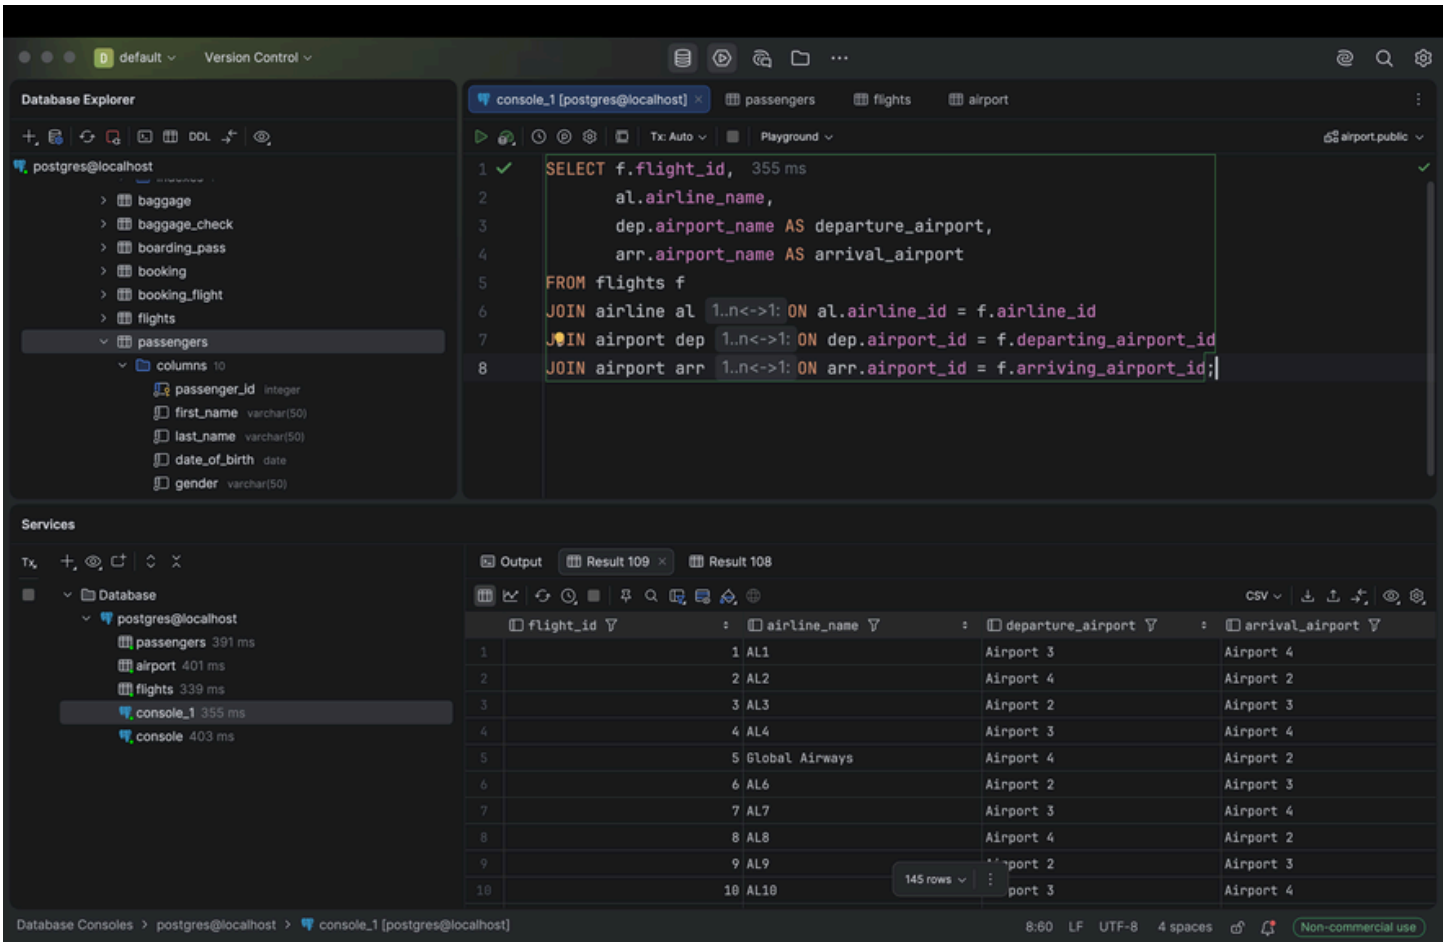
8.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT p.first_name || ' ' || p.last_name AS full_name, 356 ms
p.passport_number,
f.act_arrival_time
FROM passengers p
JOIN booking b 1<->1..n: ON b.passenger_id = p.passenger_id
JOIN flights f ON f.flight_id = b.flight_id;
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 356 ms
console 403 ms
Output
Result 103
CSV
full_name
passport_number
act_arrival_time
1 Name1 Surname1 P1 2022-01-06 03:00:00.000000
2 Name1 Surname1 P1 2022-01-06 03:00:00.000000
3 Name3 Surname3 P3 2022-01-16 03:00:00.000000
4 Name4 Surname4 P4 2022-01-21 03:00:00.000000
5 Name5 Surname5 P5 2022-01-26 03:00:00.000000
6 Name6 Surname6 P6 2022-01-31 03:00:00.000000
7 Name7 Surname7 P7 2022-02-05 03:00:00.000000
8 Name8 Surname8 P8 2022-02-10 03:00:00.000000
9 Name9 Surname9 P9 2022-02-15 03:00:00.000000
10 Name10 Surname10 P10 2022-02-20 03:00:00.000000
138 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
6:45 LF UTF-8 4 spaces
Non-commercial use

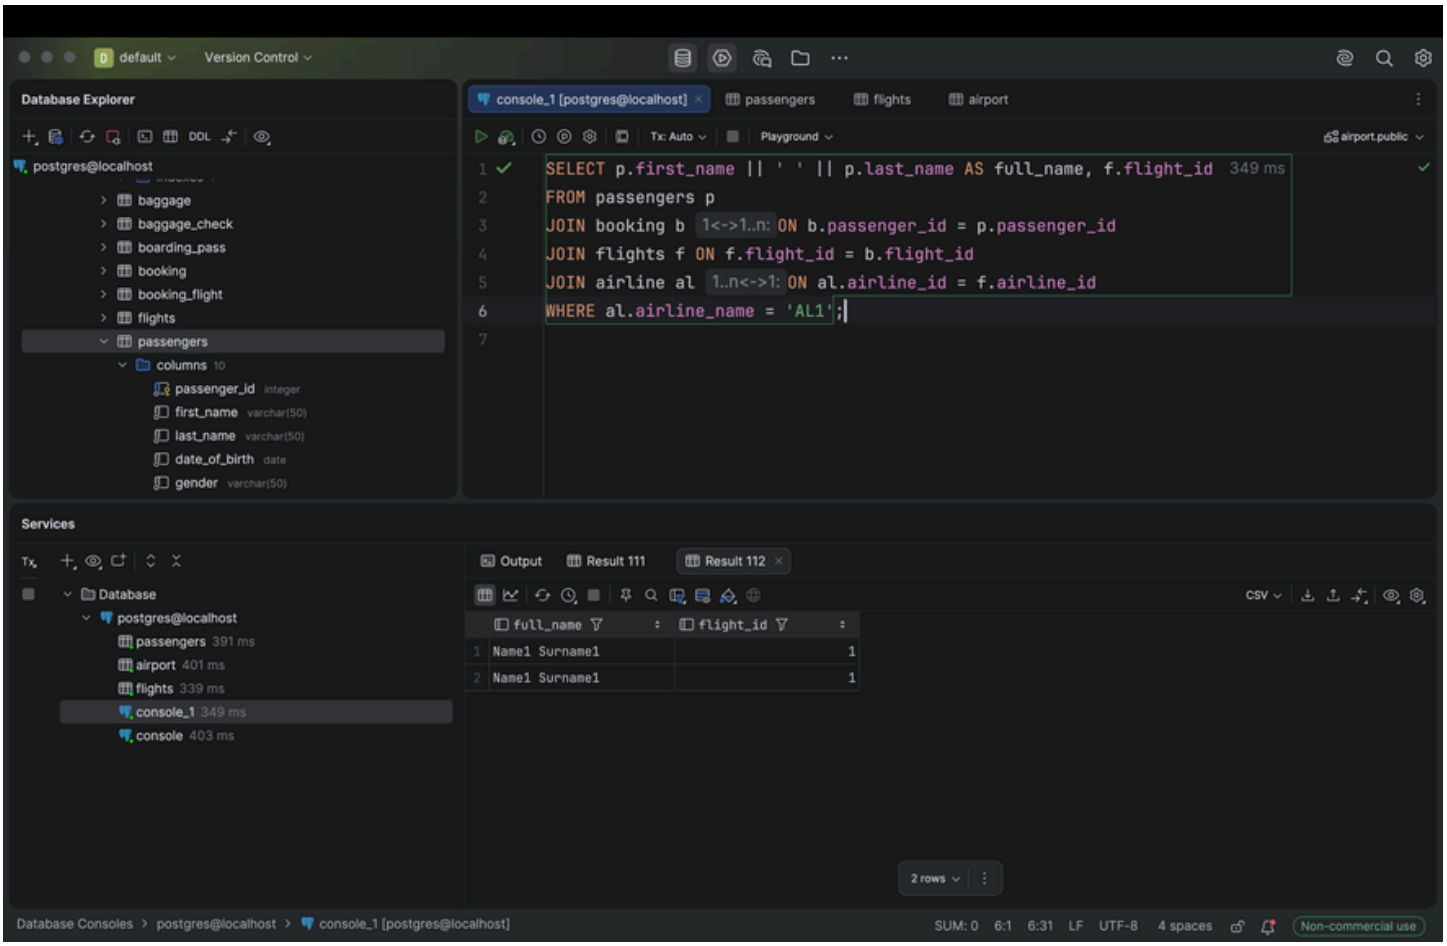
9.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT dep.country, COUNT(f.flight_id) AS flights_count 346 ms
FROM flights f
JOIN airline al 1..n<->1: ON al.airline_id = f.airline_id
JOIN airport dep 1..n<->1: ON dep.airport_id = f.departing_airport_id
WHERE LOWER(al.airline_country) = LOWER(dep.country)
GROUP BY dep.country;
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 346 ms
console 403 ms
Output
airport.public.airline
Result 108
CSV
country
flights_count
Country 2 9
Country 3 9
Country 4 9
3 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
6:22 LF UTF-8 4 spaces
Non-commercial use

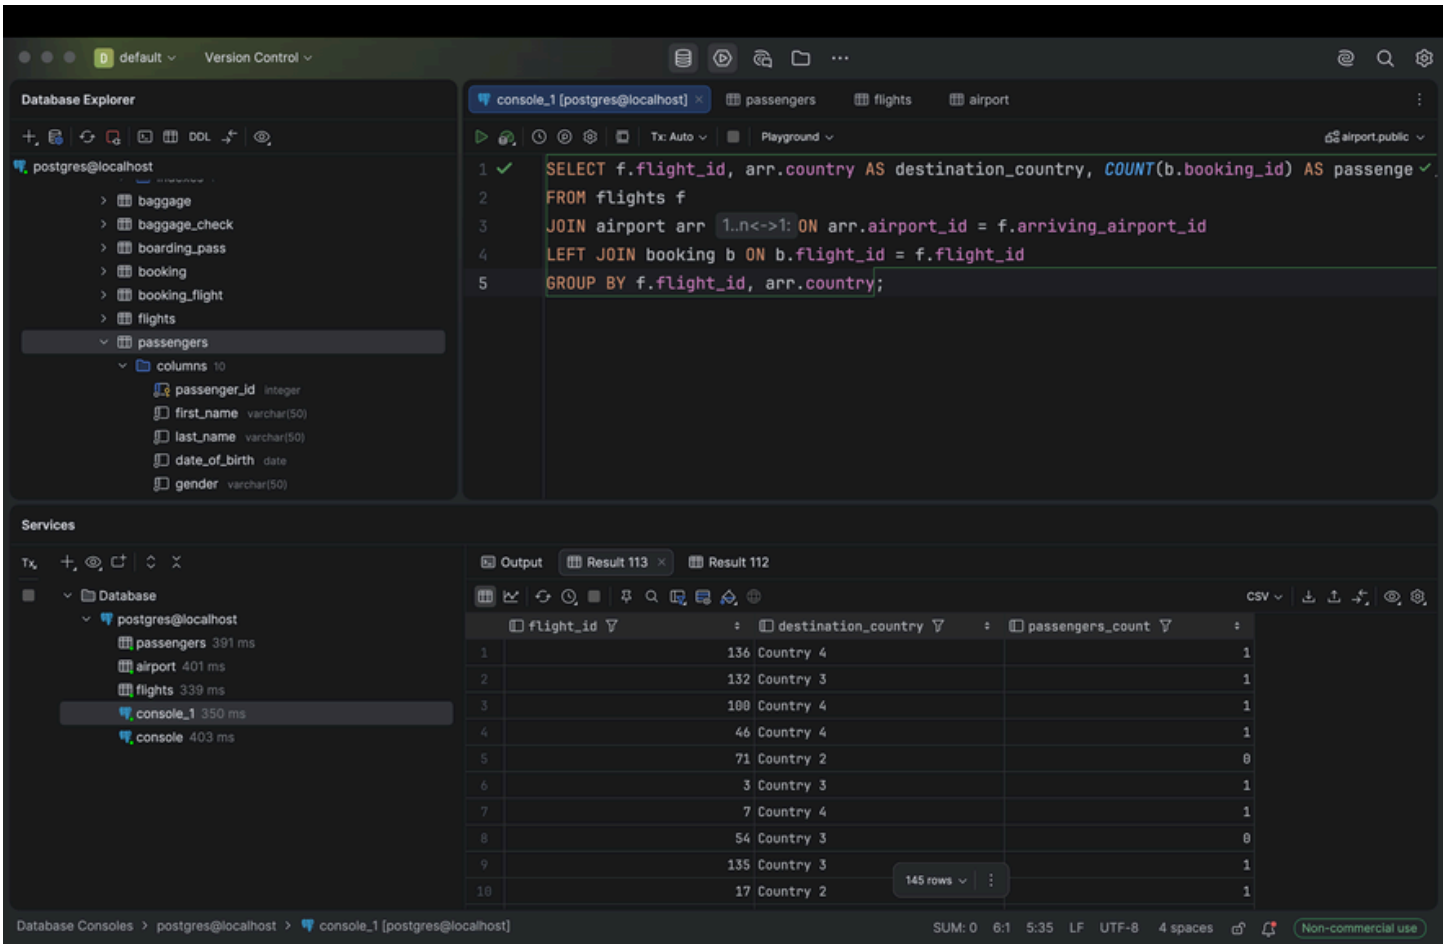
10.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT f.flight_id, 355 ms
al.airline_name,
dep.airport_name AS departure_airport,
arr.airport_name AS arrival_airport
FROM flights f
JOIN airline al 1..n<->1: ON al.airline_id = f.airline_id
JOIN airport dep 1..n<->1: ON dep.airport_id = f.departing_airport_id
JOIN airport arr 1..n<->1: ON arr.airport_id = f.arriving_airport_id;
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 355 ms
console 403 ms
Output
Result 109
Result 108
CSV
flight_id
airline_name
departure_airport
arrival_airport
1 AL1 Airport 3 Airport 4
2 AL2 Airport 4 Airport 2
3 AL3 Airport 2 Airport 3
4 AL4 Airport 3 Airport 4
5 Global Airways Airport 4 Airport 2
6 AL6 Airport 2 Airport 3
7 AL7 Airport 3 Airport 4
8 AL8 Airport 4 Airport 2
9 AL9 Airport 3
10 AL10 Airport 4
145 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
8:60 LF UTF-8 4 spaces
Non-commercial use

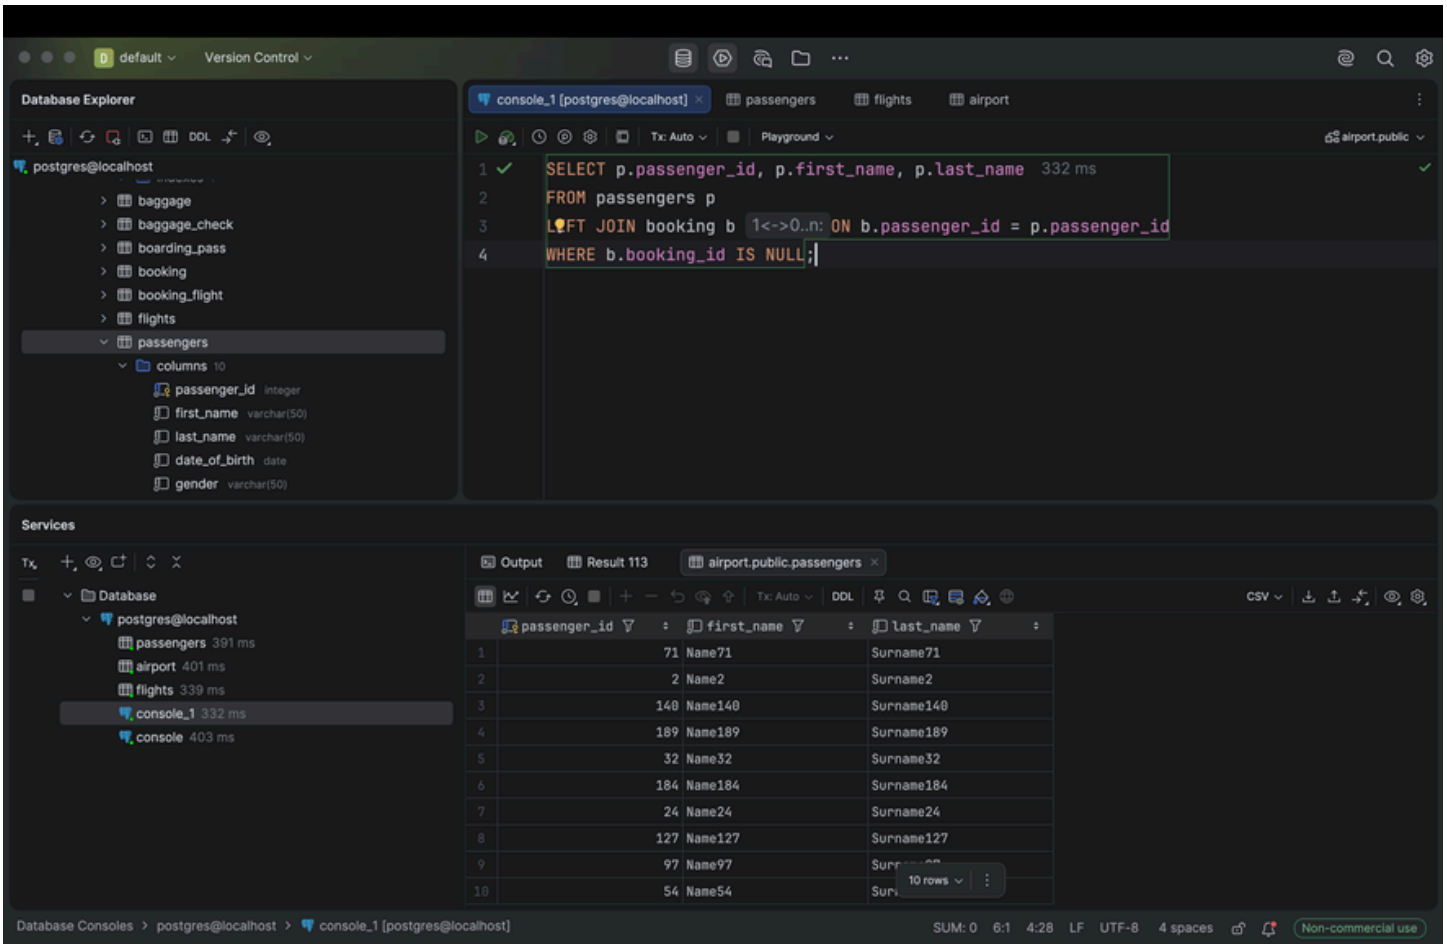
11.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT p.first_name || ' ' || p.last_name AS full_name, f.flight_id 349 ms
FROM passengers p
JOIN booking b 1<->1..n: ON b.passenger_id = p.passenger_id
JOIN flights f ON f.flight_id = b.flight_id
JOIN airline al 1..n<->1: ON al.airline_id = f.airline_id
WHERE al.airline_name = 'AL1';
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 349 ms
console 403 ms
Output
Result 111
Result 112
CSV
full_name
flight_id
1 Name1 Surname1 1
2 Name1 Surname1 1
2 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
SUM: 0 6:1 6:31 LF UTF-8 4 spaces
Non-commercial use

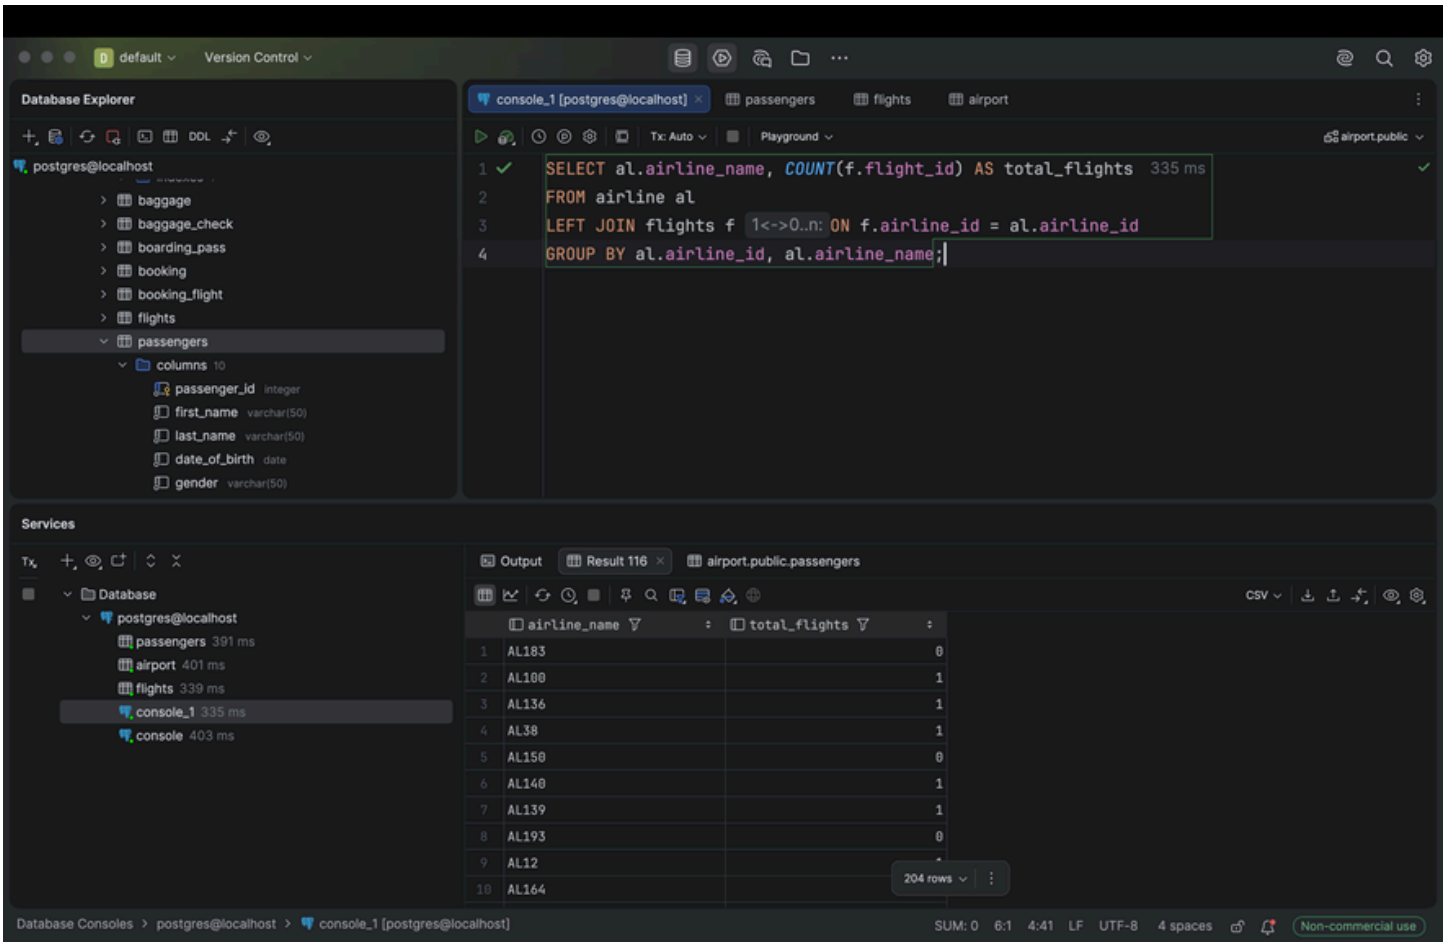
12.


default
Version Control
Database Explorer
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT f.flight_id, arr.country AS destination_country, COUNT(b.booking_id) AS passenge
FROM flights f
JOIN airport arr 1..n<->1: ON arr.airport_id = f.arriving_airport_id
LEFT JOIN booking b ON b.flight_id = f.flight_id
GROUP BY f.flight_id, arr.country;
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 350 ms
console 403 ms
Output
Result 113
Result 112
CSV
flight_id
destination_country
passengers_count
136 Country 4 1
132 Country 3 1
100 Country 4 1
46 Country 4 1
71 Country 2 0
3 Country 3 1
7 Country 4 1
54 Country 3 0
135 Country 3 1
17 Country 2 1
145 rows
Database Consoles
postgres@localhost
console_1 [postgres@localhost]
SUM: 0
6:1
5:35
LF
UTF-8
4 spaces
Non-commercial use

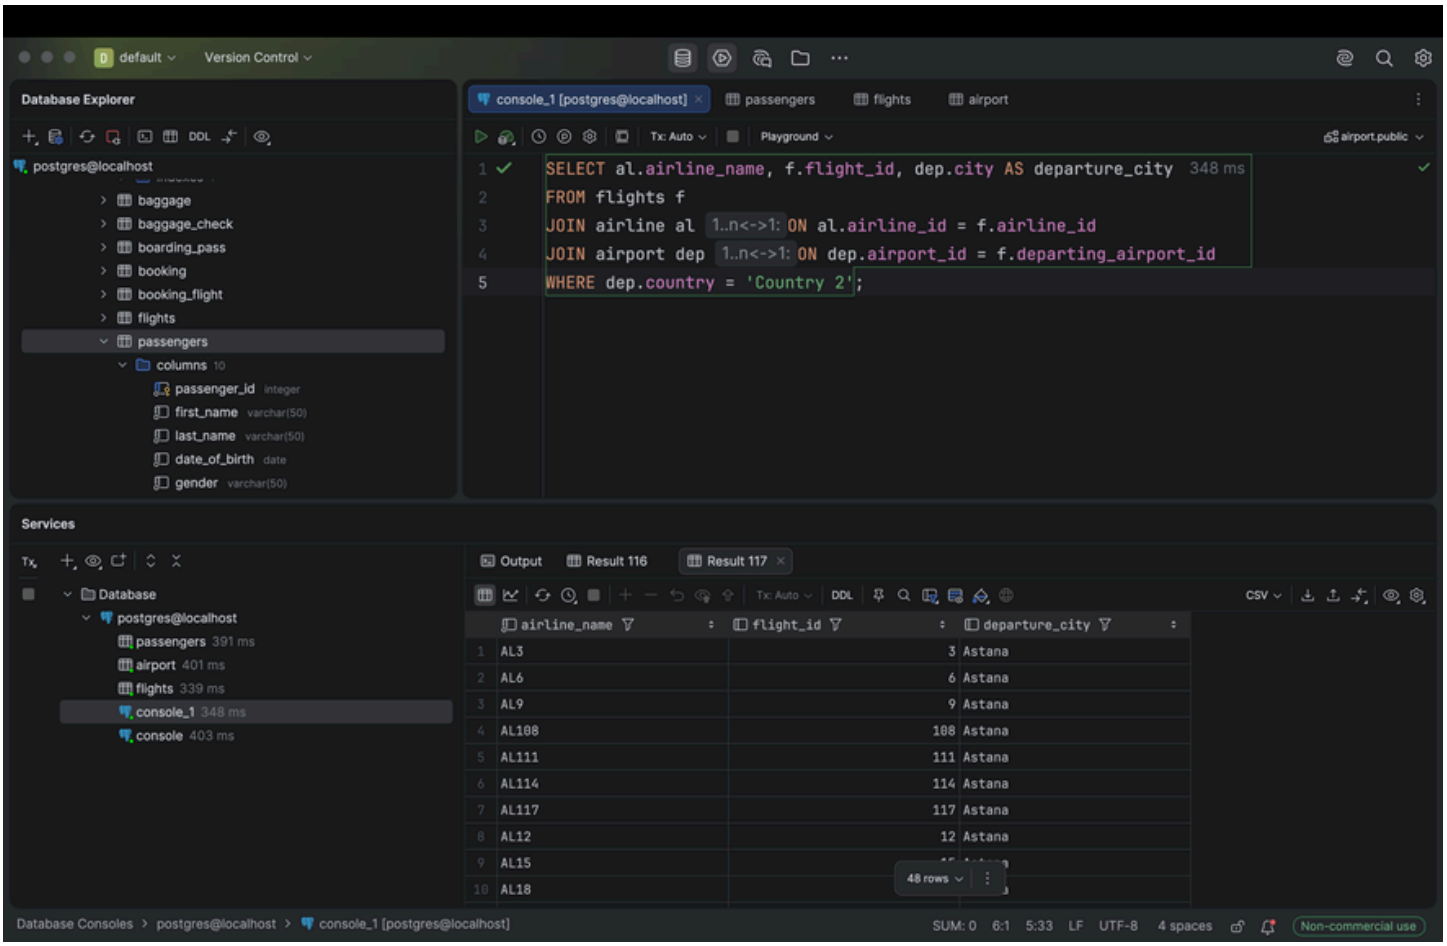
13.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
SELECT p.passenger_id, p.first_name, p.last_name 332 ms
FROM passengers p
LEFT JOIN booking b 1<->0..n: ON b.passenger_id = p.passenger_id
WHERE b.booking_id IS NULL;
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 332 ms
console 403 ms
Output
Result 113
airport.public.passengers
CSV
passenger_id
first_name
last_name
1 71 Name71 Surname71
2 2 Name2 Surname2
3 140 Name140 Surname140
4 189 Name189 Surname189
5 32 Name32 Surname32
6 184 Name184 Surname184
7 24 Name24 Surname24
8 127 Name127 Surname127
9 97 Name97
10 54 Name54
10 rows
Database Consoles
postgres@localhost
console_1 [postgres@localhost]
SUM: 0
6:1
4:28
LF
UTF-8
4 spaces
Non-commercial use

14.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
1 SELECT al.airline_name, COUNT(f.flight_id) AS total_flights 335 ms
2 FROM airline al
3 LEFT JOIN flights f 1<->0..n: ON f.airline_id = al.airline_id
4 GROUP BY al.airline_id, al.airline_name;
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 335 ms
console 403 ms
Output
Result 116
airport.public.passengers
CSV
airline_name
total_flights
1 AL183 0
2 AL100 1
3 AL136 1
4 AL38 1
5 AL150 0
6 AL140 1
7 AL139 1
8 AL193 0
9 AL12
10 AL164
204 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
SUM: 0
6:1
4:41
LF
UTF-8
4 spaces
Non-commercial use

15.


default
Version Control
Database Explorer
DDL
postgres@localhost
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
console_1 [postgres@localhost]
passengers
flights
airport
Tx: Auto
Playground
airport.public
1 SELECT al.airline_name, f.flight_id, dep.city AS departure_city 348 ms
2 FROM flights f
3 JOIN airline al 1..n<->1: ON al.airline_id = f.airline_id
4 JOIN airport dep 1..n<->1: ON dep.airport_id = f.departing_airport_id
5 WHERE dep.country = 'Country 2';
Services
Database
postgres@localhost
passengers 391 ms
airport 401 ms
flights 339 ms
console_1 348 ms
console 403 ms
Output
Result 116
Result 117
Tx: Auto
DDL
CSV
airline_name
flight_id
departure_city
1 AL3 3 Astana
2 AL6 6 Astana
3 AL9 9 Astana
4 AL108 108 Astana
5 AL111 111 Astana
6 AL114 114 Astana
7 AL117 117 Astana
8 AL12 12 Astana
9 AL15
10 AL18
48 rows
Database Consoles > postgres@localhost > console_1 [postgres@localhost]
SUM: 0 6:1 5:33 LF UTF-8 4 spaces
Non-commercial use