


A750F AUTOMATIC TRANSMISSION

DESCRIPTION

The A750F 5-speed Super ECT (Electronic Controlled Transmission) is used on the 2UZ-FE and 1GR-FE engine models.

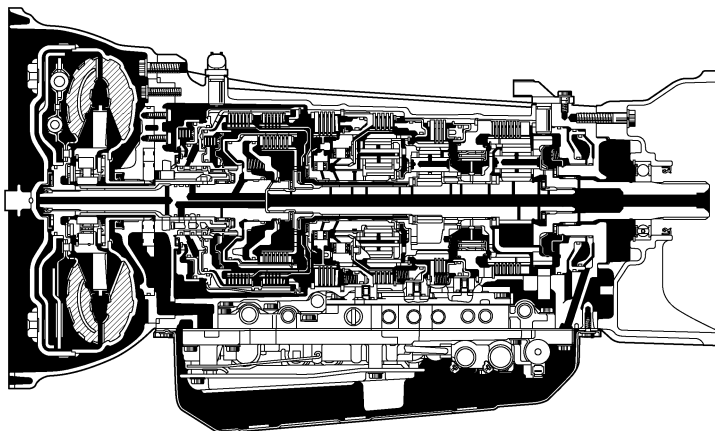


081CH06Y

CH

► Specifications ◀

Engine Type		2UZ-FE	1GR-FE
Gear Ratio	1st	3.520	←
	2nd	2.042	←
	3rd	1.400	←
	4th	1.000	←
	5th	0.716	←
	Reverse	3.224	←
Fluid Type		Toyota Genuine ATF WS	←
Fluid Capacity	with Water Cooled Oil Cooler + ATF Warmer	10.9 (11.5, 9.6)	←
Liters (US qts, Imp. qts)	with Water Cooled Oil Cooler + Air cooled ATF Cooler	11.1 (11.7, 9.8)	←
Weight (Reference)* kg (lb)	with Water Cooled Oil Cooler + ATF Warmer	86.0 (189.6)	86.5 (190.7)
	with Water Cooled Oil Cooler + Air cooled ATF Cooler	86.1 (189.8)	86.7 (191.1)

*: Weight shows the figure with the fluid fully filled.

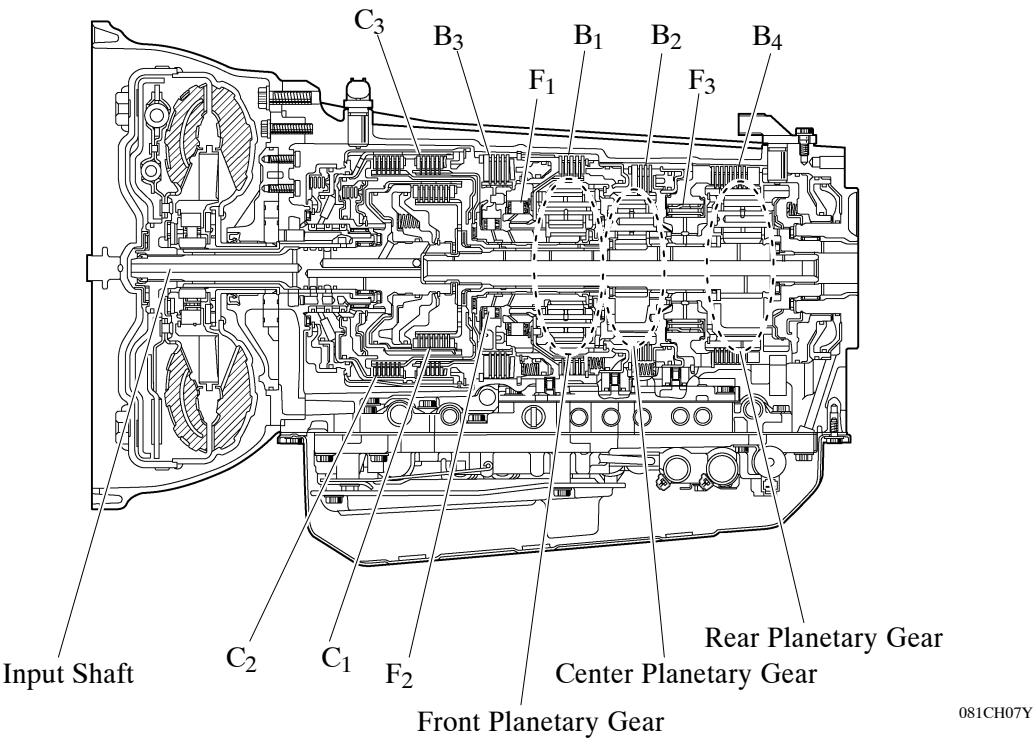

C ₁	No.1 Clutch	The No. of Discs	7	
C ₂	No.2 Clutch		6	
C ₃	No.3 Clutch		5	
B ₁	No.1 Brake		4	
B ₂	No.2 Brake		3	
B ₃	No.3 Brake		4	
B ₄	No.4 Brake		8	
F ₁	No.1 One-way Clutch	The No. of Sprags	18	
F ₂	No.2 One-way Clutch		25	
F ₃	No.3 One-way Clutch		26	
Front Planetary Gear		The No. of Sun Gear Teeth		40
		The No. of Pinion Gear Teeth	Inner	22
			Outer	21
				The No. of Ring Gear Teeth
Center Planetary Gear		The No. of Sun Gear Teeth		31
		The No. of Pinion Gear Teeth		23
		The No. of Ring Gear Teeth		77
Rear Planetary Gear		The No. of Sun Gear Teeth		25
		The No. of Pinion Gear Teeth		19
		The No. of Ring Gear Teeth		63