


Fully fleshing out TBD based on database schema work



NOTE: I've been considering a version number on each record in the DB that would be reflected here.
The version would be auto incremented and the way the DBManager would know if there was an update in the DB that needed to be pulled into the local cache, and then alert observers.

NOTE: Since DatabaseManager is a subclass of connection, either it or another subclass of Connection can be used as the connection here.


■ The subclasses should use the TvShows connection to get and set data ■



NOTE There can be reactions to reactions
It doesn't seem that QT creator allows this arrow
We may want to limit the depth

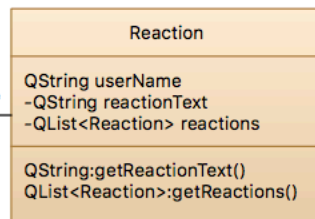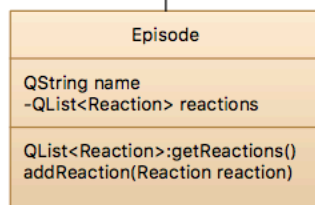

May implement if necessary, later.

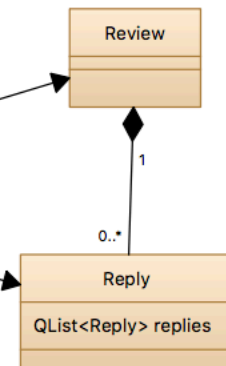

reactions is a private variable
There will be a getter, to get the reactions
Which will lazy load reactions, only when getReactions is called.

NOTE: We could do the same for Seasons and Episodes,
but those may be lightweight enough that it would be okay
to fully populate.

NOTE: There will also be a mutex around reading/modifying the database
backed data. This is to prevent either multiple changes at the same time
within the same application (probably won't happen), or doing a read in the
middle of an update (probably can happen)

There can be replies on replies
We may want to limit depth
NOTE: Qt Modeling doesn't seem to
allow a composition arrow to point to
itself.