

INSTITUTE OF TECHNOLOGY BLANCHARDSTOWN

---

# Predictions in Financial Time Series Data

---

*Author:*

Dr. Allan STEEL

*Supervisor:*

Dr. Geraldine GRAY

*A thesis submitted in partial fulfilment of the requirements  
for the degree of Master of Science in Computing*

*from the*

School of Informatics and Engineering

August 2014



# Declaration of Authorship

I, Dr. Allan STEEL, declare that this thesis titled, 'Predictions in Financial Time Series Data' and the work presented in it are my own. I confirm that:

- This work was done wholly or mainly while in candidature for a research degree at this University.
- Where any part of this thesis has previously been submitted for a degree or any other qualification at this University or any other institution, this has been clearly stated.
- Where I have consulted the published work of others, this is always clearly attributed.
- Where I have quoted from the work of others, the source is always given. With the exception of such quotations, this thesis is entirely my own work.
- I have acknowledged all main sources of help.
- Where the thesis is based on work done by myself jointly with others, I have made clear exactly what was done by others and what I have contributed myself.

Signed:

---

Date:

---

INSTITUTE OF TECHNOLOGY BLANCHARDSTOWN

## *Abstract*

School of Informatics and Engineering

Master of Science in Computing

### **Predictions in Financial Time Series Data**

by Dr. Allan STEEL

For hundreds of years speculators have tried to make a profit from the financial markets by predicting their future movements. To this end, many methods and techniques have been developed that purport to assist the market participant in generating profits. This study reports on the effectiveness of several such techniques to help predict the one-step ahead forecasts of a range of national stock market indices (DAX, FTSE, CAC, Dow Jones, Nikkei and AORD). A selection of technical analysis indicators as well as more traditional time series prediction models such as exponential smoothing, ARIMA and hybrid ARIMA techniques are explored. Results from the predictive models are passed to trading algorithms where purchasing decisions are directed by the forecasts. In general the forecasts and models developed had limited predictive capabilities on the financial markets tested, however profitable systems were developed based on predictions from technical analysis and hybrid ARIMA models.

# *Acknowledgements*

I wish to thank my supervisor Dr Geraldine Gray for her guidance, support and patience throughout the completion of this project. I would also like to acknowledge Dr Markus Hofmann and Laura Keyes, who along with Geraldine provided two years of stimulating and enjoyable lectures.

This study made extensive use of open source software and I would like to thank and acknowledge all the people who provided their time, skill and expertise to make world class software freely available.

Finally, I would like to thank my partner Ann for all her patience and help during the writing of this thesis.

# Contents

|   |            |
|---|------------|
| <b>Declaration of Authorship</b>              | <b>i</b>   |
| <b>Abstract</b>                               | <b>ii</b>  |
| <b>Acknowledgements</b>                       | <b>iii</b> |
| <b>Contents</b>                               | <b>iv</b>  |
| <b>List of Figures</b>                        | <b>ix</b>  |
| <b>List of Tables</b>                         | <b>x</b>   |
| <b>1 Introduction</b>                         | <b>1</b>   |
| 1.1 Background . . . . .                      | 1          |
| 1.1.1 Fundamental Analysis . . . . .          | 1          |
| 1.1.2 Technical Analysis . . . . .            | 2          |
| 1.1.3 Time Series Forecasting . . . . .       | 2          |
| 1.2 Statement of the Problem . . . . .        | 3          |
| 1.3 Purpose of Study . . . . .                | 4          |
| 1.3.1 Study Objectives . . . . .              | 4          |
| 1.4 Research Question . . . . .               | 4          |
| 1.5 Methodology . . . . .                     | 4          |
| 1.6 Limitations of the Study . . . . .        | 5          |
| 1.7 Scope of the Study . . . . .              | 5          |
| 1.8 Structure of Project . . . . .            | 6          |
| <b>2 Literature Review</b>                    | <b>7</b>   |
| 2.1 Technical Analysis . . . . .              | 7          |
| 2.1.1 Trading Systems . . . . .               | 7          |
| 2.1.2 Technical Analysis Overview . . . . .   | 9          |
| 2.1.3 Does Technical Analysis Work? . . . . . | 10         |
| 2.1.4 Moving Average Indicators . . . . .     | 12         |
| 2.1.5 Candlesticks Patterns . . . . .         | 12         |
| 2.1.6 Trend Reversal Oscillators . . . . .    | 14         |
| 2.2 Time Series Analysis . . . . .            | 15         |
| 2.2.1 Time Series Smoothing . . . . .         | 18         |

|          |   |           |
|----------|---|-----------|
| 2.2.1.1  | Simple Moving Average (SMA)                                 | 18        |
| 2.2.1.2  | Weighted Moving Average (WMA)                               | 19        |
| 2.2.1.3  | Exponential Moving Average (EMA)                            | 19        |
| 2.2.1.4  | Moving Averages in Practical Use                            | 20        |
| 2.2.1.5  | Holt-Winters Smoothing Models                               | 20        |
| 2.2.2    | Auto-Regression Family of Models                            | 22        |
| 2.2.2.1  | Auto-Regression   | 22        |
| 2.2.3    | Auto-Regressive Moving Average (ARMA)                       | 23        |
| 2.2.4    | Auto-Regressive Integrated Moving Average (ARIMA)           | 24        |
| 2.2.5    | ARIMA Parameter Selection                                   | 26        |
| 2.2.6    | Hybrid Models   | 28        |
| <b>3</b> | <b>Methodology</b>  | <b>31</b> |
| 3.1      | Data Collection and Quality                                 | 31        |
| 3.2      | Data Description  | 31        |
| 3.2.1    | Average True Range (ATR)                                    | 34        |
| 3.2.2    | Opening Price   | 34        |
| 3.2.3    | Closing Price   | 35        |
| 3.2.4    | High/Low Price  | 37        |
| 3.2.5    | OH/OL Price Fluctuations                                    | 37        |
| 3.3      | Software Tools  | 39        |
| 3.3.1    | R and R Studio  | 39        |
| 3.3.2    | Rapid Miner   | 40        |
| 3.4      | Methodology   | 40        |
| <b>4</b> | <b>Technical Analysis</b>                                   | <b>41</b> |
| 4.1      | Introduction  | 41        |
| 4.2      | Baseline Systems - Naive Methods                            | 43        |
| 4.2.1    | Naive Long System   | 43        |
| 4.2.2    | Naive Reversing System                                      | 45        |
| 4.2.3    | Summary of Naive Baseline Systems                           | 45        |
| 4.3      | Trend Detection Indicators                                  | 45        |
| 4.3.1    | Simple Moving Average (SMA) System                          | 46        |
| 4.3.2    | Moving Average Convergence/Divergence (MACD)                | 48        |
| 4.3.3    | Aroon Indicator   | 50        |
| 4.4      | Market Reversal Indicators                                  | 50        |
| 4.4.1    | Parabolic Stop-and-Reverse (SAR)                            | 51        |
| 4.4.2    | MACD as reversal Indicator                                  | 51        |
| 4.5      | Momentum Indicators   | 52        |
| 4.5.1    | Stochastic Oscillator                                       | 52        |
| 4.5.2    | Rate of Change (ROC)  | 54        |
| 4.6      | Breakout systems  | 54        |
| 4.6.1    | Daily High/Low Breakout System                              | 54        |
| 4.6.2    | Breakout of 90% Quantile Level                              | 55        |
| 4.7      | Candlestick Patterns  | 55        |
| 4.7.1    | Hanging Man, Hammer, Inverted Hanging Man and Shooting Star | 56        |
| 4.7.2    | Engulfing Candlestick                                       | 59        |

|          |   |           |
|----------|---|-----------|
| 4.7.3    | Doji . . . . .  | 60        |
| <b>5</b> | <b>Time Series</b>  | <b>62</b> |
| 5.1      | Exponential Smoothing . . . . .                                     | 62        |
| 5.1.1    | Time Series Base Models . . . . .                                   | 62        |
| 5.1.2    | Trading System Based on Mean Model . . . . .                        | 64        |
| 5.1.3    | Trading System Based on Drift Model . . . . .                       | 64        |
| 5.1.4    | Trading System Based on Exponential Smoothing Model . . . . .       | 65        |
| 5.2      | ARIMA Models . . . . .  | 66        |
| 5.3      | Manual Generation of ARIMA Models . . . . .                         | 67        |
| 5.3.1    | Data Exploration . . . . .  | 67        |
| 5.3.2    | Adjusting for non-uniform variance and non-stationariness . . . . . | 67        |
| 5.3.3    | Examine ACF/PACF . . . . .  | 68        |
| 5.3.4    | Try the chosen model(s) . . . . .                                   | 70        |
| 5.3.5    | Model Residuals . . . . .   | 70        |
| 5.3.6    | Calculate forecast . . . . .  | 73        |
| 5.4      | Automatic Generation of ARIMA Models . . . . .                      | 73        |
| 5.5      | Trading the ARIMA Models . . . . .                                  | 74        |
| 5.5.1    | System 1 - Close Price vs Forecast . . . . .                        | 74        |
| 5.5.2    | System 2 - Forecast vs Previous Forecast . . . . .                  | 75        |
| 5.6      | Hybrid ARIMA Models . . . . .                                       | 75        |
| 5.7      | Predicting Closing Price . . . . .                                  | 77        |
| 5.7.1    | ARIMA/Artificial Neural Networks (ANN) . . . . .                    | 77        |
| 5.7.2    | ARIMA/k-Nearest Neighbour (k-NN) . . . . .                          | 78        |
| 5.8      | Predicting Up or Down - Categorical Label . . . . .                 | 79        |
| 5.8.1    | ARIMA/Artificial Neural Networks (ANN) . . . . .                    | 80        |
| 5.8.2    | ARIMA/k-Nearest Neighbour (k-NN) . . . . .                          | 80        |
| 5.8.3    | ARIMA/Support Vector Machine (SVM) . . . . .                        | 81        |
| <b>6</b> | <b>Analysis</b>   | <b>83</b> |
| 6.1      | Introduction . . . . .  | 83        |
| 6.2      | Technical Analysis . . . . .  | 83        |
| 6.2.1    | Baseline Systems . . . . .  | 83        |
| 6.2.2    | Trend Detection . . . . .   | 85        |
| 6.2.3    | Market Reversal Indicators . . . . .                                | 87        |
| 6.2.4    | Momentum Indicators . . . . .                                       | 88        |
| 6.2.5    | Breakout systems . . . . .  | 89        |
| 6.2.6    | Candlestick Patterns . . . . .                                      | 90        |
| 6.3      | Time Series Analysis . . . . .                                      | 91        |
| 6.3.1    | Exponential Smoothing . . . . .                                     | 91        |
| 6.3.2    | ARIMA Models . . . . .  | 92        |
| 6.3.3    | ARIMA Hybrids - Predicting Closing Price . . . . .                  | 93        |
| 6.3.3.1  | ARIMA/Artificial Neural Networks (ANN) . . . . .                    | 93        |
| 6.3.3.2  | ARIMA/k-Nearest Neighbour (k-NN) . . . . .                          | 94        |
| 6.3.4    | ARIMA Hybrids - Predicting Up Down with Categorical Label . . . . . | 95        |
| 6.3.4.1  | ARIMA/Artificial Neural Networks (ANN) . . . . .                    | 95        |
| 6.3.4.2  | ARIMA/k-Nearest Neighbour (k-NN) . . . . .                          | 96        |

|          |  |            |
|----------|--|------------|
| 6.3.4.3  | ARIMA/Support Vector Machine (SVM)                                     | 96         |
| 6.4      | Conclusion   | 97         |
| 6.4.1    | Research question revisited  | 99         |
| 6.4.2    | Future Work  | 99         |
| <b>A</b> | <b>R Code</b>  | <b>101</b> |
| A.1      | Chapter 4  | 101        |
| A.1.1    | Chapter 4 Results Generation   | 101        |
| A.1.2    | Naive Systems  | 118        |
| A.1.2.1  | Naive Long System  | 118        |
| A.1.2.2  | Naive Long System trading close to close                               | 118        |
| A.1.2.3  | Naive Reversing System   | 119        |
| A.1.3    | Trend Detection Systems  | 120        |
| A.1.3.1  | SMA  | 120        |
| A.1.3.2  | MACD - trend indicator   | 121        |
| A.1.3.3  | Aroon trend indicator  | 122        |
| A.1.4    | Market Reversal Indicator  | 123        |
| A.1.4.1  | SAR reversal indicator   | 123        |
| A.1.4.2  | MACD as Reversal Indicator   | 124        |
| A.1.4.3  | Stochastic reversal indicator  | 125        |
| A.1.4.4  | Rate of Change(ROC)  | 126        |
| A.1.5    | Break Out Systems  | 127        |
| A.1.5.1  | Break Out  | 127        |
| A.1.5.2  | 90% Quantile   | 127        |
| A.1.6    | Candlestick Systems  | 129        |
| A.1.6.1  | Hammer and Inverted Hammer Candlestick Pattern                         | 129        |
| A.1.6.2  | Hammer and Inverted Hammer Candlestick Pattern in a<br>Trending Market | 129        |
| A.1.6.3  | Engulfing Candlestick Pattern  | 130        |
| A.1.6.4  | Engulfing Candlestick Pattern in a Trending Market                     | 131        |
| A.1.6.5  | Doji Candlestick Pattern in a Trending Market                          | 132        |
| A.2      | Chapter 5  | 133        |
| A.2.1    | Exponential Smoothing  | 151        |
| A.2.2    | System 1 Trading Algorithm   | 152        |
| A.2.3    | System 2 Trading Algorithm   | 152        |
| A.2.4    | Trading System for Categorical Label                                   | 153        |
| A.3      | Utility Code   | 154        |
| <b>B</b> | <b>Technical Indicators</b>  | <b>159</b> |
| B.1      | Moving Average Convergence Divergence (MACD)                           | 159        |
| B.2      | Aroon Indicator  | 159        |
| B.3      | Parabolic Stop-and-Reverse (SAR)                                       | 160        |
| B.4      | Stochastic   | 161        |
| B.5      | Rate of Change(ROC)  | 162        |
| <b>C</b> | <b>Summary of Results</b>  | <b>163</b> |



---

|                                 |                |
|---------------------------------|----------------|
| C.1 Chapter 4 Results . . . . . | 163            |
| C.2 Chapter 5 Results . . . . . | 169            |
| <br><b>Bibliography</b>         | <br><b>172</b> |

# List of Figures

|      |   |    |
|------|---|----|
| 2.1  | Candlestick representation of daily open and close prices . . . . .       | 12 |
| 2.2  | Examples of well known candlestick patterns . . . . .                     | 13 |
| 2.3  | Candlesticks and market movement . . . . .                                | 13 |
| 2.4  | A time series decomposed into primary components . . . . .                | 16 |
| 2.5  | A stationary time series . . . . .  | 17 |
| 2.6  | An additive time series . . . . .   | 17 |
| 2.7  | A multiplicative time series . . . . .                                    | 18 |
| 2.8  | Exponential smoothing of a time series with no seasonality or trend . . . | 21 |
| 2.9  | Exponential smoothing of a time series with trend though no seasonality . | 22 |
| 2.10 | Exponential smoothing of a time series with trend and seasonality . . . . | 22 |
| 2.11 | Correlogram of auto-correlations . . . . .                                | 27 |
| 2.12 | Correlogram of partial auto-correlations . . . . .                        | 27 |
| 3.1  | Open, high, low and closing prices (OHLC). . . . .                        | 32 |
| 3.2  | Graph of DAX between 2000 and 2013 . . . . .                              | 33 |
| 3.3  | Graph of DAX in 2013 . . . . .  | 33 |
| 3.4  | ATR of DAX Divided by Closing Price . . . . .                             | 35 |
| 4.1  | Situation in which using a stop loss is beneficial . . . . .              | 48 |
| 4.2  | Situation in which using a stop loss is detrimental . . . . .             | 48 |
| 4.3  | Hammer and Inverted Hammer candlestick patterns . . . . .                 | 56 |
| 4.4  | Hanging Man and Shooting Star candlestick patterns . . . . .              | 56 |
| 4.5  | DAX candlestick patterns occurring in April 2014. . . . .                 | 57 |
| 4.6  | Engulfing candlestick patterns . . . . .                                  | 59 |
| 4.7  | Doji candlestick patterns . . . . .                                       | 60 |
| 5.1  | Forecasts generated by mean and drift methods . . . . .                   | 63 |
| 5.2  | Forecasts generated by mean and drift methods and actual data . . . . .   | 64 |
| 5.3  | FTSE 100 index between the years 2000 to 2013 . . . . .                   | 68 |
| 5.4  | First difference of FTSE 100 between the years 2000 to 2013 . . . . .     | 68 |
| 5.5  | ACF of FTSE 100 between the years 2000 to 2013 . . . . .                  | 69 |
| 5.6  | PACF of FTSE 100 between the years 2000 to 2013 . . . . .                 | 69 |
| 5.7  | FTSE 100 ARIMA model residuals. . . . .                                   | 71 |
| 5.8  | ACF plot of the FTSE 100 ARIMA model residuals . . . . .                  | 72 |
| 5.9  | Histogram of the FTSE 100 ARIMA model residuals . . . . .                 | 72 |
| 5.10 | Rapid Miner hybrid ARIMA process . . . . .                                | 76 |
| 5.11 | Rapid Miner cross-validation operator . . . . .                           | 77 |
| 5.12 | SVM margins and slack variables . . . . .                                 | 81 |

# List of Tables

|      |  |    |
|------|--|----|
| 2.1  | Example of a Simple Moving Average . . . . .   | 19 |
| 2.2  | Example of a Weighted Moving Average . . . . .   | 20 |
| 2.3  | Times series and matching models . . . . .   | 26 |
| 3.1  | First 6 rows of the DAX data set. . . . .  | 32 |
| 3.2  | Final 6 rows of the DAX data set. . . . .  | 32 |
| 3.3  | DAX summary statistics . . . . .   | 32 |
| 3.4  | Average True Range of DAX . . . . .  | 35 |
| 3.5  | Opening Prices in relation to previous day's High and Low values . . . . .                   | 35 |
| 3.6  | Closing Prices in relation to previous day's High and Low values . . . . .                   | 36 |
| 3.7  | Daily Open to Close Price Range . . . . .  | 36 |
| 3.8  | Quantiles of the open to close price range . . . . .   | 36 |
| 3.9  | Today's H/L Prices in relation to previous day's HL . . . . .                                | 37 |
| 3.10 | Minor daily price fluctuation . . . . .  | 38 |
| 3.11 | Quantiles of Minor daily price fluctuation. . . . .  | 38 |
| 3.12 | Major daily price fluctuation. . . . .   | 39 |
| 3.13 | Quantiles of Major daily price fluctuation. . . . .  | 39 |
| 4.1  | Results from the Naive Long System . . . . .   | 44 |
| 4.2  | Indice Prices in 2000 and 2013. . . . .  | 44 |
| 4.3  | Results from the Naive Long System trading close to close . . . . .                          | 44 |
| 4.4  | Results from the Naive Reversing System. . . . .   | 45 |
| 4.5  | Results from a system based on SMA . . . . .   | 47 |
| 4.6  | Results from a system based on SMA with stop loss . . . . .                                  | 49 |
| 4.7  | Results from a system using MACD as a trend indicator . . . . .                              | 49 |
| 4.8  | Results from a system based on the Aroon indicator . . . . .                                 | 50 |
| 4.9  | Results from a system based on the Aroon indicator with stop loss . . . . .                  | 50 |
| 4.10 | Impact of using stop loss with Aroon trend indicator . . . . .                               | 51 |
| 4.11 | Results from a system based on the SAR indicator . . . . .                                   | 52 |
| 4.12 | Results from a system based on MACD as trend reversal indicator . . . . .                    | 52 |
| 4.13 | Results from a system based on the Stochastic indicator . . . . .                            | 53 |
| 4.14 | Results from a system based on the Stochastic indicator with a stop loss . . . . .           | 53 |
| 4.15 | Results from a system based on the ROC indicator . . . . .                                   | 54 |
| 4.16 | Results from the Daily High/Low Breakout System . . . . .                                    | 55 |
| 4.17 | Results from a break out system using the day's the minor move . . . . .                     | 55 |
| 4.18 | Results from a system based on the Hammer and Inverted Hammer candlestick patterns . . . . . | 58 |

|      |   |    |
|------|---|----|
| 4.19 | Results from a system based on the Hammer and Inverted Hammer candlestick patterns occurring in a downtrend . . . . .               | 59 |
| 4.20 | Results from a system based on the Engulfing candlestick pattern . . . . .  | 59 |
| 4.21 | Results from a system based on the Engulfing candlestick pattern in a trending market . . . . .                                     | 60 |
| 4.22 | Results from a system based on the Doji candlestick pattern in a trending market . . . . .  | 61 |
| 5.1  | Error measures from mean and drift models . . . . .   | 63 |
| 5.2  | Results from trading the predictions generated by a mean exponential smoothing system . . . . .                                     | 64 |
| 5.3  | Results from trading the predictions generated by a drift exponential smoothing system . . . . .                                    | 65 |
| 5.4  | Taxonomy of exponential smoothing methods . . . . .   | 65 |
| 5.5  | Results from trading the predictions generated by a moving window exponential smoothing system . . . . .                            | 66 |
| 5.6  | AIC, AICc and BIC results from alternative ARIMA models . . . . .   | 70 |
| 5.7  | Box Ljung test of FTSE 100 ARIMA model residuals . . . . .  | 72 |
| 5.8  | Forecast for FTSE 100 generated from the ARIMA model . . . . .  | 73 |
| 5.9  | ARIMA models chosen for the indice data sets . . . . .  | 73 |
| 5.10 | Results from trading System 1 using the forecasts generated by the ARIMA models . . . . .   | 74 |
| 5.11 | Results from trading System 2 using the forecasts generated by the ARIMA models . . . . .   | 75 |
| 5.12 | Results from passing closing price predictions from hybrid ARIMA/ANN model to System 1 . . . . .                                    | 78 |
| 5.13 | Results from passing closing price predictions from hybrid ARIMA/ANN model to System 2 . . . . .                                    | 78 |
| 5.14 | Results from passing closing price predictions from hybrid ARIMA/k-NN model to System 1 . . . . .                                   | 79 |
| 5.15 | Results from passing closing price predictions from hybrid ARIMA/k-NN model to System 2 . . . . .                                   | 79 |
| 5.16 | FTSE 100 data set with "U" and "D" label . . . . .  | 80 |
| 5.17 | Results from a trading system using the forecast of categorical label "U/D" from hybrid ARIMA/ANN model . . . . .                   | 80 |
| 5.18 | Results from a trading system using the forecast of categorical label "U/D" from hybrid ARIMA/k-NN model . . . . .                  | 81 |
| 5.19 | Results from a trading system with a stop loss using the forecast of categorical label "U/D" from hybrid ARIMA/k-NN model . . . . . | 81 |
| 5.20 | Results from a trading system using the forecast of categorical label "U/D" from hybrid ARIMA/SVM model . . . . .                   | 82 |
| 6.1  | Returns from a "Buy and Hold" technique . . . . .   | 84 |
| 6.2  | Results from the Naive Reversing System. . . . .  | 85 |
| 6.3  | Aroon system results minus Naive Reversing results . . . . .  | 87 |
| 6.4  | H/L breakout system results minus Naive Reversing results . . . . .   | 89 |
| 6.5  | 90% quantile level breakout system minus Naive Reversing results . . . . .  | 90 |
| 6.6  | ARIMA models chosen for the indice data sets . . . . .  | 92 |

---

|      |   |     |
|------|---|-----|
| 6.7  | ARIMA system results minus Naive Reversing results . . . . .          | 93  |
| 6.8  | ARIMA/ANN closing price system results minus Naive Reversing results  | 94  |
| 6.9  | ARIMA/k-NN closing price system results minus Naive Reversing results | 95  |
| 6.10 | ARIMA/k-NN U/D system results minus Naive Reversing results . . . . . | 96  |
| 6.11 | ARIMA/SVM U/D system results minus Naive Reversing results . . . . .  | 96  |
|      |   |     |
| C.1  | Chapter 4 Dax Results . . . . .                                       | 163 |
| C.2  | Chapter 4 CAC Results . . . . .                                       | 164 |
| C.3  | Chapter 4 FTSE Results . . . . .                                      | 165 |
| C.4  | Chapter 4 Dow Results . . . . .                                       | 166 |
| C.5  | Chapter 4 Nikkei Results . . . . .                                    | 167 |
| C.6  | Chapter 4 AORD Results . . . . .                                      | 168 |
| C.7  | Chapter 5 DAX Results . . . . .                                       | 169 |
| C.8  | Chapter 5 CAC Results . . . . .                                       | 169 |
| C.9  | Chapter 5 FTSE Results . . . . .                                      | 170 |
| C.10 | Chapter 5 Dow Results . . . . .                                       | 170 |
| C.11 | Chapter 5 Nikkei Results . . . . .                                    | 171 |
| C.12 | Chapter 5 AORD Results . . . . .                                      | 171 |

# Chapter 1

## Introduction

### 1.1 Background

For hundreds of years speculators have tried to make a monetary profit in financial markets by predicting the future price of commodities, stocks, foreign exchange rates and more recently futures and options. Over the last few decades these efforts have increased markedly, using a variety of techniques (Hsu, 2011), which can be broadly classified into three categories:

- fundamental analysis
- technical analysis
- traditional time series forecasting

#### 1.1.1 Fundamental Analysis

Fundamental analysis makes use of basic market information in order to predict future movements of an asset. If an investor was looking at a particular stock's fundamental data they would consider information such as revenue, profit forecasts, supply, demand and operating margins etc. Speculators looking at commodities might consider weather patterns, political aspects, government legislation and so on. Effectively fundamental analysis is concerned with macro economic and political factors that might affect the future price of a financial asset. Fundamental analysis is not considered further in this study.

### 1.1.2 Technical Analysis

Technical analysis is the study of historical prices and patterns with the aim of predicting future prices. Practitioners of technical analysis in the past were referred to as chartists, as they believed all that was needed to know about a particular market was contained in its pricing chart. Murphy (1999) defines technical analysis as:

*“Technical analysis is the study of market action, primarily through the use of charts for the purpose of forecasting future price trends.”*

Technical analysis (TA) is interesting as it tends to polarise opinion as to its scientific basis and effectiveness. To many people and particularly scholars in academia it is considered little more than Black Magic. Consider the words of Malkiel (1999):

*“Obviously I am biased against the chartist. This is not only a personal predilection, but a professional one as well. Technical Analysis is anathema to the academic world. We love to pick on it. Our bullying tactics are prompted by two considerations: (1) the method is patently false; and (2) it’s easy to pick on. And while it may seem a bit unfair to pick on such a sorry target, just remember: it is your money we are trying to save.”*

However, in the world of finance technical analysis is ubiquitous and widely used (Menkhoff, 2010). In support of TA a plethora of so-called indicators have been developed over the years from simple moving averages to much more exotic offerings. Today every piece of software or on-line analysis tool provides the ability to place a multitude of technical indicators on a graph of a stock, commodity or any financial instrument.

Most technical indicators essentially fall into one of two main categories, ones attempting to detect the start and direction of trends and those trying to identify market reversals generally called oscillators. Trend analysis indicators include Average Direction Index (ADX), Aroon, Moving Averages and Commodity Channel Indexes (CCI). Price oscillator indicators include, Moving Average Convergence Divergence (MACD - (Appel and Dobson, 2007)), Stochastics, Relative Strength Index (RSI) and the Chande Momentum Oscillator (CMO).

### 1.1.3 Time Series Forecasting

The study of forecasting time series data has been an active area of study for several decades (De Gooijer and Hyndman, 2006). Series data is ordered such that the ordering is an important if not critical aspect of the data, with the requirement to maintain this ordering enforcing certain requirements on any processing. Series data can be ordered by

factors such as distance or height but typically time is the ordering encountered. Financial data is an important category of series data and a variety of well known time series forecasting methods have been applied to the problem of predicting price movements in the financial markets. These have included, exponential smoothing, auto-regressive moving average (ARMA) and auto-regressive integrated moving average (ARIMA).

A variety of smoothing algorithms have been applied to series data in general and financial data in particular. Moving averages, including simple, weighted and exponential, are widely employed by participants in financial markets to both predict future movements and quantify current conditions. Classical time series analysis such as so-called Holt-Winters exponential smoothing, the auto-regressive moving average (ARMA or Box-Jenkins model) and auto-regressive integrated moving average (ARIMA) methods have also been widely employed. In more recent years data mining techniques have been applied to the problem of financial time series prediction, for example with the use of artificial neural networks (ANNs) and support vector machines (SVM) as well as an hybrid approach of combining the classic time series techniques with the data mining methods in an attempt to leverage the strengths of each technique.

## 1.2 Statement of the Problem

The problem under study in this thesis is that of predicting the movement of financial markets. Financial markets include:

- Indices e.g. Dow Jones Index, FTSE 100 etc.
- Commodities e.g. gold, oil etc.
- Foreign exchange rates (also known as Forex or FX) e.g. GBP USD (price of British pounds divided by US dollars).
- Stocks e.g. Google, Apple, Barclays Bank etc.

The goal of financial traders is to detect the movement of the markets and buy instruments expected to rise in price “going long” and sell those predicted to fall in price “going short”. The markets are a neutral sum process, for every participant who gains there are those who lose.



## 1.3 Purpose of Study

The purpose of this study is to investigate and establish the usefulness and accuracy of a selection of technical indicators and time series analysis on the ability to predict future data movements in a group of national indice data sets.

### 1.3.1 Study Objectives

The objective of this study is two fold:

1. To determine if a group of popular and widely used technical indicators can be used to predict the direction of movement in a range of financial markets.
2. To investigate if traditional time series models can predict the direction of movement in a range of financial markets.

## 1.4 Research Question

The research question addressed in this study is:

*“Can the use of technical indicators or time series analysis help to predict the future direction and movement of financial markets?”*

## 1.5 Methodology

The following methodology was used to answer the research question:

1. The current research in the field was reviewed.
2. Appropriate data was collected, primarily from freely available sources on the internet such as Yahoo and Google.
3. Initial data investigations and visualisations were carried out on the data.
4. Based on initial analysis, “base line” systems were established that could be used to compare the performance of systems generated by technical analysis and time series modelling.

5. A number of trading algorithms were generated that consumed the output of technical analysis indicators to determine in which direction to trade the financial data at any one time.
6. Times series modelling methods were used to generate forecasts for the financial data, and these were used in trading algorithms to decide in which direction, long or short, to trade.

In summary, the output of technical and times series analysis was consumed in a range trading algorithms. The decisions regarding which direction to trade a particular stock market was based on the predictions or output of the analysis. Success was measured in terms of whether the trading systems developed can profitably predict which way to trade the financial markets.

## 1.6 Limitations of the Study

Limitations in this study include:

1. Choice of technical indicators - a small selection of the huge number available was selected. The selected group represent widely used examples and are drawn from the various categories available.
2. Use of financial data relating to stock market indices - daily data in the form of open, high, low and close prices (OHLC) from national stock market indices such as the Dow Jones or FTSE 100 is readily and freely available and thus was used in this study. High quality data in time frames other than daily or from alternative financial markets such commodities or foreign exchange is generally only commercially available and beyond the resources of this study.

## 1.7 Scope of the Study

There is a huge choice of financial data sets from which to choose and likewise many dozens of technical indicators. Given the time frame and resources available, this study employed daily data from major national indices such as the German DAX, US Dow and Japanese Nikkei. Technical indicators selected included examples from the primary categories such as trend detection and market reversal indicators.

## 1.8 Structure of Project

Chapter 2 is a literature review and introduction to financial market trading, the methods and theory of technical analysis and time series modelling. Financial trading systems in general are discussed along with the use and applicability of technical analysis. The classical time series methods of Holt-Winters exponential smoothing, auto-regressive moving average (ARMA or Box-Jenkins model) and auto-regressive integrated moving average (ARIMA) are introduced and explained along with more recent developments such as hybrid ARIMA models.

Chapter 3 introduces the methodology used in this study. It includes a description of the data sets employed, software and programming languages utilised and the general approach taken. Chapter 4 details the experiments carried out using a variety of technical analysis indicators and lists the results from the trading algorithms generated. Chapter 5 documents the experimental work based on the use of time series modelling to generate forecasts for the financial data sets.

Chapter 6 is an analysis of the results obtained in Chapters 4 and 5 along with conclusions and suggestions for future work. Appendix A lists all the R programming code used in study. Wherever possible this report has the analysis generated by R programming code embedded into it. Thus, all trading algorithms coded in R detailed in Chapters 4 and 5 generate results that are dynamically embedded into this report. An update or alteration of this code followed by recompilation of this manuscript updates the tables and results accordingly.

Appendix B provides additional details and background information on various technical analysis indicators. Finally, Appendix C presents all the results generated in Chapters 4 and 5 collected together by the particular financial market.

## Chapter 2

# Literature Review

Speculators, stock market traders, market participants or simply traders are all terms used to describe individuals and organisations who attempt to make a living from buying and selling various financial assets in a huge range of markets around the world. Clearly the ability to forecast the direction of market movements, up or down, is vital to these individuals and entities. To this end a wide variety of techniques and methods have been tried and used by the participants in the market. Further, over the last few decades academics have shown an interest in this field and attempted to quantify and justify the wide variety of techniques used.

Two areas where traders and academics have looked for help in predicting future market direction is time series forecasting and the use of technical indicators. This chapter is divided into two these general categories, time series modelling and the use of technical indicators.

### 2.1 Technical Analysis

#### 2.1.1 Trading Systems

A wide variety of techniques have been employed by financial market traders in their attempts to make profits with the term “trading system” being applied generally to the methodology used. Often trading systems are “mechanical” in nature in that traders use a distinct set of rules in order to guide them as when to enter a trade, when to exit and so on. Faith (2007), one of the original and now famous “Turtle Traders” provides an excellent overview of mechanical trading systems (and how they were to become known as the “Turtles”).

Weissman (2005) makes the point that there are several aspects to a trading system. Firstly there are entry and exit signals, which are market events that trigger a speculator to enter into the market and either buy or sell a particular asset. These signals are typically events such as a fast moving average crossing a slower one, the market hitting a certain price or the occurrence of a particular chart pattern (see section 2.1.5). Other elements of a trading system include position sizing rules and money management strategies such that returns are significant, losses are minimised and the entire risk profile is controlled.

Many traders erroneously mistake entry and exit signals as being a full trading system in themselves whereas in actuality they are merely components of a system (Beau and Lucas, 1999). Likewise most, if not all, papers published by academia focus on entry and exit signals alone, which is probably a result of several factors. Firstly, entry and exit signals are important components in trading systems and are a good place to start in system development. Additionally, the other aspects of a system are not as well known and their importance is often ignored (Kaufman, 2013). Finally, testing an “entire” system as defined here is far more difficult and time consuming than considering entry and exit signals alone and often it is not practical to extend a study to include a full system. In summary there is value in considering entry and exit signal in isolation but one has to remember it is not the whole story.

Attempting to forecast stock market prices is a complex and challenging endeavour, yet one that is widely encountered. There is a large body of research published in this area which has been reviewed by Atsalakis and Valavanis (2009). Work usually focuses on either individual stocks or more commonly stock indices. Stock indices are the sum movements of many individual equities and therefore reflect the movement of the market as a whole as opposed to any one stock. Many stock market indices have been investigated including those belonging to well-developed countries such as those in Western Europe, North America etc. as well as developing markets such as those in Eastern Europe.

In trying to predict stock market movements a variety of input variables have been used. Frequently, the so-called OHLC (open, high, low and closing prices) are used as inputs along with a variety of technical indicators (Fiess and MacDonald, 2002). In addition, many authors have used a combination of markets, for example Huang et al. (2005) use both the USD/YEN exchange rate and the S&P 500 to build a prediction model for the Japanese NIKKEI index. A variety of predictive methodologies have been reported in the literature including linear and multi-linear regression, ARMA and ARIMA models, genetic algorithms (GA), artificial neural networks (ANN), random walk (RW) and the so-called buy and hold (B & H) strategy.

A variety of performance measures have been reported including both non-statistical and statistical methods. Non-statistical performance measures encountered include annual return and annual profit of a particular model as well as the hit rate or the number of times a model correctly predicts whether a market will go up or down. Alternatively a variety of statistical measures have also been employed and prominent amongst them are, mean absolute error (MAE), root mean squared (RMSE), mean squared prediction error (MSPE), correlation coefficient and autocorrelation squared correlation and Akaike's minimum final prediction error (FPE).

Two well studied and used methodologies in stock trading are the moving average system and range breakout system as reported by (Brock et al., 1992) in one of the very earliest papers published covering technical analysis. In a moving average system (see section 4.3.1) the speculator buys into a market when its price is above the moving average and sells in the reverse situation. A large number of variations on this theme can be found, with the use of two moving averages being popular. When using two averages there is normally a "fast" one, usually of the order of 10 to 25 days, and a "slow" one in the 50 to 250 day range. In these circumstances a buy is usually triggered when the fast average crosses above the slower average. The theory is that the moving averages follow the trends in the market and thus allow the market participant to trade in the direction of the trend, which is an advantageous situation for the trader.

A second popular idea is that of breaking out of a range. Often financial markets trade between a range of values in a particular time period, essentially markets are either trending (up or down) or not trending at all but moving within a defined range. While moving in a range the lower price boundary is referred to as support and the upper one as resistance. In a breakout system the analyst buys a market when it moves beyond these resistance levels or sells when it breaks below the support. Brock et al. (1992) analysed both these two ideas and found merit in them. Using daily data from the Dow Jones industrial index they found that these strategies provided better results than those generated with random walk, AR and GARCH models.

### **2.1.2 Technical Analysis Overview**

Technical analysis is the technique of looking at the past history of a financial market, identifying patterns and trends and utilising the information in predicting future price movements (Bulkowski, 2011). A technical indicator is a method used to identify a particular pattern, and there have been a large number developed over the years to predict situations such as the start of a trend or a reversal in price movement. A wide range of papers on technical analysis (TA) indicators and methods can be found in the

literature. Likewise technical analysis is prominent in many best selling books including *Market Wizards* (Schwager, 1988), *New Market Wizards* (Schwager, 1994) and *Covel's Trend Following* (Covel, 2009). In the following sections various technical indicators are introduced and their use in predicting market movements are explored. Firstly, the question of whether technical analysis even works is addressed, as this has received attention in the literature (Marshall and Cahan, 2005, Reitz, 2006, Schulmeister, 2009, Marshall et al., 2008). Although technical analysis is widely used in the market place there is a question mark over the entire concept behind it and many people, especially academics, are highly sceptical about the validity of the entire approach.

### **2.1.3 Does Technical Analysis Work?**

Friesen et al. (2009) have examined various price "patterns" used by traders in their systems such as "head-and-shoulders" and "double-top" patterns. The authors note that although a wide array of patterns have been identified and documented there lacks any convincing explanations for the formation of these patterns and how they can lead to profitable trading systems. The authors report that several studies based on the US equity market have identified distinct behaviours, namely the tendency for short-term momentum over 1 year to 6 months (De Bondt and Thaler, 1985, Chopra et al., 1992, Jegadeesh and Titman, 1993), longer term mean reversion and finally price reversals over the one to four week period (Jegadeesh, 1990, Lehmann, 1990, Jegadeesh and Titman, 1995, Gutierrez Jr and Kelley, 2008). These observations lend support to the success of trading systems that purport to detect and follow trends in the market (Sweeney, 1986, Levich and Thomas, 1993, Neely et al., 1997, Dueker and Neely, 2007).

The authors present a model that can explain the profitability of selected trading rules that utilise past chart patterns. One important aspect of this model is the inclusion of confirmation bias, which shows up in a wide range of decision making processes. Their model displays negative autocorrelations over the very short term, positive ones in the mid term and become negative again over the longer horizon, reflecting the documented empirical properties of US stock prices (Novy-Marx, 2012, Moskowitz et al., 2012, Fama and French, 2012). It is suggested that traders take market positions affected by their original biased view which leads to autocorrelations and price movement patterns resulting in the previously described market behaviour.

Shynkevich (2012) investigated the power of a large selection of technical trading rules to yield profits when applied a selection of small cap and technology portfolios (US stocks) between 1995 and 2010. The author chose technical indicators from four general categories:

1. standard filter rules - for example a buy is generated when prices increase from a previous low. Such a low may be defined as the lowest closing price in a particular period. In more recent years this technique has been replaced by moving averages.
2. moving averages (MA) - signals generated when short MA cross long MA.
3. support and resistance trading strategy (SR) - a buy is initiated when prices rise above a local maximum, and vice versa for a local minimum price.
4. channel breakout - related to SR, a buy/sell is triggered when a price moves outside a channel generated from highs and lows of a certain period.

The author applied a variety of parameters in each model resulting in a total of 12937 models being tested. It was reported that TA produced positive results in the first half of the time period tested, but not in the latter half. In the second half of the time period studied TA provided inferior performance than a buy-and-hold approach, i.e. a trader simply buys a particular asset and waits. The author concludes these differences in performance are due to equity markets having become more efficient in recent years which has reduced the short term predictive powers of TA.

The use of technical analysis in the finance community was studied by Menkhoff (2010) who looked into its use by professional fund managers. This study is noteworthy as it used data from experienced and educated market professionals and not a wider cross-section of traders. With the advent of the internet and the explosive growth in on-line financial charting and trading sites, financial trading became accessible to the general public, resulting in huge numbers of amateur traders entering the market. All of the web sites that cater for this segment of traders offer a huge number of technical analysis indicators built into their respective charting packages and even a rudimentary visit to any of the discussion forums will demonstrate the popularity and wide spread use of technical analysis.

The author surveyed 692 fund managers in several countries, with funds of various sizes under management. The vast majority of these fund managers reported using technical analysis to some degree and particular faith was put in TA for predicting price movements in the short term of up to a few weeks, beyond which focus shifts to fundamental analysis. Further, the workers found that smaller asset manager firms make greater use of TA, possibly because deriving the information for fundamental analysis is beyond their resources. Finally, most respondents to the survey believe that human psychology is the reason TA works. In particular they suggest psychological biases in the market participants are the root cause of market trends and that TA is able to identify and follow them.



### 2.1.4 Moving Average Indicators

A study of moving average convergence divergence (MACD) is reported by Ulku and Prodan (2013). MACD is a technique which attempts to detect the early stage of a trend as it forms, and is widely used by market participants. It is described in more detail in Appendix B section B.1. Ulku and Prodan (2013) apply MACD to a wide range of national stock market indices comprising developed as well as emerging markets. The authors compare the MACD signals against entry signals generated from simple break out systems (described previously). The comparison systems would generate a buy signal if the price moved higher than a moving average (MA), set at either 22, 56 and 200 days. The MACD and the comparison system using 22 day moving averages are classified as short horizon signals, while the break out of the 56 and 200 day MA are considered long horizon signals. The workers reported that the MACD indicators provide for profitable returns on 23 of 30 national indices, but that the 22 day MA performs better being positive in 27 of the 30 markets.

### 2.1.5 Candlesticks Patterns

Probably the oldest form of technical analysis in use today is the so-called candlestick analysis, so named because daily open and close prices are plotted such that they resemble candlesticks (Morris, 2006). Figure 2.1 is an example of daily prices being plotted as a candlestick, with this plotting methodology being ubiquitous today in trading software. Typically the colour in which the candlestick is plotted indicates whether the price went up or down over the course of the day. Many charts that are plotted in colour use green to represent days that close up and red for days that close down. The main body of the candlestick represents the movement from open to close, and the protruding lines mark the high and low of the day.

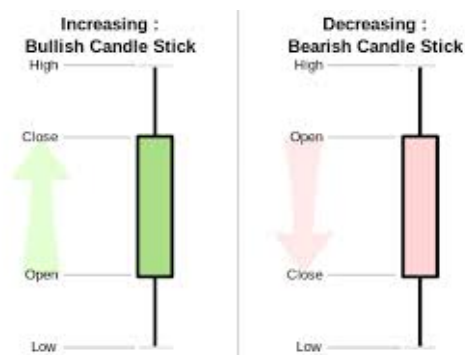


FIGURE 2.1: Candlestick representation of daily open and close prices. Different colouring is used to distinguish between prices going up or down.

Technical analysis via candlesticks is reputed to have been developed by Munelusa Homma, a legendary trader of rice in Osaka, Japan who made a fortune analysing rice prices with candlesticks in the seventeenth century (Nison, 2001). Candlestick patterns with supposed predictive qualities can be derived from a single day or from considering a few days, usually 2 or 3, together (Bigalow, 2011). There are a huge number of patterns recorded in the literature and usually assigned exotic names such as “White Marubozu”, ”Black Shooting Star” and ”Hanging Man”. Examples of such named patterns can be seen in Figure 2.2.

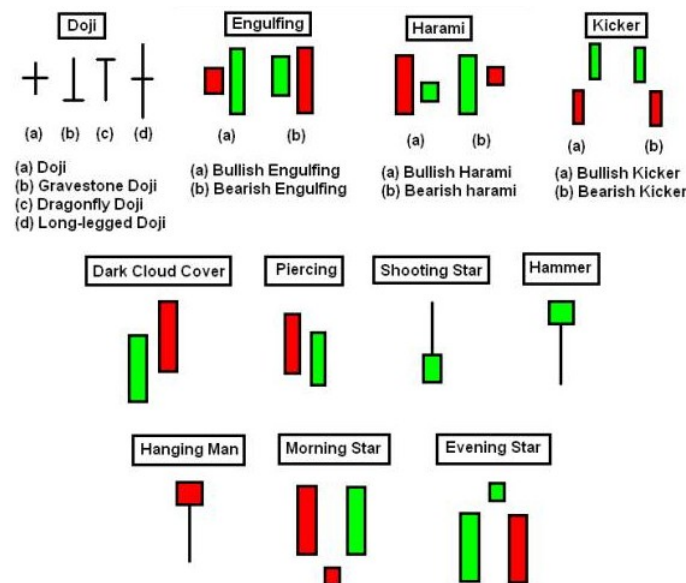


FIGURE 2.2: Examples of well known patterns encountered in candlestick analysis.

Candlestick patterns are essentially visualisation tools providing an easy to comprehend view of the market movements in a particular day. However there is some vital information which is not conveyed in a candlestick. In particular the order of events isn't displayed. Figure 2.3 shows how two days can produce the same candlestick but in actuality the price movements and volatility in them was very different. Depending upon the type of trading system being employed this could have important effects.

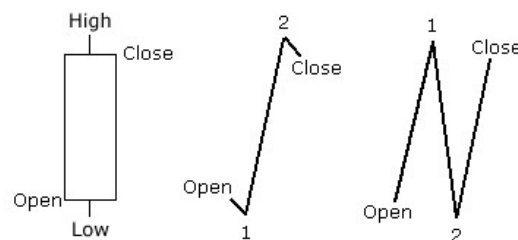


FIGURE 2.3: Candlesticks don't provide information regarding the order of price movements. Both these daily price movements would be represented with the same candlestick pattern.

As always with technical analysis there is doubt as to the validity of the methods despite its almost universal employment. An in-depth study of the predictive power of a range of candlestick patterns on stock prices between 1992 and 2002 from the Dow Jones Industrial Average (DJIA) was carried out by (Marshall et al., 2006) in which doubt was cast on the validity of candlestick patterns to predict market movements. The workers used a range of bullish (signals that indicate a trader should buy) and bearish (signals that indicate a trader should sell) candlestick patterns to initiate trades on the various stocks. Trades were held for ten days as it was assumed that these patterns reflect short terms trends and thus have a predictive power in a similar time frame. In order to quantify the results generated from the use candlestick patterns they were compared to results observed from four alternative null models. Simulated stock data was generated using a bootstrapping methodology (Efron, 1979) and then four null models were applied to the data, random walk, an autoregressive process of order one (AR(1)), a GARCH in-Mean (GARCH-M) model and an Exponential GARCH (EGARCH) model.

From the comparison of the results generated from the candlestick patterns and the four null models the workers concluded that the variety of candlestick patterns tested had no predictive power on the stocks at all. The returns from making buying and selling decisions based on candlestick patterns didn't outperform the null models on the simulated data. As always one has to be slightly careful with results of this nature as the trading period was fixed at ten days, in other words the candlestick patterns were used as an entry signal for the trade but there wasn't an exit signal. Further in reality use of candlesticks analysis would be incorporated into a trading system, which typically consists entry and exit signal, position sizing rules and money management strategies (Faith, 2007).

### **2.1.6 Trend Reversal Oscillators**

Tanaka-Yamawaki and Tokuoka (2007) reported the use of several technical analysis techniques in the successful prediction of price movements in eight stocks found on the New York Stock Exchange (NYSE) by analysing tick data. The predictions were in the very short term as tick data is the most granular level reported in financial data. The workers used ten technical analysis indicators from three broad classes, namely trend indicators, oscillators to find market reversals and momentum indicators to measure the strength of the market. Combinations of indicators, typically from the different categories are usually combined by market participants into a variety of systems. In this study the ten indicators can form a possible 1023 combinations. A genetic algorithm was used to determine the best combination of indicators for each stock, resulting in a customised combination for each. Using each stock's indicators, the next ten ticks of

data were modelled with very high accuracy, with predictions for IBM's stock being the best at a very impressive 82%.

## 2.2 Time Series Analysis

The study of forecasting time series data has been an active area of study for several decades and an overview of work over 25 years has been documented by De Gooijer and Hyndman (2006). Series data is ordered such that the ordering is an important if not critical aspect of the data and the requirement to maintain this ordering enforces certain constraints on its processing. Series data can be ordered by factors such as distance or height but typically time is the ordering encountered, and thus such collections are referred to as time series. Analysis of time series data is found in a wide range of areas including, Sales Forecasting, Speech Recognition, Economic Forecasting, Stock Market Analysis, Process and Quality Control and Seismic Recordings.

In general with non-series data we are interested in the relationships between the attributes of any particular row of data and perhaps how they affect the parameter we are interested in. Frequently some kind of regression technique is used in this kind of analysis in order to answer questions such as how is rainfall in an area affected by altitude or how does fuel consumption vary with car engine size (Han et al., 2011).

However with time series data there is an additional consideration, the relationship between the attribute's current value to that of its previous or later values. This is known as auto-correlation (Mills, 2011) and more details can be seen in section 2.2.2.1. Typically with financial data we are interested in previous values, in other words how is today's price of a security affected by the price one, two or three days ago?

As illustrated in Figure 2.4 a time series can contain some or all of the following components:

1. Trend - the overall direction of the series, is it increasing or decreasing over time?
2. Seasonality - regular variations in the time series that is caused by re-occurring events, for example a spike in sales during the Christmas period (So and Chung, 2014).
3. Random component - additional fluctuations in the series that may be attributed to noise or other random events.

There are three primary types of time series, stationary, additive and multiplicative. Stationary series have constant amplitude without a trend element and an example can

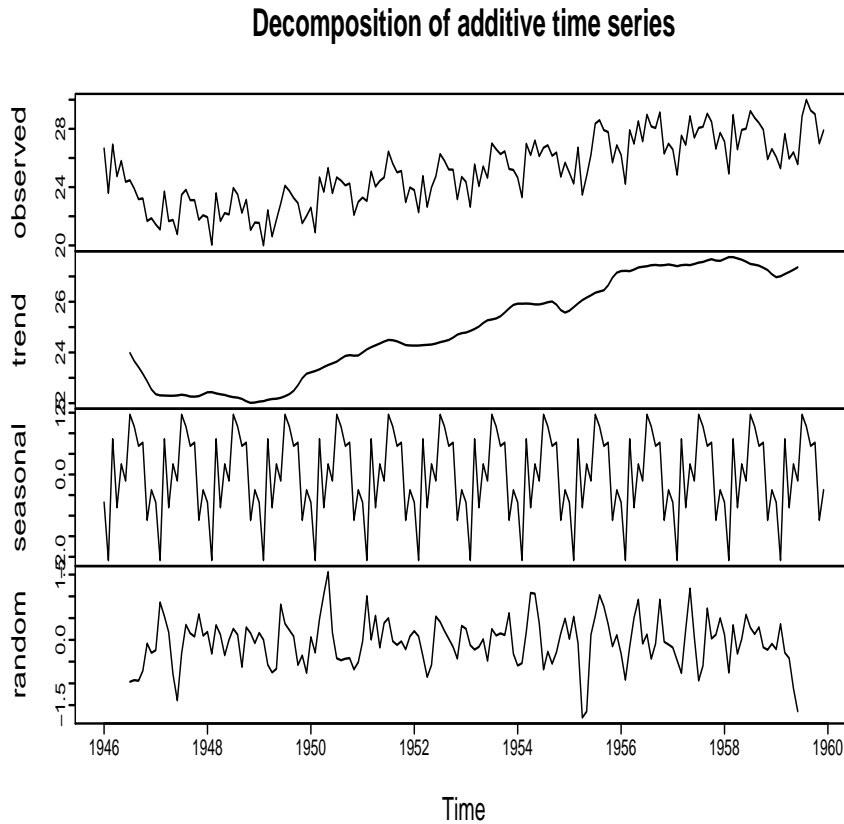


FIGURE 2.4: A time series decomposed into its three primary components.

be seen in Figure 2.5. Often stationary time series are repetitive, in other words showing constant auto-correlation and are considered the easiest type to model. A stationary time series can be composed of a seasonal element and/or a random component, thus:

$$\text{stationary time series} = \text{seasonality} +/\text{or noise}$$

The second type of time series is the additive type. In this type all three components of the series are present, trend, seasonality and noise. The distinguishing feature here is the amplitude of the seasonal component in that it is quite regular being static over time. An example of an additive series can be seen in Figure 2.6. This time series is trending upwards overall but there is a clear repetitive pattern of peaks and troughs caused by the seasonality, with the heights of the peaks all being similar. We can consider an additive time series as:

$$\text{additive time series} = \text{trend} + \text{seasonality} + \text{noise}$$



FIGURE 2.5: Example of a stationary time series which can be made up from noise and/or a seasonal component.

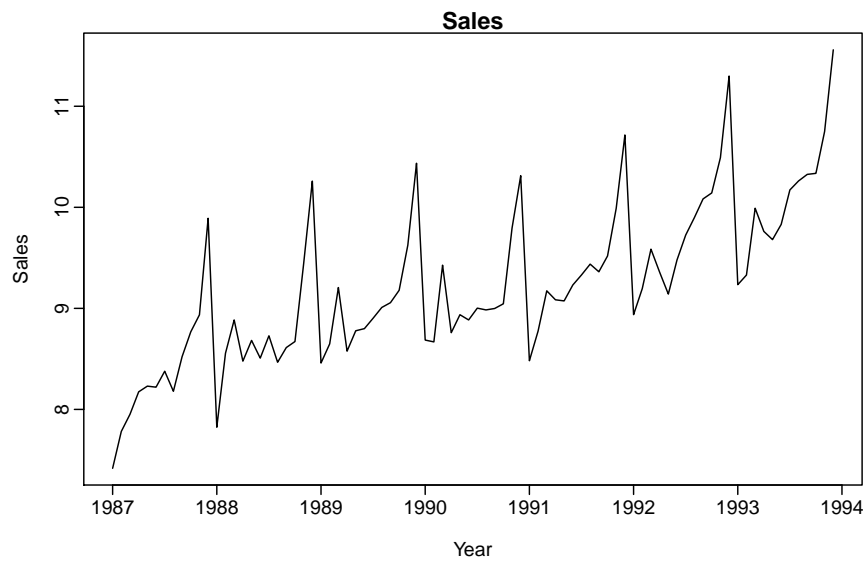


FIGURE 2.6: Example of an additive time series which results from all three components trend, noise and seasonality.

The third type of time series, as seen in Figure 2.7 is multiplicative. This is similar to the additive version except the amplitude of the seasonality increases over time. It can be considered as:

$$\text{multiplicative time series} = \text{trend} * \text{seasonality} * \text{noise}$$

Financial time series can be considered as containing all three elements of a time series. They can show properties of a stationary time series when they are range bound and only move between two values. At other times, markets trend strongly consistently, making

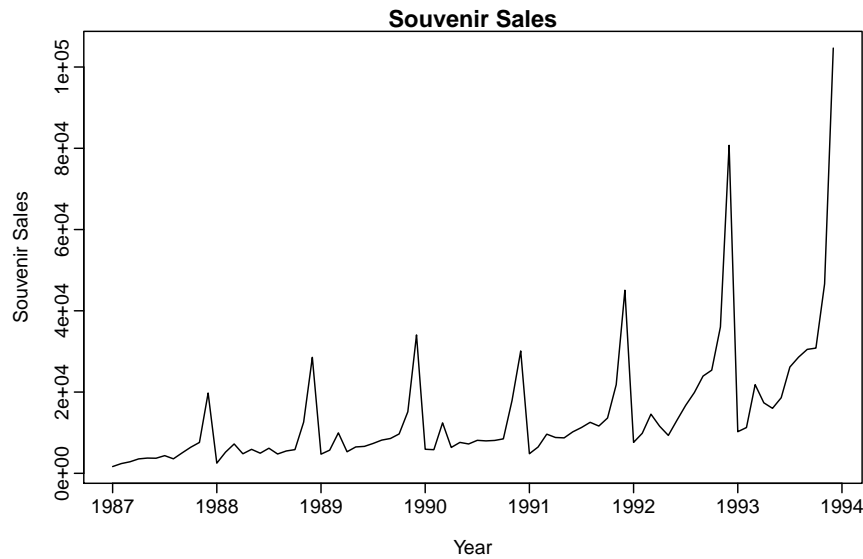


FIGURE 2.7: Example of a multiplicative time series resulting from the effects of trend, noise and seasonality.

new highs or lows and exhibit properties of an additive and occasionally a multiplicative series.

## 2.2.1 Time Series Smoothing

Smoothing is an important and widely adopted method to predict financial markets. Recent work on smoothing time series data has its origins in Brown (1959), Brown (1963), Holt (2004) and Winters (1960). Typically, the various smoothing techniques encountered are based around the concept of moving averages. This section will introduce a variety of smoothing methods commonly encountered in forecasting financial data.

### 2.2.1.1 Simple Moving Average (SMA)

A simple moving average is calculated from the value itself and its neighbours, which can be ahead or behind in the series. In this study values behind the current value are considered. The number of previous values included is often referred to as the “window” or “lag”, so if one was to consider the current value and four previous ones this would be considered a simple moving average of lag 5 (SMA5). An example of a simple moving average can be seen in Table 2.1, where a SMA5 of the closing price has been added.

TABLE 2.1: Example of a simple moving average of the closing price with a lag of 5 periods.

| Date     | Open | High | Low  | Close | SMA5 |
|----------|------|------|------|-------|------|
| 02/01/14 | 9598 | 9621 | 9394 | 9400  | NA   |
| 03/01/14 | 9410 | 9453 | 9368 | 9435  | NA   |
| 06/01/14 | 9419 | 9469 | 9400 | 9428  | NA   |
| 07/01/14 | 9446 | 9519 | 9417 | 9506  | NA   |
| 08/01/14 | 9513 | 9516 | 9468 | 9498  | 9453 |
| 09/01/14 | 9492 | 9550 | 9403 | 9422  | 9458 |
| 10/01/14 | 9474 | 9530 | 9441 | 9473  | 9465 |
| 13/01/14 | 9498 | 9519 | 9457 | 9510  | 9482 |

### 2.2.1.2 Weighted Moving Average (WMA)

A simple moving average assigns equal importance to all data points being averaged, however if this is considered unsuitable a higher weighting can be applied to certain data points elevating their importance in the average and thus generating a weighted moving average (Devic, 2010). Typically the more recent data points in a time series would be given higher importance. One common version of a WMA is to decrease the weighting by one for each period in the average. The formula for calculating a weighted moving average is:

$$((n * P_n) + (n - 1 * P_{n-1}) + ... (n - (n - 1) * P_{n-(n-1)})) \div (n + (n - 1) + ... n - (n - 1))$$

where:

$n$  = the number of periods used in calculating the moving average

$P_n$  = the price of the most recent period used to calculate the moving average

An extra column has been added to the data in Table 2.1 which contains the WMA for the last five close values. The current value was multiplied by 5, the previous one by 4, the previous one to that by 3 and so on. These five values were added together and divided by 5+4+3+2+1 to generate the WMA as shown in Table 2.2.

### 2.2.1.3 Exponential Moving Average (EMA)

An exponential moving average (EMA) is an extension of the weighted moving average (Ord, 2004). In comparison to the simple moving average, greater emphasis is given to the most recent data points and the resulting averaged values are closer to the actual



TABLE 2.2: Example of a weighted moving average.

| Date     | Open | High | Low  | Close | SMA5 | WMA5 |
|----------|------|------|------|-------|------|------|
| 02/01/14 | 9598 | 9621 | 9394 | 9400  | NA   | NA   |
| 03/01/14 | 9410 | 9453 | 9368 | 9435  | NA   | NA   |
| 06/01/14 | 9419 | 9469 | 9400 | 9428  | NA   | NA   |
| 07/01/14 | 9446 | 9519 | 9417 | 9506  | NA   | NA   |
| 08/01/14 | 9513 | 9516 | 9468 | 9498  | 9453 | 9471 |
| 09/01/14 | 9492 | 9550 | 9403 | 9422  | 9458 | 9461 |
| 10/01/14 | 9474 | 9530 | 9441 | 9473  | 9465 | 9466 |
| 13/01/14 | 9498 | 9519 | 9457 | 9510  | 9482 | 9481 |

observations of the data set. Weighting factors decay exponentially resulting in the emphasis falling on the recent values though not discarding the older ones totally.

#### 2.2.1.4 Moving Averages in Practical Use

Moving averages are widely used in the financial world to predict the start of trends which is important as trends are considered the best opportunity to make profits from the markets. By their nature moving averages are lagged indicators in that they reflect market action from the past (recent or distant depending on the lag variable) and this can be considered a drawback. The lag period offers a trade off in terms of prediction. If the lag is short and/or weighting is applied the average is affected strongly by recent prices and trends can be detected in the early stages and trading profits can be enhanced. However when the average is close to the current price they have a tendency to generate “false signals” (see section 2.1.1 for an explanation of entry and exit signals), in other words prices may start to rise (or fall) but they are not actually in a trend, it is just the natural wax and wane of the market, and traders are said to be “whipsawed”. When the lag variable is long a different problem is encountered. For example, if a price moves above a long moving average the indicated trend is usually genuine, however by the time this is reflected in the average a lot of the trend has developed and the trader has lost a lot of potential profits. Thus there are pros and cons associated with using the different types of moving average.

#### 2.2.1.5 Holt-Winters Smoothing Models

The exponential smoothing of a time series containing noise, trend and seasonality was developed by Winters (1960) who as a student of Holt, built upon his previous work, and is today called the Holt-Winters method. This method uses three parameters alpha, beta and gamma which define the degree of smoothing to be applied to the three components

of the time series. Firstly, a value of alpha is used to dictate the amount of smoothing to apply, with high smoothing factors placing more emphasis on recent data points at the expense of those further away. In a data set with trend this simple exponential moving average doesn't perform well and a second order of smoothing is needed, so called "double exponential smoothing". The parameter beta in Holt-Winters defines this second order smoothing. Finally, if a seasonal component is also present in the data set a third level of smoothing is introduced making the process a triple exponential smoothing. It is this third level of smoothing that the parameter gamma refers to. Depending upon the nature of the time series one, two or all three of the parameters may be defined in the Holt-Winters methodology.

If researching a time series with no seasonality or trend use of the Holt-Winters model with the beta and gamma parameters set to false, in other words not used, is appropriate. Figure 2.8 shows the addition of an exponential smoothing line to the stationary data set introduced in Figure 2.5.

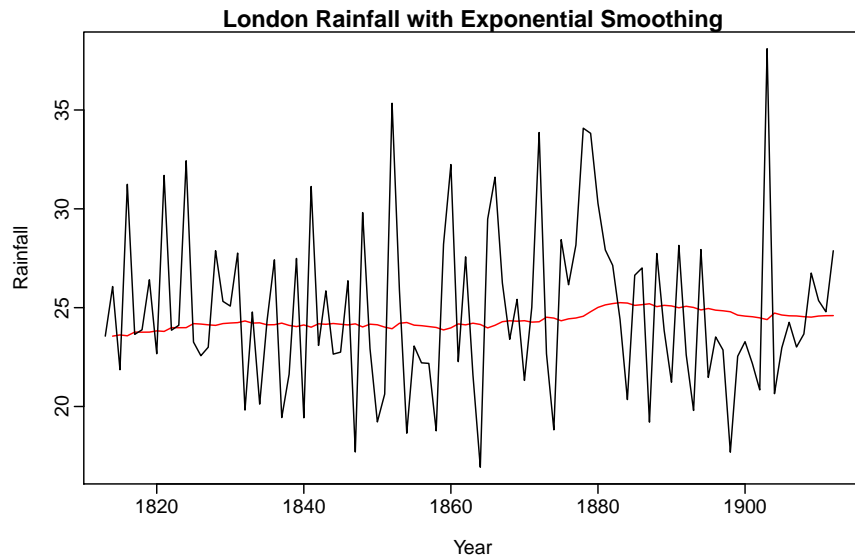


FIGURE 2.8: A time series with no seasonality or trend, showing the fitted line generated from Holt-Winters exponential smoothing with the beta and gamma parameters set to false.

If the time series is additive with a trend but without seasonality the use of Holt-Winters with values used for alpha and beta but with the gamma parameter set to false is appropriate. Such a time series can be seen in Figure 2.9 with the exponential smoothing. Finally if the time series contains all three components a smoothing line can be fitted using Holt-Winters exponential smoothing in which there are values for all three terms alpha, beta and gamma. Figure 2.10 is an example of a time series with both trend and seasonality and overlaid with Holt-Winters smoothing generated by using values for all three terms in the smoothing algorithm.

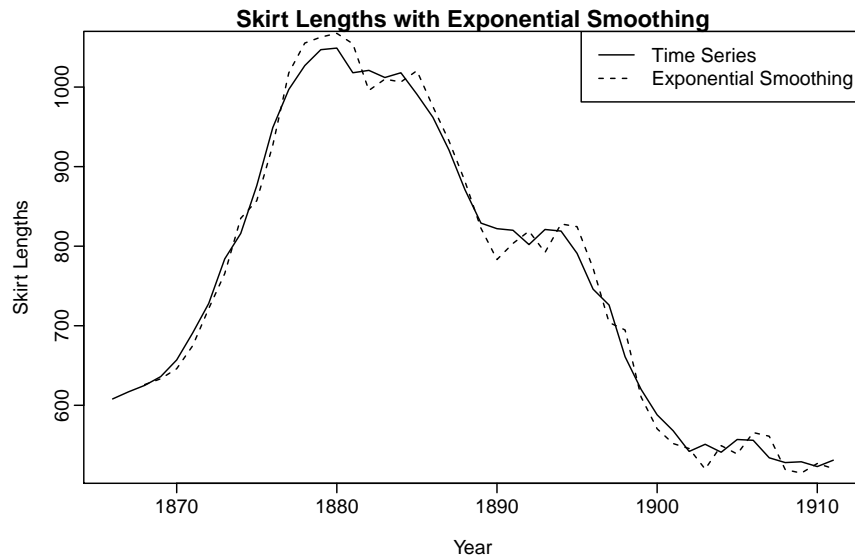


FIGURE 2.9: A time series with trend though no seasonality, showing the fitted Holt-Winters exponential smoothing with the gamma parameter set to false.

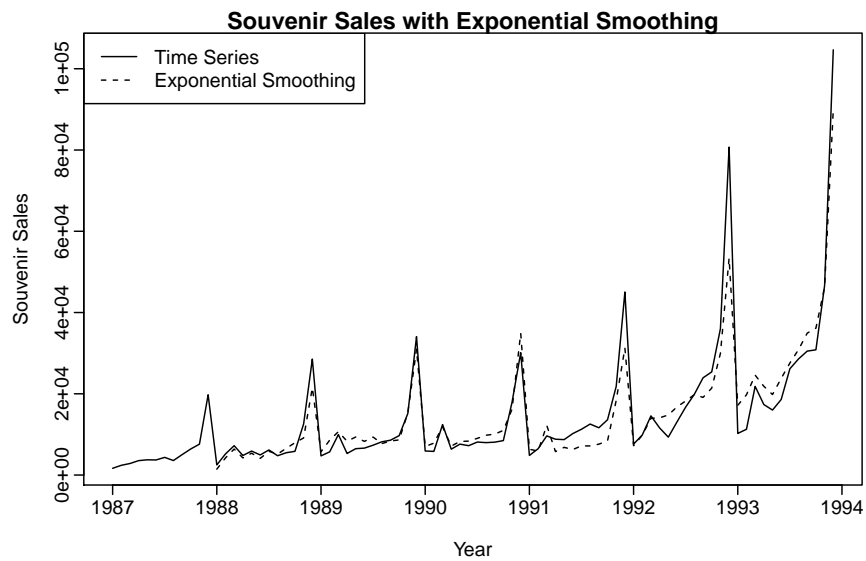


FIGURE 2.10: A time series with trend and seasonality, showing the fitted Holt-Winters exponential smoothing.

## 2.2.2 Auto-Regression Family of Models

### 2.2.2.1 Auto-Regression

Regression is the study of the impact of known variables (independent) on an unknown (dependent) variable and addresses questions such as how does a person's income vary with their years of education. The general equation for linear regression is given by:

$$y = a + bx + \varepsilon$$

where:

$a$  is the intercept.

$b$  is the co-efficient.

$x$  is the independent variable.

$\varepsilon$  is the error term.

In reality there are often a large number of independent variables that affect the unknown under study and thus multiple regression, shown below, is usually of interest.

$$y_1 = a + b_1x_{1i} + b_2x_{2i} + \dots + b_nx_{ni} + \varepsilon$$

In a time series the preceding values often have a bearing on the current data point, and this is especially important in financial time series data. Thus auto-regression is the prediction of the current point from the use of previous values of the data point itself, and is given by:

$$t_t = c + b_1 * r_{t-1} + b_2 * r_{t-2} \dots b_p * r_{t-p} + \varepsilon$$

where:

$c$  is the intercept, is often zero and the mean of the time series.

$b_1 - b_p$  are the independent variables, the previous values.

$\varepsilon$  is random noise.

### 2.2.3 Auto-Regressive Moving Average (ARMA)

The auto-regressive moving average (ARMA) model, also known as Box-Jenkins (Box and Jenkins, 1970), combines moving averages with auto-regression. A model that uses moving averages to predict current values is given by:

$$-r_t = c + a_1 * ma_{t-1} + a_2 * ma_{t-2} \dots a_q * ma_{t-q} + err_t$$

ARMA combines the moving average model with auto-regressive terms to generate:

$$\begin{aligned} r(t) = & c + \\ & b_1 * r_{t-1} + b_2 * r_{t-2} \dots b_p * r_{t-p} + \\ & a_1 * ma_{t-1} + a_2 * ma_{t-2} \dots a_q * ma_{t-q} \\ & + err \end{aligned}$$

where:

$c$  is the intercept, which is often zero and the mean of the time series.

$b_1 - b_p$  are the independent variables, the previous values in the auto-regression term.

$a_1 - a_p$  are parameters of the moving average model.

$\varepsilon$  is random noise.

An ARMA(1,1) model uses the previous value in the auto-regression term and the previous value's moving average. Thus in general terms an ARMA(p,q) model uses the previous p values in the auto-regression term and the moving averages derived from the last q values. There are therefore three steps in developing an ARMA model:

1. identification step in which the order of AR and MA components is determined
2. parameter estimation
3. forecasting

ARMA models have certain intrinsic properties that may be considered drawbacks, namely the requirement for the time series to be stationary with no trend and also linear and the difficulty in deriving the correct parameters to use in the model. In order to overcome these restrictions researchers have tried a number of approaches to enhance the effectiveness of ARMA models.

The problem of model and parameter selection in ARMA models has also been addressed by Rojas et al. (2008). The authors make the point that in traditional research choosing the correct model is time consuming and requires a large degree of expertise. In order to circumvent these issues they propose an automatic model selection method to speed up the process, remove the need for expert intervention and allow the processing of a large number of time series. In a similar study Qian and Zhao (2007) investigate how to determine model selection where there are potentially millions of candidate ARMA models available for the time series. Again, the authors propose an automatic selection algorithm centred on the Gibbs sampler. The proposed method allows for various problems typically encountered in selecting ARMA models and the resulting choice was used to generate a prediction of China's Consumer Price Index (CPI).

#### **2.2.4 Auto-Regressive Integrated Moving Average (ARIMA)**

One limitation with the ARMA model and indeed other approaches is that it is assumed that the time series is stationary, it doesn't have trend and has constant variance and mean (Shumway and Stoffer, 2010). In reality of course many time series data sets have

trend, and in the world of financial data this is also true. In order to account for trend in a time series it is often transformed into a stationary data set, modelling is then performed on this adapted data after which it is returned to its original state. In effect the trend aspect is removed, modelling is done, then the trend component is added back into the data.

One such method for removing trend is differencing (Mills, 2011). Differencing is the technique of replacing the actual values of the observations with the values of the differences between them. This is represented as:

$$Diff1_t = r_t - r_{t-1}$$

Differencing is the same as calculating the derivative of the series, thus a time series that has undergone differencing is considered “integrated”. If taking this so-called first difference doesn’t remove the trend one can go further and use the second difference:

$$Diff2_t = (r_t - r_{t-1}) - (r_{t-1} - r_{t-2})$$

Addition of an integration step to the ARMA model results in an auto-regressive integrated moving average (ARIMA) model, with the general formula:

$$\begin{aligned} r(t) = & c + \\ & b_1 * r_{t-1} + b_2 * r_{t-2} \dots b_p * r_{t-p} + \\ & a_1 * ma_{t-1} + a_2 * ma_{t-2} \dots a_q * ma_{t-q} \\ & d_1 * diff_{t-1} + d_2 * diff_{t-2} \dots d_d * diff_{t-d} \\ & + err \end{aligned}$$

where:

$c$  is the intercept, which is often zero and the mean of the time series.

$b_1 - b_p$  are the independent variables, the previous values in the auto-regression term.

$a_1 - a_p$  are parameters of the moving average model.

$d_1 - d_p$  are the parameters of the differencing term.  $\varepsilon$  is random noise.

ARIMA models are usually referenced as ARIMA(p,d,q) with p the number of terms used in the auto-regression, d the number of differencing terms and q the number of

terms used in the moving average. A summary of which model (Holt-Winters, ARMA or ARIMA) to use with which type of time series can be seen in Table 2.3.

TABLE 2.3: Appropriate models for use with time series data.

| Model        | Time Series<br>Required                          | Assumes<br>Correlation | Trend | Seasonality |
|--------------|--|------------------------|-------|-------------|
| Holt-Winters | Short Term                                       | N                      | Y     | Y           |
| ARMA         | Stationary                                       | Y                      | N     | Y           |
| ARIMA        | Non-stationary:<br>Additive or<br>Multiplicative | Y                      | Y     | Y           |

### 2.2.5 ARIMA Parameter Selection

An important aspect of building time series models with ARIMA techniques is the choice of parameters to use. Auto-correlation (AC) and partial auto-correlation (PAC) are important measures in the selection process of these parameters (Mills, 2011).

Correlation is the measure of how one variable changes with a second one. For example if variable A increases while variable B increases they are positively correlated and conversely they are negatively correlated when one decreases as the other increases. Further, correlations are measured by degree on a scale of 1 to -1, with 1 being perfectly correlated. A value of 1 indicates that the two variables increase together perfectly in sync, whereas a value of -1 suggests that as one variable increases the other decreases by the same amount. Finally a value of 0 is indicative of no correlation at all between the two variables.

Auto-correlation is the correlation between an attributes value now and the same attribute's value in the past or future (Shumway and Stoffer, 2010). Typically with financial data we are interested in the correlation with values in the past. The interval between the value of interest and the previous observation used in determining the correlation is known as the lag. Thus the correlation between the current observation and the previous one may be of interest, and this is a lag of +1, while a value five time intervals previous is +5. Non-intuitively positive values for lags refer to the past while negative values are in the future.

A correlogram is a matrix plot of auto-correlations over a series of time lags. Correlograms are used in checking data for randomness and in the model identification stage of the ARMA methodology (see section 2.2.3). Data is considered random if the auto-correlation value is close to zero. In general a data set's randomness needs to be checked

in order to confirm the validity of many statistical tests. Thus a correlogram helps to determine if data is random or if an observation is related to an earlier one, thereby helping in the determination of an appropriate ARMA model. Figure 2.11 is the correlogram of auto-correlation and Figure 2.12 the correlogram of partial auto-correlation for a data set of rain fall figures.

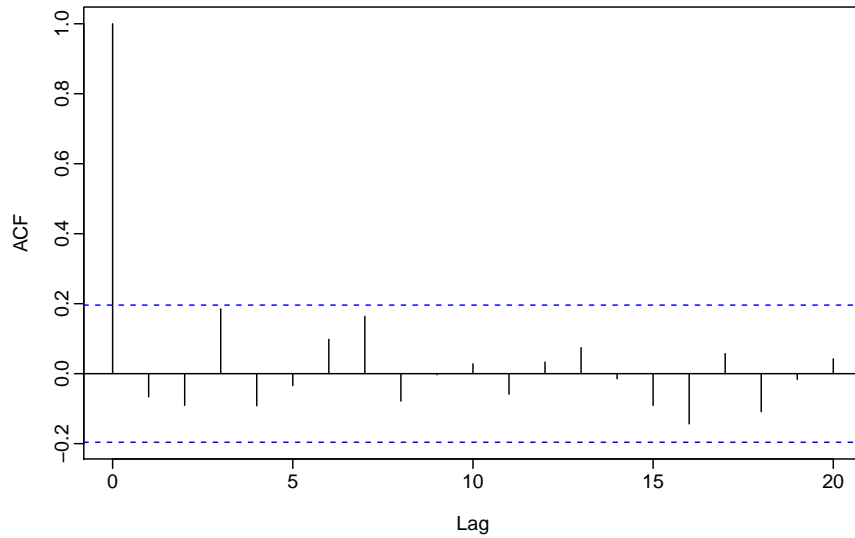


FIGURE 2.11: Correlogram of auto-correlations.

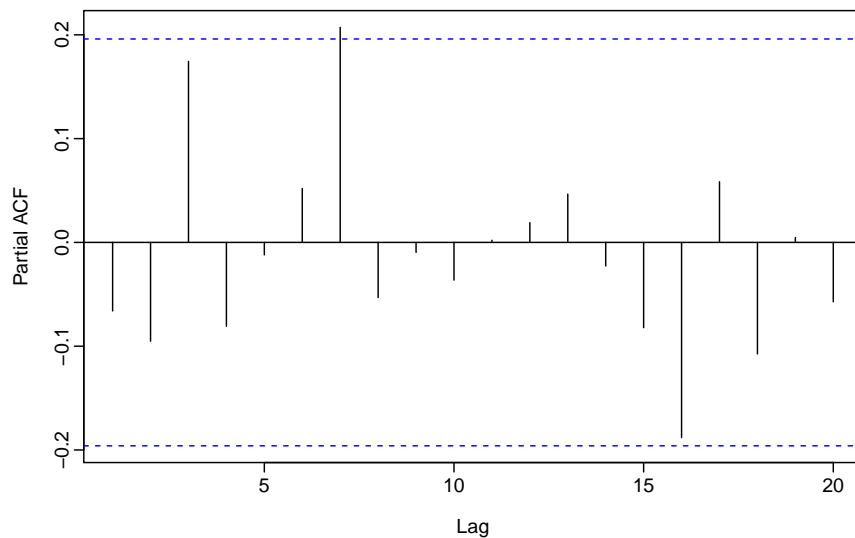


FIGURE 2.12: Correlogram of partial auto-correlations.

The partial correlation is defined as the degree of correlation not already explained by the correlations previously measured. If the regression of variable A on variables B1, B2 and B3 is considered the partial correlation between variables A and B3 is the degree of correlation not accounted for by their common correlations with variables B1 and B2. In a similar manner the partial autocorrelation is the unexplained correlation after considering the variable and itself at an earlier time period. In a series, if a variable



A at time  $t$  is correlated with an earlier lag at time  $t-1$  it follows that the variable at  $t-1$  itself is correlated with the previous variable at lag  $t-2$ . By extension the variable at time  $t$  should also be correlated with the variable at lag  $t-2$ , as the correlation will propagate through the series. The partial autocorrelation is the difference the expected correlations due the propagating factors and the actual correlation measured.

If the ARIMA model is  $ARIMA(p,d,0)$  or  $ARIMA(0,d,q)$  then the ACF and PACF plots are helpful in deciding the values for  $p$  or  $q$ . If both  $p$  and  $q$  are positive, the ACF and PACF are not useful in estimating the values for  $p$  and  $q$ . An  $ARIMA(p,d,0)$  model may be appropriate if the ACF and PACF plots of the stationary data exhibit an exponentially decaying pattern in the ACF and a large spike at lag  $p$  in PACF plot. Conversely an  $ARIMA(0,d,q)$  model may be appropriate if the PACF is decaying exponentially and there is there is a significant spike in the ACF plot at lag  $q$ .

### 2.2.6 Hybrid Models

Auto-regressive (integrated) moving average models have shown themselves to be important modelling methods for time series data, including financial time series data. However the techniques have limitations that have detracted from their popularity, namely their assumption of a linear relationship and the need for a lot of data to produce accurate results. In order to address these limitations a variety of hybrid solutions have been proposed in which ARIMA models are combined with other techniques, often non-linear prediction algorithms (Wang et al., 2012, Khashei and Bijari, 2012, Aladag et al., 2009).

One combination that has found a lot of attention in the literature is the combination of Artificial Neural Networks (ANNs) with ARIMA. Khashei et al. (2009) report on the use of this combination in a attempt to predict the future price movement in gold and US dollar/Iran rials financial markets. The workers report favourable results in comparison to the techniques alone and suggest the method as having potential for accurate predictions of non-linear time series data. In a similar study Zhang (2003) applied a combination of ARIMA and ANN to various data sets including the British pound/US dollar exchange rate. They observe that in the literature in general these two popular techniques are frequently compared in terms of predictive power with the reported results non-conclusive. Results from the three data sets modelled show that the combination of the two methods outperform the individual ones when the mean squared error (MSE) and mean absolute deviation (MAD) are used as the measure of forecasting accuracy.

Fatima and Hussain (2008) also investigated the impact of a hybrid approach in modelling short term predictions for the Karachi Stock Exchange index (KSE100). The

authors reported comparison results for ANN versus ARIMA and a hybrid of ANN/ARIMA. The hybrid solution out-performed the individual ARIMA and ANN models. It is postulated that a rationale for this is that at any point in time financial markets are subject to linear, non-linear and volatility patterns as the cumulative effects of government fiscal and monetary policies and general rumour and political instabilities feed into the market. Under these complex conditions simple models can only capture one aspect of the underlying factors affecting the price series. A hybrid combination approach is more successful as more of the market variance is modelled.

Kriechbaumer et al. (2014) reports on a further hybrid approach to forecast the prices of aluminium, copper, lead and zinc. Previous research has indicated that these markets exhibit a strong cyclic behaviour. In an attempt to factor this into the predictive model ARIMA was coupled with a wavelet approach. Wavelet analysis decomposes a time series into its frequency and time domains in an attempt to isolate this cyclic behaviour. The performance of the ARIMA modelling was shown to be enhanced substantially by the addition of wavelet based multi-resolution analysis (MRA) before performing the ARIMA analysis.

Tan et al. (2010) have also reported the combination of wavelet analysis and ARIMA in the prediction of electricity prices. The general method employed is to transform the original time series data set into a collection of sub-series through the application of wavelet analysis. Subsequent to the transformation a prediction for each sub-series can be made with ARIMA modelling. The final forecasted result is obtained by reforming the sub-series back into the original time series. The authors report results showing the enhanced predictive power of the ARIMA wavelet hybrid approach compared to ARIMA and GARCH models used in isolation.

Pai and Lin (2005) reported on attempts to overcome the limitation of ARIMA models in that the time series must be linear by use of an hybrid ARIMA/Support vector machine (SVM) combination. SVM have been successfully applied to non-linear regression problems and the authors have harnessed the strengths of both methodologies in order to predict the prices of a selection of fifty stocks. Results from the work show that the hybrid method out-performs the ARIMA and SVM methods individually.

Rout et al. (2014) report the use of ARMA models in the prediction of exchange rates. The workers note the limitations of ARMA in that the time series data must be linear and stationary, a condition often not met in practical situations and the difficulty in deriving steps one and two (listed previously) in developing the ARMA model. In order to overcome these limitations ARMA is combined with differential evolution (DE) in order to determine the models feed-forward and feed-back parameters. The results from the

prediction models generated are compared with models resulting from ARMA in conjunction with particle swarm optimisation (PSO), cat swarm optimisation (CSO), bacterial foraging optimization (BFO) and forward backward least mean square (FBLMS). The workers conclude that the ARMA - DE model produces the best short and long-range predictions from the options tested and is a potentially valuable method in predicting exchange rates on the international finance markets.

## Chapter 3

# Methodology

### 3.1 Data Collection and Quality

The data used in this study was freely collected from the Yahoo finance web site ([www.yahoo.com](http://www.yahoo.com)). It is of high quality with no missing values and represents the opening, high, low and closing prices for each day that the particular market indice was open for trading.

### 3.2 Data Description

Data from a variety of national stock market indices was employed in this study. The indices were from a variety of geographic locations with FTSE (UK), DAX (Germany) and CAC (France) all being in Europe, the Dow is from the US, the Nikkei from Japan and AORD from Australia. The data is in the form of so-called daily OHLC (daily open, high, low and close prices) for Monday to Friday (excluding appropriate national holidays) for the period 2000 until the end of 2013. A schematic representation of daily OHLC data can be seen in Figure 3.1. The first six observations from the DAX data set (German national indice) can be seen in Table 3.1.

The final six observations from the DAX data set can be seen in Table 3.2. Over the period of the data (2000 until the end of 2013) the DAX started at 6691 and finished at 9552. Summary statistics for the DAX data set can be seen in Table 3.3. The data set contains 3621 observations and the closing price has ranged between 2202 and 9742 over the period. A graph of the closing prices from 2000 to 2013 can be seen in Figure 3.2 and a graph for 2013 can be seen in Figure 3.3.



FIGURE 3.1: A schematic representation of open, high, low and closing prices (OHLC).

TABLE 3.1: First 6 rows of the DAX data set

| Date       | Open | High | Low  | Close |
|------------|------|------|------|-------|
| 03/01/2000 | 6962 | 7159 | 6721 | 6751  |
| 04/01/2000 | 6747 | 6755 | 6510 | 6587  |
| 05/01/2000 | 6586 | 6586 | 6389 | 6502  |
| 06/01/2000 | 6501 | 6539 | 6403 | 6475  |
| 07/01/2000 | 6490 | 6792 | 6470 | 6781  |
| 10/01/2000 | 6785 | 6975 | 6785 | 6926  |

TABLE 3.2: Final 6 rows of the DAX data set

| Date       | Open | High | Low  | Close |
|------------|------|------|------|-------|
| 16/12/2013 | 9005 | 9188 | 8998 | 9164  |
| 17/12/2013 | 9143 | 9162 | 9085 | 9085  |
| 18/12/2013 | 9145 | 9191 | 9122 | 9182  |
| 19/12/2013 | 9280 | 9352 | 9257 | 9336  |
| 20/12/2013 | 9371 | 9413 | 9353 | 9400  |
| 23/12/2013 | 9400 | 9400 | 9400 | 9400  |

TABLE 3.3: Summary statistics of the DAX data set.

| Statistic | N     | Mean     | St. Dev  | Min      | Max      |
|-----------|-------|----------|----------|----------|----------|
| Open      | 3,621 | 5,858.36 | 1,559.40 | 2,203.97 | 9,752.11 |
| High      | 3,621 | 5,906.70 | 1,561.17 | 2,319.65 | 9,794.05 |
| Low       | 3,621 | 5,804.85 | 1,557.49 | 2,188.75 | 9,714.02 |
| Close     | 3,621 | 5,857.74 | 1,559.39 | 2,202.96 | 9,742.96 |

Each data set has a particular set of characteristics and these are important when technical analysis and other analytical techniques are applied to the data set (Chen and Li, 2014, Matheson, 2012). A variety of these are explored in the following sections. The average amount a market moves is investigated and the term Average True Range



FIGURE 3.2: Graph of German DAX between 2000 and 2013.

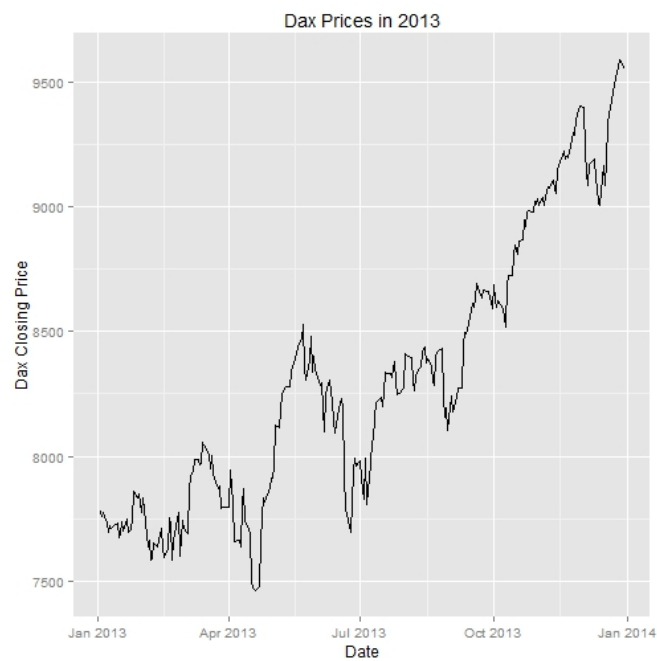


FIGURE 3.3: Graph of German DAX in 2013.

is introduced and defined for the data sets. Where the opening and closing prices are in relation to the previous day's high and low values are also considered. Finally, the distance between the day's opening and high prices and opening to low prices are investigated. The relative ratios of these values are important when considering which technical analysis may be best suited to a particular market.

### 3.2.1 Average True Range (ATR)

Wilder (1978) introduced the concept of Average True Range (ATR) as a way to measure a market's volatility or the amount the price is likely to move in any one day. Initially the True Range (TR) is calculated as the maximum of:

1. the today's high price minus today's low price.
2. the absolute value of the today's high minus the previous day's closing price.
3. the absolute value of the today's low minus the previous day's closing price.

Having calculated the TR, an average of a previous number of days is used to derive the ATR. Typically the TR values from the previous 14 days are used.

Absolute values are used in the calculation of the ATR as we are not concerned with the market direction but rather the the amount the market is likely to move. ATRs are typically quoted as absolute values and as such markets trading at higher prices will have higher ATRs. For example the Japanese Nikkei with a value of 14000 will move more in a day than the French CAC with a value in the 4000's.

Dividing the ATR by the closing price is a useful way to see how a security's volatility varies over time. Table 3.4 shows summary statistics for the ATR and ATR divided by closing price and Figure 3.4 is a graph of how ATR divided by closing price has varied for the DAX between 2000 and 2013. In absolute terms the ATR varied between 36 and 316, however the value of the indice itself varied a lot. Looking at the ATR value divided by the closing period it can be seen that over the period of 2000 to 2014 the mean value is approximately 2. Thus on average the market can be expected to move 2% of the closing price in any one day. However this value has varied between 0.7% in periods of low volatility to a value of 6.7%.

### 3.2.2 Opening Price

Where a market opens in relation to the previous day's high and low price varies across the data sets. This is important and can influence the technical analysis indicator or

TABLE 3.4: ATR and ATR divided by closing price for the DAX between 2000 and 2013

| Statistic | N     | Mean   | St. Dev | Min   | Max    |
|-----------|-------|--------|---------|-------|--------|
| ATR       | 3,556 | 108.29 | 45.53   | 36.07 | 316.04 |
| ATR/Close | 3,556 | 1.995  | 1.065   | 0.700 | 6.740  |

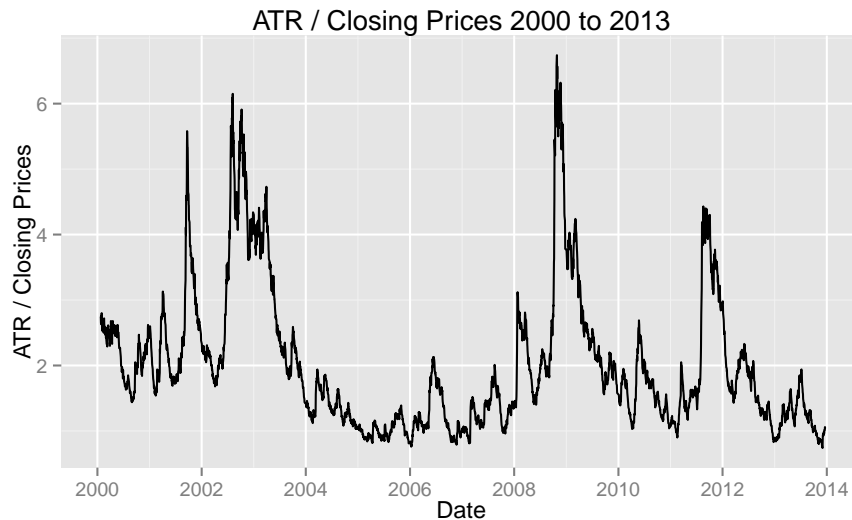


FIGURE 3.4: ATR of DAX divided by closing price between 2000 and 2013.

trading system to utilise. Table 3.5 lists opening price statistics for a variety of national indices. The table lists the number of times that opening prices are between the previous day's high and low prices. These statistics are useful in characterising a market in terms how they move out of hours and can have an impact when choosing a trading system.

TABLE 3.5: Opening prices in relation to the previous day's high and low values.

| Market | Opening Price between Previous Day's High and Low (%) |
|--------|---|
| DAX    | 75  |
| FTSE   | 90  |
| CAC    | 60  |
| Dow    | 98  |
| Nikkei | 53  |
| AORD   | 79  |

### 3.2.3 Closing Price

In a similar fashion to the opening prices the position of the closing prices in relation to the previous day's high and low price are also of interest. In this case, the percentage of closes outside the previous high/low price may indicate that the market may be a good



choice for a breakout type of trading system (see section 4.6.1 for details of breakout systems). Likewise the opposite situation occurs if a market frequently finishes within the previous day's high and low levels and may be a candidate for a reversal type of system. The statistics for various national indices can be seen in Table 3.6. Looking at these figures it would suggest that the Dow with a low ratio of finishing outside the previous period's high low values may be a candidate for a reversal type of system and conversely the Japanese Nikkei has a high percentage value and potentially a candidate for a breakout system.

TABLE 3.6: Number of occasions when closing prices finished outside the previous day's high or low values.

| Market | Closing Price outside Previous<br>Day's High and Low (%) |
|--------|--|
| DAX    | 56   |
| FTSE   | 56   |
| CAC    | 58   |
| Dow    | 39   |
| Nikkei | 63   |
| AORD   | 60   |

The range from opening price to closing price, either up or down, is of interest. Table 3.7 lists the minimum and maximum values in this range and Table 3.8 shows the quantiles for this price range.

TABLE 3.7: Minimum and maximum values for the open to close price range.

| Market | Min Value | Max Value |
|--------|-----------|-----------|
| DAX    | 0         | 508       |
| FTSE   | 0         | 431       |
| CAC    | 0         | 313       |
| Dow    | 0         | 950       |
| Nikkei | 0         | 1333      |
| AORD   | 0         | 347       |

TABLE 3.8: Quantile values for the open to close price range.

| Market | 25% | 50% | 75% | 90%  |
|--------|-----|-----|-----|------|
| DAX    | 16  | 39  | 75  | 508  |
| FTSE   | 15  | 33  | 63  | 431  |
| CAC    | 11  | 26  | 49  | 313  |
| Dow    | 27  | 61  | 119 | 950  |
| Nikkei | 32  | 71  | 133 | 1333 |
| AORD   | 8   | 19  | 36  | 347  |

### 3.2.4 High/Low Price

Table 3.9 shows the percentage of times that either today's high price crosses yesterday's high or today's low prices dips below yesterday's low value. The final closing price may be between yesterday's high and low or outside of it. The second column of Table 3.9 is the number of times when today's values crossed both the previous low and the previous high in the same day. This is also known as an Engulfing Candlestick (see section 4.7.2). In all the indices the previous day's high or low value is reached the following day in a large number of instances, in the case of the Nikkei 90% of the time. Conversely, the likelihood of both the previous day's high and low values being touched are low, only 5% of occasions in the Australian AORD.

TABLE 3.9: Number of occasions when today's high or low prices crossed the previous day's high or low values.

| Market | Crosses either previous<br>day's High or Low (%) | Crosses both the previous<br>day's High and Low (%) |
|--------|--|---|
| DAX    | 89   | 9   |
| FTSE   | 87   | 8   |
| CAC    | 90   | 10  |
| Dow    | 88   | 9   |
| Nikkei | 90   | 8   |
| AORD   | 86   | 5   |

### 3.2.5 OH/OL Price Fluctuations

The movements in prices between the open and high (OH) and open to low (OL) are interesting and can have an influence on any trading systems developed. On any given day prices open, move to their lowest point, move to their highest point and then close (not in any particular order). From the OHLC data used in this study the order of these events can not be determined or even the number of times in a day these price points are reached.

In this section we are concerned with the relative sizes of these two price movements, the day's high price minus the opening price (OH) and the opening price minus the low price (OL), one of which is usually greater than the other. We will define the daily "minor" price fluctuation as the smaller of the two price movements. Likewise we will define the larger value as the "major" price fluctuation.

Considering the minor price fluctuation, the range of values encountered in the indice markets under study can be seen in Table 3.10. In all cases the minimum value is zero, in other words the market opening price and either the day's high or low price were

the same, the market didn't dip below or above this level. The second column in Table 3.10 is the maximum value. In the case of the German DAX, there was a day when the market moved 189 points away from its opening price but also moved further in the opposite direction away from the opening price. Clearly this was a highly volatile day on the German markets.

TABLE 3.10: Minimum and maximum values for the smaller of the daily OH or OL price movement - the "minor" move.

| Market | Min Value | Max Value |
|--------|-----------|-----------|
| DAX    | 0         | 189       |
| FTSE   | 0         | 186       |
| CAC    | 0         | 134       |
| Dow    | 0         | 379       |
| Nikkei | 0         | 310       |
| AORD   | 0         | 114       |

The quantiles of the minor price movements can be seen in Table 3.11. The 90% quantile is the level at which 90% of the time the minor move is less than this level. This value may be important to know and understand when considering breakout type of systems (see section 4.6). Looking at the value of the DAX we can see that the 90% quantile level occurs at 46, which indicates that if the market has moved to this level it is unlikely to be the day's minor move (whose level 90% of the time is below this). Perhaps a breakout type of system may be profitable at this point, as once the market has moved this far it is usually a major move and may be expected to continue further in the same direction.

TABLE 3.11: Quantile values for the smaller of the days OH or OL price movement - the "minor" move.

| Market | 25% | 50% | 75% | 90% |
|--------|-----|-----|-----|-----|
| DAX    | 5   | 15  | 29  | 46  |
| FTSE   | 0   | 7   | 20  | 33  |
| CAC    | 4   | 11  | 19  | 31  |
| Dow    | 12  | 43  | 75  | 113 |
| Nikkei | 5   | 21  | 43  | 72  |
| AORD   | 0   | 1   | 7   | 13  |

In contrast to the minor daily price fluctuation, the "major" price fluctuation is defined as the largest of the OH or OL values. The range of values encountered in this price fluctuation in the indice markets can be seen in Table 3.12 and the quantiles of the major price movements can be seen in Table 3.13. Considering the DAX once more, it can be seen that the 25% quantile is approximately equal to the 90% quantile of the minor fluctuation. Thus if the DAX moves approximately 50 points away from the opening it is unlikely to be the smaller of the price movements and much more likely to be part

of the larger movement. Knowledge of the minor and major price fluctuations may be useful in developing trading systems.

TABLE 3.12: Minimum and maximum values for the larger of the days OH or OL price movement - the “major” daily price fluctuation.

| Market | Min Value | Max Value |
|--------|-----------|-----------|
| DAX    | 0         | 530       |
| FTSE   | 0         | 471       |
| CAC    | 0         | 359       |
| Dow    | 0         | 992       |
| Nikkei | 0         | 1737      |
| AORD   | 0         | 347       |

TABLE 3.13: Quantile levels for the larger of the day’s OH or OL price movement - the “major” daily price fluctuation.

| Market | 25% | 50% | 75% |
|--------|-----|-----|-----|
| DAX    | 43  | 69  | 106 |
| FTSE   | 37  | 56  | 86  |
| CAC    | 30  | 45  | 69  |
| Dow    | 92  | 131 | 190 |
| Nikkei | 76  | 118 | 184 |
| AORD   | 18  | 30  | 48  |

A final consideration in this section is the range of the open to close prices detailed in section 3.2.3. Again considering the German DAX it can be seen that the 50% quantile value is 39, as shown in Table 3.8, which is below the 90% minor fluctuation level.

## 3.3 Software Tools

### 3.3.1 R and R Studio

Experimental results and graphs were produced with the open source programming language R version 3.0.2. For help in the creation and organisation of the R code for this thesis the open-source development environment R Studio version 0.98.490 was used extensively. The following packages were immensely helpful in the preparation of this thesis:

- TTR - provided technical analysis functions
- xts - irregularly spaced time series
- forecast - time series forecasting

- candlestick - Japanese candlestick patterns

### 3.3.2 Rapid Miner

Rapid Miner version 5.3, a market leading open-source data mining and predictive analytic platform, was used for building hybrid ARIMA models. The base system and time series plug-ins were used.

## 3.4 Methodology

The aim of this study was to predict market movement, not in terms of absolute values but more in terms of general direction. The trading algorithms developed in this study were based around a daily time period. The data used was daily data containing open, high, low and closing prices. The trading algorithms developed typically opened a trade at the day's opening price and closed them at the day's closing prices. There are some deviations from this, for example trades are closed at some pre-defined point in the event of a stop loss being entered or trades running from close to close, and these are detailed in the text at the appropriate place.

Prior to passing the data sets to the trading algorithms they were subjected to either technical or time series analysis. Typically technical analysis results in the generation of a value (for example a moving average or stochastic value) which is considered meaningful in the future prediction of the financial market. The forecasts produced from the technical analysis and time series models were consumed by the trading algorithms and used to decide in which direction the daily trade would be made, i.e. would the market rise or fall.

The success or failure of any particular method was determined by the number of points gained or lost in these trading algorithms. In turn these points can be considered money and the net number of points can represent a profit or loss (PL). The results presented in Chapters 4 and 5 report either the total PL of a system or the average PL per trade. The latter value is probably most useful when it comes to comparing systems that don't enter trades every day, for example when one uses candlestick patterns which only occur very infrequently. Also the direction of trade is also a consideration. Results are separated into long (a buy is made in the expectation of the market rising) or short (a sell is made in the expectation of the market falling).

## Chapter 4

# Technical Analysis

### 4.1 Introduction

This chapter investigates whether technical analysis can provide a positive expectancy for financial traders (Kuang et al., 2014, Hsu et al., 2010). A variety of technical analysis indicators are employed including MACD, Aroon, Stochastics Oscillator and Rate of Change (ROC) indicator. The experimental results from using these indicators are presented in groupings based on the general category of indicator such as trend identification, market reversal and momentum indicators (Taylor, 2014). Some technical indicators have a role to play in more than one area, for example MACD can be considered a trend detection indicator or a market reversal indicator.

The effectiveness of a particular indicator or system is measured in terms of “points” gained, which is also referred to as “PL” (which stands for profit and loss). The results presented in this chapter are mainly based around systems in which a trade is opened and closed each day, producing a daily PL either positive or negative. The sum of all the individual days produces the total system PL and these values are reported in the results tables. For example, if the market moved from 6000 to 6200 in any one day a PL of either 200 ( $6200 - 6000$ ) or -200 ( $6000 - 6200$ ) depending upon which way the trade was placed, would be added to the overall system results.

In addition, the results are presented such that returns from “going long” (expecting the market to rise) are presented separately from the opposite scenario of “going short”. This is because market behaviour is often different while it is rising than it is while falling and systems may be more adept at predicting price movements in one of the directions. Further, transactions costs are not taken into account in the results and these would typically be 1 point per trade for the European markets, 2 points for the Dow and 10 for

the Nikkei. Thus if a system made a PL of 1000 but it required 2000 trades at 2 points per trade, in reality the system would have lost money.

The results presented in this chapter and the following one are based around trading systems. Essentially the methodology concerned, technical analysis in this chapter and time series analysis in the next, attempt to predict future market direction. The values from the various indicators and forecast techniques are fed into a variety of trading algorithms which use the forecast information to decide whether to make long (expect the market to rise) or short (expect the market to fall) trades. For consistency the algorithms all return the same data object containing the following results:

1. Mkt - the name of the financial market such as DAX, FTSE etc.
2. S Loss - the value of any stop loss applied
3. LongPL - the profit or loss generated from just the “Long” trades.
4. ShortPL - the profit or loss generated from just the “Short” trades.
5. L Win % - the percentage of time the Long trades win.
6. L Trades - the number of Long trades executed.
7. Av L PL - the average profit or loss generated from each Long trade.
8. S Win % - the percentage of time the Short trades win.
9. S Trades - the number of Short trades executed.
10. Av S PL - the average profit or loss generated from each Short trade.
11. misc - miscellaneous information such as the SMA used in the algorithm.

The results from Long and Short trades in particular trading algorithm are considered separately as frequently markets behave differently as they move up as opposed to as they fall. Further, the percentage of times the algorithm results in winning trades, the number of trades and the average profit or loss (PL) for each trade is reported for both Long and Short trades. The average PL is primarily reported in the following results tables because this allows comparisons between systems that generate a lot of trades with those such as the algorithms based on candlestick patterns that results in only a small number of trades.

## 4.2 Baseline Systems - Naive Methods

Initially two very simple ideas were explored in order for the results to be used as baselines against which the technical indicators explored in the rest of the chapter and the time series models of Chapter 5 can be compared. There is an expectation that the use of technical indicators will produce systems that provide much better results than these two so-called naive systems.

The first system simply uses the idea that markets tend to increase in value over time. The algorithm applies a naive approach and simply enters a trade each day expecting the market to rise. The well-known method of "Buy and Hold" applies the same principles. The total PL of the resulting system is the the sum of all the daily close minus open prices. This approach has been named a "Naive Long System".

The second approach is equally simplistic, and again is based around opening and closing a trade each day. A notable difference from the first naive system is that the algorithm can result in either a buy or a sell (expecting the market to decline in value) occurring. If a market increased in price the previous day the algorithm "reverses" it and expects the market to fall today. Likewise if the market had fallen the previous day the system buys the market today. This idea has been named the "Naive Reversing System".

### 4.2.1 Naive Long System

The results of the naive long system can be seen in Table 4.1. The R code for the algorithm which generates the results shown in Table 4.1 can be seen in Appendix A section A.1.2.1. For comparison purposes, the opening prices of the indices in January 2000 along with the closing prices in 2013 can be seen in Table 4.2. In this period three of the indices increased in value (DAX, Dow and AORD) and three decreased (FTSE, CAC and Nikkei).

Interestingly, the PL produced from the Naive Long System doesn't match the price differentials seen in Table 4.2. The German DAX indice produced a marked loss in the naive system even though it actually increased 37% during this period. The Japanese Nikkei declined by over 2600 points in this period, whereas the system reported a loss of over 18000 points in the same period. On the other hand the US Dow increased by around 5000 points during the period of the study but the trading algorithm produced a positive result of almost 10000. These discrepancies can be explained by the fact that the system was using prices from the market's opening to closing times, which represents approximately eight hours of trading between 8am and 4pm local time. These price movements don't account for the rest of the hours, the so-called out of market hours,



when the market prices also change. Clearly the markets show different characteristics in the amount they move during market hours compared to out of market hours. The Nikkei, DAX and CAC have a tendency to fall during market hours and rise during out of market hours. The opposite situation occurs for the Dow.

TABLE 4.1: Naive Long System. A very simple system in which the algorithm assumes the market will rise and enters a long trade each day.

| Mkt    | LongPL | L Win % | Av L PL |
|--------|--------|---------|---------|
| DAX    | -1714  | 52      | 0       |
| CAC    | -6725  | 50      | -2      |
| FTSE   | 149    | 51      | 0       |
| Dow    | 9816   | 53      | 3       |
| Nikkei | -18125 | 49      | -5      |
| AORD   | 972    | 52      | 0       |

TABLE 4.2: Prices of six national indices in January 2000 and December 2013.

| Date   | Start 2000 | End 2013 | Difference | % Change |
|--------|------------|----------|------------|----------|
| DAX    | 6961       | 9552     | +2591      | +37      |
| CAC    | 6024       | 4250     | -1774      | -29      |
| FTSE   | 6930       | 6749     | -181       | +3       |
| Dow    | 11501      | 16576    | +5075      | +44      |
| Nikkei | 18937      | 16291    | -2646      | -14      |
| AORD   | 3152       | 5353     | +2201      | +70      |

Altering the algorithm slightly so that a trade represents the difference between the previous closing price and today's closing price affects the results markedly. A full 24 hour period is now accounted for and the system reflects the overall market movement during this period. These results can be seen in Table 4.3 and the amended R code can be seen in Appendix A section A.1.2.2.

TABLE 4.3: Naive Long System changed such that the trading period is the previous close price minus today's close.

| Mkt    | LongPL | L Win % | Av L PL |
|--------|--------|---------|---------|
| DAX    | 2649   | 53      | 1       |
| CAC    | -1667  | 51      | 0       |
| FTSE   | 86     | 51      | 0       |
| Dow    | 5219   | 53      | 1       |
| Nikkei | -2712  | 51      | -1      |
| AORD   | 2229   | 53      | 1       |

### 4.2.2 Naive Reversing System

The second naive method is to reverse the previous day's movement. For example, if the market closed up the previous day the algorithm follows this by trading short for the current day (the R code for this algorithm can be seen in Appendix A section A.1.2.3). The results from this system can be seen in Table 4.4.

TABLE 4.4: Results from a naive trading system which simply trades in the opposite direction to the previous day's movement.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 947    | 3131    | 53      | 1       | 49      | 2       |
| CAC    | 940    | 7810    | 53      | 1       | 53      | 4       |
| FTSE   | 4284   | 4115    | 53      | 3       | 50      | 2       |
| Dow    | 15799  | 6047    | 56      | 10      | 49      | 3       |
| Nikkei | 2324   | 20486   | 51      | 1       | 54      | 12      |
| AORD   | 1264   | 237     | 53      | 1       | 48      | 0       |

For all the markets tested, this second naive system produces positive results especially for the Nikkei and CAC trading short and the Dow trading long. These results demonstrate that markets have a tendency to reverse direction each day, they move up one day then down the next. This behaviour is also observed in trending markets, and market “pull-backs” are a well-known phenomena.

### 4.2.3 Summary of Naive Baseline Systems

Of the two naive systems tested, the “reversing” methodology produces the best results in terms of profit and loss by quite a margin. Thus the results from the “Naive Reversing System” will be used to compare the performance of technical indicators being tested in the following sections.

## 4.3 Trend Detection Indicators

One of the most widely used phrases in financial trading is “the trend is your friend”. Thus, most market participants are interested in identifying the start of trends, their direction and strength. In this section a variety of technical indicators that purport to assist in this important task are tested.

### 4.3.1 Simple Moving Average (SMA) System

One of the most popular and widely utilised technical indicators is the simple moving average (as detailed in Chapter 2 section 2.2.1.1). The effectiveness of SMA as an aid to predicting future market movements has been widely debated, with views mixed. A system based on simple moving averages is presented here, and the R code used to generate the results can be seen in Appendix A section A.1.3.1. The algorithm trades daily, opening and closing a trade each day. If the market opens above the SMA the algorithm trades long and trades short when the market opens below the SMA.

Table 4.5 lists the results from passing a variety of national index data sets (see Chapter 3 for details) to the algorithm. For each indice the algorithm is run with values of 5, 25, 50, 100 and 200 for the SMA period. In general the results are poor, especially after consideration is given to any transaction costs. The CAC and Nikkei produce negative results for long trades, the FTSE negative results across the board, and the Dow negative returns on the short side.

One aspect of a trading system of this nature worth considering is the risk/reward profile. As written in its current form the SMA algorithm has an unlimited profit potential (trades are left to run until the end of the day) and an unlimited potential loss for the same reason. Often traders employ what is known as a “stop loss”. This is a level in the market that if reached during a trade will cause the trade to close. The risk is now therefore reduced to this value while the profit is still potentially uncapped. Table 4.6 lists the results of using a stop loss with the SMA system.

The logic of the stop loss was coded as follows. Considering a long trade (the opposite holds true for trading short), where there is an expectation that the market will rise, a the stop loss would be triggered if the market fell to a certain level. Thus in the algorithm for a long trade the distance from the opening price to the low is calculated and this is compared to the stop loss value. If the open to low value exceeds the stop loss value the PL for this particular trade is set at the stop loss value, for example a loss of 100 points. One point of note is the fact that after hitting this low level the market may well recover and move upwards as originally expected. In many cases a trade that ultimately would have been profitable may be “stopped out” by the natural wax and wane of the markets. Therefore the impact of a stop loss is the balance between lost good trades and the reduction in the lost PL from losing trades. The size of the stop loss determines the impact of the two competing situations.

Figure 4.1 shows the situation in which a stop loss is beneficial. The potential large loss is reduced to the value of the stop loss value. Figure 4.2 illustrates the alternative scenario of being “Stopped Out” of an ultimately winning trade, an undesirable outcome.

TABLE 4.5: Results from a system based on SMA.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL | misc    |
|--------|--------|---------|---------|---------|---------|---------|---------|
| DAX    | 2113   | 3278    | 54      | 1       | 50      | 2       | SMA 5   |
| DAX    | 1367   | 3427    | 54      | 1       | 50      | 2       | SMA 25  |
| DAX    | 779    | 3447    | 54      | 0       | 51      | 3       | SMA 50  |
| DAX    | 714    | 2339    | 54      | 0       | 51      | 2       | SMA 100 |
| DAX    | 3401   | 4416    | 55      | 2       | 52      | 4       | SMA 200 |
| CAC    | -3952  | 2338    | 49      | -2      | 49      | 1       | SMA 5   |
| CAC    | -5058  | 1615    | 49      | -2      | 49      | 1       | SMA 25  |
| CAC    | -5323  | 1029    | 49      | -3      | 49      | 1       | SMA 50  |
| CAC    | -2363  | 3188    | 50      | -1      | 50      | 2       | SMA 100 |
| CAC    | -1219  | 3923    | 50      | -1      | 50      | 3       | SMA 200 |
| FTSE   | -4724  | -5331   | 49      | -2      | 46      | -3      | SMA 5   |
| FTSE   | -1013  | -1940   | 51      | 0       | 47      | -1      | SMA 25  |
| FTSE   | -2226  | -2769   | 50      | -1      | 47      | -2      | SMA 50  |
| FTSE   | -889   | -1692   | 51      | 0       | 48      | -1      | SMA 100 |
| FTSE   | -158   | -835    | 52      | 0       | 49      | -1      | SMA 200 |
| Dow    | 408    | -9630   | 52      | 0       | 46      | -6      | SMA 5   |
| Dow    | 1138   | -9204   | 53      | 1       | 46      | -7      | SMA 25  |
| Dow    | 5478   | -5876   | 53      | 3       | 47      | -4      | SMA 50  |
| Dow    | 2576   | -8220   | 53      | 1       | 47      | -6      | SMA 100 |
| Dow    | 6378   | -4567   | 54      | 3       | 48      | -4      | SMA 200 |
| Nikkei | 3078   | 20401   | 51      | 2       | 54      | 13      | SMA 5   |
| Nikkei | -7878  | 10770   | 48      | -4      | 52      | 7       | SMA 25  |
| Nikkei | -6054  | 11408   | 49      | -4      | 52      | 7       | SMA 50  |
| Nikkei | -6235  | 8381    | 49      | -4      | 52      | 5       | SMA 100 |
| Nikkei | -5928  | 6836    | 49      | -4      | 52      | 4       | SMA 200 |
| AORD   | 5009   | 3929    | 55      | 3       | 51      | 3       | SMA 5   |
| AORD   | 3701   | 2674    | 54      | 2       | 50      | 2       | SMA 25  |
| AORD   | 2804   | 1864    | 54      | 1       | 50      | 1       | SMA 50  |
| AORD   | 2688   | 1521    | 54      | 1       | 50      | 1       | SMA 100 |
| AORD   | 2574   | 1616    | 54      | 1       | 51      | 2       | SMA 200 |

It is the ratio of these scenarios that ultimately determines whether using a stop loss is a sound strategy.

Comparing Tables 4.5 and 4.6 it can be seen that applying the stop loss has been on the whole beneficial to the results obtained, with the exception of those from the Dow which were markedly negatively impacted. Essentially losing trades have been truncated while winning trades have been left to develop. One question that needs to be addressed is what value is appropriate for a stop loss. If the value is large the benefits of cutting losses is lost, whereas if it is too small a large number of trades will be “stopped out”. Many traders use a value based on the Average True Range (see Chapter 3 section 3.2.1 for details) as this allows for the volatility of a particular market.

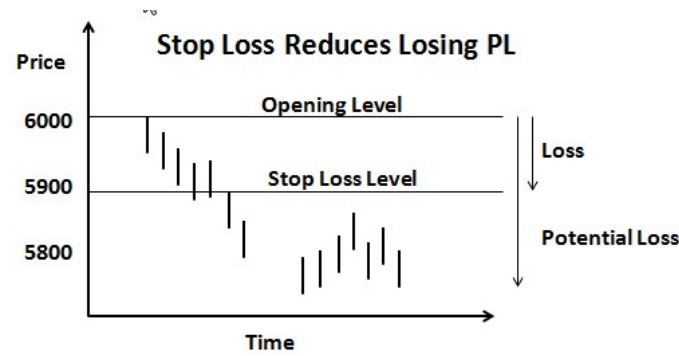


FIGURE 4.1: Situation in which using a stop loss is beneficial, with a losing PL being reduced.

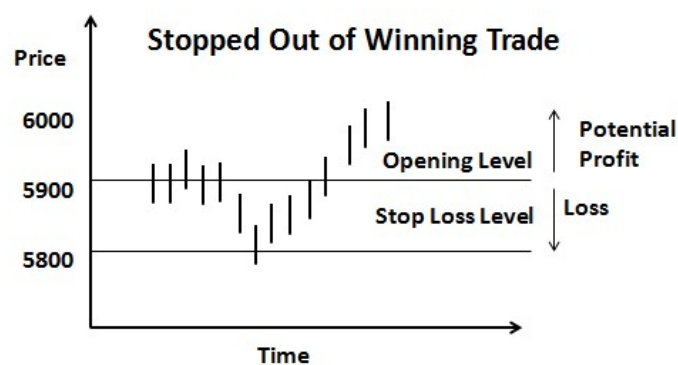


FIGURE 4.2: Situation in which using a stop loss is detrimental, being “stopped out” of an ultimately winning trade.

### 4.3.2 Moving Average Convergence/Divergence (MACD)

Moving Average Convergence/Divergence (MACD) is a trend following indicator, developed by Appel (2005), that is formed from the relationship of two moving averages, see Appendix B section B.1 for more details. The value of MACD itself is the difference between two exponential moving averages (EMA), a “slower” e.g. 26 day value and a “faster” e.g. 12 day value. In addition an EMA of the MACD value is calculated, which is set to 9 days in the following algorithm, which acts as a “signal” line.

The MACD is generally used two ways. Firstly, it can be used to derive the general trend of the security so that the market participant can trade with the trend. Secondly, it can be employed to identify periods when the market is “over-bought” or “over-sold” and can be expected to reverse direction (Achelis, 2014).

In order to identify the trend of a market using the MACD indicator, the relative values of the MACD itself and the signal line are used. If the value of the MACD exceeds the signal it is considered “bullish” and the market is expected to rise in price. Similarly in

TABLE 4.6: Results from a system based on SMA with stop loss.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL | misc    |
|--------|--------|---------|---------|---------|---------|---------|---------|
| DAX    | 3652   | 6618    | 51      | 2       | 42      | 5       | SMA 100 |
| DAX    | 1392   | 5272    | 54      | 1       | 50      | 4       | SMA 100 |
| CAC    | -172   | 5178    | 50      | 0       | 47      | 4       | SMA 100 |
| CAC    | -1822  | 4658    | 50      | -1      | 50      | 3       | SMA 100 |
| FTSE   | 1114   | 6303    | 50      | 1       | 43      | 5       | SMA 100 |
| FTSE   | -885   | 1892    | 51      | 0       | 47      | 1       | SMA 100 |
| Dow    | -18212 | -8229   | 32      | -9      | 22      | -6      | SMA 100 |
| Dow    | -11771 | -14696  | 49      | -6      | 36      | -11     | SMA 100 |
| Nikkei | 8258   | 33882   | 38      | 5       | 39      | 20      | SMA 100 |
| Nikkei | 2550   | 25582   | 47      | 2       | 48      | 15      | SMA 100 |
| AORD   | 4008   | 3730    | 54      | 2       | 49      | 3       | SMA 100 |
| AORD   | 2881   | 2149    | 54      | 1       | 50      | 2       | SMA 100 |

the opposite situation where the value of the signal is greater than the MACD the trend of the market is expected to be down.

Table 4.7 lists the results of using the MACD indicator in just such a way. The MACD value itself is generated using the EMA of the opening prices with values of 26 and 12 for the slow and long averages and a value of 9 days for the indicator line.

The trading algorithm splits the results into two values, days when the system expected the market to rise and days when a market decline were predicted (see Appendix A section A.1.3.2 for details of the R code used). At the start of each day if the MACD value exceeds the signal line the algorithm adds the value of the close price minus the opening price to the “Long PL” running total. Likewise in the opposite situation with the signal line greater than the MACD, the value of the open price minus the close price is added to the “Short PL”. Table 4.7 lists the results of the algorithm run against a variety of national indices.

TABLE 4.7: Results from a system using MACD as a trend indicator.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -791   | 1424    | 53      | 0       | 48      | 1       |
| CAC    | -4153  | 2188    | 49      | -2      | 49      | 1       |
| FTSE   | 63     | -839    | 51      | 0       | 48      | 0       |
| Dow    | 5592   | -5190   | 53      | 3       | 46      | -3      |
| Nikkei | -4078  | 14064   | 49      | -2      | 52      | 8       |
| AORD   | 2563   | 1569    | 54      | 1       | 49      | 1       |

### 4.3.3 Aroon Indicator

Developed by Tushar Chande, the Aroon indicator was designed to identify trending markets (Chande and Kroll, 1994). The word aroon means “dawn’s early light” in Sanskrit and this indicator tries to pin point the dawning of a new trend. Essentially it is a measure of the time since the occurrence of a high/low price in a particular period. Further details can be seen in Appendix B section B.2.

TABLE 4.8: Results from a system based on the Aroon indicator.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 5308   | 5257    | 56      | 3       | 51      | 4       |
| CAC    | -1638  | 4919    | 50      | -1      | 52      | 4       |
| FTSE   | 3042   | 5715    | 52      | 2       | 51      | 5       |
| Dow    | 12131  | 3811    | 55      | 7       | 49      | 3       |
| Nikkei | -4852  | 12013   | 49      | -3      | 52      | 10      |
| AORD   | 3735   | 3540    | 55      | 2       | 50      | 3       |

Table 4.8 shows the results of applying the Aroon algorithm (shown in Appendix A section A.1.3.3) on the data of the national indices. The results are promising with the indicator making positive predictions in most of the markets and doing particularly well in declining markets.

TABLE 4.9: Results from a system based on the Aroon indicator with stop loss.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 5410   | 7465    | 56      | 3       | 50      | 6       |
| CAC    | -1224  | 6086    | 50      | -1      | 52      | 5       |
| FTSE   | 3091   | 8015    | 52      | 2       | 51      | 7       |
| Dow    | -5922  | -9341   | 49      | -3      | 37      | -8      |
| Nikkei | 3153   | 22177   | 46      | 2       | 47      | 18      |
| AORD   | 3786   | 4159    | 55      | 2       | 50      | 4       |

The affects of using a stop loss with the Aroon indicator was investigated and the results shown in Table 4.9. The use of a stop loss was beneficial in all cases except the Dow, in which case it had a catastrophic impact turning a winning system into a losing one. The impact of the stop loss is shown in Table 4.10 which lists the difference in PL between the original results without a stop loss and the revised ones with it.

## 4.4 Market Reversal Indicators

The alternative to trend detection indicators are market reversal indicators, designed to identify when a trend may be ending and the market will start to move in the opposite

TABLE 4.10: Impact of using stop loss with Aroon trend indicator.

| Market | Long Difference | Short Difference |
|--------|-----------------|------------------|
| DAX    | 102             | 2208             |
| CAC    | 414             | 1167             |
| FTSE   | 49              | 2300             |
| Dow    | -18053          | -13152           |
| Nikkei | 8005            | 10164            |
| AORD   | 51              | 619              |

direction. Many traders advocate that this type of trading should be avoided and cite the old phrase “never try to catch a falling knife”. Nevertheless a variety of market reversal technical indicators are explored and their effectiveness noted.

#### 4.4.1 Parabolic Stop-and-Reverse (SAR)

The parabolic stop-and-reverse (SAR) is a method to calculate a trailing stop. This technical indicator was developed by J. Welles Wilder and is detailed in his book *New Concepts in Technical Trading Systems* (Wilder, 1978). A trailing stop is related to the stop loss explored previously but differs in that it is adjusted as the market moves. The level of this of kind of stop loss is amended periodically such that it is a certain amount away from the high or low value of a market. As the the market makes new highs it is adjusted up or down if the market makes new lows. The parabolic SAR calculates the point at which a long trade would be closed and a short position entered, the assumption being that the market participant is always in the market either short or long. More details on the theory and calculations to generate the parabolic SAR can be found in Appendix B section B.3.

Table 4.11 lists the results from passing a variety of national index data sets to an algorithm using the parabolic SAR. The R code used to generate these results can be seen in See Appendix A section A.1.4.1. On the whole the results from these initial tests are very disappointing. Only three of the national indices generated positive results and only the Japanese Nikkei provided reasonable returns.

#### 4.4.2 MACD as reversal Indicator

MACD can also be used as a reversal indicator. Recalling that the MACD is formed from the relationship of two moving averages, when the faster one moves sharply away from the slower one (i.e.the value of MACD rises) this could be an indication of an “over-bought” market and that a reversal is approaching. In this situation the trader would



TABLE 4.11: Results from a system based on the SAR indicator.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -3856  | -2353   | 53      | -2      | 48      | -2      |
| CAC    | -5584  | 1034    | 49      | -3      | 49      | 1       |
| FTSE   | -1141  | -1663   | 51      | -1      | 48      | -1      |
| Dow    | -1301  | -11112  | 52      | -1      | 46      | -7      |
| Nikkei | -5767  | 12424   | 49      | -3      | 52      | 8       |
| AORD   | 2071   | 1097    | 53      | 1       | 49      | 1       |

place a sell trade. The opposite is true for a large negative MACD, and it is postulated that the market may well reverse upwards.

Table 4.12 shows the results of applying the algorithm shown in Appendix A section A.1.4.2 on the data of the national indices. In the algorithm the 15% and 85% quantile of the MACD value is calculated and this is used to decide on the reversal point. Once the 85% value is exceeded the algorithm predicts a reversal will occur and trades short, the opposite is true for the 15% level which triggers a long trade. Overall the results are very modest, with small positive gains being seen in 5 of the 6 national indices.

TABLE 4.12: Results from a trading system based on MACD being used as a trend reversal indicator.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 391    | 407     | 49      | 1       | 48      | 1       |
| CAC    | -545   | 2657    | 51      | -1      | 55      | 5       |
| FTSE   | 2080   | 1649    | 53      | 4       | 53      | 3       |
| Dow    | 3882   | -807    | 52      | 7       | 48      | -2      |
| Nikkei | 199    | 2828    | 51      | 0       | 52      | 6       |
| AORD   | -319   | -584    | 50      | -1      | 49      | -1      |

## 4.5 Momentum Indicators

Momentum indicators are closely related to the trend indicators introduced in section 4.3. They are concerned with trending markets but differ in that the strength of the trend is also included in the information the indicator attempts to portray.

### 4.5.1 Stochastic Oscillator

The stochastic indicator is one of the oldest in widespread use today having been developed by George Lane in the 1950s (Lane, 1986). It measures the relative position

of a market's closing price in the range between the low and high of the period of interest. This is of interest as some market participants believe that financial markets essentially swing between price boundaries marked by where the market closes in this range (Williams, 2011). Thus markets increase until the close is at the top of this range before changing direction and moving down until it is at the bottom of the high low range.

The stochastic is usually represented by two lines %K which is the position of the price within this high low envelope described above, and %D a moving average of %K (see Appendix B section B.4 for more details). It can be used a number of ways and one popular technique is to go long when the %K crosses above %D and to go short in the opposite situation. Table 4.13 lists the results from passing a variety of national index data sets to an algorithm which uses the relative position of %K and %D to decide which way to trade. The R code used to generate these results can be seen in See Appendix A section A.1.4.3.

TABLE 4.13: Results from a system based on the Stochastic indicator.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -28    | 1673    | 53      | 0       | 49      | 1       |
| CAC    | -4540  | 1817    | 48      | -3      | 48      | 1       |
| FTSE   | -73    | -744    | 51      | 0       | 48      | 0       |
| Dow    | 867    | -9414   | 53      | 0       | 46      | -5      |
| Nikkei | -10591 | 7802    | 48      | -6      | 51      | 5       |
| AORD   | 2839   | 1780    | 54      | 2       | 49      | 1       |

The results from Table 4.13 for this system are very modest with only the Australian ORD showing positive values for both long and short trades. Adding a stop loss of 100 points increases the PL across the board except for the case of the Dow where again the stop loss has had a detrimental affect. The results from using a stochastic based system with a stop loss can be seen in Table 4.14.

TABLE 4.14: Results from a system based on the Stochastic indicator with a stop loss.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 1173   | 3889    | 52      | 1       | 48      | 2       |
| CAC    | -3493  | 2730    | 48      | -2      | 48      | 2       |
| FTSE   | 1640   | 1424    | 51      | 1       | 48      | 1       |
| Dow    | -13969 | -27388  | 45      | -8      | 37      | -16     |
| Nikkei | 1647   | 17977   | 45      | 1       | 46      | 10      |
| AORD   | 3028   | 1974    | 54      | 2       | 49      | 1       |

### 4.5.2 Rate of Change (ROC)

The Rate of Change (ROC) indicator is a simple and widely observed technical indicator. It is the difference between the current price and the price several observations ago. See Appendix B section B.5 for details. If this value is large, either positive or negative it is indicative of a strongly trending market with a lot of momentum either upwards or downwards. The R code for a trading system exploiting these ideas can be seen in Appendix A section A.1.4.4. The results can be seen in Table 4.15 which lists the results from passing a variety of national index data sets to the algorithm.

TABLE 4.15: Results from a system based on the ROC indicator.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 1026   | 180     | 50      | 2       | 50      | 0       |
| CAC    | 952    | 956     | 53      | 2       | 51      | 2       |
| FTSE   | 1147   | 1880    | 51      | 2       | 51      | 4       |
| Dow    | 8517   | 3396    | 58      | 16      | 49      | 6       |
| Nikkei | 2971   | 2546    | 50      | 6       | 52      | 5       |
| AORD   | 271    | 1325    | 51      | 1       | 52      | 2       |

## 4.6 Breakout systems

This section explores some trading systems that use a particular price as the indicator to place a trade. The first system uses the simple idea of trading when the previous day's high or low is passed. The second idea is related to the results generated in Chapter 3, where the 90% quantile for the day's minor move was calculated. The system tested here is to simply trade long or short when this point is reached in a day.

### 4.6.1 Daily High/Low Breakout System

Table 4.16 lists the results from a trading system based around the idea of trading after the previous day's high or low price has been breached. The R code used to generate these results can be seen in See Appendix A section A.1.5.1.

Referring to Table 4.16 we can see that this system produces good results, with the exception of the US Dow. This ties in with the data in Chapter 3 Table 3.6 which shows that the Dow only closes outside of the previous low or high price a relatively low number of times. Likewise good results are seen with the Japanese Nikkei from the breakout system and this tallies with the high proportion of the time in which it closes above or below the previous day's high or low.

TABLE 4.16: Results from the Daily High/Low Breakout System.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 12225  | 13411   | 55      | 7       | 54      | 8       |
| CAC    | 3491   | 6955    | 53      | 2       | 53      | 4       |
| FTSE   | 13189  | 18481   | 59      | 7       | 59      | 12      |
| Dow    | -19598 | -28337  | 42      | -11     | 38      | -17     |
| Nikkei | 31988  | 43554   | 57      | 19      | 58      | 27      |
| AORD   | 17225  | 19184   | 66      | 10      | 65      | 13      |

#### 4.6.2 Breakout of 90% Quantile Level

A second system utilising the breakout concept is presented in this section. In Chapter 3 one characteristic of the markets was noted, namely that each day the market moves from its opening price to a low price and then to a high price (not necessarily in any particular order). One of these moves (O-H vs O-L) is greater than the other was termed the major move and the smaller move was called the minor move. The algorithm generating the results in this section (see Appendix A section A.1.5.2) makes a long or short trade after the market has passed the 90% quantile of the minor move. Table 4.17 lists the results from this algorithm.

TABLE 4.17: Results from a system that breaks out from the 90% quantile level of the day's minor move.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 7841   | 6371    | 56      | 6       | 53      | 4       |
| CAC    | 2647   | 5085    | 54      | 2       | 52      | 3       |
| FTSE   | 10758  | 15295   | 56      | 7       | 54      | 10      |
| Dow    | -30262 | -34854  | 39      | -24     | 37      | -28     |
| Nikkei | 23606  | 31830   | 58      | 16      | 56      | 20      |
| AORD   | 16730  | 19357   | 63      | 9       | 62      | 12      |

## 4.7 Candlestick Patterns

As previously noted in Chapter 2 section 2.1.5 candlestick patterns are visual representations of price movements over the course of a particular time period (often a day) in terms of the market's opening, closing, high and low prices. The pattern generated from these price markets are categorised and named depending upon the visual shape they produce. Thus candlestick patterns represent the counter forces of buyers and sellers throughout the trading period. This section analyses some well known candlestick patterns for predictive power in making trading decisions (Lu, 2014).

### 4.7.1 Hanging Man, Hammer, Inverted Hanging Man and Shooting Star

Four well-known patterns that are generally considered to indicate the possible end of a trend and the start of a reversal are the so-called Hanging Man, Hammer, Inverted Hanging Man and Shooting Star candlestick patterns.

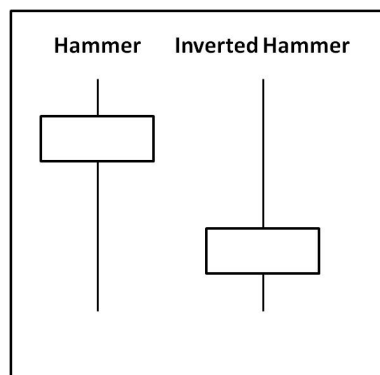


FIGURE 4.3: Hammer and Inverted Hammer candlestick patterns.

Figure 4.3 is a diagram of a Hammer and Inverted Hammer patterns. Both patterns have a small “body” (the distance between the open and close prices) and a long “shadow” (the distance between the high and low prices). In the diagrams presented here a white candlestick means the market price increased over the course of the day while a black one means the market fell. The body of the candlestick is white in this case, indicating that the market moved up (the closing price was above the opening price), although by only a small amount. Hammer and Inverted Hammer differ in that the long shadow in hammer is generated from a low price whereas the shadow of Inverted Hammer goes upwards as it is indicative of the period’s high price.

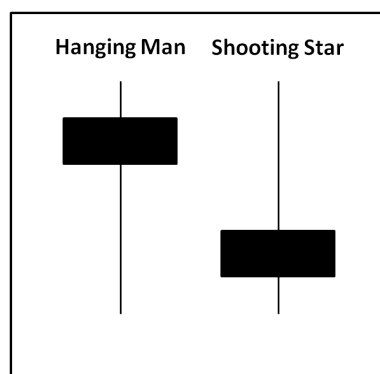


FIGURE 4.4: Hanging Man and Shooting Star candlestick patterns.

Figure 4.4 is a diagram of Hanging Man and Shooting Star, these being the opposite to Hammer and Inverted Hammer. In this case the market direction is down, albeit only by a small amount, and thus the body of the candlestick is a different colour, in this

case black. Again both patterns have long shadows, the direction of which determines if the pattern is Hanging Man or Shooting Star.



FIGURE 4.5: Daily candlestick patterns from the German DAX over 22 days in April 2014 with Shooting Star and Hanging Man circled.

Both sets of patterns Hammer/Inverted Hammer and Hanging Man/Shooting Star are considered to indicate that a trend is coming to a close and a reversal could be looming. In the case of Hammer/Inverted Hammer if they are encountered during a down trend they could indicate that the selling pressure is easing and a market move to the upside could happen soon. The opposite is true for Hanging Man/Shooting Star. When these are encountered in an up trend they often indicate that the trend is ending and a reversal may occur. Figure 4.5 shows daily candlestick patterns for the German DAX over 22 days in April 2014. A Shooting Star is circled on the 6th April and a Hanging Man on the 23rd April. In each case they occur while the market is rising and in each case it reverses immediately afterwards.

In order to have a system based on candlestick patterns, the pattern itself must be identified in code. A Hammer and Hanging Man are essentially the same pattern except Hammer has a close higher than the open whereas Hanging Man represents a decline in the price. For these patterns three components are defined, the length of the upper shadow (short), the size of the body (short) and the length of the lower shadow. In the trading system that follows these were defined as:

1. Upper Shadow - the value of the day's high minus the high of the body is less than 10% the total High-Low range.
2. Body - is larger than 10% the total High-Low range.
3. Lower Shadow - the value of the day's low minus the low of the body is greater than 66% of the High-Low range.

Analysing the DAX data set running from 2000 to 2013 with 3570 observations, and using the criteria described above 35 Hammer and 48 Hanging Man patterns can be detected.

Inverted Hammer and Shooting Star are again the same pattern except in Inverted Hammer the price rose. In the later system these are defined as:

1. Upper Shadow - the value of the day's high minus the high of the body is at least 66% the total High-Low range.
2. Body - is larger than 10% the total High-Low range.
3. Lower Shadow - the value of the day's low minus the low of the body is less than 10% of the High-Low range.

Considering the DAX data set again, occurrences of these patterns are quite rare with 30 Inverted Hammers and 17 Shooting Stars in 3570 observations.

Results from a trading system based on the Hammer/Inverted Hammer can be seen in Table 4.18 and the R code in Appendix A section A.1.6.1. The algorithm simply places a buy the day after a Hammer or Inverted Hammer occur, the assumption being that these patterns indicate that the market is about to rise.

TABLE 4.18: Results from a system based on the Hammer and Inverted Hammer candlestick patterns.

| Mkt    | LongPL | L Win % | L Trades | Av L PL |
|--------|--------|---------|----------|---------|
| DAX    | 594    | 53      | 126      | 5       |
| CAC    | -793   | 44      | 149      | -5      |
| FTSE   | 834    | 58      | 188      | 4       |
| Dow    | 2097   | 59      | 88       | 24      |
| Nikkei | -2202  | 48      | 147      | -15     |
| AORD   | -809   | 46      | 236      | -3      |

An alternative approach is to look for Hammer and Inverted Hammer patterns occurring in a down trend, in which case it could signal the end of the down trend and the start of a reversal. Table 4.19 shows the results of using the Hammer and Inverted Hammer to predict a price rise during a down trend. An aroon down value of greater than 65 (with a 20 day look back period) is used to define the down trend. The algorithm can be seen in Appendix A section A.1.6.2.

TABLE 4.19: Results from a system based on the Hammer and Inverted Hammer candlestick patterns occurring in a downtrend as defined by the aroon value.

| Mkt    | LongPL | L Win % | L Trades | Av L PL |
|--------|--------|---------|----------|---------|
| DAX    | -187   | 42      | 36       | -5      |
| CAC    | -515   | 44      | 55       | -9      |
| FTSE   | 281    | 55      | 65       | 4       |
| Dow    | 730    | 55      | 22       | 33      |
| Nikkei | -934   | 48      | 58       | -16     |
| AORD   | -614   | 41      | 77       | -8      |

### 4.7.2 Engulfing Candlestick

The “Engulfing” pattern, either Bull or Bear is another widely considered candlestick pattern and is depicted in Figure 4.6. This pattern has a lower low and a higher high than the preceding candlestick and is usually interpreted as indicating a change in direction of the trend. Engulfing candlesticks can be either bullish, where the closing price is above the opening price or bearish when the market moves down.

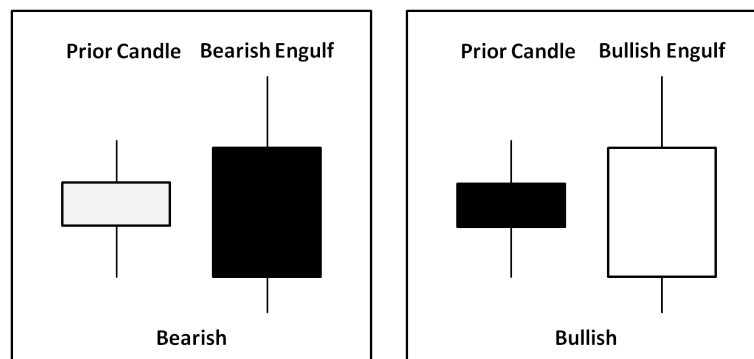


FIGURE 4.6: Engulfing candlestick patterns.

Table 4.20 lists the results from passing a variety of national index data sets (see Appendix A section A.1.6.3 for details) to an algorithm that buys or sells the market depending on the presence of an Engulfing pattern.

TABLE 4.20: Results from a system based on the Engulfing candlestick pattern.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -920   | -258    | 44      | -7      | 46      | -2      |
| CAC    | -319   | 228     | 45      | -2      | 50      | 1       |
| FTSE   | -1721  | 1185    | 51      | -4      | 50      | 3       |
| Dow    | -770   | -3662   | 48      | -4      | 35      | -28     |
| Nikkei | -3823  | -1166   | 37      | -39     | 44      | -11     |
| AORD   | -6     | -600    | 53      | 0       | 46      | -3      |



Table 4.21 lists the results from extending the algorithm such that trades are only taken in either up or down trends, as defined by the aroon indicator. The R code for the amended algorithm can be see Appendix A section A.1.6.4.

TABLE 4.21: Results from a system based on the Engulfing candlestick pattern in a trending market.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -874   | -513    | 38      | -20     | 43      | -7      |
| CAC    | -118   | -666    | 49      | -3      | 30      | -11     |
| FTSE   | -1217  | -782    | 47      | -8      | 48      | -3      |
| Dow    | 202    | -1154   | 45      | 4       | 44      | -11     |
| Nikkei | -1522  | -1733   | 38      | -59     | 37      | -32     |
| AORD   | -49    | -27     | 53      | -1      | 50      | 0       |

### 4.7.3 Doji

Doji is a well-known candlestick pattern that can appear on its own or as a component of a pattern. A Doji forms when the open and close price are similar and there is an upper and lower shadow, thus they often resemble a cross. Variations within Doji include the Dragonfly and Gravestone Doji, see Figure 4.7. In an up trend Doji (especially Gravestone) can indicate a reversal could occur and likewise in a down trend a Dragonfly could suggest an upward move is about to start.

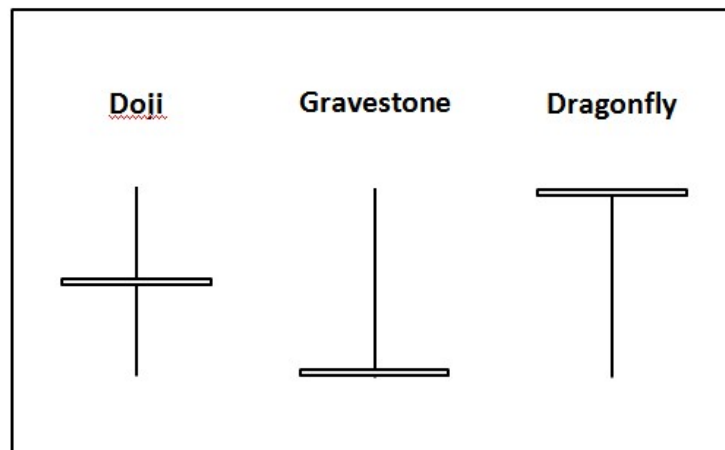


FIGURE 4.7: Doji candlestick patterns.

Table 4.22 lists the results from passing a variety of national index data sets (see Appendix A section A.1.6.5 for details) to an algorithm that buys or sells the market depending on the presence of a Doji. In an up trend, as identified by the aroon indicator, a Doji or Gravestone is used to initiate a sell and conversely in down trend a Doji or Dragonfly is used as a signal to buy.

TABLE 4.22: Results from a system based on the Doji candlestick pattern in a trending market.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -826   | -1132   | 53      | -8      | 52      | -6      |
| CAC    | -747   | -326    | 46      | -6      | 49      | -2      |
| FTSE   | -697   | 418     | 53      | -8      | 52      | 3       |
| Dow    | -763   | -2869   | 51      | -5      | 50      | -10     |
| Nikkei | 1296   | -2944   | 55      | 12      | 45      | -22     |
| AORD   | -115   | 195     | 54      | -1      | 54      | 2       |

## Chapter 5

# Time Series

This chapter will explore the use of time series analysis techniques to generate models for forecasting prices in various national stock market indices. Usually, in trying to predict the future behaviour of financial markets the direction they will move, either up or down, is of more interest than the actual value itself. Thus, in this chapter predictions of the future direction as well as the actual value itself are attempted. A variety of time series models are developed using exponential smoothing, ARIMA and hybrid ARIMA methods.

### 5.1 Exponential Smoothing

Exponential smoothing was applied to the stock market indice data sets in order to generate predictions for the following day's closing price, so-called one-step ahead forecasts. Two basic approaches and an exponential smoothing methodology were examined. The two basic methods provide a useful baseline against which to compare later models, and are the mean and drift methodologies. The mean is simply the average of the data points in the sample while the drift is equivalent to drawing a straight line between the first and last point of the sample and then extrapolating this line forward the desired number of observations.

#### 5.1.1 Time Series Base Models

Figure 5.1 shows the two base methods, mean and drift, being applied to a data set derived from the German DAX. The models were trained on the first 3000 observations of the DAX data set and tested on the remaining ones. The actual data points being predicted in Figure 5.1 are added to the plot in Figure 5.2. Five error measures, root

mean square error (RMSE), mean absolute error (MAE), mean percentage error (MPE), mean absolute percentage error (MAPE) and mean absolute scaled error (MASE) for the two methods are listed in Table 5.1. From these error measures we can see that the drift model fits the training data the best, having the smallest error values across all the measures, but that the mean model actually performs the best on the test data.

TABLE 5.1: Error measures from mean and drift models.

|                    | RMSE | MAE  | MPE | MAPE | MASE |
|--------------------|------|------|-----|------|------|
| Mean Training Set  | 1394 | 1183 | -8  | 25   | 1    |
| Mean Test Set      | 208  | 163  | 2   | 3    | 3    |
| Drift Training Set | 84   | 61   | -0  | 1    | 0    |
| Drift Test Set     | 302  | 262  | -5  | 5    | 4    |

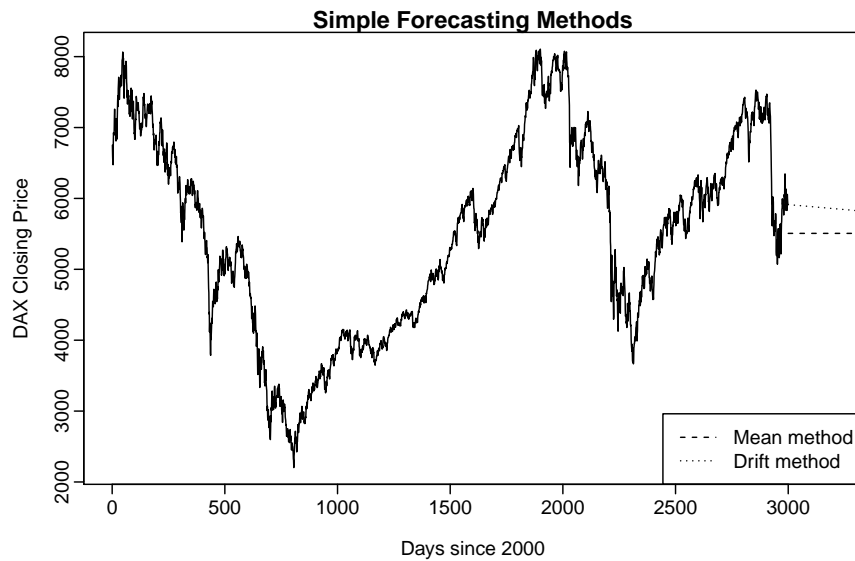


FIGURE 5.1: Forecasts generated by mean and drift methods.

Looking at Figure 5.2 it can be seen that neither the mean or the drift does a good job with the predictions for the DAX. The forecasts were based on the entire data set, treating it as a homogeneous whole. However, financial time series typically show a variety of behaviour at different periods. On occasions it is stationary and at other times trending. Thus, in the following sections, in order to generate forecasts a sliding window approach was adopted. A window of data (the last 30 observations) was used to generate a model and the one-step ahead forecast, before the window was advanced one observation to the next period. In this way the model is constantly adapting and changing. Using this approach forecasts and models for use in a trading system from a mean, drift and exponential smoothing methodology were developed.

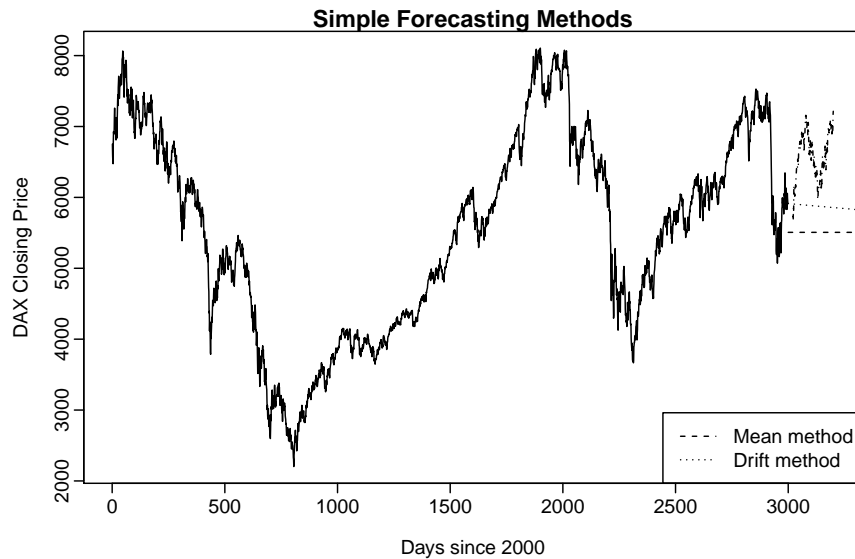


FIGURE 5.2: Forecasts generated by mean and drift methods with actual data in forecast period added.

### 5.1.2 Trading System Based on Mean Model

Results from a trading system using the one-step ahead forecasts generated by the mean model using a moving window are listed in Table 5.2. A trading algorithm, which can be seen in Appendix A section A.2.1, used these forecasts to decide in which direction to trade. If the forecast was higher than the closing price a long trade was entered the following day and likewise if it was below the close a short trade was entered.

TABLE 5.2: Results from trading the predictions generated by a mean exponential smoothing system.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -1640  | -1505   | 50      | -1      | 45      | -1      |
| CAC    | -1086  | 3553    | 52      | -1      | 51      | 2       |
| FTSE   | 1680   | 345     | 53      | 1       | 49      | 0       |
| Dow    | 8356   | -2126   | 54      | 7       | 46      | -1      |
| Nikkei | -32    | 10646   | 51      | 0       | 53      | 6       |
| AORD   | -1333  | -2149   | 50      | -1      | 46      | -1      |

### 5.1.3 Trading System Based on Drift Model

In a similar way to the mean model of section 5.1.2 the predictions generated by the drift model were passed to the trading algorithm and the results can be seen in Table 5.3.

TABLE 5.3: Results from trading the predictions generated by a drift exponential smoothing system.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 2310   | 2445    | 54      | 1       | 50      | 2       |
| CAC    | -2422  | 2217    | 49      | -1      | 48      | 2       |
| FTSE   | -518   | -1853   | 51      | 0       | 47      | -1      |
| Dow    | 5416   | -5066   | 54      | 3       | 46      | -4      |
| Nikkei | -6939  | 3739    | 48      | -4      | 50      | 3       |
| AORD   | 1476   | 660     | 53      | 1       | 49      | 1       |

#### 5.1.4 Trading System Based on Exponential Smoothing Model

Using Rob J Hyndman's forecast package and the ets function, a variety of exponential smoothing methods can be applied to sample data (Hyndman and Yeasmin, 2008). Table 5.4 lists fifteen possibilities when one combines trend and seasonality, both additive and multiplicative. In fact Hyndman extends this further by allowing the error term to be either added or multiplied against the results.

TABLE 5.4: Taxonomy of exponential smoothing methods.

| Trend<br>Component         | Seasonal Component |                 |                       |
|----------------------------|--------------------|-----------------|-----------------------|
|                            | N<br>(None)        | A<br>(Additive) | M<br>(Multiplicative) |
| N (None)                   | (N,N)              | (N,A)           | (N,M)                 |
| A (Additive)               | (A,N)              | (A,A)           | (A,M)                 |
| Ad (Additive damped)       | (Ad,N)             | (Ad,A)          | (Ad,M)                |
| M (Multiplicative)         | (M,N)              | (M,A)           | (M,M)                 |
| Md (Multiplicative damped) | (Md,N)             | (Md,A)          | (Md,M)                |

Using a sliding window approach, one-step ahead forecasts were generated using the ets function. Because a different sample of data was contained in each window, the exponential smoothing function selects the best model for each window of data independently of the data set as a whole. Thus the ets function applies a variety of models to the windows of data including:

- ETS(A,N,N)
- ETS(M,N,N)
- ETS(M,A,N)
- ETS(A,A,N)
- ETS(A,Ad,N)

- ETS(M,Md,N)
- ETS(M,Ad,N)
- ETS(M,M,N)

The one-step ahead forecasts generated from these models were once again passed to the same trading algorithm listed in Appendix A section A.2.1 and the results can be seen in Table 5.5.

TABLE 5.5: Results from trading the predictions generated by a moving window exponential smoothing system.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -2029  | -1894   | 53      | -1      | 47      | -1      |
| CAC    | -266   | 4048    | 52      | 0       | 51      | 2       |
| FTSE   | 3866   | 2531    | 53      | 3       | 50      | 2       |
| Dow    | 12901  | 2419    | 57      | 8       | 50      | 2       |
| Nikkei | -2741  | 7937    | 49      | -2      | 51      | 5       |
| AORD   | 645    | -171    | 52      | 0       | 48      | 0       |

## 5.2 ARIMA Models

The use of Auto-Regressive Integrated Moving Average (ARIMA) models, see section 2.2.4 for details, was explored in order to forecast future prices for financial markets. The process of fitting an ARIMA model to a time series is quite challenging and involves the following general steps:

1. Plot the data to get a general feel for the time series and to establish if it is stationary.
2. Stabilize any variance in the data with a transformation process such as the Box-Cox method.
3. ARIMA models work with stationary data, so if necessary, take differences of the data until it is stationary.
4. Examine the auto-correlation and partial auto-correlation (ACF/PACF) plots in order to determine if an AR(p) or MA(q) model is appropriate.
5. Test the chosen model(s), using the AICc to determine if a better model is available.

6. Check the residuals from the best model by plotting the ACF, and doing a port-manteau test on them. If the results from these tests do not look like white noise, a modified model may be required.
7. Finally, once the residuals have a similar pattern to white noise, the model can be used to generate forecasts.

In recent years automatic forecasting algorithms have become available and are widely used (Hyndman and Yeasmin, 2008). These are necessary in a variety of circumstances, especially when organisations are faced with the need to repeatedly carry out a large number of forecasts and the human effort required renders manual means impractical. The `auto.arima` function found in R’s “forecast” package is an example of an automatic algorithm for ARIMA models. This function automates steps 3, 4, and 5 of those outlined previously, in the general steps required for ARIMA modelling. In the following sections, the general steps are used to generate an ARIMA model manually, and then the automatic algorithm is utilised to build one.

## 5.3 Manual Generation of ARIMA Models

### 5.3.1 Data Exploration

The first step, as always is to explore the data. Figure 5.3 shows the UK’s FTSE 100 index between the years 2000 to 2013. Over this time period the series has shown strong trends to move up and down and a uniform variance. Because the time series is non-stationary it will need to be transformed into a stationary series before ARIMA modelling can be undertaken.

### 5.3.2 Adjusting for non-uniform variance and non-stationariness

The variance within the FTSE time series is relatively uniform and thus this data set doesn’t need stabilizing with regard to this. If it did, a Box-Cox transformation could be used. However, over this time period the FTSE 100 exhibits marked non-stationariness and requires adjusting accordingly. One such technique to make a data set stationary is differencing. Instead of using the actual observations the differences between two adjacent points are used and this is known as the first difference. If the data set still isn’t stationary the difference between consecutive points in the differenced data set can be used, this is the difference of the differences and is known as the second difference. Figure 5.4 shows the FTSE data set after the first differences have been taken. The resulting data set is now stationary.



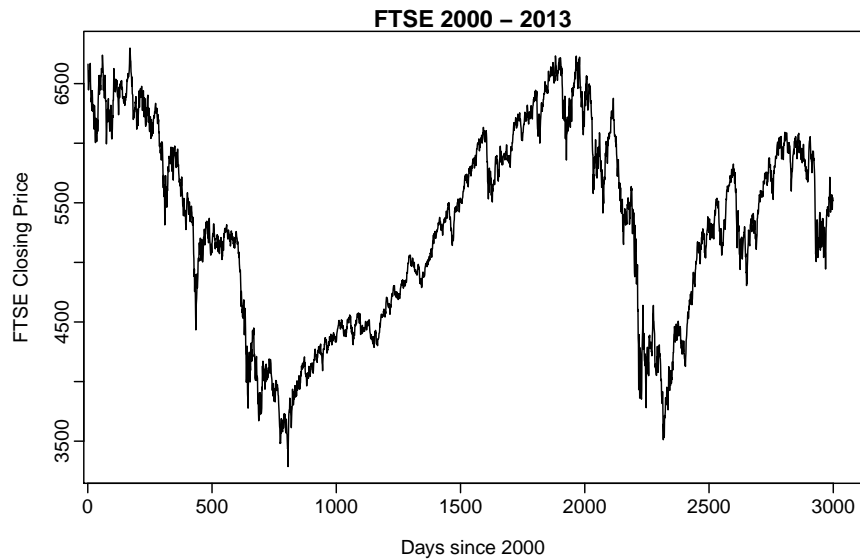


FIGURE 5.3: UK's FTSE 100 index between the years 2000 to 2013.

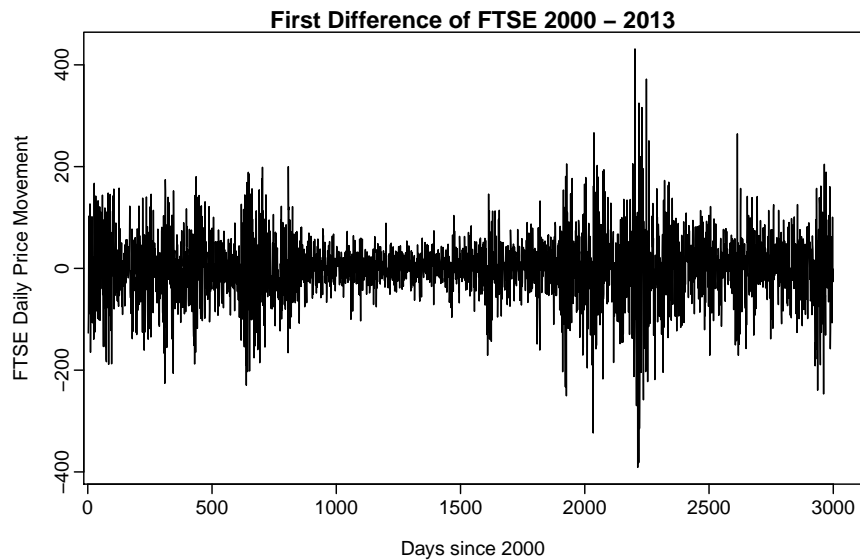


FIGURE 5.4: First difference of FTSE 100 between the years 2000 to 2013.

### 5.3.3 Examine ACF/PACF

With a stationary data set, the next stage is to investigate the auto-correlation and partial auto-correlation (ACF/PACF) plots in order to help in the model selection process (see section 2.2.5 for details of ACF and PACF). The ACF and PACF for the FTSE data set can be seen in Figures 5.5 and 5.6.

If ultimately the ARIMA model is of the form  $\text{ARIMA}(p,d,0)$  or  $\text{ARIMA}(0,d,q)$  then the ACF and PACF plots are useful in helping to define values for  $p$  or  $q$ . In the event that both  $p$  and  $q$  are positive, the ACF and PACF are not helpful in deducing the values for  $p$  and  $q$ . An  $\text{ARIMA}(p,d,0)$  model may be appropriate if the ACF and PACF plots

of the stationary data exhibit an exponentially decaying pattern in the ACF and a large spike at lag  $p$  in PACF plot. Conversely an  $\text{ARIMA}(0,d,q)$  model may be appropriate if the PACF is decaying exponentially and there is a significant spike in the ACF plot at lag  $q$ . Considering the ACF and PACF plots in Figures 5.5 and 5.6, neither of the two patterns are observed and thus an ARIMA model where both  $p$  and  $q$  are positive is likely.

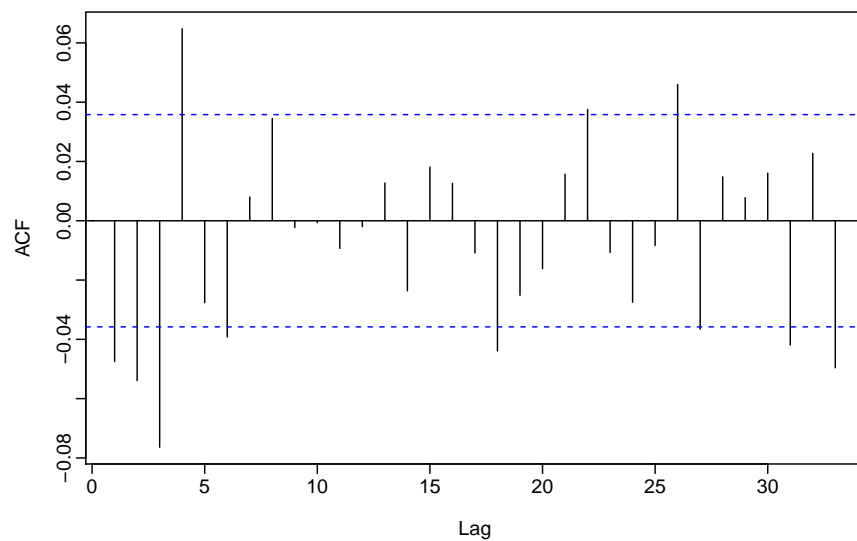


FIGURE 5.5: Auto-correlation plot of differenced data from FTSE 100 between the years 2000 to 2013.

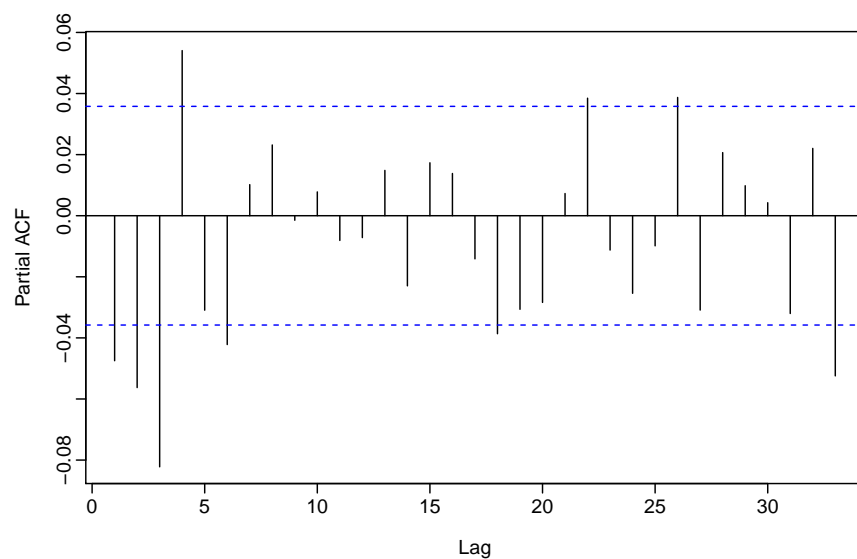


FIGURE 5.6: Partial auto-correlation plot of differenced data from FTSE 100 between the years 2000 to 2013.

### 5.3.4 Try the chosen model(s)

The next step is to try the chosen model along with a few viable alternatives. Akaike's Information Criterion (AIC) and Bayesian Information Criterion (BIC) are useful for determining the optimum order of an ARIMA model, and are typically used as a measure of how well the model fits the data. AIC can be given by:

$$AIC = -2\log(L) + 2(p + q + k + 1)$$

where:

$L$  is the likelihood of the data and  $k = 1$  if  $c \neq 0$  and  $k = 0$  if  $c = 0$ , the last term in parentheses is the number of parameters in the model.

For ARIMA models, the corrected AIC can be written as:

$$AIC_c = AIC + \frac{2(p + q + k + 1)(p + q + k + 2)}{T - p - q - k - 2}$$

The Bayesian Information Criterion can be expressed as:

$$BIC = AIC + \log(T)(p + q + k + 1)$$

Table 5.6 shows the AIC, AICc and BIC accuracy measures for a selection of ARIMA models applied to the FTSE data set. On all three measures the ARIMA(2,1,3) model has the lowest value.

TABLE 5.6: AIC, AICc and BIC results from alternative ARIMA models.

| Model        | AIC     | AICc    | BIC     |
|--------------|---------|---------|---------|
| ARIMA(3,1,1) | 33598.5 | 33598.5 | 33628.5 |
| ARIMA(3,1,2) | 33594.6 | 33594.6 | 33630.6 |
| ARIMA(3,1,3) | 33596.1 | 33596.1 | 33638.1 |
| ARIMA(2,1,1) | 33616.4 | 33616.4 | 33640.4 |
| ARIMA(2,1,2) | 33618.1 | 33618.1 | 33648.1 |
| ARIMA(2,1,3) | 33594.1 | 33594.1 | 33630.1 |

### 5.3.5 Model Residuals

A so-called residual is the difference between an observation and its forecast. In forecasting a time series, residuals are calculated from a one-step forecast. A one-step forecast is based on all observations from the start of the series until the previous observation to which the forecast applies to. Thus the number of data points used to calculate the

one-step forecast increases as the forecast proceeds through the time series. An alternative is cross-sectional forecasting which uses all the points in the data set except the observation being predicted.

Knowledge of the residuals from the application of a model is important in establishing the validity of the model. There are two essential and two valuable properties that can be established by inspecting the model residuals. A good method of forecasting will produce a model in which the residuals are uncorrelated and have a zero mean. If a forecasting method doesn't comply with these two properties it can be improved upon. Correlation in residuals means that information is present in them that the model has missed and a non-zero mean is evidence of bias in the forecast. Adjusting for bias is straight forward, the mean value observed in the residuals can simply be added to all forecasts. Looking at Figure 5.7 it can be seen that the mean of the residuals is close to zero and this model doesn't have any bias. Figure 5.8 is the plot of the residuals of the ARIMA model applied to the FTSE data set. The lower order lags are all within the confidence boundaries and is indicative of a good model.

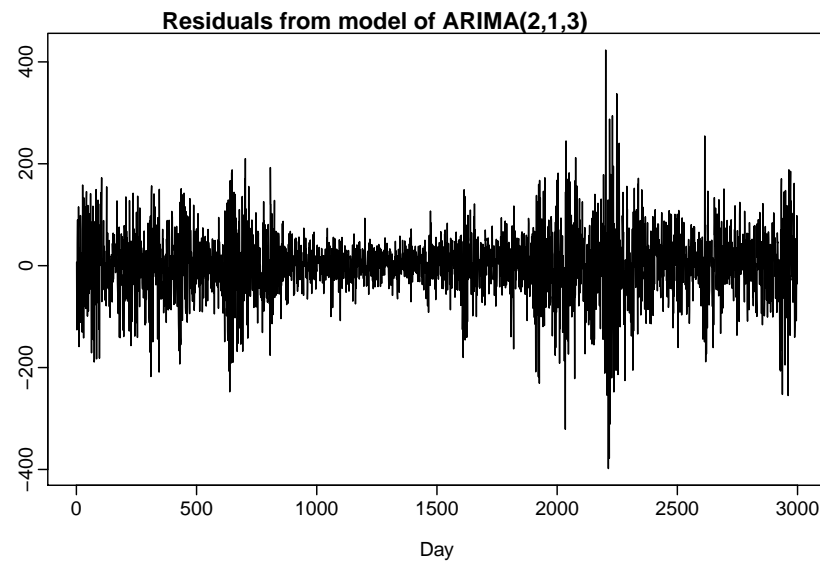


FIGURE 5.7: The residuals after applying the ARIMA(2,1,3) model to the FTSE data set.

Two additional properties of the residuals that are desirable, though not necessary, are constant variance and normal distribution. If these two conditions are met, the calculation of the prediction interval in the forecast step is easier. From Figure 5.7 it can be seen that the residuals have relatively constant variance and from Figure 5.9, a histogram of the residuals, it can be seen that they are normally distributed.

Consideration of the ACF plots provides evidence for auto-correlation. However a more formal approach is to consider auto-correlation values together as a group as opposed to individually. The Box-Ljung portmanteau test is just one such approach and Table 5.7

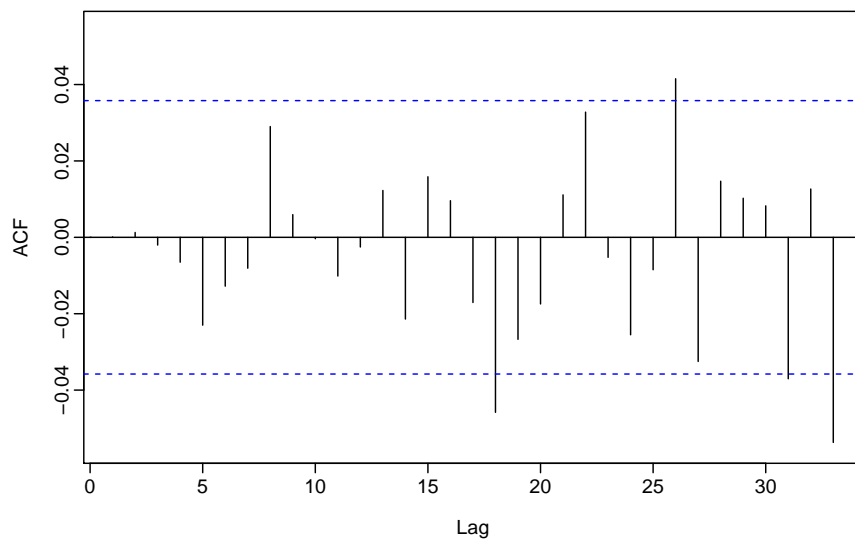


FIGURE 5.8: ACF plot of the residuals after applying the ARIMA(2,1,3) model to the FTSE data set.

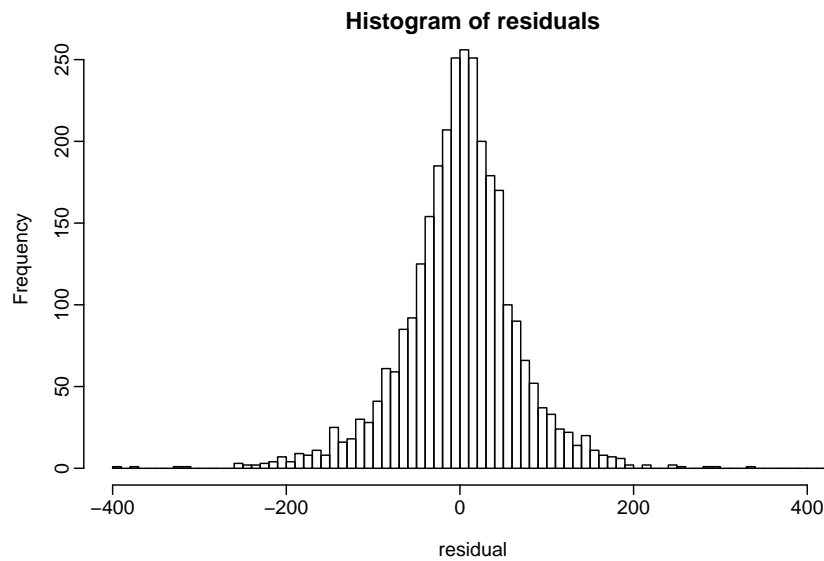


FIGURE 5.9: Histogram of the residuals after applying the ARIMA(2,1,3) model to the FTSE data set.

lists the results of the Box-Ljung portmanteau test being applied to the residuals of the ARIMA(2,1,3) model. A large p-value is indicative of white noise and is the desirable situation for a good ARIMA model. Taking all the evidence together the ARIMA(2,1,3) model appears a good option for the FTSE data set.

TABLE 5.7: Box Ljung test of FTSE 100 ARIMA model residuals.

|              | p-value | x-squared | df |
|--------------|---------|-----------|----|
| ARIMA(2,1,3) | 0.2328  | 20        | 24 |

### 5.3.6 Calculate forecast

Finally, after developing a model that meets the previous criteria a forecast can be generated. Table 5.8 shows the one-step forecast produced when the ARIMA(2,1,3) model developed in the previous section is applied to the FTSE data set.

TABLE 5.8: One-step ahead forecast for FTSE 100 generated from ARIMA(2,1,3) model.

| Date       | Open | High | Low  | Close | Forecast |
|------------|------|------|------|-------|----------|
| 20/12/2013 | 6585 | 6617 | 6577 | 6607  | 6560     |
| 23/12/2013 | 6607 | 6679 | 6606 | 6679  | 6598     |
| 24/12/2013 | 6679 | 6712 | 6672 | 6694  | 6666     |
| 27/12/2013 | 6694 | 6754 | 6694 | 6751  | 6692     |
| 30/12/2013 | 6751 | 6768 | 6718 | 6731  | 6743     |
| 31/12/2013 | 6731 | 6757 | 6731 | 6749  | 6730     |

## 5.4 Automatic Generation of ARIMA Models

As explained previously the automatic ARIMA modelling algorithm in the R forecast package, `auto.arima`, automates steps 3 to 5 in the general steps used in the modelling process as outlined in section 5.2. The function uses a variation of the Hyndman and Khandakar algorithm which obtains an ARIMA model by the minimisation of the AICc and combination with unit root tests. KPSS tests are used to establish the number of differences,  $d$ , required to get a stationary time series. The  $p$  and  $q$  values are then obtained by choosing the model that minimises the AICc for the differenced data.

The results of passing the indice data sets to the `auto.arima` function can be seen in Table 5.9. For the FTSE data set the automatic procedure selects the ARIMA(2,1,3) as being the most appropriate, which matches the conclusion of the work from the manual model selection process described earlier in section 5.3.

TABLE 5.9: ARIMA models chosen to forecast future values in the national indice data sets.

| Market | ARIMA Model  |
|--------|--------------|
| DAX    | ARIMA(3,1,3) |
| CAC    | ARIMA(2,1,3) |
| FTSE   | ARIMA(2,1,3) |
| Dow    | ARIMA(1,1,2) |
| Nikkei | ARIMA(2,1,3) |
| AORD   | ARIMA(1,1,0) |

## 5.5 Trading the ARIMA Models

Having developed forecasts based on ARIMA models these can be passed into a trading system. Two ideas are presented here, in the first the previous closing price is compared against the prediction and if it is lower than the forecast a long trade is entered. This first system will be referred to as System 1. In the second algorithm the current forecast is compared with the previous prediction. When the previous forecast value is lower than the current prediction the system trades long. This algorithm will be referred to as System 2.

The data sets containing fourteen years of indice data was divided into a training set, containing the first ten years of data, and a test set holding the remaining four years worth of data. Models were trained on the training sets before being applied to the unseen data in the test sets.

### 5.5.1 System 1 - Close Price vs Forecast

Using the ARIMA models listed in Table 5.9 a series of amended data sets were generated by applying the models to the national indice data sets used throughout this study. The amended data sets contained the original Date, Open, High, Low and Close attributes plus a new one called Forecast, in a similar manner to the data seen in Table 5.8. Table 5.10 are results produced from passing the newly generated data sets to the algorithm listed in Appendix A section A.2.2. This system uses the relative position of the close price and the forecast to determine the direction of the trade. If the forecast is higher than the close a long trade is made the next day and when the prediction is lower than the close price a short trade is made.

TABLE 5.10: Results from trading System 1 using the forecasts generated by the ARIMA models.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -1285  | -2522   | 50      | -5      | 42      | -9      |
| CAC    | 872    | 167     | 57      | 3       | 51      | 1       |
| FTSE   | 990    | -249    | 53      | 4       | 46      | -1      |
| Dow    | 1539   | -3356   | 56      | 7       | 47      | -11     |
| Nikkei | 4268   | 3071    | 53      | 21      | 49      | 13      |
| AORD   | 635    | -247    | 55      | 2       | 49      | -1      |

### 5.5.2 System 2 - Forecast vs Previous Forecast

Table 5.11 lists the results from passing the amended indice data sets with the forecasts generated from the `auto.arima` function, described in the previous section, to the System 2 algorithm. The R code of this system can be seen in Appendix A section A.2.3. System 2 uses the relative values of the forecasts themselves to decide which direction to trade. If the prediction is higher than the previous day's prediction a long trade is initiated the following day and in the opposite circumstances when the previous forecast is higher than the current forecast a short trade is made.

TABLE 5.11: Results from trading System 2 using the forecasts generated by the ARIMA models.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 733    | -505    | 55      | 3       | 46      | -2      |
| CAC    | 545    | -80     | 53      | 2       | 47      | 0       |
| FTSE   | 941    | -383    | 54      | 3       | 46      | -2      |
| Dow    | 2598   | -2221   | 55      | 9       | 46      | -10     |
| Nikkei | 179    | -916    | 50      | 1       | 47      | -4      |
| AORD   | 811    | -117    | 53      | 3       | 46      | 0       |

## 5.6 Hybrid ARIMA Models

A hybrid ARIMA model is one in which the moving averages of a stationary data set (possibly a non-stationary data set that has been differenced) are combined with data mining learners other than regression. A variety of combinations were tried, with a combination of the three previous closing prices and differences and the four previous moving averages providing good results. Possible learners include k-Nearest Neighbour (k-NN) algorithms, Artificial Neural Networks (ANN) and Support Vector Machines (SVM). RapidMiner, an open source data mining tool is a powerful solution for building hybrid ARIMA models. Figure 5.10 shows the RapidMiner process used to generate hybrid ARIMA models. The Validation operator in the model below can hold a variety of learners depending upon the task and data types involved. The various components in Figure 5.10 are as follows:

- Read CSV - reads in the appropriate data set.
- Select Attribute (1) - selects the attribute that will be processed in the following steps.



- **Rename** - renames the attribute selected in Select Attribute (1) to “attr1” which is then used in the rest of the steps. This component is used to make it easy to change the attribute without having to rename all the subsequent steps.
- **Moving Average** - calculates a moving average of the time series (see section 2.2.1.1 for details.) This provides the q in ARIMA(p,d,q) models.
- **Differentiate** - calculates the difference in the time series and provides the d in ARIMA(p,d,q) models.
- **Lag** - creates lag variables which are values of the attribute (the attribute itself, the moving average or the difference value) at earlier points in the time series. The three previous closing prices and differences and the four previous moving averages were typically used.
- **Select Attribute (2)** - selects the attributes that will be passed to the validation block, including the number of previous moving averages and differences.
- **Set Role** - sets an attribute as the label to be predicted.

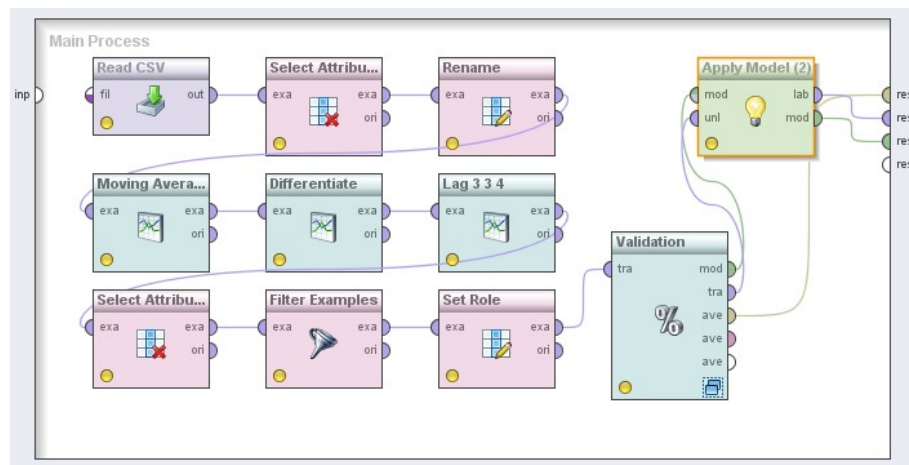


FIGURE 5.10: Rapid Miner hybrid ARIMA process.

Figure 5.11 shows the cross-validation operator of the hybrid ARIMA Rapid miner process. This operator can hold alternative learners other than the standard regression operator found in ARIMA models. In the diagram there is an Artificial Neural Network (ANN) operator shown, other options include k-Nearest Neighbour (k-NN) and Support Vector Machine (SVM) operators.

Using the hybrid ARIMA methods two types of predictions were carried out. Firstly, in section 5.7 the actual closing price of the following observation was predicted, which is a numeric label. This was done by combining ANN and k-NN with ARIMA, as these learners can output numeric class labels. Secondly, in section 5.8 the more general

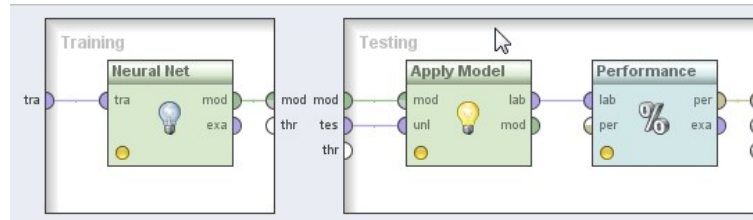


FIGURE 5.11: Rapid Miner cross-validation operator within the hybrid ARIMA process.

situation of whether the market increased or fell in value over the course of the day, was predicted. In this case there are two options, either the market moved up or down. For this second situation a combination of ARIMA with ANN, k-NN and SVM was used, as all three can forecast a binary label.

## 5.7 Predicting Closing Price

As mentioned previously ARIMA and hybrid ARIMA models were used to predict either the value of the one-step ahead close price or the binary value of whether the market moved up or down. In this section the ability of hybrid ARIMA models to forecast the future price of financial markets (as opposed to the general direction up or down) is explored.

### 5.7.1 ARIMA/Artificial Neural Networks (ANN)

An ARIMA/ANN method was used to generate predictions for the closing price of the indice data sets under study. As described in section 5.6, previous values of the label (closing price), along with past values for the difference and moving averages are passed to an ANN learner within a rapid miner process. Artificial Neural Networks can be used to predict categorical or numeric labels, but can only use numeric inputs. They are slow to learn, but their strength lies in their ability to model complex patterns. Essentially they are designed to mimic the human brain by the use of layers of neurons with connections between them. The neurons are found in input and output layers as well as optional hidden layers. The model is constructed by applying weights to the connections which are used to calculate the label.

Rapid miner implements ANN as a feed-forward neural network trained by back propagation. Feed-forward refers to the fact that information only moves forward from the input nodes to the output neurons. Back propagation is an algorithm in which errors are fed back into the system so that the algorithm can adjust the connection weights

between nodes until the error converges to some state. Typically the best results were obtained from using a small learning rate and momentum and using a hidden layer of neurons.

For each data set applying the hybrid model produces a new one-step forecast attribute, in a similar manner to the forecast attribute seen in Table 5.8, which can be used in the System 1 and 2 algorithms previously introduced in section 5.5. Table 5.12 are the results generated by passing the output of the ARIMA/ANN models to trading System 1, which compares the previous closing price with the current forecast.

TABLE 5.12: Results from passing closing price predictions from hybrid ARIMA/ANN model to System 1.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -446   | -645    | 53      | -1      | 46      | -2      |
| CAC    | 532    | 1527    | 55      | 2       | 50      | 2       |
| FTSE   | 625    | -624    | 51      | 1       | 45      | -2      |
| Dow    | 2846   | -3979   | 55      | 5       | 45      | -9      |
| Nikkei | 913    | 2039    | 54      | 2       | 55      | 4       |
| AORD   | -3036  | -371    | 54      | -5      | 51      | -1      |

Table 5.13 are the results of passing the output of the ARIMA/ANN models to trading System 2, which compares the value of the current forecast with the previous one.

TABLE 5.13: Results from passing closing price predictions from hybrid ARIMA/ANN model to System 2.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 3283   | 3110    | 56      | 6       | 49      | 7       |
| CAC    | -1832  | -816    | 49      | -3      | 46      | -2      |
| FTSE   | 1092   | -182    | 52      | 2       | 48      | 0       |
| Dow    | 3829   | -2942   | 54      | 7       | 43      | -7      |
| Nikkei | -4485  | -3229   | 48      | -9      | 50      | -7      |
| AORD   | -2783  | -137    | 51      | -5      | 47      | 0       |

### 5.7.2 ARIMA/k-Nearest Neighbour (k-NN)

An ARIMA/k-NN method was used to generate predictions for the closing price of the indice data sets. The k-Nearest Neighbour algorithm operates by comparing the current set of attributes to others in the data set and finding ones that are “close” to it. Closeness is usually defined by a distance measure, such as Euclidean, after the attributes have been stored in a n-dimensional pattern space. The k closest neighbours are selected and the most common class of these used to classify the label. In a similar manner to the ANN modelling of section 5.7.1, lag variables of the close price (label attribute to

be forecast), moving average and differences of the close price were passed to a k-NN learner in Rapid Miner in order to predict the one-step ahead forecast.

The k-NN learner has only a small number of parameters such as k, the number of close neighbours to be considered and the types of measures to be used. Fifteen was found to be a good value for k and either euclidean or cosine similarity a good choice for the distance measure. Table 5.14 shows the results of passing data sets containing forecasts generated with the hybrid ARIMA/k-NN to trading System 1. Table 5.15 shows the results of passing data sets containing forecasts generated with the hybrid ARIMA/k-NN to trading System 2.

TABLE 5.14: Results from passing closing price predictions from hybrid ARIMA/k-NN model to System 1.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 12     | -174    | 52      | 0       | 45      | 0       |
| CAC    | -249   | 747     | 52      | 0       | 50      | 2       |
| FTSE   | 699    | -550    | 54      | 1       | 50      | -1      |
| Dow    | 4436   | -2389   | 57      | 11      | 46      | -4      |
| Nikkei | -66    | 1060    | 48      | 0       | 50      | 2       |
| AORD   | 497    | 3162    | 53      | 1       | 50      | 7       |

TABLE 5.15: Results from passing closing price predictions from hybrid ARIMA/k-NN model to System 2.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 489    | 731     | 54      | 1       | 47      | 2       |
| CAC    | -966   | 50      | 50      | -2      | 47      | 0       |
| FTSE   | -388   | -1662   | 50      | -1      | 45      | -4      |
| Dow    | 2969   | -3411   | 54      | 5       | 43      | -9      |
| Nikkei | -2916  | -1660   | 47      | -6      | 49      | -4      |
| AORD   | -3449  | -804    | 52      | -6      | 48      | -2      |

## 5.8 Predicting Up or Down - Categorical Label

In this section the ability of hybrid ARIMA models to forecast whether a financial market will rise or fall is investigated. A categorical attribute taking values “U” and “D”, representing whether the market moved up (“U”) or down (“D”) was introduced into the indice data sets depending upon which way the market moved that day. the final six observations of the FTSE data sat with the binary label added can be seen in Table 5.16. Hybrid ARIMA models using ANN, k-NN and SVM learners, were used to generate one-step ahead forecasts for this categorical label.

TABLE 5.16: FTSE 100 data set with “U” and “D” label introduced.

| Date       | Open | High | Low  | Close | U/D |
|------------|------|------|------|-------|-----|
| 20/12/2013 | 6585 | 6617 | 6577 | 6607  | U   |
| 23/12/2013 | 6607 | 6679 | 6606 | 6679  | U   |
| 24/12/2013 | 6679 | 6712 | 6672 | 6694  | U   |
| 27/12/2013 | 6694 | 6754 | 6694 | 6751  | U   |
| 30/12/2013 | 6751 | 6768 | 6718 | 6731  | D   |
| 31/12/2013 | 6731 | 6757 | 6731 | 6749  | U   |

### 5.8.1 ARIMA/Artificial Neural Networks (ANN)

Lag values from the moving average of the closing price, the difference values between consecutive observations and the closing price were passed to an ANN learner to create one-step ahead forecasts of the “U” and “D” values. The R code for a trading system using the forecasts from a hybrid model can be seen in Appendix A section A.2.4. The algorithm simply uses the prediction from the hybrid ARIMA model to decide whether to trade long or short. Table 5.17 lists the results from the trading system using the hybrid ARIMA/ANN forecasts.

TABLE 5.17: Results from a trading system using the forecast of categorical label “U/D” from hybrid ARIMA/ANN model.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 2321   | 2122    | 54      | 6       | 47      | 4       |
| CAC    | 102    | 1098    | 52      | 0       | 49      | 2       |
| FTSE   | 1400   | 151     | 53      | 2       | 49      | 0       |
| Dow    | 5218   | -1607   | 55      | 6       | 45      | -10     |
| Nikkei | 234    | 1360    | 53      | 12      | 51      | 1       |
| AORD   | -2712  | -47     | 52      | -3      | 25      | -12     |

### 5.8.2 ARIMA/k-Nearest Neighbour (k-NN)

In a similar manner to section 5.8.1, an ARIMA/k-NN model was also employed in an attempt to predict the categorical label indicating whether the financial markets would move up or down. The forecasts produced from these hybrid models were also applied to the trading algorithms listed in A section A.2.4. Table 5.18 lists the trading results from this combination.

As the results from Table 5.18 were good, the algorithm was re-run but this time a stop loss was introduced. A stop loss of 100 points was applied to all the markets and the amended results can be seen in Table 5.19. In a similar manner as encountered

TABLE 5.18: Results from a trading system using the forecast of categorical label "U/D" from hybrid ARIMA/k-NN model.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -1553  | -1752   | 54      | -3      | 47      | -4      |
| CAC    | 270    | 1265    | 52      | 1       | 49      | 2       |
| FTSE   | 1764   | 515     | 55      | 3       | 50      | 1       |
| Dow    | 3211   | -3614   | 55      | 6       | 44      | -8      |
| Nikkei | 2707   | 3834    | 50      | 6       | 52      | 8       |
| AORD   | 748    | 3413    | 54      | 1       | 50      | 7       |

previously, the use of the stop loss was beneficial for all the markets except the Dow in which case it had a large detrimental affect.

TABLE 5.19: Results from a trading system with a stop loss using the forecast of categorical label "U/D" from hybrid ARIMA/k-NN model.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -430   | -1444   | 53      | -1      | 47      | -4      |
| CAC    | 203    | 1326    | 52      | 0       | 49      | 2       |
| FTSE   | 1919   | 526     | 54      | 4       | 50      | 1       |
| Dow    | 5475   | -1922   | 51      | 11      | 42      | -4      |
| Nikkei | 4021   | 2804    | 48      | 9       | 49      | 6       |
| AORD   | 570    | 3424    | 53      | 1       | 50      | 7       |

### 5.8.3 ARIMA/Support Vector Machine (SVM)

ARIMA was also married with a SVM learner in order to predict the categorical value, "U" or "D". SVMs are linear classifiers that can only operate with binary class labels and thus assign observations in a data set to one of two options, in this case "U" or "D".

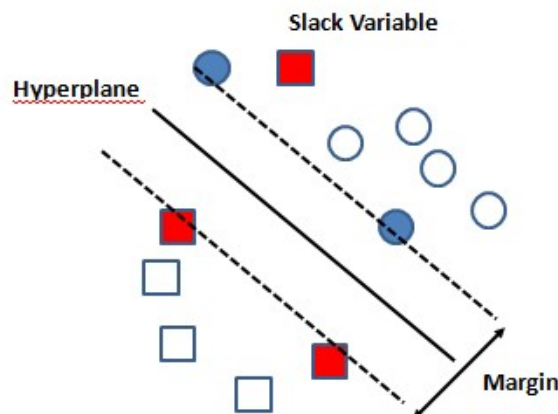


FIGURE 5.12: SVM margins and slack variables.

Support vector machines operate by finding the straight line that dissects a data set such that the points close to the dividing line are as far away from it as possible. In high dimensional data sets the dividing lines can be considered as a set of hyperplanes in a high dimensional space. The algorithm works by choosing the hyperplanes that are furthest from the boundary data points, which are known as the support vectors. This intuitively would provide the best classification between two sets of data points. Observations that are classified into the wrong class are known as slack variables, the number of which increases as width of the dividing margin increases.

Figure 5.12 illustrates the margin calculated from a SVM between two classes of observations, and the presence of a wrongly classified slack variable. Therefore in SVMs there is a trade off between a narrow margin with a small number of slack margins, which could represent over-fitting, and a wider margin with more wrongly classified data points. In the Rapid Miner SVM operator, the parameter “C” is a cost function, that applies a cost to slack variables. If this parameter is set to a high value there is a high cost applied to the creation of a slack variable and therefore the model produces tight margins and risks over-fitting the model. For low values of C, models with wider margins with more slack variables are produced.

In order to allow for non-linear boundaries between classes non-linear kernel functions are used in SVM. These map the original data set into a data set with a larger number of dimensions which can then be split with a linear function.

Table 5.20 lists the results of passing forecasts made using hybrid ARIMA/SVM models to the trading algorithm listed in A section A.2.4. Typically small values were used for the cost parameter in Rapid Miner and a radial non-linear kernel function applied.

TABLE 5.20: Results from a trading system using the forecast of categorical label “U/D” from hybrid ARIMA/SVM model.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | -123   | -322    | 53      | 0       | 46      | -1      |
| CAC    | -1607  | -612    | 49      | -4      | 47      | -1      |
| FTSE   | 2115   | 866     | 54      | 5       | 49      | 1       |
| Dow    | 2138   | -4686   | 57      | 10      | 45      | -6      |
| Nikkei | 9      | 1135    | 48      | 0       | 51      | 2       |
| AORD   | -2364  | 301     | 53      | -4      | 49      | 1       |

## Chapter 6

# Analysis

### 6.1 Introduction

In chapters 4 and 5 a wide variety of analytical techniques were applied to a range of time series data sets. In Chapter 4 a number of trading algorithms were developed based on technical analysis indicators, with the intention of automating the decision of whether to buy or sell a market. For comparison purposes, two simple so called "naive" systems were explored to act as a baseline against which the technical analysis indicators could be compared. The technical indicators were grouped together into their general area of applicability, namely trend detection indicators, reversal, momentum and candlestick indicators.

Chapter 5 continued the exploration of financial time series through the use of exponential smoothing, ARIMA and hybrid ARIMA techniques. The generated models were used to create one-step ahead forecasts which were then added to the original data sets. These amended data sets were then fed into trading algorithms which used the forecast values to make buying decisions.

### 6.2 Technical Analysis

#### 6.2.1 Baseline Systems

Initially two simple, naive systems were explored so that they could be used as a baseline against which the developed predictive models could be compared. These systems were



the Naive Long System which mirrors a buy and hold strategy and a Naive Reversing System which simply trades in the opposite direction to the previous days market movement.

The first baseline system tried was the Naive Long system in which a market buy is placed each day and is similar to the so-called “Buy and Hold” technique. The assumption here is that the market rises over time and if an investor simply holds a security it will eventually generate a profit. The total profit is the price at the start, in this case the data set started in 2000, subtracted from the price at the end of the period, which in this case was the end of 2013.

The first iteration of the algorithm placed a buy at the start of the trading session and closed it at the end and thus the system was out of the market overnight. This resulted in significant discrepancies from the returns expected from a buy and hold system. Table 6.1 lists the expected returns from a Buy and Hold system over this period, with the Difference column being the profit or loss over the time.

TABLE 6.1: Returns from a “Buy and Hold” technique.

| Date   | Start 2000 | End 2013 | Difference | % Change |
|--------|------------|----------|------------|----------|
| DAX    | 6961       | 9552     | +2591      | +37      |
| CAC    | 6024       | 4250     | -1774      | -29      |
| FTSE   | 6930       | 6749     | -181       | +3       |
| Dow    | 11501      | 16576    | +5075      | +44      |
| Nikkei | 18937      | 16291    | -2646      | -14      |
| AORD   | 3152       | 5353     | +2201      | +70      |

From simply trading long during market hours the DAX generated a loss as opposed to the 2591 profit expected, likewise the CAC showed a much larger loss than expected and the Nikkei resulted in a large loss when a small loss was expected. The Dow, FTSE and AORD were similar to the expected values. The discrepancies in the returns between the trading algorithm and a Buy and Hold approach was due to the fact that the algorithm opened and closed trades each day as opposed to simply opening the trade and waiting several years. This first algorithm was simply trading within market hours, approximately 8am to 5pm local time, and was not in the market for the full 24 hours of the day.

Changing the algorithm such that the trades ran from the market close time until the close time of the following day and thus covered the full 24 hour period resulted in system results that matched those expected from a buy and hold approach. Clearly the discrepancies from the first algorithm were due to the relative amounts the markets moved during the day as opposed to during the “out of hours” trading. There is a slight

bias for the markets to move upwards overnight and over the course of the study (14 years) adds up to significant values.

The second naive system was termed the “Naive Reversing” system and simply places a trade today in the opposite direction from the previous day. This idea produced reasonable returns, with every market making money. From these results it can be concluded that the markets have a tendency to “flip flop” and reverse back on themselves, and the phenomena of market reverses is well understood. This second concept produced far better results than the first and was thus used as the primary basis of comparison for the algorithms and systems developed from technical indicators and time series methods. For convenience the results from this system are reproduced in Table 6.2.

TABLE 6.2: Results from a naive trading system which simply trades in the opposite direction to the previous day’s movement.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 947    | 3131    | 53      | 1       | 49      | 2       |
| CAC    | 940    | 7810    | 53      | 1       | 53      | 4       |
| FTSE   | 4284   | 4115    | 53      | 3       | 50      | 2       |
| Dow    | 15799  | 6047    | 56      | 10      | 49      | 3       |
| Nikkei | 2324   | 20486   | 51      | 1       | 54      | 12      |
| AORD   | 1264   | 237     | 53      | 1       | 48      | 0       |

### 6.2.2 Trend Detection

The first group of the technical analysis indicators studied were the trend detection indicators. Identification of trend direction and strength is very important in the world of financial trading and one of the most widely encountered phrases is “the trend is your friend”, as most authorities advocate trading in the direction of the trend. (In fact on a recent webinar it was claimed that 80% of all money made is made trading in the direction of the trend.) Well known indicators that purport to assist the trader in identifying trends are the simple moving average (SMA), the moving average convergence/divergence indicator (MACD) and the Aroon indicator.

The use of simple moving average is wide-spread in the financial markets. Market participants track moving averages or even more than one and make a decision which way to trade based on the position of the current price relative to it. Popular values to use in the SMA are 25, 50 and 200 for the look back period. The results of a trading system based on SMA is presented in Table 4.5 of Chapter 4. The algorithm places a buy trade if the current price is above the SMA and a sell trade if it is below it.

Results are mixed from using the SMA, with some markets producing positive results and some ending in losses. The German DAX and Australian AORD produce positive results across all the SMA values with returns from trading short (predicting the market will decline) doing best. The Japanese Nikkei and French CAC display different behaviour in that all the SMA values tried produce negative results in trying to predict long trades but positive returns when attempting to predict short trades. The UK's FTSE 100 is different again, producing negative results across the board. Finally, the Dow produces positive results for trades on the long side but losses for trading short.

In an attempt to improve the returns from the trading system a stop loss was introduced. Comparing Tables 4.5 and 4.6 of Chapter 4 it can be seen that applying the stop loss has been on the whole beneficial to the results obtained, with the exception of those from the Dow which were negatively impacted. Essentially losing trades have been truncated while winning trades have been left to develop. This general pattern of a stop loss being beneficial to all the markets except the US Dow was seen multiple times with the systems tested.

The second trend detection indicator explored was the Moving Average Convergence Divergence (MACD) indicator, full details of which can be found in section B.1 of Appendix B. The MACD can generally be used two ways, as a trend detection indicator and as an over-bought/over-sold indicator in which case traders use it to identify potential market reversals. In this section the indicator was used as a trend detector and the results from a system based on the MACD indicator can be seen in Table 4.7 in Chapter 4. The algorithm trades long when the value of MACD is greater than the value of the signal line, see Appendix A section A.1.3.2 for details of the R code used. The results are not very impressive, only the Nikkei producing reasonable profits, although they wouldn't beat the baseline Naive Reversing system.

The final trend detection indicator examined was Aroon. This indicator measures the number of intervals since the previous high or low within a certain time window. The algorithms presented here used a time window of 20 days. If the current day was the highest price in the last 20 days trading, the indicator would take a value of 100 and for each following day that doesn't make a new high the indicator falls by 5 (100 divided by the lag period which is 20). Thus if the highest price was four days ago the AroonUp value would be 80. The opposite situation occurs with regard to the low price. A value of 70 or above for the AroonUp is indicative of an upward trending market and likewise a value of 70 and above for AroonDn suggests a falling market.

The results from an algorithm using the Aroon indicator can be seen in Table 4.8 of Chapter 4. Overall the results are encouraging with the DAX, FTSE, Dow and AORD all producing positive returns for both long and short trades, while the CAC and Nikkei

are positive when trading short. Table 6.3 lists the values derived from the Aroon system with those from the baseline Reversing system (see Chapter 4 section 4.2.2) subtracted. Because the Aroon system doesn't execute trades each day it only makes sense to compare the average daily returns as opposed to the total returns. As can be seen from Table 6.3, compared with the baseline system for some markets the Aroon indicator outperforms the baseline while for others it is worse, notably the Nikkei. Considering the second column in Table 6.3, "Diff in Mean Long PL" only the DAX and AORD outperformed the baseline reversing system in producing long winning trades. Alternatively, the system based on the Aroon indicator was superior in predicting winning short trades for all the markets except the Nikkei, as seen in the third column "Diff in Mean Short PL".

TABLE 6.3: PL from Naive Reversing system subtracted from results generated by a trading system based on the Aroon indicator.

| Mkt    | Diff in Mean Long PL | Diff in Mean Short PL |
|--------|----------------------|-----------------------|
| DAX    | 2                    | 2                     |
| CAC    | -2                   | 0                     |
| FTSE   | -1                   | 3                     |
| Dow    | -3                   | 0                     |
| Nikkei | -4                   | -2                    |
| AORD   | 1                    | 3                     |

The trading system based on the Aroon indicator was re-run with a stop loss value of 100. Overall the use of a stop loss improves the returns, with the exception of the Dow. One again using a stop loss with the Dow shows very marked negative impacts on profits. These results can be seen in 4.9 of Chapter 4.

### 6.2.3 Market Reversal Indicators

In this section two indicators that purport to assist in identifying market reversals are examined, namely the Parabolic Stop-and-Reverse (SAR) and the Moving Average Convergence Divergence (MACD) used as an over-bought/over-sold indicator.

The first market reversal indicator explored was the Parabolic Stop-and-Reverse (SAR), an indicator initially developed for traders who were always in the market with either long or short position. The SAR is used to judge when the position should be reversed from long to short or vice versa. The trading algorithm reported here trades each day (i.e opens a trade at the start of the trading session and closes it out at the end) and makes a decision regarding the direction of the trade based on the SAR indicator. If the market opening is above the SAR a long trade is initiated and vice versa if the market is below the SAR value.

The results from the trading system based on the SAR can be seen in Table 4.11 of Chapter 4 and are very poor. Only the Nikkei trading short produces reasonable results, but these are much worse than the baseline Naive Reversing method introduced previously.

As previously mentioned the MACD indicator can be used as a market reversal indicator. Once the MACD value reaches its extreme values, the market is considered over-bought or over-sold and likely to reverse back on itself. The trading algorithm using this concept expects a market reversal once the MACD crosses above the 85% quantile (of the MACD range) or below the 15% quantile. Short trades are initiated once the MACD crosses above the 85% quantile value and short trades once it has passed below the 15% quantile. The results from this trading system can be seen in Table 4.12 and are very unimpressive being inferior to the baseline method.

Both market reversal indicators resulted in poor results. However, the trading horizon was short at just one day. Given the difficult task at hand, trying to pin point the reversal of a financial market perhaps a longer trading horizon may have helped. This might have allowed leeway in the timing and caught any reversals that may have occurred two or three days later. This is an area for future research.

#### 6.2.4 Momentum Indicators

A third category of technical indicators are the momentum indicators, which are related to the trend detection indicators (Menkhoff et al., 2012). Two such indicators are studied here, the stochastic and the rate of change (ROC). The stochastic oscillator is one of the oldest and most widely used of the technical indicators. It measures the percentage position the current close is in relation to the high low range of the period of interest. For example the current close could be 80% of the way between the low and high of the last 10 days. Thus it has conceptual similarities to the Aroon indicator. The stochastic is usually represented by two lines %K which is the position of the price within this high low envelope described above, and %D a moving average of %K (see Appendix B section B.4 for more details).

The trading algorithm utilising the stochastic initiates long trades when %K is above %D and short trades when %K is below %D. Results from an algorithm implementing these ideas can be seen in Table 4.13 in Chapter 4. The results of this system are poor being significantly worse than the baseline Naive Reversing system.

The second momentum indicator is the Rate Of Change (ROC) indicator, and this is simply the difference between the current price and a price a certain number of days

previously. If this value is positive the market is considered to be trending up and the larger the value the greater the trending momentum. The results from an algorithm using these ideas is presented in Table 4.15 of Chapter 4. The results are positive but very modest and inferior to the baseline Reversing system.

### 6.2.5 Breakout systems

The fourth area of technical analysis explored the idea of trade signals being generated by a particular value from the previous day, so-called breakout systems. Two particular values are used as the trigger price for a trade, the previous day's high/low or the 90% quantile of the minor move (see section 3.2.5 of Chapter 3).

The first idea explored was to use the previous time period's high or low price as a trigger for a buy or sell. If the current day's high price exceeded the previous day's high price a long trade would be made and in a similar manner if today's low price is lower than previous day's low a short trade is initiated. Results from using the previous day's high price or low price as a trigger to trade long or short can be seen in Table 4.16. Generally the results are very good with the exception of the Dow. These results can be linked to the data exploratory work shown in Table 3.6 of section 3.2.3. The best returns were generated in the Nikkei, a market which had the highest number of times closing outside the previous day's high or low. Conversely, the lowest ranked market in terms of closing outside yesterday's high low range was the Dow, and this was the one market that produced negative results in the breakout system. Table 6.4 lists the returns from the high low breakout system with the profits from the baseline Naive Reversing system subtracted. As can be seen, with the exception of the Dow, the method out-performs the baseline system markedly.

TABLE 6.4: PL from Naive Reversing system subtracted from results generated by a trading system based on the H/L breakout system.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 11278  | 10280   | 2       | 6       | 5       | 6       |
| CAC    | 2551   | -855    | 0       | 1       | 0       | 0       |
| FTSE   | 8905   | 14366   | 6       | 4       | 9       | 10      |
| Dow    | -35397 | -34384  | -14     | -21     | -11     | -20     |
| Nikkei | 29664  | 23068   | 6       | 18      | 4       | 15      |
| AORD   | 15961  | 18947   | 13      | 9       | 17      | 13      |

The second breakout system used the minor fluctuation 90% quantile value as the trigger level to trade long or short. Once the market moved above this level a long trade was made or if the market moved below this level a short trade was executed. Overall this methodology produces good results with the exception of the Dow and CAC. Table 6.5

lists the difference in results between this breakout methodology and the baseline Naive Reversing system.

TABLE 6.5: PL from Naive Reversing system subtracted from results generated by a trading system based on the 90% quantile level breakout system.

| Mkt    | LongPL | ShortPL | L Win % | Av L PL | S Win % | Av S PL |
|--------|--------|---------|---------|---------|---------|---------|
| DAX    | 6894   | 3240    | 3       | 5       | 4       | 2       |
| CAC    | 1707   | -2725   | 1       | 1       | -1      | -1      |
| FTSE   | 6474   | 11180   | 3       | 4       | 4       | 8       |
| Dow    | -46061 | -40901  | -17     | -34     | -12     | -31     |
| Nikkei | 21282  | 11344   | 7       | 15      | 2       | 8       |
| AORD   | 15466  | 19120   | 10      | 8       | 14      | 12      |

### 6.2.6 Candlestick Patterns

A number of so-called candlestick patterns were explored for predictive properties in financial markets. The patterns tested were essentially market reversal patterns. Firstly, Hammer and Inverted Hammer were considered. When these patterns occur it is considered a sign that the market will move upwards, especially when they are encountered in a down trend, thus reversing direction. Table 4.18 lists the results from placing buy trades after all occurrences of either pattern while Table 4.19 shows the results from initiating buy trades when these patterns occur in trending markets. The Aroon indicator detailed in section B.2 of Appendix B was used to determine if the market was in a trending phase. Overall the results from using the Hammer or Inverted Hammer candlestick pattern to predict market movement was poor. Only the Dow and FTSE showed positive results, although the per trade profit from the Dow was good. Another consideration is the small number of times in which these patterns occur, only 22 trades in the 14 years of the Dow data were made. Clearly these visual patterns are quite subjective and in reality a trader would use judgement as to whether the pattern constituted a Hammer or not. However, in developing an algorithm to recognise and trade them no such latitude is possible and thus the number of trades taken by the algorithms is likely to be less than in reality.

The next pattern tested was the Engulfing pattern. This pattern occurs when a candlestick has a lower low and a higher high than the previous day's candlestick, it engulfs it. The presence of this pattern is supposed to indicate that the market will change direction. The results of a trading algorithm that trades long or short depending upon the presence of an Engulfing candlestick can be seen in Table 4.20. The results shown in Table 4.21 are similar to Table 4.20 except trades are only taken if the market is trending, with the Aroon indicator used to determine if the market is in a trending phase.

The results from both algorithms were very poor, with most markets showing negative results.

The final pattern tested was the Doji, one of the best known candlestick patterns. Again the presence of this pattern in a trending market is supposed to give warning to the market participants that a reversal may be imminent. Table 4.22 shows the results of a trading system that uses the presence of a Doji in a trending market to initiate a trade. Again the results are very poor with mostly negative returns.

None of the candlestick patterns produced good results in the trading algorithms and time frames used. Given the subjective nature of what constitutes the particular pattern and the context in which it occurs it is difficult to generate trading systems through computer programming. Further, it may be beneficial to alter the trading time frame to a longer period and perhaps combine these patterns with additional technical analysis indicators, and is an area suitable for further work.

## 6.3 Time Series Analysis

Exponential smoothing, ARIMA and hybrid ARIMA models were used to generate forecasts of the closing prices and the more general situation of whether the market would rise or fall. In modelling the more general situation of market direction, a categorical label was employed. The categorical label used “U” to represent occasions when the market prices increased and “D” for when it decreased in value.

### 6.3.1 Exponential Smoothing

Exponential smoothing was used to make one-step ahead forecasts for the indice data sets. Initially two base systems were explored in order that they could be used as a baseline against which later results could be compared. The two methods generated predictions using a mean method in which the forecast was simply the average of the sample and a drift method which is the extrapolation of a straight line between the first and last point in a data sample. For all the forecasts generated in this section a moving window approach was adopted. A window of sample data points was used, typically the last 30 observations, for which a forecast was generated using one of the methods. This window was then advanced one observation forward and the forecast for this data set calculated and the process repeated for the entire data set.

Once the forecasts were generated they were passed to a trading algorithm which made decisions regarding whether to trade long or short based on the value of the forecast. If



the forecast was higher than the previous closing price a long trade was initiated or if it was lower a short trade was made with the expectation that the market would fall. Results from the forecasts generated from the mean method can be seen in Table 5.2 while results from the drift method can be seen in Table 5.3. Both systems produced poor results and wouldn't generate enough profits to offset any transaction costs that would be incurred in the real world.

Next exponential smoothing was used to generate forecasts. Allowing for trend, seasonality and whether there are additive or multiplicative affects, a variety of models may be used to generate predictions. The `ets` function of the `forecast` package in R can create models from all the available possibilities. Once again using a moving window approach, one-step ahead forecasts were created for the indice data sets. As the window moved through the data, different models were selected as being the best fit and these used to generate the forecasts. Having generated the predictions they were passed to the same trading algorithm as used for the mean and drift models, and the results can be seen in Table 5.5.

On the whole the results from the models generated from exponential smoothing are quite poor, with only the Dow producing reasonable, though very modest results. In comparison to the base systems developed from mean and drift methods, the adaptive exponential smoothing concept produces higher profits in general when all the results are considered, but there are much better returns from alternative methods such as the daily breakout technical analysis methods.

### 6.3.2 ARIMA Models

The `auto.arima` function of the R `forecast` package was used to assist in generating ARIMA models for the national indice data sets used in this study. For convenience the models selected are listed in Table 6.6.

TABLE 6.6: ARIMA models chosen to forecast future values in the national indice data sets.

| Market | ARIMA Model  |
|--------|--------------|
| DAX    | ARIMA(3,1,3) |
| CAC    | ARIMA(2,1,3) |
| FTSE   | ARIMA(2,1,3) |
| Dow    | ARIMA(1,1,2) |
| Nikkei | ARIMA(2,1,3) |
| AORD   | ARIMA(1,1,0) |

The one-step forecasts generated from these models were then used in two trading systems. In the first algorithm the decision to trade long or short was dependant upon on the relative values of the previous close price and the forecast. If the forecast was higher than the close price a long trade was entered the next day in the expectation that the market would rise towards the prediction. The opposite situation was expected for when the forecast was lower than the close price. The R code for this first algorithm can be seen in Appendix A section A.2.2 and is labelled system 1.

The second trading algorithm used the relative values of the predictions themselves in order to decide whether to trade long or short. If the current forecast was higher than the previous one a long trade was entered the following day and vice versa. The R code for this second algorithm can be seen in Appendix A section A.2.3 and is labelled system 2.

The results from both systems were poor. The difference in mean PL per trade between the first system based on the auto.arima models (previous close in comparison to forecast) and the mean PL for the Naive Reversing system from section 4.2.2 Chapter 4 (the best of the baseline systems) can be seen in Table 6.7. Most of the results are worse than the naive baseline system except for the French CAC and US Dow when trading long.

TABLE 6.7: PL from Naive Reversing system subtracted from results generated by a trading system based on ARIMA forecasts.

| Mkt    | Diff in Mean Long PL | Diff in Mean Short PL |
|--------|----------------------|-----------------------|
| DAX    | -6                   | -11                   |
| CAC    | 2                    | -3                    |
| FTSE   | 1                    | -3                    |
| Dow    | -3                   | -14                   |
| Nikkei | 20                   | 1                     |
| AORD   | 1                    | -1                    |

### 6.3.3 ARIMA Hybrids - Predicting Closing Price

Hybrid ARIMA models in which Artificial Neural Networks and k-Nearest Neighbour algorithms were used instead of regression in the ARIMA algorithm to predict the closing prices of financial markets, see Chapter 5 section 5.6 for details.

#### 6.3.3.1 ARIMA/Artificial Neural Networks (ANN)

Overall the use of the forecasts from the models generated from hybrid ARIMA/ANN algorithms to create trading systems was not very successful. The results from passing

the indice data sets augmented with a forecast attribute generated by the hybrid ARIMA models can be seen in Tables 5.12 and 5.13 of Chapter 5. System 1 compares the price of the forecast with the price of the previous close and in the event that the prediction is higher than the previous closing price a long trade is entered. The opposite is true when the forecast is lower than the closing price and a short trade is made. System 2 is similar but compares the forecast with the last forecast. In the event that the current prediction is greater than the previous one a long trade is initiated.

Considering the results in Tables 5.12 and 5.13 it can be seen that System 1 slightly outperforms System 2. However, the results are poor across most of the indices with most producing negative results. The best of the returns were from System 2 applied to the DAX, which would have provided a profit even after allowing for transactions costs which would be encountered in reality. The high percentage win rate for the long trades may make this combination a candidate for additional study in conjunction with other techniques to filter trades further. Overall the results prove inferior to the baseline Naive Reversing System introduced in 4.2.2 Chapter 4 and the difference between the System 1 returns and the baseline returns can be seen in Table 6.8.

TABLE 6.8: PL from Naive Reversing system subtracted from results generated by trading System 1 based on ARIMA/ANN closing price forecasts.

| Mkt    | Diff in Mean Long PL | Diff in Mean Short PL |
|--------|----------------------|-----------------------|
| DAX    | -2                   | -4                    |
| CAC    | 1                    | -2                    |
| FTSE   | -2                   | -4                    |
| Dow    | -5                   | -12                   |
| Nikkei | 1                    | -8                    |
| AORD   | -6                   | -1                    |

### 6.3.3.2 ARIMA/k-Nearest Neighbour (k-NN)

An alternative to the ARIMA/ANN methodology is to replace ANN with a k-Nearest Neighbour learner, that looks for neighbouring data points that are similar or close (usually defined by some measure distance) to it. Results from using the forecasts generated in the two trading systems introduced in section 5.5 can be seen in Tables 5.14 and 5.15.

The results from both System 1 and 2 are similar to each other and those generated using the hybrid ARIMA/ANN forecasts of the previous section. In comparison to the baseline Naive Reversing approach they are likewise inferior, although for trading long they produce similar winning percentages. The best of the results were generated by applying System 1 to the AORD and Dow data sets, although the Dow only produced

reasonable results while trading long. Table 6.9 lists the difference in results between those generated with System 1 and the ARIMA/k-NN models and the baseline Naive Reversing system.

TABLE 6.9: PL from Naive Reversing system subtracted from results generated by trading System 1 based on ARIMA/k-NN closing price forecasts.

| Mkt    | L Win % | Av L PL | S Win % | Av S PL |
|--------|---------|---------|---------|---------|
| DAX    | -1      | -1      | -4      | -2      |
| CAC    | -1      | -1      | -3      | -2      |
| FTSE   | 1       | -2      | 0       | -3      |
| Dow    | 1       | 1       | -3      | -7      |
| Nikkei | -3      | -1      | -4      | -10     |
| AORD   | 0       | 0       | 2       | 7       |

### 6.3.4 ARIMA Hybrids - Predicting Up Down with Categorical Label

An alternative to forecasting the closing price of a financial market is to predict the general direction it will move in the short term either up or down. To this end an additional categorical label to indicate whether the market increased or fell in value over the course of the day was introduced into the data sets. This new attribute had the value “U” if the market increased and “D” if it decreased. Hybrid ARIMA models were then employed to predict this label.

#### 6.3.4.1 ARIMA/Artificial Neural Networks (ANN)

The first methodology employed was to combine ARIMA with Artificial Neural Networks (ANN) in order to generate a forecast of the categorical label that indicated whether the market increased in value or fell over the course of the day. Once the forecast was generated and added to the data set in the form of a new attribute it was passed to a trading algorithm which based the decision whether to trade long or short on the forecast generated. The R code for the trading algorithm can be seen in Appendix A section A.2.4 and the results generated in Table 5.17. Overall the returns were modest and inferior to the Naive Reversing baseline system used for comparison. In comparison to the hybrid ARIMA/ANN forecast of the closing price in section 6.3.3.1 these results were superior, being mostly positive. Generally the returns from trading long were better than trading short and could be a candidate for further studies if this technique was combined with additional filters, such as one of the technical analysis indicators.

### 6.3.4.2 ARIMA/k-Nearest Neighbour (k-NN)

Replacing the ANN learner from the previous section with a k-NN method resulted in similar results. Again the returns from using the hybrid methodology were inferior to the baseline methodology. Table 5.18 lists the results of passing the forecasts from this combination to the trading algorithm in Appendix A section A.2.4. Table 6.10 lists the difference in results between using this hybrid ARIMA/k-NN approach and the Naive Reversing baseline returns.

TABLE 6.10: PL from Naive Reversing system subtracted from results generated by a trading system based on ARIMA/k-NN U/D forecasts.

| Mkt    | L Win % | Av L PL | S Win % | Av S PL |
|--------|---------|---------|---------|---------|
| DAX    | 1       | -4      | -2      | -6      |
| CAC    | -1      | 0       | -4      | -2      |
| FTSE   | 2       | 0       | 0       | -1      |
| Dow    | -1      | -4      | -5      | -11     |
| Nikkei | -1      | 5       | -2      | -4      |
| AORD   | 1       | 0       | 2       | 7       |

### 6.3.4.3 ARIMA/Support Vector Machine (SVM)

Finally, the ARIMA methodology was coupled with a Support Vector Machine (SVM) learner. The SVM is appropriate here because the categorical label being forecast is binary, there are only the values "U" or "D" representing up (the market increased) and down (the market fell) respectively. The results from passing the generated forecast to the same trading algorithm as that used in the previous section and described in Appendix A section A.2.4 can be seen in Table 5.20 of Chapter 5. Overall the results were poor with the exception of the FTSE and the CAC and Nikkei trading long.

Table 6.11 lists the difference in results between using this hybrid ARIMA/SVM approach and the Naive Reversing baseline returns.

TABLE 6.11: PL from Naive Reversing system subtracted from results generated by a trading system based on ARIMA/SVM U/D forecasts.

| Mkt    | L Win % | Av L PL | S Win % | Av S PL |
|--------|---------|---------|---------|---------|
| DAX    | 0       | -1      | -3      | -3      |
| CAC    | -4      | -5      | -6      | -5      |
| FTSE   | 1       | 2       | -1      | -1      |
| Dow    | 1       | 0       | -4      | -9      |
| Nikkei | -3      | -1      | -3      | -10     |
| AORD   | 0       | -5      | 1       | 1       |

## 6.4 Conclusion

This study delved into the issue of whether financial markets can be predicted with the use of technical analysis or times series modelling. To this end a wide variety of technical analysis indicators were explored along with a range of time series models. One aspect of technical analysis worth noting is that opinion is divided as to its value, with many voices in academia being critical of it (Kuang et al., 2014, Fang et al., 2014, Bajgrowicz and Scaillet, 2012). Having stated that, it is also a fact that it is widely, almost ubiquitously, used by participants of the financial markets (Taylor and Allen, 1992). The widespread use of technical analysis includes the large body of amateur traders, as may be expected, as well as highly educated professionals. Indeed it was reported by Menkhoff (2010) that most fund managers who were polled, sophisticated professionals in this arena, employ technical analysis.

The results from the technical analysis presented in Chapter 4 were grouped into the general area in which they purport to operate. These area were trend detection, market reversals, momentum indicators, breakout patterns and candlestick patterns. Of all the technical indicators explored in this study the breakout and trend detection methods seem to hold the most promise. This is in agreement with Brock et al. (1992) who also found merit in these techniques. The use of Moving Average Convergence/Divergence (MACD) is one area where the results of this study divert from the literature. The results from Chapter 4 section 4.3.2 are quite poor whereas Ulku and Prodan (2013) report profitable returns from using MACD to forecast national stock market indices.

Another area in which conflicting results are found in the literature is the use of candlestick patterns. Marshall et al. (2006) reported on unsuccessful studies using a range of candlestick patterns to assist in forecasting the Dow Jones Industrial Average. This is contrasted by Lu (2014) who reports on the successful use candlestick charts in finding profitable trades in the Taiwan stock market. Results from this study reflect the findings of Marshall et al. (2006), in that predictions from the candlestick patterns produced poor returns. However, an element of caution is required before dismissing the usefulness of candlestick patterns. Being visual patterns they need an element of subjectivity to be applied to their use and this is difficult to achieve in the rigid arena of computer programming.

The second area of study concentrated on established time series modelling techniques with a firmer basis in academia. This included the use of exponential smoothing, ARIMA and hybrid ARIMA techniques. The Holt-Winters method of exponential smoothing defines various aspects of a time series and applies a smoothing function to each (Winters, 1960). Thus models can be defined to account for stationary, trending or data sets with

a seasonal element. Financial markets exhibit a variety of behaviour at different periods and thus one single smoothing model is not appropriate. The approach adopted in this study was to use a moving window technique. Thus as the window moved through the data set an appropriate model could be selected and applied for each subset of observations. The results generated from this exponential moving methodology were poor, barely producing returns better than a baseline approach that simply used the average of the data sample.

Another widely used time series modelling technique is Auto-Regressive Integrated Moving Average (ARIMA). ARIMA models were built for the data sets under study and the forecasts generated used in trading algorithms, see Chapter 5 section 5.5 for details. The results were generally poor, although they returned profits while forecasting long trades.

One major limitation in the ARIMA model is the need for the relationship in the data to be linear. The use of hybrid ARIMA methods is an attempt to overcome this limitation, coupling ARIMA with a different learner such as Artificial Neural Networks (ANN), k-Nearest Neighbour (k-NN) or Support Vector Machines (SVM). There are many reports in the literature of good results obtained from the use of these hybrid methods. Wang et al. (2012), Khashei et al. (2009) and Zhang (2003) reported promising results from the use of ARIMA/ANN and Pai and Lin (2005) good results from ARIMA/SVM. This study showed only very modest returns from the use of ARIMA/ANN, ARIMA/k-NN or ARIMA/SVM.

In summary, this study addressed the difficult problem of predicting the short-term movements in a number of stock market indices, a task that has been attempted by thousands of workers over the years. The techniques used to make these predictions were derived from technical analysis and time series methods. On the whole the methods employed were not successful with the exception of the daily breakout methods detailed in section 4.6. The aroon trend detection indicator also showed some promise. The forecasts from the time series models were in general poor, in that trading systems based on these predictions produced very modest and often negative returns. However, this study covered only a small portion of the possible permutations available in this subject. There are many more financial markets, technical indicators and data mining methods that could be explored. Further, there are more time frames available for study and the variety of trading algorithms in use is extensive. It was noted in Chapter 3 that the markets under test have a tendency to switch direction, such that today's movements are opposite to yesterday's movements. Thus, any methodology that doesn't capture this will produce poor returns from a trading perspective. However, poor results from a methodology in one time-frame is no indication of similar results in a longer or shorter

time frame and it would be interesting to continue the work so that longer time horizons are considered.

#### **6.4.1 Research question revisited**

This study had the aim of answering the following question:

*“Can the use of technical indicators or time series analysis help to predict the future direction and movement of financial markets?”*

Essentially there are two elements to this question, the ability of technical analysis to aid in predicting future market movements and the usefulness of time series modelling techniques to predict market movements. Considering technical analysis first the results overall are quite poor and most techniques tried produced poor results, rarely beating the baseline system of simply trading in the opposite direction to the previous day, especially when this concept is married with a stop loss. Overall the daily breakout ideas and the aroon indicator produced the best results from the technical analysis indicators. Of the times series modelling techniques explored the results were very modest and quite similar across the board with no one methodology standing out as a success. In summary, of all the techniques studied here only the daily breakout methods proved to be a useful tool in trading the chosen financial markets.

#### **6.4.2 Future Work**

Restraints of time and resources restricted this study to a selection of technical analysis indicators and times series models. Further, the data selected were limited to national indices of daily data. There are a large number of other technical indicators that can be explored and many other financial markets including individual stocks, commodities such as gold and oil and a wide range of currency pairs. The techniques reported in this study were compared in isolation. In many situations traders use combinations of methods and this could form the basis of future work. Given the huge number of possible combinations careful consideration would have to be given to the selection of the techniques to use.

The time frame of the data used is another important consideration. This report used daily open, high, low and close data and used trading algorithms based around the day. Data sets in different times frames, particularly shorter ones such as minute or even tick data (the most granular of financial data) could be explored. Trading algorithms that hold trades for days or weeks could also be tried and this idea maybe particularly



---

interesting for techniques such as candlestick patterns for which the predictive benefit may not be immediate.

# Appendix A

## R Code

### A.1 Chapter 4

The R code used to generate the results and tables in Chapter 4 is shown in listing A.1.1. This is followed by the individual files containing the algorithms used in the chapter.

#### A.1.1 Chapter 4 Results Generation

```
1 # Chapter 4
2 setwd("D:/Allan/DropBox/MSc/Dissertation/Thesis/RCode")
3
4 # libraries to include
5 library(xtable)
6 library(TTR)
7 library(candlesticks)
8
9 # files to include
10 source("../RCode//Utils.R")
11 source("../RCode//NaiveLongSystem.R")
12 source("../RCode//NaiveLongSystem2.R")
13 source("../RCode//NaiveReversePrev.R")
14 source("../RCode//SMA_sys.R")
15 source("../RCode//MACD_XO.R")
16 source("../RCode//Aroon.R")
17 source("../RCode//SAR.R")
18 source("../RCode//Stoch.R")
19 source("../RCode//ROC.R")
20 source("../RCode//MACD_OB.R")
21 source("../RCode//Bout_sys_2.R")
22 source("../RCode//Quant90_sys.R")
23 source("../RCode//Candle_Hammer.R")
24 source("../RCode//Candle_Hammer_aroon.R")
25 source("../RCode//Candle_Engulf.R")
26 source("../RCode//Candle_Engulf_aroon.R")
```

```

27 source("../RCode//Candle_Doji_aroon.R")
28
29 fil <- c("../Data/Dax_2000_d.csv",
30          "../Data/CAC_2000_d.csv",
31          "../Data/F100_2000_d.csv",
32          "../Data/Dow_2000_d.csv",
33          "../Data/N225_2000_d.csv",
34          "../Data/Oz_2000.csv")
35
36 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11)) # to hold results
37 std6 <- c(1,3,4,5,7,8,10)
38 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
39 NaiveRev <- run_NaiveReversePrev(fil, 0, nm)
40 misc_col <- 11
41
42 # -----
43 # ----- 1. Naive Long Base System -----
44
45 run_NaiveLongSystem <- function(fil, SLoss, nm){
46   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
47   for(i in 1:length(fil)){
48     Mkt <- read.csv(fil[i])
49     a <- NaiveLongSystem(Mkt, SLoss, nm[i])
50     df10 <- rbind(df10, a)
51   }
52   df.name <- names(a)
53   names(df10) <- df.name
54   df10 <- df10[-1,]
55   return(df10)
56 }
57
58 res1 <- run_NaiveLongSystem(fil,0,nm)
59 res1[misc_col] <- 'Naive Long'
60
61 # for summary results
62 total_res <- res1
63
64 # produce latex table
65 dat <- res1[,c(1,3,5,7)]
66 dig <- 2
67 cap = c('Naive Long System. A very simple system in which the algorithm assumes
68         the market will rise and enters a long trade each day.',
69         'Results from the Naive Long System')
69 lab = 'tab:nlng_results'
70 filename = '../Tables/chp_ta_naive_long.tex'
71 inclrnam=FALSE
72 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
73
74 # -----
75 # ----- Naive Long Base System -----
76 # ----- previous close and today's close -----
77
78 run_NaiveLongSystem2 <- function(fil,SLoss, nm){
79   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
80   for(i in 1:length(fil)){

```

```

81   Dax <- read.csv(fil[i])
82   a <- NaiveLongSystem2(Dax, 0, nm[i])
83   df10 <- rbind(df10, a)
84 }
85 df.name <- names(a)
86 names(df10) <- df.name
87 df10 <- df10[-1,]
88 return(df10)
89 }
90
91 res2 <- run_NaiveLongSystem2(fil,0,nm)
92 res2[misc_col] <- 'Naive Long 2'
93
94 # Add to total results
95 total_res <- rbind(total_res, res2)
96
97 # produce latex table
98 dat <- res2[,c(1,3,5,7)]
99 dig <- 2
100 cap = c('Naive Long System changed such that the trading period is the previous
        close price minus today\'s close.',
101         'Results from the Naive Long System trading close to close')
102 lab = 'tab:nlng_results_2'
103 filename = '../Tables/chp_ta_naive_long_ctoc.tex'
104 inclrnam=FALSE
105 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
106
107
108 # -----
109 # ----- Reverse Previous Baseline System -----
110 # -----
111
112 res3 <- run_NaiveReversePrev(fil, 0, nm)
113 res3[misc_col] <- 'Reverse Prev'
114
115 # Add to total results
116 total_res <- rbind(total_res, res3)
117
118 # produce latex table
119 dat <- res3[,c(1,3,4,5,7,8,10)]
120 dig <- 2
121 cap = c('Results from a naive trading system which simply trades in the opposite
        direction to the previous day\'s movement.',
122         'Results from the Naive Reversing System.')
123 lab = 'tab:n_rev_results'
124 filename = '../Tables/chp_ta_naive_reverse_prev.tex'
125 inclrnam=FALSE
126 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
127
128 # repeat latex table for Chp6 - affects numbering if re-use from Chp5
129 dat <- res3[,c(1,3,4,5,7,8,10)]
130 dig <- 2
131 cap = c('Results from a naive trading system which simply trades in the opposite
        direction to the previous day\'s movement.',
132         'Results from the Naive Reversing System.')

```

```

133 lab = 'tab:n_rev_results_chp6'
134 filename = '../Tables/chp_ta_naive_reverse_prev_chp6.tex'
135 inclrnam=FALSE
136 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
137
138 # repeat with a stop loss
139 res3a <- run_NaiveReversePrev(fil, -75, nm)
140 res3a[misc_col] <- 'Reverse Prev Stop Loss'
141
142 # Add to total results
143 total_res <- rbind(total_res, res3a)
144
145 # produce latex table
146 dat <- res3a[,std6]
147 dig <- 2
148 cap = c('Naive system which reverses the previous day\'s trade direction with
        stop loss.',
        'Naive Following System.')
149 lab = 'tab:n_rev_results_sl'
150 filename = '../Tables/chp_ta_naive_reverse_prev_sl.tex'
151 inclrnam=FALSE
152 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
153
154
155
156 # -----
157 # ----- Trend Detection Indicators -----
158
159 # ----- SMA
160 run_BaseSystem1SMA <- function(fil,SLoss,nm){
161   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
162   for(i in 1:length(fil)){
163     Dax <- read.csv(fil[i])
164     a <- BaseSystem1SMA(Dax, 5, SLoss, nm[i])
165     b <- BaseSystem1SMA(Dax, 25, SLoss, nm[i])
166     c <- BaseSystem1SMA(Dax, 50, SLoss, nm[i])
167     d <- BaseSystem1SMA(Dax, 100, SLoss, nm[i])
168     e <- BaseSystem1SMA(Dax, 200, SLoss, nm[i])
169     df10 <- rbind(df10, a, b, c, d, e)
170   }
171   df.name <- names(a)
172   names(df10) <- df.name
173   df10 <- df10[-1,]
174   return(df10)
175 }
176
177 res4 <- run_BaseSystem1SMA(fil,0,nm)
178
179 # Add to total results
180 total_res <- rbind(total_res, res4)
181
182 dat <- res4[,c(1,3,4,5,7,8,10,11)]
183 dig <- 2
184 cap = c('Results from a system based on SMA.', 'Results from a system based on SMA
        ')
185 lab = 'tab:sma_results'

```

```

186 filename = '../Tables/chp_ta_sma.tex'
187 inclrnam=FALSE
188 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
189
190 # SMA SLoss -----
191 run_BaseSystem1SMA2 <- function(fil,SLoss,nm){
192   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
193   for(i in 1:length(fil)){
194     Dax <- read.csv(fil[i])
195     h <- BaseSystem1SMA(Dax, 100, -50, nm[i])
196     hh <- BaseSystem1SMA(Dax, 100, -100, nm[i]) #don't use i !!!!!
197     df10 <- rbind(df10,h,hh)
198   }
199   df.name <- names(hh)
200   names(df10) <- df.name
201   df10 <- df10[-1,]
202   return(df10)
203 }
204
205 res5 <- run_BaseSystem1SMA2(fil,0,nm)
206
207 # Add to total results
208 total_res <- rbind(total_res, res5)
209
210 dat <- res5[,c(1,3,4,5,7,8,10,11)]
211 dig <- 2
212 cap = c('Results from a system based on SMA with stop loss.',
213         'Results from a system based on SMA with stop loss')
214 lab = 'tab:sma_results_SLoss'
215 filename = '../Tables/chp_ta_sma_sloss.tex'
216 inclrnam=FALSE
217 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
218
219 # -----
220 # ----- Moving Average Convergence/Divergence (MACD)}
221
222 run_MACD_X0 <- function(fil,SLoss,nm){
223   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
224   for(i in 1:length(fil)){
225     Mkt <- read.csv(fil[i])
226     ma <- MACD( Mkt[, "Open"], 12, 26, 9, maType="EMA" ) #calc MACD values
227     Mkt <- cbind(Mkt, ma)
228     a <- MACD_X0(Mkt, SLoss, nm[i])
229     df10 <- rbind(df10,a)
230   }
231   df.name <- names(a)
232   names(df10) <- df.name
233   df10 <- df10[-1,]
234   return(df10)
235 }
236
237 res6 <- run_MACD_X0(fil,0,nm)
238 res6[misc_col] <- 'MACD'
239
240 # Add to total results

```

```

241 total_res <- rbind(total_res, res6)
242
243 dat <- res6[,std6]
244 dig <- 2
245 cap = c('Results from a system using MACD as a trend indicator.',
246         'Results from a system using MACD as a trend indicator')
247 lab = 'tab:mac_trend_results'
248 filename = '../Tables/chp_ta_macd.tex'
249 inclrnam=FALSE
250 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
251
252
253 # -----
254 # ----- Aroon -----
255
256 run_aroon_sys <- function(fil,SLoss,nm){
257   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
258   for(i in 1:length(fil)){
259     Mkt <- read.csv(fil[i])
260     ar <- aroon(Mkt[c(3,4)], n=20)           #calc Aroon values
261     Mkt <- cbind(Mkt, ar)                   #Add Aroon values to orig
262     data set
263     a <- aroon_sys(Mkt, SLoss, nm[i])
264     df10 <- rbind(df10,a)
265   }
266   df.name <- names(a)
267   names(df10) <- df.name
268   df10 <- df10[-1,]
269   return(df10)
270 }
271
272 res7 <- run_aroon_sys(fil,0,nm)
273 res7[misc_col] <- 'Aroon'
274
275 # Add to total results
276 total_res <- rbind(total_res, res7)
277
278 dat <- res7[,std6]
279 dig <- 2
280 cap = c('Results from a system based on the Aroon indicator.',
281         'Results from a system based on the Aroon indicator')
282 lab = 'tab:aroon_results'
283 filename = '../Tables/chp_ta_aroon.tex'
284 inclrnam=FALSE
285 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
286
287 # ---- Aroon with SLoss
288 aroondfsl <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
289 for(i in 1:length(fil)){
290   Dax <- read.csv(fil[i])           #read data
291   ar <- aroon(Dax[c(3,4)], n=20)     #calc Aroon values
292   Dax <- cbind(Dax, ar)             #Add Aroon values to orig data
293   set
294   a <- aroon_sys(Dax, -100, nm[i])   #Call fnc

```

```

294   aroondfsl <- rbind(aroondfsl, a)
295 }
296 df.name <- names(a)
297 names(aroondfsl) <- df.name
298
299 res7a <- run_aaron_sys(fil,-100,nm)
300 aroondfsl <- res7a
301
302 res7a[misc_col] <- 'Aroon Stop Loss'
303
304 # Add to total results
305 total_res <- rbind(total_res, res7a)
306
307 dat <- res7a[,std6]
308 dig <- 2
309 cap = c('Results from a system based on the Aroon indicator with stop loss.',
310         'Results from a system based on the Aroon indicator with
          stop loss')
311 lab = 'tab:aaron_results_sloss'
312 filename = '../Tables/chp_ta_aaron_sloss.tex'
313 inclrnam=FALSE
314 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
315
316 # Aroon - Diffs - between Aroon and Aroon with Stop Loss
317 aroondfslidf <- as.data.frame(matrix(seq(3),nrow=1,ncol=3))
318 ln <- nrow(aroondfsl)
319 res <- 1:3
320 for(i in 1:ln){
321   res[1] <- aroondfsl[i,1]
322   res[2] <- as.numeric(res7a[i,3]) - as.numeric(res7[i,3])
323   res[3] <- as.numeric(res7a[i,4]) - as.numeric(res7[i,4])
324   aroondfslidf <- rbind(aroondfslidf,res)
325 }
326 df.name <- c("Market", "Long Difference", "Short Difference")
327 names(aroondfslidf) <- df.name
328 aroondfslidf <- aroondfslidf[-1,]
329
330 dat <- aroondfslidf[,c(1,2,3)]
331 dig <- 2
332 cap = c('Impact of using stop loss with Aroon trend indicator.',
333         'Impact of using stop loss with Aroon trend indicator')
334 lab = 'tab:aaron_results_sloss_diff'
335 filename = '../Tables/chp_ta_aaron_sloss_diff.tex'
336 inclrnam=FALSE
337 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
338
339 # Aroon compared to baseline system
340 res7_diff <- sub_df_av_pl(res7,NaiveRev)
341 #print table
342 dat <- res7_diff
343 dig <- 0
344 cap = c('PL from Naive Reversing system subtracted from results generated by a
          trading system based on the Aroon indicator.',
345         'Aroon system results minus Naive Reversing results')
346 lab = 'tab:aaron_results_diff'

```



```

347 filename = '../Tables/chp_ta_aroon_diff.tex'
348 inclrnam=FALSE
349 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
350
351 # -----
352 # ----- Trend Reversal -----
353
354 # ----- SAR
355 run_sar_sys <- function(fil,SLoss,nm){
356   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
357   for(i in 1:length(fil)){
358     Mkt <- read.csv(fil[i])
359     sar <- SAR(Mkt[c(3,4)]) #HL
360     Mkt <- cbind(Mkt,sar)
361     a <- sar_sys(Mkt,SLoss, nm[i])
362     df10 <- rbind(df10,a)
363   }
364   df.name <- names(a)
365   names(df10) <- df.name
366   df10 <- df10[-1,]
367   return(df10)
368 }
369
370 res8 <- run_sar_sys(fil,0,nm)
371 res8[misc_col] <- 'SAR'
372
373 # Add to total results
374 total_res <- rbind(total_res, res8)
375
376 dat <- res8[,std6]
377 dig <- 2
378 cap = c('Results from a system based on the SAR indicator.',
379         'Results from a system based on the SAR indicator')
380 lab = 'tab:sar_results'
381 filename = '../Tables/chp_ta_sar.tex'
382 inclrnam=FALSE
383 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
384
385
386 # -----
387 # ----- MACD OB -----
388
389 run_MACD_OB <- function(fil,SLoss,nm){
390   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
391   for(i in 1:length(fil)){
392     Mkt <- read.csv(fil[i])
393     ma <- MACD( Mkt[, "Open"], 12, 26, 9, maType="EMA" ) #calc MACD values
394     Mkt <- cbind(Mkt, ma)                                #Add MACD values to orig
                                                           data set
395     lw <- quantile(Mkt$macd, na.rm=T, probs=0.15)        #Calc low val for algo
396     up <- quantile(Mkt$macd, na.rm=T, probs=0.85)        #Calc up val for algo
397     a <- MACD_OB(Mkt, 0, nm[i], lw, up)
398     df10 <- rbind(df10,a)
399   }
400   df.name <- names(a)

```

```

401   names(df10) <- df.name
402   df10 <- df10[-1,]
403   return(df10)
404 }
405
406 res9 <- run_MACD_OB(fil,0,nm)
407 res9[misc_col] <- 'MACD Reversal'
408
409 # Add to total results
410 total_res <- rbind(total_res, res9)
411
412 dat <- res9[,std6]
413 dig <- 2
414 cap = c('Results from a trading system based on MACD being used as a trend
         reversal indicator.',
         'Results from a system based on MACD as trend reversal
         indicator')
416 lab = 'tab:mac_ob_results'
417 filename = '../Tables/chp_ta_macd_ob.tex'
418 inclrnam=FALSE
419 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
420
421
422 #-----
423 # ----- Stochastic -----
424
425 ln <- nrow(df10)
426 for(i in 1:length(fil)){
427   Dax <- read.csv(fil[i])
428   st <- stoch(Dax[c(3,4,5)]) #HL
429   Dax <- cbind(Dax,st)
430   a <- stoch_sys(Dax, 0, nm[i])
431   df10 <- rbind(df10, a)
432 }
433 df10 <- df10[-c(1:ln-1),]
434
435 run_stoch_sys <- function(fil,SLoss,nm){
436   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
437   for(i in 1:length(fil)){
438     Mkt <- read.csv(fil[i])
439     st <- stoch(Mkt[c(3,4,5)]) #HL
440     Mkt <- cbind(Mkt,st)
441     a <- stoch_sys(Mkt, SLoss, nm[i])
442     df10 <- rbind(df10,a)
443   }
444   df.name <- names(a)
445   names(df10) <- df.name
446   df10 <- df10[-1,]
447   return(df10)
448 }
449
450 res10 <- run_stoch_sys(fil,0,nm)
451 res10[misc_col] <- 'Stoch'
452
453 # Add to total results

```

```

454 total_res <- rbind(total_res, res10)
455
456
457 dat <- res10[,std6]
458 dig <- 2
459 cap = c('Results from a system based on the Stochastic indicator.',
460         'Results from a system based on the Stochastic indicator')
461 lab = 'tab:stoch_results'
462 filename = '../Tables/chp_ta_stoch.tex'
463 inclrnam=FALSE
464 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
465
466 # ----- Stochastic plus Stop Loss
467 res10a <- run_stoch_sys(fil,-100,nm)
468 res10a[misc_col] <- 'Stoch Stop Loss'
469
470 # Add to total results
471 total_res <- rbind(total_res, res10a)
472
473 dat <- res10a[,std6]
474 dig <- 2
475 cap = c('Results from a system based on the Stochastic indicator with a stop
476         loss.',
477         'Results from a system based on the Stochastic indicator with a stop
478         loss')
479 lab = 'tab:stoch_results_sloss'
480 filename = '../Tables/chp_ta_stoch_sloss.tex'
481 inclrnam=FALSE
482 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
483
484 # ----- ROC -----
485 run_roc_sys <- function(fil,SLoss,nm){
486   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
487   for(i in 1:length(fil)){
488     Mkt <- read.csv(fil[i])
489     roc <- ROC( Mkt$Close ) #calc MACD values
490     Mkt <- cbind(Mkt, roc) #Add MACD values to orig
491     data set
492     lw <- quantile(Mkt$roc, na.rm=T, probs=0.15) #Calc low val for algo
493     up <- quantile(Mkt$roc, na.rm=T, probs=0.85) #Calc up val for algo
494     a <- roc_sys(Mkt, SLoss, nm[i], lw, up)
495     df10 <- rbind(df10,a)
496   }
497   df.name <- names(a)
498   names(df10) <- df.name
499   df10 <- df10[-1,]
500   return(df10)
501 }
502 res11 <- run_roc_sys(fil,0,nm)
503 res11[misc_col] <- 'ROC'
504
505 # Add to total results

```

```

506 total_res <- rbind(total_res, res11)
507
508 dat <- res11[,std6]
509 dig <- 2
510 cap = c('Results from a system based on the ROC indicator.',
511         'Results from a system based on the ROC indicator')
512 lab = 'tab:mac_roc_results'
513 filename = '../Tables/chp_ta_roc.tex'
514 inclrnam=FALSE
515 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
516
517 # -----
518 # ----- Breakout Systems -----
519
520 # ----- Daily Breakout -----
521 run_BaseSystem2Bout <- function(fil,Sloss,nm){
522   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
523   for(i in 1:length(fil)){
524     Mkt <- read.csv(fil[i])
525     a <- BaseSystem2Bout2(Mkt, Sloss, nm[i])
526     df10 <- rbind(df10,a)
527   }
528   df.name <- names(a)
529   names(df10) <- df.name
530   df10 <- df10[-1,]
531   return(df10)
532 }
533
534 res12 <- run_BaseSystem2Bout(fil,0,nm)
535 res12[misc_col] <- 'Daily Breakout'
536
537 # Add to total results
538 total_res <- rbind(total_res, res12)
539
540 dat <- res12[,std6]
541 dig <- 2
542 cap = c('Results from the Daily High/Low Breakout System.',
543         'Results from the Daily High/Low Breakout System')
544 lab = 'tab:hl_bout_sys'
545 filename = '../Tables/chp_ta_b_out.tex'
546 inclrnam=FALSE
547 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
548
549 # comp to Naive
550 res_diff <- sub_df(res12,NaiveRev)
551
552 dat <- res_diff[,c(1,3,4,5,7,8,10)]
553 dig <- 0
554 cap <- c("PL from Naive Reversing system subtracted from results generated by a
555         trading system based on the H/L breakout system.",
556         "H/L breakout system results minus Naive Reversing results")
557 lab = 'tab:hl_bout_sys_diff'
558 filename = '../Tables/chp_ta_b_out_diff.tex'
559 inclrnam=FALSE
560 print_xt(dat,dig,cap,lab,al,filename,inclrnam)

```

```

560
561 #-----
562 # ----- 90% Quantile Breakout -----
563 run_BaseSystem3Quant902 <- function(fil,SLoss,nm){
564   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
565   for(i in 1:length(fil)){
566     Mkt <- read.csv(fil[i])
567     a <- BaseSystem3Quant902(Mkt, SLoss, nm[i])
568     df10 <- rbind(df10,a)
569   }
570   df.name <- names(a)
571   names(df10) <- df.name
572   df10 <- df10[-1,]
573   return(df10)
574 }
575
576 res14 <- run_BaseSystem3Quant902(fil,0,nm)
577 res14[misc_col] <- '90% Quantile Breakout'
578
579 # Add to total results
580 total_res <- rbind(total_res, res14)
581
582 dat <- res14[,std6]
583 dig <- 2
584 cap = c('Results from a system that breaks out from the 90\\% quantile level of
585         the day\\'s minor move.',
586         'Results from a break out system using the day\\'s the minor move')
587 lab = 'tab:q_90_results'
588 filename = '../Tables/chp_ta_90q.tex'
589 inclrnam=FALSE
590 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
591
592 # comp to Naive
593 res_diff <- sub_df(res14,NaiveRev)
594
595 dat <- res_diff[,c(1,3,4,5,7,8,10)]
596 dig <- 0
597 cap <- c("PL from Naive Reversing system subtracted from results generated by a
598         trading system based on the 90\\% quantile level breakout system.",
599         "90\\% quantile level breakout system minus Naive Reversing results")
600 lab = 'tab:chp_ta_90q_diff'
601 filename = '../Tables/chp_ta_90q_diff.tex'
602 inclrnam=FALSE
603 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
604
605 # ----- Candlestick Patterns
606 # ----- Hammer Pattern
607 run_candle_hammer <- function(fil,SLoss,nm){
608   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
609   for(i in 1:length(fil)){
610     Mkt <- read.csv(fil[i],stringsAsFactors = FALSE)
611     Mkt <- Mkt[,c(1,2,3,4,5)]
612     Mkt$Date <- as.POSIXct(Mkt$Date,format='%d/%m/%Y')
613     Mkt_xts <- xts(Mkt[,c(2,3,4,5)],Mkt$Date)

```

```

613   hh <- as.data.frame(CSPHammer(Mkt_xts))
614   hi <- as.data.frame(CSPInvertedHammer(Mkt_xts))
615   Mkt <- cbind(Mkt,hh)
616   Mkt <- cbind(Mkt,hi)
617   a <- candle_hammer(Mkt,SLoss, nm[i])
618   df10 <- rbind(df10,a)
619 }
620 df.name <- names(a)
621 names(df10) <- df.name
622 df10 <- df10[-1,]
623 return(df10)
624 }
625
626 res15 <- run_candle_hammer(fil,0,nm)
627 res15[misc_col] <- 'Hammer Candlestick'
628
629 # Add to total results
630 total_res <- rbind(total_res, res15)
631
632 # latex table
633 dat <- res15[,c(1,3,5,6,7)]
634 dig <- 2
635 cap = c('Results from a system based on the Hammer and Inverted Hammer
        candlestick patterns.',
636         'Results from a system based on the Hammer and Inverted Hammer
        candlestick patterns')
637 lab = 'tab:hammer_results'
638 filename = '../Tables/chp_ta_hammer.tex'
639 inclrnam=FALSE
640 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
641
642 # plus aroon
643 run_candle_hammer_aron <- function(fil,SLoss,nm){
644   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
645   for(i in 1:length(fil)){
646     Mkt <- read.csv(fil[i],stringsAsFactors = FALSE)
647     Mkt <- Mkt[,c(1,2,3,4,5)]
648     Mkt$Date <- as.POSIXct(Mkt$Date,format='%d/%m/%Y')
649     Mkt_xts <- xts(Mkt[,c(2,3,4,5)],Mkt$Date)
650     hh <- as.data.frame(CSPHammer(Mkt_xts))
651     hi <- as.data.frame(CSPInvertedHammer(Mkt_xts))
652     Mkt <- cbind(Mkt,hh)
653     Mkt <- cbind(Mkt,hi)
654     ar <- aroon(Mkt$Close,n=20)
655     Mkt <- cbind(Mkt,ar)
656     a <- candle_hammer_aron(Mkt,SLoss, nm[i])
657     df10 <- rbind(df10,a)
658   }
659   df.name <- names(a)
660   names(df10) <- df.name
661   df10 <- df10[-1,]
662   return(df10)
663 }
664
665 res15a <- run_candle_hammer_aron(fil,0,nm)

```

```

666
667 # latex table
668 dat <- res15a[,c(1,3,5,6,7)]
669 dig <- 2
670 cap = c('Results from a system based on the Hammer and Inverted Hammer
        candlestick patterns occurring in a downtrend as defined by the aroon value.',
        ,
671         'Results from a system based on the Hammer and Inverted Hammer
        candlestick patterns occurring in a downtrend')
672 lab = 'tab:hammer_aroon_results'
673 filename = '../Tables/chp_ta_hammer_d_trend.tex'
674 inclrnam=FALSE
675 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
676
677 # -----
678 # ----- Engulfing Candlestick -----
679 run_candle_engulf <- function(fil,SLoss,nm){
680   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
681   for(i in 1:length(fil)){
682     Mkt <- read.csv(fil[i],stringsAsFactors = FALSE)
683     #create xts obj
684     Mkt$Date <- as.POSIXct(Mkt$Date,format='%d/%m/%Y')
685     Mkt_xts <- xts(Mkt[,c(2,3,4,5)],Mkt$Date)
686     en <- as.data.frame(CSPEngulfing(Mkt_xts))
687     #use data frame again
688     Mkt <- cbind(Mkt,en)
689     a <- candle_engulf(Mkt,SLoss, nm[i])
690     df10 <- rbind(df10,a)
691   }
692   df.name <- names(a)
693   names(df10) <- df.name
694   df10 <- df10[-1,]
695   return(df10)
696 }
697
698 res16 <- run_candle_engulf(fil,0,nm)
699 res16[misc_col] <- 'Engulfing Candlestick'
700
701 # Add to total results
702 total_res <- rbind(total_res, res16)
703
704 # latex table
705 dat <- res16[,std6]
706 dig <- 2
707 cap = c('Results from a system based on the Engulfing candlestick pattern.',
708         'Results from a system based on the Engulfing candlestick pattern')
709 lab = 'tab:engulf_results'
710 filename = '../Tables/chp_ta_englf.tex'
711 inclrnam=FALSE
712 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
713
714
715 # ----- Engulfing Candlestick with Aroon
716 run_candle_engulf_aroon <- function(fil,SLoss,nm){
717   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))

```

```

718   for(i in 1:length(fil)){
719     Mkt <- read.csv(fil[i],stringsAsFactors = FALSE)
720     #create xts obj
721     Mkt$Date <- as.POSIXct(Mkt$Date,format='%d/%m/%Y')
722     Mkt_xts <- xts(Mkt[,c(2,3,4,5)],Mkt$Date)
723     en <- as.data.frame(CSPEngulfing(Mkt_xts))
724     #use data frame again
725     Mkt <- cbind(Mkt,en)
726     ar <- aroon(Mkt$Close,n=20)
727     Mkt <- cbind(Mkt,ar)
728     a <- candle_engulf_aroon(Mkt,SLoss, nm[i])
729     df10 <- rbind(df10,a)
730   }
731   df.name <- names(a)
732   names(df10) <- df.name
733   df10 <- df10[-1,]
734   return(df10)
735 }
736
737 res16a <- run_candle_engulf_aroon(fil,0,nm)
738 res16a[misc_col] <- 'Engulfing Candlestick in Trend'
739
740 # Add to total results
741 total_res <- rbind(total_res, res16a)
742
743 # latex table
744 dat <- res16a[,std6]
745 dig <- 2
746 cap = c('Results from a system based on the Engulfing candlestick pattern in a
747         trending market.',
748         'Results from a system based on the Engulfing candlestick pattern in a
749         trending market')
750 lab = 'tab:engulf_aroon_results'
751 filename = '../Tables/chp_ta_englf_aroon.tex'
752 inclrnam=FALSE
753 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
754
755 # -----
756 # ----- Doji Candlestick -----
757
758 run_candle_doji_aroon <- function(fil,SLoss,nm){
759   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
760   for(i in 1:length(fil)){
761     Mkt <- read.csv(fil[i],stringsAsFactors = FALSE)
762     #create xts obj
763     Mkt$Date <- as.POSIXct(Mkt$Date,format='%d/%m/%Y')
764     Mkt_xts <- xts(Mkt[,c(2,3,4,5)],Mkt$Date)
765     dj <- as.data.frame(CSPDoji(Mkt_xts))
766     #back to data fram
767     Mkt <- cbind(Mkt,dj)
768     ar <- aroon(Mkt$Close,n=20)
769     Mkt <- cbind(Mkt,ar)
770     a <- candle_doji_aroon(Mkt,SLoss, nm[i])
771     df10 <- rbind(df10,a)
772   }
773   df.name <- names(a)

```



```

771   names(df10) <- df.name
772   df10 <- df10[-1,]
773   return(df10)
774 }
775
776 res17 <- run_candle_doji_aroon(fil,0,nm)
777 res17[misc_col] <- 'Doji Candlestick'
778
779 # Add to total results
780 total_res <- rbind(total_res, res17)
781
782 # latex table
783 dat <- res17[,std6]
784 dig <- 2
785 cap = c('Results from a system based on the Doji candlestick pattern in a
786         trending market.',
787         'Results from a system based on the Doji candlestick pattern in a
788         trending market')
789 lab = 'tab:doji_aroon_results'
790 filename = '../Tables/chp_ta_doji.tex'
791 inclrnam=FALSE
792 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
793
794 #-----
795 # -- Generate Summary tables for Appendic C -----
796 # 1. Dax
797 colnames(total_res)[11] <- 'Methodology'
798 Dx <- total_res[total_res$Mkt == 'DAX',]
799 Dx2 <- Dx[c(11,3,4,7,10)]
800
801 # latex table
802 dat <- Dx2
803 dig <- 2
804 cap = c('Chapter 4 Dax Results',
805         'Chapter 4 Dax Results')
806 lab = 'tab:chp6:dax_summary'
807 filename = '../Tables/chp_6_dax_summary.tex'
808 inclrnam=FALSE
809 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
810
811 # 2. CAC
812 Cc <- total_res[total_res$Mkt == 'CAC',]
813 Cc2 <- Cc[c(11,3,4,7,10)]
814
815 # latex table
816 dat <- Cc2
817 dig <- 2
818 cap = c('Chapter 4 CAC Results',
819         'Chapter 4 CAC Results')
820 lab = 'tab:chp6:cac_summary'
821 filename = '../Tables/chp_6_cac_summary.tex'
822 inclrnam=FALSE
823 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
824
825 # 3. FTSE

```

```
824 Ft <- total_res[total_res$Mkt == 'FTSE',]
825 Ft2 <- Ft[c(11,3,4,7,10)]
826
827 # latex table
828 dat <- Ft2
829 dig <- 2
830 cap = c('Chapter 4 FTSE Results',
831         'Chapter 4 FTSE Results')
832 lab = 'tab:chp6:ftse_summary'
833 filename = '../Tables/chp_6_ftse_summary.tex'
834 inclrnam=FALSE
835 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
836
837 # 4. Dow
838 Dw <- total_res[total_res$Mkt == 'Dow',]
839 Dw2 <- Dw[c(11,3,4,7,10)]
840
841 # latex table
842 dat <- Dw2
843 dig <- 2
844 cap = c('Chapter 4 Dow Results',
845         'Chapter 4 Dow Results')
846 lab = 'tab:chp6:dow_summary'
847 filename = '../Tables/chp_6_dow_summary.tex'
848 inclrnam=FALSE
849 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
850
851 # 5. Nikkei
852 Nk <- total_res[total_res$Mkt == 'Nikkei',]
853 Nk2 <- Nk[c(11,3,4,7,10)]
854
855 # latex table
856 dat <- Nk2
857 dig <- 2
858 cap = c('Chapter 4 Nikkei Results',
859         'Chapter 4 Nikkei Results')
860 lab = 'tab:chp6:nik_summary'
861 filename = '../Tables/chp_6_nik_summary.tex'
862 inclrnam=FALSE
863 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
864
865 # 6. Oz
866 Oz <- total_res[total_res$Mkt == 'AORD',]
867 Oz2 <- Oz[c(11,3,4,7,10)]
868
869 # latex table
870 dat <- Oz2
871 dig <- 2
872 cap = c('Chapter 4 AORD Results',
873         'Chapter 4 AORD Results')
874 lab = 'tab:chp6:aord_summary'
875 filename = '../Tables/chp_6_aord_summary.tex'
876 inclrnam=FALSE
877 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
878
```

---

879 # END

---

RCode/Chapter4.R

## A.1.2 Naive Systems

### A.1.2.1 Naive Long System

```

1 NaiveLongSystem <- function(Mkt, SLoss, MktName){
2   # Calculates the profit/loss from simply trading long.
3   #
4   #   Mkt: market data
5   #   SLoss: stop loss
6   #   MktName: market's name for print out
7   # Returns:
8   #   results vector.
9
10  results <- createResultsVector(MktName, SLoss)
11
12  # Buy Long
13  Mkt$Long <- Mkt$Close - Mkt$Open
14  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
15  #Adj for SLoss
16  if (SLoss < 0) {
17    Mkt$Long <- ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long)
18    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
19  }
20
21  Stats <- calcStats(Mkt$Long)
22  results[5:7] <- Stats
23
24  return(results)
25 }
```

RCode/NaiveLongSystem.R

### A.1.2.2 Naive Long System trading close to close

```

1 NaiveLongSystem2 <- function(Mkt, SLoss, MktName){
2   # Calculates the profit/loss from simply trading long each day.
3   # Opening price is previous day's close price.
4   #
5   # Args:
6   #   Mkt: market data
7   #   SLoss: stop loss
8   #   MktName: name of market data
9   # Returns:
10  #   results vector.
11
12  results <- createResultsVector(MktName, SLoss)
```

```

13
14   Mkt$prevCl <- c(NA,Mkt$Close[ - length(Mkt$Close) ])
15
16   # Buy Long
17   Mkt$Long <- Mkt$Close - Mkt$prevCl
18   results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
19   #Adj for SLoss
20   if (SLoss < 0) {
21     Mkt$Long <- ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long)
22     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
23   }
24
25   Stats <- calcStats(Mkt$Long)
26   results[5:7] <- Stats
27
28   return(results)
29 }

```

RCode/NaiveLongSystem2.R

### A.1.2.3 Naive Reversing System

```

1 NaiveReversePrev <- function(Mkt, SLoss, MktName){
2   # Calculates the profit/loss from trading according to a naive idea of trading
3   # in the opposite direction to the previous day.
4   #
5   #   Mkt: market data
6   #   SLoss: stop loss
7   #   MktName: market's name for print out
8   # Returns:
9   #   results vector
10
11   results <- createResultsVector(MktName, SLoss)
12
13   Mkt$pl <- Mkt$Close - Mkt$Open
14   Mkt$prevPL <- c( NA, Mkt$pl[ - length(Mkt$pl) ] )
15
16   # Trade Long
17   Mkt$Long <- ifelse(Mkt$prevPL<0,Mkt$Close-Mkt$Open,NA)
18   results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
19   #Adj for SLoss
20   if (SLoss < 0) {
21     Mkt$Long <- ifelse(Mkt$prevPL<0,
22                       ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
23                       Mkt$Long)
24
25     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
26   }
27
28   # Trade Short
29   Mkt$Short <- ifelse(Mkt$prevPL>0,Mkt$Open-Mkt$Close,NA)
30   results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
31   #Adj for SLoss

```

```

31   if (SLoss < 0) {
32     Mkt$Short <- ifelse(Mkt$prevPL>0,
33                         ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
34                         Mkt$Short)
35     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
36   }
37
38   Stats <- calcStats(Mkt$Long)
39   results[5:7] <- Stats
40
41   Stats <- calcStats(Mkt$Short)
42   results[8:10] <- Stats
43
44   return(results)
45 }

```

RCode/NaiveReversePrev.R

### A.1.3 Trend Detection Systems

#### A.1.3.1 SMA

```

1 BaseSystem1SMA <- function(Mkt, sma, SLoss, MktName){
2   # Calculates the profit/loss from trading according to SMA.
3   #
4   #   Mkt: market data
5   #   SLoss: stop loss
6   #   MktName: market's name for print out
7   # Returns:
8   #   profit/loss from trading according to SMA.
9
10  results <- createResultsVector(MktName, SLoss)
11
12  sma.value <- SMA(Mkt["Open"], sma) #create sma vector
13  Mkt <- cbind(Mkt, sma.value)       #add sma vector as new col
14
15  # Trade Long
16  Mkt$Long <- ifelse(Mkt$Open > Mkt$sma.value, Mkt$Close - Mkt$Open, NA)
17  results["LongPL"] <- round(sum(Mkt$Long, na.rm=T))
18  if (SLoss < 0) {
19    Mkt$Long <- ifelse(Mkt$Open > Mkt$sma.value,
20                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
21                      Mkt$Long)
22    results["LongPL"] <- round(sum(Mkt$Long, na.rm=T))
23  }
24
25  # Trade Short
26  Mkt$Short <- ifelse(Mkt$Open < Mkt$sma.value, Mkt$Open - Mkt$Close, NA)
27  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=T))
28  if (SLoss < 0) {
29    Mkt$Short <- ifelse(Mkt$Open < Mkt$sma.value,
30                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$

```

```

31         Mkt$Short)
32     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=T))
33 }
34
35 #calculate Long results
36 results[5:7] <- calcStats(Mkt$Long)
37
38 #calculate Short results
39 results[8:10] <- calcStats(Mkt$Short)
40
41 if (SLoss == 0){
42     results[11] <- paste("SMA",sma)
43 } else {
44     results[11] <- paste("SMA",sma)
45 }
46
47
48 return(results)
49 }

```

RCode/SMA\_sys.R

### A.1.3.2 MACD - trend indicator

```

1 MACD_X0 <- function(Mkt, SLoss, MktName){
2     # MACD cross-over system.
3     #
4     # Args:
5     #   Mkt: market data
6     #   SLoss: stop loss
7     #   MktName: market's name for print out
8     # Returns:
9     #   results vector.
10
11     results <- createResultsVector(MktName, SLoss)
12
13     # Trade Long
14     Mkt$Long <- ifelse(Mkt$macd>Mkt$signal,Mkt$Close-Mkt$Open,NA)
15     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
16     #Adj for SLoss
17     if (SLoss < 0) {
18         Mkt$Long <- ifelse(Mkt$macd>Mkt$signal,
19                             ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
20                             Mkt$Long)
21         results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
22     }
23
24     # Trade Short
25     Mkt$Short <- ifelse(Mkt$macd<Mkt$signal,Mkt$Open-Mkt$Close,NA)
26     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
27     #Adj for SLoss
28     if (SLoss < 0) {
29         Mkt$Short <- ifelse(Mkt$macd<Mkt$signal,

```

```

30         ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
31         Mkt$Short)
32     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
33 }
34
35 #calculate Long results
36 results[5:7] <- calcStats(Mkt$Long)
37
38 #calculate Short results
39 results[8:10] <- calcStats(Mkt$Short)
40
41 return(results)
42 }

```

RCode/MACD\_XO.R

### A.1.3.3 Aroon trend indicator

```

1 aroon_sys <- function(Mkt, SLoss, MktName){
2   # uses Aroon indicator to trigger trades
3   #
4   # Args:
5   #   Mkt:      Data to run system on
6   #   SLoss:    Stop Loss (if 0 not used)
7   #   MktName:  Name of market
8   # Returns:
9   #   results vector.
10
11   results <- createResultsVector(MktName, SLoss)
12   # Trade Long
13   Mkt$Long <- ifelse(Mkt$aroonUp >= 70, Mkt$Close-Mkt$Open, NA)
14   results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
15   #Adj for SLoss
16   if (SLoss < 0) {
17     Mkt$Long <- ifelse(Mkt$aroonUp >= 70,
18                       ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
19                       Mkt$Long)
20     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
21   }
22
23   # Trade Short
24   Mkt$Short <- ifelse(Mkt$aroonDn >= 70, Mkt$Open-Mkt$Close, NA)
25   results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
26   #Adj for SLoss
27   if (SLoss < 0) {
28     Mkt$Short <- ifelse(Mkt$aroonDn >= 70,
29                       ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
30                       Mkt$Short)
31     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
32   }
33
34   #calculate Long results
35   results[5:7] <- calcStats(Mkt$Long)

```

```

36
37   #calculate Short results
38   results[8:10] <- calcStats(Mkt$Short)
39
40   return(results)
41 }

```

RCode/Aroon.R

## A.1.4 Market Reversal Indicator

### A.1.4.1 SAR reversal indicator

```

1 sar_sys <- function(Mkt, SLoss, MktName){
2   # uses Parabolic SAR indicator to trigger trades
3   #
4   # Args:
5   #   Mkt:      Data
6   #   SLoss:    Stop Loss (if 0 not used)
7   #   MktName:  Name of market
8   # Returns:
9   #   results vector.
10
11   results <- createResultsVector(MktName, SLoss)
12
13   Mkt$prevsar <- c( NA, Mkt$sar[ - length(Mkt$sar) ])
14
15   # Trade Long
16   Mkt$Long <- ifelse(Mkt$Open > Mkt$prevsar, Mkt$Close-Mkt$Open, NA)
17   results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
18   #Adj for SLoss
19   if (SLoss < 0) {
20     Mkt$Long <- ifelse(Mkt$Open > Mkt$prevsar,
21                       ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
22                       Mkt$Long)
23     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
24   }
25
26   # Trade Short
27   Mkt$Short <- ifelse(Mkt$Open < Mkt$prevsar, Mkt$Open-Mkt$Close, NA)
28   results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
29   if (SLoss < 0) {
30     Mkt$Short <- ifelse(Mkt$Open < Mkt$prevsar,
31                       ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
32                       Mkt$Short)
33     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
34   }
35
36   #calculate Long results
37   results[5:7] <- calcStats(Mkt$Long)
38
39   #calculate Short results

```



```

40   results[8:10] <- calcStats(Mkt$Short)
41
42   return(results)
43 }

```

RCode/SAR.R

#### A.1.4.2 MACD as Reversal Indicator

```

1 MACD_OB <- function(Mkt, SLoss, MktName, lw, up){
2   # MACD over-bought/sold system.
3   #
4   # Args:
5   #   Mkt: market data
6   #   SLoss: stop loss
7   #   MktName: market's name for print out
8   #   lw: value of MACD that signals end of bear runs and rev
9   #   up: value of MACD that signals end of bull runs and rev
10  # Returns:
11  #   results vector.
12
13  results <- createResultsVector(MktName, SLoss)
14
15  # Trade Long
16  Mkt$Long <- ifelse(Mkt$macd < lw, Mkt$Close-Mkt$Open, NA)
17  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
18  #Adj for SLoss
19  if (SLoss < 0) {
20    Mkt$Long <- ifelse(Mkt$macd < lw,
21                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
22                      Mkt$Long)
23    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
24  }
25
26  # Trade Short
27  Mkt$Short <- ifelse(Mkt$macd > up, Mkt$Open-Mkt$Close, NA)
28  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
29  if (SLoss < 0) {
30    Mkt$Short <- ifelse(Mkt$macd > up,
31                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
32                      Mkt$Short)
33    results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
34  }
35
36  Stats <- calcStats(Mkt$Long)
37  results[5:7] <- Stats
38
39  Stats <- calcStats(Mkt$Short)
40  results[8:10] <- Stats
41
42  return(results)
43 }

```

## RCode/MACD\_OB.R

**A.1.4.3 Stochastic reversal indicator**

```

1 stoch_sys <- function(Mkt, SLoss, MktName){
2   # Trading system useing Stochastic Oscillator to trigger trades
3   #
4   # Args:
5   #   Mkt:      Data
6   #   SLoss:    Stop Loss (if 0 not used)
7   #   MktName:  Name of market
8   # Returns:
9   #   results vector.
10
11  results <- createResultsVector(MktName, SLoss)
12
13  Mkt$PrevfastD <- c( NA, Mkt$fastD[ - length(Mkt$fastD) ])
14  Mkt$PrevslowD <- c( NA, Mkt$slowD[ - length(Mkt$slowD) ])
15
16  # Trade Long
17  Mkt$Long <- ifelse(Mkt$PrevfastD > Mkt$PrevslowD, Mkt$Close-Mkt$Open, NA)
18  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
19  #Adj for SLoss
20  if (SLoss < 0) {
21    Mkt$Long <- ifelse(Mkt$PrevfastD > Mkt$PrevslowD,
22                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
23                      Mkt$Long)
24    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
25  }
26
27  # Trade Short
28  Mkt$Short <- ifelse(Mkt$PrevfastD < Mkt$PrevslowD, Mkt$Open-Mkt$Close, NA)
29  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
30  #Adj for SLoss
31  if (SLoss < 0) {
32    Mkt$Short <- ifelse(Mkt$PrevfastD < Mkt$PrevslowD,
33                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
34                      Mkt$Short)
35    results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
36  }
37
38  Stats <- calcStats(Mkt$Long)
39  results[5:7] <- Stats
40
41  Stats <- calcStats(Mkt$Short)
42  results[8:10] <- Stats
43
44  return(results)
45 }

```

## RCode/Stoch.R

## A.1.4.4 Rate of Change(ROC)

```

1 roc_sys <- function(Mkt, SLoss, MktName, lw, up){
2   # Rate of Change (ROC) system.
3   #
4   # Args:
5   #   Mkt: market data
6   #   SLoss: stop loss
7   #   MktName: market's name for print out
8   #   lw: value of ROC for reversal up
9   #   up: value of ROC for reversal down
10  #
11  # Returns:
12  #   results vector.
13
14  results <- createResultsVector(MktName, SLoss)
15
16  Mkt$prevROC <- c( NA, Mkt$roc[ - length(Mkt$roc) ] )
17
18  # Trade Long
19  Mkt$Long <- ifelse(Mkt$prevROC < lw, Mkt$Close-Mkt$Open, NA)
20  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
21  #Adj for SLoss
22  if (SLoss < 0) {
23    Mkt$Long <- ifelse(Mkt$prevROC < lw,
24                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
25                      Mkt$Long)
26    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
27  }
28
29  # Trade Short
30  Mkt$Short <- ifelse(Mkt$prevROC > up, Mkt$Open-Mkt$Close, NA)
31  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
32  #Adj for SLoss
33  if (SLoss < 0) {
34    Mkt$Short <- ifelse(Mkt$prevROC > up,
35                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
36                      Mkt$Short)
37    results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
38  }
39
40  Stats <- calcStats(Mkt$Long)
41  results[5:7] <- Stats
42
43  Stats <- calcStats(Mkt$Short)
44  results[8:10] <- Stats
45
46  return(results)
47 }

```

## A.1.5 Break Out Systems

### A.1.5.1 Break Out

```

1 BaseSystem2Bout <- function(Mkt, SLoss, MktName){
2   # Trading system based on the break out of the previous day's high/low value.
3   #
4   #   Mkt: market data
5   #   SLoss: stop loss
6   #   MktName: market's name for print out
7   # Returns:
8   #   results vector.
9
10  results <- createResultsVector(MktName, SLoss)
11
12  Mkt$prevHigh <- c( NA, Mkt$High[ - length(Mkt$High) ] )
13  Mkt$prevLow <- c( NA, Mkt$Low[ - length(Mkt$Low) ] )
14
15  # Break out high
16  Mkt$Long <- ifelse(Mkt$High>Mkt$prevHigh,Mkt$Close-Mkt$prevHigh,NA)
17  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
18  #Adj for SLoss
19  if (SLoss < 0) {
20    Mkt$Long <- ifelse(Mkt$High>Mkt$prevHigh,
21                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
22                      Mkt$Long)
23    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
24  }
25
26  # Break out low
27  Mkt$Short <- ifelse(Mkt$Low<Mkt$prevLow,Mkt$prevLow-Mkt$Close,NA)
28  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
29  if (SLoss < 0) {
30    Mkt$Short <- ifelse(Mkt$Low<Mkt$prevLow,
31                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
32                      Mkt$Short)
33    results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
34  }
35
36  Stats <- calcStats(Mkt$Long)
37  results[5:7] <- Stats
38
39  Stats <- calcStats(Mkt$Short)
40  results[8:10] <- Stats
41
42  return(results)
43 }

```

RCode/Bout\_sys.R

### A.1.5.2 90% Quantile

```

1 BaseSystem3Quant902 <- function(Mkt, SLoss, MktName){
2   # Calculates the profit/loss from trading a breakout of a 90% quantile move.
3   #
4   #   Mkt: market data
5   #   SLoss: stop loss
6   #   MktName: market's name for print out
7   # Returns:
8   #   results vector.
9
10  results <- createResultsVector(MktName, SLoss)
11
12  Mkt$OH <- Mkt$High - Mkt$Open
13  Mkt$OL <- Mkt$Open - Mkt$Low
14  Mkt$mn <- ifelse(Mkt$OH>Mkt$OL,Mkt$OL,Mkt$OH)
15  qq <- quantile(Mkt$mn, probs=0.90)
16
17  # Trade Long
18  Mkt$Long <- ifelse((Mkt$High - Mkt$Open) > qq, Mkt$Close - (Mkt$Open + qq), NA)
19  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
20  #Adj for SLoss
21  if (SLoss < 0) {
22    Mkt$Long <- ifelse((Mkt$High - Mkt$Open) > qq,
23                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
24                      Mkt$Long)
25    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
26  }
27
28  # Trade Short
29  Mkt$Short <- ifelse((Mkt$Open - Mkt$Low) > qq, (Mkt$Open - qq) - Mkt$Close, NA)
30  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
31  #Adj for SLoss
32  if (SLoss < 0){
33    Mkt$Short <- ifelse((Mkt$Open - Mkt$Low) > qq,
34                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
35                      Mkt$Short)
36    results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
37  }
38
39  Stats <- calcStats(Mkt$Long)
40  results[5:7] <- Stats
41
42  Stats <- calcStats(Mkt$Short)
43  results[8:10] <- Stats
44
45  return(results)
46 }

```

## A.1.6 Candlestick Systems

### A.1.6.1 Hammer and Inverted Hammer Candlestick Pattern

```

1 candle_hammer <- function(Mkt, SLoss, MktName){
2   # Trading system based on the Hammer candlestick pattern.
3   #
4   #   Mkt: market data
5   #   SLoss: stop loss
6   #   MktName: market's name for print out
7   # Returns:
8   #   results vector.
9
10  results <- createResultsVector(MktName, SLoss)
11
12  Mkt$prev_Hammer <- c( NA, Mkt$Hammer[ - length(Mkt$Hammer) ] )
13  Mkt$prev_Inv_Hammer <- c( NA, Mkt$InvertedHammer[ - length(Mkt$InvertedHammer
14    ) ] )
15
16  # Trade Long
17  Mkt$Long <- ifelse(Mkt$prev_Hammer==TRUE | Mkt$prev_Inv_Hammer==TRUE, Mkt$Close
18    -Mkt$Open, NA)
19  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
20  #Adj for SLoss
21  if (SLoss < 0) {
22    Mkt$Long <- ifelse((Mkt$prev_Hammer==TRUE | Mkt$prev_Inv_Hammer==TRUE) > 0,
23      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
24      Mkt$Long)
25    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
26  }
27
28  Stats <- calcStats(Mkt$Long)
29  results[5:7] <- Stats
30
31  return(results)
32 }
```

RCode/Candle\_Hammer.R

### A.1.6.2 Hammer and Inverted Hammer Candlestick Pattern in a Trending Market

```

1 candle_hammer_aroon <- function(Mkt, SLoss, MktName){
2   # Trading system based on the Hammer candlestick pattern occurring in a
3   # trending market.
4   #
5   #   Mkt: market data
6   #   SLoss: stop loss
7   #   MktName: market's name for print out
8   # Returns:
9   #   results vector.
10
11 }
```

```

10 results <- createResultsVector(MktName, SLoss)
11
12 #browser()
13 Mkt$prev_Aroon_UP <- c( NA, Mkt$aroonUp[ - length(Mkt$aroonUp) ] )
14 Mkt$prev_Aroon_DN <- c( NA, Mkt$aroonDn[ - length(Mkt$aroonDn) ] )
15 Mkt$prev_Hammer <- c( NA, Mkt$Hammer[ - length(Mkt$Hammer) ] )
16 Mkt$prev_Inv_Hammer <- c( NA, Mkt$InvertedHammer[ - length(Mkt$InvertedHammer
    ) ] )
17
18 # Trade Long
19 Mkt$Long <- ifelse(Mkt$prev_Aroon_DN >= 70, ifelse(Mkt$prev_Hammer==T | Mkt$
    prev_Inv_Hammer==T, Mkt$Close-Mkt$Open, NA) ,NA)
20
21 results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
22
23 #Adj for SLoss
24 if (SLoss < 0) {
25     Mkt$Long <- ifelse((Mkt$High - Mkt$Open) > 0,
26                         ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
27                         Mkt$Long)
28     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
29 }
30
31 Stats <- calcStats(Mkt$Long)
32 results[5:7] <- Stats
33
34 return(results)
35 }

```

RCode/Candle\_Hammer-aroon.R

### A.1.6.3 Engulfing Candlestick Pattern

```

1 candle_engulf <- function(Mkt, SLoss, MktName){
2     # Trading system based on the Engulfing candlestick pattern.
3     #
4     # Mkt: market data
5     # SLoss: stop loss
6     # MktName: market's name for print out
7     # Returns:
8     # results vector.
9
10    results <- createResultsVector(MktName, SLoss)
11
12    Mkt$prev_Bull_Engulf <- c( NA, Mkt$Bull.Engulfing[ - length(Mkt$Bull.Engulfing)
        ] )
13    Mkt$prev_Bear_Engulf <- c( NA, Mkt$Bear.Engulfing[ - length(Mkt$Bear.Engulfing)
        ] )
14
15    # Trade Long
16    Mkt$Long <- ifelse(Mkt$prev_Bull_Engulf==TRUE, Mkt$Close-Mkt$Open, NA)
17    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
18 #     #Adj for SLoss

```

```

19   if (SLoss < 0) {
20     Mkt$Long <- ifelse(Mkt$prev_Bull_Engulf == TRUE,
21                       ifelse( (Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
22                       Mkt$Long)
23     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
24   }
25
26   # Trade Short
27   Mkt$Short <- ifelse(Mkt$prev_Bear_Engulf == TRUE, Mkt$Open-Mkt$Close, NA)
28   results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
29   #Adj for SLoss
30   if (SLoss < 0) {
31     Mkt$Short <- ifelse(Mkt$prev_Bear_Engulf == TRUE,
32                       ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
33                       Mkt$Short)
34     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
35   }
36
37   Stats <- calcStats(Mkt$Long)
38   results[5:7] <- Stats
39
40   Stats <- calcStats(Mkt$Short)
41   results[8:10] <- Stats
42
43   return(results)
44 }

```

RCode/Candle\_Engulf.R

#### A.1.6.4 Engulfing Candlestick Pattern in a Trending Market

```

1 candle_engulf_aroon <- function(Mkt, SLoss, MktName){
2   # Trading system based on the Engulfing candlestick pattern occurring in a
   trending market.
3   #
4   #   Mkt: market data
5   #   SLoss: stop loss
6   #   MktName: market's name for print out
7   # Returns:
8   #   results vector.
9
10  results <- createResultsVector(MktName, SLoss)
11
12  #browser()
13  Mkt$prev_Aroon_UP <- c( NA, Mkt$aroonUp[ - length(Mkt$aroonUp) ] )
14  Mkt$prev_Aroon_DN <- c( NA, Mkt$aroonDn[ - length(Mkt$aroonDn) ] )
15  Mkt$prev_Bull_Engulf <- c( NA, Mkt$Bull.Engulfing[ - length(Mkt$Bull.
   Engulfing) ] )
16  Mkt$prev_Bear_Engulf <- c( NA, Mkt$Bear.Engulfing[ - length(Mkt$Bear.
   Engulfing) ] )
17
18  # Trade Long

```



```

19 Mkt$Long <- ifelse(Mkt$prev_Aroon_DN >= 70, ifelse(Mkt$prev_Bull_Engulf==T, Mkt
    $Close-Mkt$Open, NA) ,NA)
20
21 results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
22
23 #Adj for SLoss
24 if (SLoss < 0) {
25     Mkt$Long <- ifelse((Mkt$High - Mkt$Open) > 0,
26                         ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
27                         Mkt$Long)
28     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
29 }
30
31 #Trade Short
32 Mkt$Short <- ifelse(Mkt$prev_Aroon_UP >= 70, ifelse(Mkt$prev_Bull_Engulf==T,
    Mkt$Close-Mkt$Open, NA) ,NA)
33 results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
34 #Adj for SLoss
35 if (SLoss < 0){
36     Mkt$Short <- ifelse((Mkt$Open - Mkt$Low) > 0,
37                         ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
38                         Mkt$Short)
39     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
40 }
41
42 Stats <- calcStats(Mkt$Long)
43 results[5:7] <- Stats
44
45 Stats <- calcStats(Mkt$Short)
46 results[8:10] <- Stats
47
48 return(results)
49 }

```

RCode/Candle\_Engulf\_aroon.R

#### A.1.6.5 Doji Candlestick Pattern in a Trending Market

```

1 candle_doji_aroon <- function(Mkt, SLoss, MktName){
2     # Trading system based on the Doji candlestick pattern occurring in a trending
    market.
3     #
4     # Mkt: market data
5     # SLoss: stop loss
6     # MktName: market's name for print out
7     #
8     # Returns:
9     # results vector.
10
11     results <- createResultsVector(MktName, SLoss)
12
13     #browser()
14     Mkt$prev_Aroon_UP <- c( NA, Mkt$aroonUp[ - length(Mkt$aroonUp) ] )

```

```

15 Mkt$prev_Aroon_DN <- c( NA, Mkt$aroonDn[ - length(Mkt$aroonDn) ] )
16 Mkt$prev_Doji <- c( NA, Mkt$Doji[ - length(Mkt$Doji) ] )
17 Mkt$prev_Dragonfly <- c( NA, Mkt$DragonflyDoji[ - length(Mkt$DragonflyDoji) ]
18 )
19 Mkt$prev_Gravestone <- c( NA, Mkt$GravestoneDoji[ - length(Mkt$GravestoneDoji
20 ) ] )
21 # Trade Long
22 Mkt$Long <- ifelse(Mkt$prev_Aroon_DN >= 70, ifelse(Mkt$prev_Doji==TRUE | Mkt$
23 prev_Dragonfly == TRUE, Mkt$Close-Mkt$Open, NA) ,NA)
24 results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
25 #Adj for SLoss
26 if (SLoss < 0) {
27 Mkt$Long <- ifelse((Mkt$High - Mkt$Open) > 0,
28 ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
29 Mkt$Long)
30 results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
31 }
32 #Trade Short
33 Mkt$Short <- ifelse(Mkt$prev_Aroon_UP >= 70, ifelse(Mkt$prev_Doji==TRUE | Mkt$
34 prev_Gravestone == TRUE, Mkt$Close-Mkt$Open, NA) ,NA)
35 results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
36 #Adj for SLoss
37 if (SLoss < 0){
38 Mkt$Short <- ifelse((Mkt$Open - Mkt$Low) > 0,
39 ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
40 Mkt$Short)
41 results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
42 }
43 Stats <- calcStats(Mkt$Long)
44 results[5:7] <- Stats
45
46 Stats <- calcStats(Mkt$Short)
47 results[8:10] <- Stats
48
49 return(results)
50 }

```

RCode/Candle\_Doji\_aroon.R

## A.2 Chapter 5

The R code used to generate the results and tables in Chapter 5 is shown in listing A.2. This is followed by the individual files containing the algorithms used in the chapter.

```

1 # Chapter 5
2 setwd("D:/Allan/DropBox/MSc/Dissertation/Thesis/RCode")
3
4 # libraries

```

```

5 library(forecast)
6 library(xtable)
7
8 #source
9 source("../RCode/Utils.R")
10 source("../RCode/es_1.R")
11 source("../RCode/ts_1.R")
12 source("../RCode/ts_2.R")
13 source("../RCode/ts_3.R")
14 source("../RCode/ts_3a.R")
15 source("../RCode/ts_4.R")
16 source("../RCode//NaiveReversePrev.R")
17
18 fil <- c("../Data/Dax_2000_d.csv",
19         "../Data/CAC_2000_d.csv",
20         "../Data/F100_2000_d.csv",
21         "../Data/Dow_2000_d.csv",
22         "../Data/N225_2000_d.csv",
23         "../Data/Oz_2000.csv")
24 nm <- c("DAX", "CAC", "FTSE", "Dow", "Nikkei", "AORD")
25
26 # Add Naive reverse prev for comparison purposes
27 # data frame will be fed into sub_df
28 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
29 NaiveRev <- run_NaiveReversePrev(fil, 0, nm)
30 std6 <- c(1,3,4,5,7,8,10)
31 misc_col <- 11
32
33 # -----
34 # ----- Base Systems
35 Mkt <- read.csv("../Data/Dax_2000_d.csv")
36 Mkt$Date[2999]
37 Mkt_ts <- ts(Mkt$Close)
38 Mkt_train <- window(Mkt_ts, end=2999.99)
39 Mkt_test <- window(Mkt_ts, start=3000)
40
41 # a.build the mean model
42 mean_model <- meanf(Mkt_train, h=5)
43 a <- accuracy(mean_model, Mkt_test) #out of sample
44 rownames(a) <- c('Mean Training Set', 'Mean Test Set')
45
46 # b. build the naive model
47 naive_model <- naive(Mkt_train, h=5)
48 b <- accuracy(naive_model, Mkt_test) #out of sample
49 rownames(b) <- c('Naive Training Set', 'Naive Test Set')
50
51 # c. build the drift model
52 drift_model <- rwf(Mkt_train,drift=TRUE,h=5)
53 c <- accuracy(drift_model, Mkt_test) #out of sample
54 rownames(c) <- c('Drift Training Set', 'Drift Test Set')
55
56 # combine results
57 d <- rbind(a,c)
58
59 # produce latex table

```

```

60 dat <- d[,c(2,3,4,5,6)]
61 dig <- 0
62 cap <- c("Error measures from mean and drift models.",
63         "Error measures from mean and drift models")
64 lab = 'tab:chp_ts:sma'
65 filename = '../Tables/chp_ts_sma.tex'
66 inclrnam=TRUE
67 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
68
69 # --- plot all three base systems on Dow
70 savepdf("chp_ts_dax1")
71 Mkt_act <- window(Mkt_ts, start=3020, end=3200)
72 plot.ts(Mkt_train,
73         main="Simple Forecasting Methods",
74         xlab="Days since 2000", ylab="DAX Closing Price",
75         xlim=c(2, 3200))
76 lines(meanf(Mkt_train, h=350) $mean, lty=2)
77 lines(rwf(Mkt_train,drift=TRUE,h=350)$mean,lty=3)
78 legend("bottomright",lty=c(2,3),
79       legend=c("Mean method","Drift method"))
80 dev.off() #savepdf end
81
82 # --- plot all three base systems on Dow PLUS actual data
83 savepdf("chp_ts_dax1_plus_act_data")
84 Mkt_act <- window(Mkt_ts, start=3020, end=3200)
85 plot.ts(Mkt_train,
86         main="Simple Forecasting Methods",
87         xlab="Days since 2000", ylab="DAX Closing Price",
88         xlim=c(2, 3200))
89 lines(meanf(Mkt_train, h=350) $mean, lty=2)
90 lines(rwf(Mkt_train,drift=TRUE,h=350)$mean,lty=3)
91 legend("bottomright",lty=c(2,3),
92       legend=c("Mean method","Drift method"))
93 lines(Mkt_act, lty=4)
94 dev.off() #savepdf end
95
96 # 1. Exp Smoothing - mean model
97 # a. build data set - window thru and add prediction
98 # a1 - calculates mean prediction
99 exp_mean <- function(Mkt_ts, Mkt, strt, mean_flag){
100   Mkta <- Mkt
101   cc <- Mkta[1,]
102   cc$a <- 0
103   ln <- nrow(Mkt)
104   for(i in strt:ln){
105     st <- i-30
106     Mkt_slice <- window(Mkt_ts,start=st,end=i)
107     if (mean_flag == TRUE) {
108       modf <- meanf(Mkt_slice,h=1)
109     } else {
110       modf <- rwf(Mkt_slice,drift=TRUE,h=1)
111     }
112     a <- as.numeric(modf$mean)
113     c1 <- Mkta[i,]
114     ab <- cbind(c1,a)

```

```

115     cc <- rbind(cc,ab)
116   }
117   cc <- cc[-1,]
118   return(cc)
119 }
120
121 # a2 - generates data sets with predictions
122 run_exp_mean <- function(fil,nm){
123   for(i in 1:length(fil)){
124     Mkt <- read.csv(fil[i])
125     Mkt_ts <- ts(Mkt$Close)
126     res <- exp_mean(Mkt_ts,Mkt,400,TRUE)
127     browser()
128     write.csv(res,paste('../Data/ES/',nm[i],'_es_mean.csv',sep=""),row.names=
129       FALSE)
130   }
131 }
132 # a3 - run thru data sets - takes while so need to run just once
133 # run_exp_mean(fil,nm)
134
135 # a4 - use data sets in system
136 fil_mean <- c("../Data/ES/Dax_es_mean.csv",
137               "../Data/ES/CAC_es_mean.csv",
138               "../Data/ES/FTSE_es_mean.csv",
139               "../Data/ES/Dow_es_mean.csv",
140               "../Data/ES/Nikkei_es_mean.csv",
141               "../Data/ES/AORD_es_mean.csv")
142
143 run_es_1 <- function(fil,SLoss,nm){
144   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
145   for(i in 1:length(fil)){
146     Mkt <- read.csv(fil[i])
147     a <- es_1(Mkt, SLoss, nm[i])
148     df10 <- rbind(df10,a)
149   }
150   df.name <- names(a)
151   names(df10) <- df.name
152   df10 <- df10[-1,]
153   return(df10)
154 }
155
156 res_mean <- run_es_1(fil_mean,0,nm)
157 res_mean[misc_col] <- 'Mean Method'
158
159 # for summary results
160 total_res <- res_mean
161
162 dat <- res_mean[,std6]
163 dig <- 2
164 cap = c('Results from trading the predictions generated by a mean exponential
165         smoothing system.',
166         'Results from trading the predictions generated by a mean exponential
167         smoothing system')
168 lab = 'tab:es_mean_sys'

```

```

167 filename = '../Tables/chp_ts_es_mean.tex'
168 inclrnam=FALSE
169 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
170
171 # -----
172 # 2 - Drift model
173 run_exp_drift <- function(fil,nm){
174   for(i in 1:length(fil)){
175     Mkt <- read.csv(fil[i])
176     Mkt_ts <- ts(Mkt$Close)
177     res <- exp_mean(Mkt_ts,Mkt,400,FALSE)
178     write.csv(res,paste('../Data/ES/',nm[i],'_es_drift.csv',sep=""),row.names=
179       FALSE)
180   }
181 }
182 # a3 - run thru data sets - takes while so need to run just once
183 #run_exp_drift(fil,nm)
184
185 fil_drift <- c("../Data/ES/Dax_es_drift.csv",
186               "../Data/ES/CAC_es_drift.csv",
187               "../Data/ES/FTSE_es_drift.csv",
188               "../Data/ES/Dow_es_drift.csv",
189               "../Data/ES/Nikkei_es_drift.csv",
190               "../Data/ES/AORD_es_drift.csv")
191
192 res_drift <- run_es_1(fil_drift,0,nm)
193 res_drift[misc_col] <- 'Drift Method'
194
195 # Add to total results
196 total_res <- rbind(total_res, res_drift)
197
198 dat <- res_drift[,std6]
199 dig <- 2
200 cap = c('Results from trading the predictions generated by a drift exponential
201         smoothing system.',
202         'Results from trading the predictions generated by a drift exponential
203         smoothing system')
204 lab = 'tab:es_drift_sys'
205 filename = '../Tables/chp_ts_es_drift.tex'
206 inclrnam=FALSE
207 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
208
209 # 3. Exp Smoothing - ets model
210 # 3a. gen data set
211 exp_sm <- function(Mkt_ts, Mkt, strt){
212   Mkta <- Mkt
213   cc <- Mkta[1,]
214   cc$a <- 0
215   cc$b <- 0
216   ln <- nrow(Mkt)
217   for(i in strt:ln){
218     st <- i-30
219     Mkt_slice <- window(Mkt_ts,start=st,end=i)
220     modf <- ets(Mkt_slice)

```

```

219     fcastf <- forecast.ets(modf,h=1)
220     a <- as.numeric(fcastf$mean)
221     b <- modf$method
222     c1 <- Mkta[i,]
223     ab <- cbind(c1,b,a)
224     cc <- rbind(cc,ab)
225   }
226   cc <- cc[-1,]
227   return(cc)
228 }
229
230 # 3b - generates data sets with predictions
231 run_exp_sm <- function(fil,nm){
232   for(i in 1:length(fil)){
233     Mkt <- read.csv(fil[i])
234     Mkt_ts <- ts(Mkt$Close)
235     res <- exp_sm(Mkt_ts,Mkt,400)
236     browser()
237     write.csv(res,paste('../Data/ES/',nm[i],'_es.csv',sep=""),row.names=FALSE)
238   }
239 }
240
241 # loop thru data sets - takes while so need to run just once
242 #run_exp_sm(fil,nm)
243
244 # 3d Trade ES
245 fil_es <- c("../Data/ES/Dax_es.csv",
246             "../Data/ES/CAC_es.csv",
247             "../Data/ES/FTSE_es.csv",
248             "../Data/ES/Dow_es.csv",
249             "../Data/ES/Nikkei_es.csv",
250             "../Data/ES/AORD_es.csv")
251
252 # use prev function
253 res_es <- run_es_1(fil_es,0,nm)
254 res_es[misc_col] <- 'Exponential Smoothing'
255
256 # Add to total results
257 total_res <- rbind(total_res, res_es)
258
259 dat <- res_es[,std6]
260 dig <- 2
261 cap = c('Results from trading the predictions generated by a moving window
262         exponential smoothing system.',
263         'Results from trading the predictions generated by a moving window
264         exponential smoothing system')
265 lab = 'tab:es_sys'
266 filename = '../Tables/chp_ts_es.tex'
267 inclrnam=FALSE
268 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
269
270 # -----
271 # 2. ARIMA -----
272 Mkt <- read.csv("../Data/F100_2000_d.csv")
273 Mkt_ts <- ts(Mkt$Close)

```

```

272 Mkt_train <- window(Mkt_ts, end=2999.99)
273 Mkt_test <- window(Mkt_ts, start=3000)
274
275 # -----
276 # 2.1. Plot the data. Identify any unusual observations.
277 savepdf("chp_ts_ftse_2000-13")
278 plot.ts(Mkt_train,
279         main="FTSE 2000 - 2013",
280         xlab="Days since 2000",
281         ylab="FTSE Closing Price",
282         xlim=c(100, 3000))
283 dev.off()
284
285 # 2.3. If the data are non-stationary: take first differences of the
286 #data until the data are stationary.
287 savepdf("chp_ts_ftse_2000-13_diff")
288 plot(diff(Mkt_train),
289      main="First Difference of FTSE 2000 - 2013",
290      xlab="Days since 2000",
291      ylab="FTSE Daily Price Movement",
292      xlim=c(100, 3000))
293 dev.off()
294
295 # -----
296 # 2.4. Examine the ACF/PACF: Is an AR(p) or MA(q) model appropriate?
297
298 # all 3 incl diff
299 savepdf("chp_ts_ftse_2000-13_diff_acf_tsd")
300 tsdisplay(diff(Mkt_train),main="FTSE 100 between 2000 and 2013",
301          xlab="Days since 2000",
302          ylab="FTSE Daily Price Movement")
303 dev.off()
304
305 # a ACF
306 savepdf("chp_ts_ftse_2000-13_diff_acf")
307 plot(Acf(diff(Mkt_train)),
308      main="ACF of FTSE 100 between 2000 and 2013",
309      ylim=c(-0.08, 0.08))
310 dev.off()
311
312 # a PACF
313 savepdf("chp_ts_ftse_2000-13_diff_pacf")
314 plot(Pacf(diff(Mkt_train)),
315      main="PACF of FTSE 100 between 2000 and 2013",
316      ylim=c(-0.08, 0.08))
317 dev.off()
318
319 # -----
320 # 2.5. Try your chosen model(s), and use the AICc to search for a better model.
321
322 mod_ar <- function(Mkt_ts, ord, nm){
323   res <- t(as.data.frame(rep(0,4)))
324   mod <- Arima(Mkt_ts, order=ord)
325   res[1,1] <- nm
326   res[1,2] <- round(mod$aic,1)

```



```

327   res[1,3] <- round(mod$aicc,1)
328   res[1,4] <- round(mod$bic,1)
329   return(res)
330 }
331
332 results <- t(as.data.frame(rep(0,4)))
333 colnames(results) <- c('Model','AIC','AICc','BIC')
334
335 r2 <- mod_ar(Mkt_train, c(3,1,1), 'ARIMA(3,1,1)')
336 results <- rbind(results,r2)
337 r2 <- mod_ar(Mkt_train, c(3,1,2), 'ARIMA(3,1,2)')
338 results <- rbind(results,r2)
339 r2 <- mod_ar(Mkt_train, c(3,1,3), 'ARIMA(3,1,3)')
340 results <- rbind(results,r2)
341 r2 <- mod_ar(Mkt_train, c(2,1,1), 'ARIMA(2,1,1)')
342 results <- rbind(results,r2)
343 r2 <- mod_ar(Mkt_train, c(2,1,2), 'ARIMA(2,1,2)')
344 results <- rbind(results,r2)
345 r2 <- mod_ar(Mkt_train, c(2,1,3), 'ARIMA(2,1,3)')
346 results <- rbind(results,r2)
347 results <- results[-1,]
348
349 # produce latex table
350 dat <- results
351 dig <- c(0,0,2,2,2)
352 cap <- c("AIC, AICc and BIC results from alternative ARIMA models.",
353         "AIC, AICc and BIC results from alternative ARIMA models")
354 lab = 'tab:chp_ts:arima_res_r'
355 filename = '../Tables/chp_ts_arima_res_r.tex'
356 inclrnam=F
357 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
358
359 # -----
360 # 2.6. Check the residuals from your chosen model by plotting the ACF of the
      residuals,
361 #and doing a portmanteau test of the residuals.
362 #If they do not look like white noise, try a modified model.
363
364 model_used_for_res <- Arima(Mkt_train, order=c(2,1,3))
365 model_name <- forecast(model_used_for_res)$method
366
367 # a mean of residual
368 residual <- model_used_for_res$residuals
369 savepdf("chp_ts_ftse_2000-13_mean_residuals")
370 plot(residual, main = paste("Residuals from model of", model_name),
371      ylab="", xlab="Day")
372 dev.off()
373
374 # b. acf of residual
375 savepdf("chp_ts_ftse_2000-13_acf_residuals")
376 Acf(residuals(model_used_for_res),
377     main= paste("ACF of Residuals of", model_name))
378 dev.off()
379
380 # d. histogram of residuals - normal distribution

```

```

381 savepdf("chp_ts_ftse_2000-13_hist_residuals")
382 hist(residual, nclass="FD", main="Histogram of residuals")
383 dev.off()
384
385 # e. portmanteau tests
386 bb <- Box.test(residuals(model_used_for_res), lag=24, fitdf=4, type="Ljung")
387 results_bc <- as.data.frame(rep(0,3))
388 results_bc[1,1] <- round(bb$p.value,4)
389 results_bc[2,1] <- round(bb$parameter)
390 results_bc[3,1] <- round(bb$statistic)
391 colnames(results_bc) <- c(forecast(model_used_for_res)$method)
392 rownames(results_bc) <- c('p-value','x-squared','df')
393 results_bc_t <- t(results_bc)
394
395 dat <- results_bc_t
396 dig <- c(0,4,0,0)
397 cap <- c("Box Ljung test of FTSE 100 ARIMA model residuals.",
398         "Box Ljung test of FTSE 100 ARIMA model residuals")
399 lab = 'tab:chp_ts:arima_res_rbox_l'
400 filename = '../Tables/chp_ts_arima_res_r_box_l.tex'
401 inclrnam=TRUE
402 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
403
404 # 2.7 Once the residuals look like white noise, calculate forecasts.
405 model_used_for_res <- Arima(Mkt_ts, order=c(2,1,3))
406 model_name <- forecast(model_used_for_res)$method
407
408 arima_man_fcast <- forecast.Arima(model_used_for_res,Mkt_test)
409 fitted.data <- as.data.frame(arima_man_fcast$fitted);
410 Mkt_test_df <- cbind(Mkt,fitted.data)
411 colnames(Mkt_test_df) <- c('Date','Open','High','Low','Close','Forecast')
412
413 # plot the results
414 dat <- tail(Mkt_test_df)
415 dig <- 0
416 cap <- c("One-step ahead forecast for FTSE 100 generated from ARIMA(2,1,3) model.",
417         "",
418         "Forecast for FTSE 100 generated from the ARIMA model")
419 lab = 'tab:chp_ts:ftse_100_fcast'
420 filename = '../Tables/chp_ts_ftse_100_fcast.tex'
421 inclrnam=F
422 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
423
424 # -----
425 # 2.8 auto.arima
426 arim_mod_fnc <- function(fil,nm){
427   dfres <- dfres <- t(c('a','b'))
428   for(i in 1:length(fil)){
429     Mkt <- read.csv(fil[i])
430     Mkt_train <- ts(Mkt$Close)
431     arima_train_mod <- auto.arima(Mkt_train)
432     dfres <- rbind(dfres,c(nm[i], forecast(arima_train_mod)$method))
433   }
434   return(dfres)
435 }

```

```

435
436 fg <- arim_mod_fnc(fil,nm)
437 fg <- fg[-1,]
438 colnames(fg) <- c('Market','ARIMA Model')
439
440 # plot the results
441 dat <- fg
442 dig <- 0
443 cap <- c("ARIMA models chosen to forecast future values in the national indice
      data sets.",
444          "ARIMA models chosen for the indice data sets")
445 lab = 'tab:chp_ts_arima_models'
446 filename = '../Tables/chp_ts_arima_models.tex'
447 inclrn=F
448 print_xt(dat,dig,cap,lab,al,filename,inclrn)
449
450 # plot the results for Chp 6 ...
451 dat <- fg
452 dig <- 0
453 cap <- c("ARIMA models chosen to forecast future values in the national indice
      data sets.",
454          "ARIMA models chosen for the indice data sets")
455 lab = 'tab:chp_ts_arima_models_chp6'
456 filename = '../Tables/chp_ts_arima_models_chp6.tex'
457 inclrn=F
458 print_xt(dat,dig,cap,lab,al,filename,inclrn)
459
460 # -----
461 # 3. Trading System
462 # using the models generated from the auto.arima function
463 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
464 ts_1_fnc <- function(fil,nm,ts1){
465   for(i in 1:length(fil)){
466     Mkt <- read.csv(fil[i])
467     Mkt_ts <- ts(Mkt$Close)
468     Mkt_train <- window(Mkt_ts, end=2999.99)
469     Mkt_test <- window(Mkt_ts, start=3000)
470     arima_train_mod <- auto.arima(Mkt_train)
471     arima_fcast <- forecast.Arima(arima_train_mod,Mkt_test)
472     arima_test_mod <- Arima(Mkt_test, model = arima_train_mod) # 1 step fcast on
      future data ...
473     arima_test_fcast <- forecast(arima_test_mod)
474     fitted.data <- as.data.frame(arima_test_fcast$fitted);
475     ln <- nrow(Mkt)
476     lw <- nrow(fitted.data)
477     Mkt_test_df <- Mkt[(ln-lw+1):ln,]
478     Mkt_test_df <- cbind(Mkt_test_df,fitted.data)
479     colnames(Mkt_test_df) <- c("Date","Open", "High","Low","Close","p")
480     if(ts1 == TRUE){
481       a <- ts_1(Mkt_test_df, 0, nm[i]) # System 1
482     } else {
483       a <- ts_2(Mkt_test_df, 0, nm[i]) # System 2
484     }
485     df10 <- rbind(df10, a)
486   }

```

```

487   df.name <- names(a)
488   names(df10) <- df.name
489   df10 <- df10[-c(1),]
490   return(df10)
491 }
492
493 # run the fnc ts_1 and apply Sys 1 to the auto.arima data
494 res1 <- ts_1_fnc(fil,nm,TRUE)
495 res1[misc_col] <- 'ARIMA - System 1'
496
497 # Add to total results
498 total_res <- rbind(total_res, res1)
499
500 # produce latex table from ts_1
501 dat <- res1[,c(1,3,4,5,7,8,10)]
502 dig <- 0
503 cap <- c("Results from trading System 1 using the forecasts generated by the
          ARIMA models.",
          "Results from trading System 1 using the forecasts generated by the
          ARIMA models")
505 lab = 'tab:chp_ts:arima1'
506 filename = '../Tables/chp_ts_arima1.tex'
507 inclrnam=FALSE
508 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
509
510 # compare to Naive reverse
511 diff_df1 <- sub_df_av_pl(res1,NaiveRev)
512 # produce latex table from ts_1
513 #dat <- diff[,c(1,7,10)]
514 dat <- diff_df1
515 dig <- 0
516 cap <- c("PL from Naive Reversing system subtracted from results generated by a
          trading system based on ARIMA forecasts.",
          "ARIMA system results minus Naive Reversing results")
518 lab = 'tab:chp_ts:arima1_diff'
519 filename = '../Tables/chp_ts_arima1_diff.tex'
520 inclrnam=FALSE
521 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
522
523 # -----
524 # run the fnc ts_2
525 # apply system 2 to auto.arima data
526 res2 <- ts_1_fnc(fil,nm,FALSE) # F = ts_2
527 res2[misc_col] <- 'ARIMA - System 2'
528
529 # Add to total results
530 total_res <- rbind(total_res,res2)
531
532 # produce latex table from ts_2
533 dat <- res2[,c(1,3,4,5,7,8,10)]
534 dig <- 0
535 cap <- c("Results from trading System 2 using the forecasts generated by the
          ARIMA models.",
          "Results from trading System 2 using the forecasts generated by the
          ARIMA models")
536

```

```

537 lab = 'tab:chp_ts:arima2'
538 filename = '../Tables/chp_ts_arima2.tex'
539 inclrnam=FALSE
540 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
541
542 # ----- RM Generated Files -----
543 # ----- HYBRID ARIMA SYSTEMS -----
544
545 ts_1_2_fnc_ar <- function(fil,nm,ts1){
546   for(i in 1:length(fil)){
547     #browser()
548     Mkt <- read.csv(fil[i],stringsAsFactors=F)
549     Mkt_p <- Mkt[,c(1,2,3,4,5,20)]
550     colnames(Mkt_p) <- c("Date","Open", "High","Low","Close","p")
551     if(ts1 == TRUE){
552       a <- ts_1(Mkt_p, 0, nm[i])
553     } else {
554       a <- ts_2(Mkt_p, 0, nm[i])
555     }
556     df10 <- rbind(df10, a)
557   }
558   df.name <- names(a)
559   names(df10) <- df.name
560   df10 <- df10[-c(1),]
561   return(df10)
562 }
563
564 # ----- Predicting Closing Price -----
565 # 1. ----- Arima Ann Predicting Closing Price -----
566 fil <- c("../Data/ARIMA2/Predict_Close/ar334_ann_DAX.csv",
567          "../Data/ARIMA2/Predict_Close/ar334_ann_CAC.csv",
568          "../Data/ARIMA2/Predict_Close/ar334_ann_FTSE.csv",
569          "../Data/ARIMA2/Predict_Close/ar334_ann_Dow.csv",
570          "../Data/ARIMA2/Predict_Close/ar334_ann_Nik.csv",
571          "../Data/ARIMA2/Predict_Close/ar334_ann_Oz.csv")
572
573 #nm <- c("Dax","CAC","FTSE","Dow","Nikkei","AORD")
574 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
575
576 # a. System 1
577 res3 <- ts_1_2_fnc_ar(fil,nm,TRUE)
578 res3[misc_col] <- 'ARIMA/ANN Closing Price System 1'
579
580 # Add to total results
581 total_res <- rbind(total_res, res3)
582
583 # produce latex table from ts_1
584 dat <- res3[,c(1,3,4,5,7,8,10)]
585 dig <- 0
586 cap <- c("Results from passing closing price predictions from hybrid ARIMA/ANN
587          model to System 1.",
588          "Results from passing closing price predictions from hybrid ARIMA/ANN
589          model to System 1")
588 lab = 'tab:chp_ts:arima_ann_sys1'
589 filename = '../Tables/chp_ts_arima_ann_sys1.tex'

```

```

590 inclrnam=FALSE
591 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
592
593 # comp aring to Naive Prev
594 res_diff3 <- sub_df_av_pl(res3,NaiveRev)
595
596 dat <- res_diff3
597 dig <- 0
598 cap <- c("PL from Naive Reversing system subtracted from results generated by
          trading System 1 based on ARIMA/ANN closing price forecasts.",
          "ARIMA/ANN closing price system results minus Naive Reversing results")
599
600 lab = 'tab:chp_ts:arima_ann_sys1_diff'
601 filename = '../Tables/chp_ts_arima_ann_sys1_diff.tex'
602 inclrnam=FALSE
603 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
604
605 # a. System 2
606 res4 <- ts_1_2_fnc_ar(fil,nm,FALSE)
607 res4[misc_col] <- 'ARIMA/ANN Closing Price System 2'
608
609 # Add to total results
610 total_res <- rbind(total_res, res4)
611
612 # produce latex table from ts_1
613 dat <- res4[,c(1,3,4,5,7,8,10)]
614 dig <- 0
615 cap <- c("Results from passing closing price predictions from hybrid ARIMA/ANN
          model to System 2.",
          "Results from passing closing price predictions from hybrid ARIMA/ANN
          model to System 2")
616
617 lab = 'tab:chp_ts:arima_ann_sys2'
618 filename = '../Tables/chp_ts_arima_ann_sys2.tex'
619 inclrnam=FALSE
620 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
621
622 # 2. ----- Arima knn Predicting Closing Price -----
623 fil <- c("../Data/ARIMA2/Predict_Close/ar334_knn_Dax.csv",
624          "../Data/ARIMA2/Predict_Close/ar334_knn_CAC.csv",
625          "../Data/ARIMA2/Predict_Close/ar334_knn_F100.csv",
626          "../Data/ARIMA2/Predict_Close/ar334_knn_Dow.csv",
627          "../Data/ARIMA2/Predict_Close/ar334_knn_Nik.csv",
628          "../Data/ARIMA2/Predict_Close/ar334_knn_Oz.csv")
629
630 # a. System 1
631 #nm <- c("Dax","CAC","FTSE","Dow","Nikkei","AORD")
632 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
633 # a. System 1
634 res5 <- ts_1_2_fnc_ar(fil,nm,TRUE)
635 res5[misc_col] <- 'ARIMA/k-NN Closing Price System 1'
636
637 # Add to total results
638 total_res <- rbind(total_res, res5)
639
640 # produce latex table from ts_1
641 dat <- res5[,c(1,3,4,5,7,8,10)]

```

```

642 dig <- 0
643 cap <- c("Results from passing closing price predictions from hybrid ARIMA/k-NN
        model to System 1.",
644         "Results from passing closing price predictions from hybrid ARIMA/k-NN
        model to System 1")
645 lab = 'tab:chp_ts:pred_close_arma_knn_sys1'
646 filename = '../Tables/chp_ts_pred_close_arma_knn_sys1.tex'
647 inclrnam=FALSE
648 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
649
650 # comp aring to Naive Prev
651 #res_diff <- sub_df_av_pl(res,NaiveRev)
652 res_diff5 <- sub_df(res5,NaiveRev)
653
654 # produce latex table from ts_1
655 dat <- res_diff5[,c(1,5,7,8,10)]
656 dig <- 0
657 cap <- c("PL from Naive Reversing system subtracted from results generated by
        trading System 1 based on ARIMA/k-NN closing price forecasts.",
658         "ARIMA/k-NN closing price system results minus Naive Reversing results")
659 lab = 'tab:chp_ts:pred_close_arma_knn_sys1_diff'
660 filename = '../Tables/chp_ts_pred_close_arma_knn_sys1_diff.tex'
661 inclrnam=FALSE
662 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
663
664 # a. System 2
665 res6 <- ts_1_2_fnc_ar(fil,nm,FALSE)
666 res6[misc_col] <- 'ARIMA/k-NN Closing Price System 2'
667
668 # Add to total results
669 total_res <- rbind(total_res, res6)
670
671 # produce latex table from ts_1
672 dat <- res6[,c(1,3,4,5,7,8,10)]
673 dig <- 0
674 cap <- c("Results from passing closing price predictions from hybrid ARIMA/k-NN
        model to System 2.",
675         "Results from passing closing price predictions from hybrid ARIMA/k-NN
        model to System 2")
676 lab = 'tab:chp_ts:pred_close_arma_knn_sys2'
677 filename = '../Tables/chp_ts_pred_close_arma_knn_sys2.tex'
678 inclrnam=FALSE
679 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
680
681 # -----
682 # ----- Arima Ann Predicting Up/Dn - Categorical -----
683 # a. Categorical
684
685 # 1. ARMA / ANN (Predicting Up/Dn - Categorical)
686 fil <- c("../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_ann_Dax2.csv",
687          "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_ann_CAC.csv",
688          "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_ann_F100.csv",
689          "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_ann_Dow.csv",
690          "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_ann_N225.csv",
691          "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_ann_0z.csv")

```

```

692
693 #nm <- c("Dax","CAC","FTSE","Dow","Nik","AORD")
694 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
695
696 res7 <- ts_4_fnc_ar(fil,0, nm)
697 res7[misc_col] <- 'ARIMA/ANN Up/Down'
698
699 # Add to total results
700 total_res <- rbind(total_res, res7)
701
702 # produce latex table from ts_1
703 dat <- res7[,c(1,3,4,5,7,8,10)]
704 dig <- 0
705 cap <- c("Results from a trading system using the forecast of categorical label \
        "U/D\" from hybrid ARIMA/ANN model.",
706         "Results from a trading system using the forecast of categorical label \
        "U/D\" from hybrid ARIMA/ANN model")
707 lab = 'tab:chp_ts:pUD_CAT_arima_ann_sys'
708 filename = '../Tables/chp_ts_predUpDn_CAT_arima_ann_sys.tex'
709 inclrnam=FALSE
710 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
711
712 # -----
713 # 2. ARMA / knn (Predicting Up/Dn - Categorical)
714 fil <- c("../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_knn_Dax.csv",
715         "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_knn_CAC.csv",
716         "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_knn_F100.csv",
717         "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_knn_Dow.csv",
718         "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_knn_N225.csv",
719         "../Data/ARIMA2/PredUpDn_CAT/ar_334_UD_knn_0z.csv")
720
721 #nm <- c("Dax","CAC","FTSE","Dow","Nikkei","AORD")
722 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
723
724 res8 <- ts_4_fnc_ar(fil, 0, nm)
725 res8[misc_col] <- 'ARIMA/k-NN Up/Down'
726
727 # Add to total results
728 total_res <- rbind(total_res, res8)
729
730 # produce latex table from ts_1
731 dat <- res8[,c(1,3,4,5,7,8,10)]
732 dig <- 0
733 cap <- c("Results from a trading system using the forecast of categorical label \
        "U/D\" from hybrid ARIMA/k-NN model.",
734         "Results from a trading system using the forecast of categorical label \
        "U/D\" from hybrid ARIMA/k-NN model")
735 lab = 'tab:chp_ts:pUD_CAT_arima_knn_sys'
736 filename = '../Tables/chp_ts_predUpDn_CAT_arima_knn_sys.tex'
737 inclrnam=FALSE
738 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
739
740 # 2. ARMA / knn (Predicting Up/Dn - Categorical) - SLoss
741 res8a <- ts_4_fnc_ar(fil, -100, nm)
742 res8a[misc_col] <- 'ARIMA/ANN Up/Down Stop Loss'

```



```

743
744 # Add to total results
745 total_res <- rbind(total_res, res8a)
746
747 # produce latex table from ts_1
748 dat <- res8a[,c(1,3,4,5,7,8,10)]
749 dig <- 0
750 cap <- c("Results from a trading system with a stop loss using the forecast of
       categorical label \"U/D\" from hybrid ARIMA/k-NN model.",
751         "Results from a trading system with a stop loss using the forecast of
       categorical label \"U/D\" from hybrid ARIMA/k-NN model")
752 lab = 'tab:chp_ts:pUD_CAT_arima_knn_sys_SL'
753 filename = '../Tables/chp_ts_predUpDn_CAT_arima_knn_sys_SL.tex'
754 inclrnam=FALSE
755 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
756
757 # comp aring to Naive Prev
758 res_diff8 <- sub_df(res8,NaiveRev)
759
760 # produce latex table from ts_1
761 dat <- res_diff8[,c(1,5,7,8,10)]
762 dig <- 0
763 cap <- c("PL from Naive Reversing system subtracted from results generated by a
       trading system based on ARIMA/k-NN U/D forecasts.",
764         "ARIMA/k-NN U/D system results minus Naive Reversing results")
765 lab = 'tab:chp_ts:pUD_CAT_arima_knn_sys_diff'
766 filename = '../Tables/chp_ts_predUpDn_CAT_arima_knn_sys_diff.tex'
767 inclrnam=FALSE
768 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
769
770 # 4. ARMA / SVM (Predicting Up/Dn - Categorical)
771 fil <- c("../Data/ARIMA2/PredUpDn_CAT/ar_334_ud_svm_Dax.csv",
772         "../Data/ARIMA2/PredUpDn_CAT/ar_334_ud_svm_CAC.csv",
773         "../Data/ARIMA2/PredUpDn_CAT/ar_334_ud_svm_F100.csv",
774         "../Data/ARIMA2/PredUpDn_CAT/ar_334_ud_svm_Dow.csv",
775         "../Data/ARIMA2/PredUpDn_CAT/ar_334_ud_svm_N225.csv",
776         "../Data/ARIMA2/PredUpDn_CAT/ar_334_ud_svm_0z.csv")
777
778 #nm <- c("Dax","CAC","FTSE","Dow","Nikkei","AORD")
779 df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
780
781 res9 <- ts_4_fnc_ar(fil,0, nm)
782 res9[misc_col] <- 'ARIMA/SVM Up/Down'
783
784 # Add to total results
785 total_res <- rbind(total_res, res9)
786
787 # produce latex table from ts_1
788 dat <- res9[,c(1,3,4,5,7,8,10)]
789 dig <- 0
790 cap <- c("Results from a trading system using the forecast of categorical label \
       \"U/D\" from hybrid ARIMA/SVM model.",
791         "Results from a trading system using the forecast of categorical label \
       \"U/D\" from hybrid ARIMA/SVM model")
792 lab = 'tab:chp_ts:pUD_CAT_arima_svm_sys'

```

```

793 filename = '../Tables/chp_ts_predUpDn_CAT_arima_svm_sys.tex'
794 inclrnam=FALSE
795 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
796
797 # comp aring to Naive Prev
798 res_diff9 <- sub_df(res9,NaiveRev)
799
800 # produce latex table from ts_1
801 dat <- res_diff9[,c(1,5,7,8,10)]
802 dig <- 0
803 cap <- c("PL from Naive Reversing system subtracted from results generated by a
      trading system based on ARIMA/SVM U/D forecasts.",
804         "ARIMA/SVM U/D system results minus Naive Reversing results")
805 lab = 'tab:chp_ts:pUD_CAT_arima_svm_sys_diff'
806 filename = '../Tables/chp_ts_predUpDn_CAT_arima_svm_sys_diff.tex'
807 inclrnam=FALSE
808 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
809
810 # Chp6
811 lab = 'tab:chp_ts:pUD_CAT_arima_svm_sys_ch6'
812 filename = '../Tables/chp_ts_predUpDn_CAT_arima_svm_sys_chp6.tex'
813 inclrnam=FALSE
814 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
815
816 # -- Generate Summary tables for Chp6
817 # 1. Dax
818 colnames(total_res)[11] <- 'Methodology'
819 Dx <- total_res[total_res$Mkt == 'DAX',]
820 Dx2 <- Dx[c(11,3,4,7,10)]
821
822 # latex table
823 dat <- Dx2
824 dig <- 2
825 cap = c('Chapter 5 DAX Results',
826         'Chapter 5 DAX Results')
827 lab = 'tab:chp6:dax2_summary'
828 filename = '../Tables/chp_6_dax2_summary.tex'
829 inclrnam=FALSE
830 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
831
832 # 2. CAC
833 Cc <- total_res[total_res$Mkt == 'CAC',]
834 Cc2 <- Cc[c(11,3,4,7,10)]
835
836 # latex table
837 dat <- Cc2
838 dig <- 2
839 cap = c('Chapter 5 CAC Results',
840         'Chapter 5 CAC Results')
841 lab = 'tab:chp6:cac2_summary'
842 filename = '../Tables/chp_6_cac2_summary.tex'
843 inclrnam=FALSE
844 print_xt(dat,dig,cap,lab,al,filename,inclrnam)
845
846 # 3. FTSE

```

```

847 Ft <- total_res[total_res$Mkt == 'FTSE',]
848 Ft2 <- Ft[c(11,3,4,7,10)]
849
850 # latex table
851 dat <- Ft2
852 dig <- 2
853 cap = c('Chapter 5 FTSE Results',
854         'Chapter 5 FTSE Results')
855 lab = 'tab:chp6:ftse2_summary'
856 filename = '../Tables/chp_6_ftse2_summary.tex'
857 inclrnsm=FALSE
858 print_xt(dat,dig,cap,lab,al,filename,inclrnsm)
859
860 # 4. Dow
861 Dw <- total_res[total_res$Mkt == 'Dow',]
862 Dw2 <- Dw[c(11,3,4,7,10)]
863
864 # latex table
865 dat <- Dw2
866 dig <- 2
867 cap = c('Chapter 5 Dow Results',
868         'Chapter 5 Dow Results')
869 lab = 'tab:chp6:dow2_summary'
870 filename = '../Tables/chp_6_dow2_summary.tex'
871 inclrnsm=FALSE
872 print_xt(dat,dig,cap,lab,al,filename,inclrnsm)
873
874 # 5. Nikkei
875 Nk <- total_res[total_res$Mkt == 'Nikkei',]
876 Nk2 <- Nk[c(11,3,4,7,10)]
877
878 # latex table
879 dat <- Nk2
880 dig <- 2
881 cap = c('Chapter 5 Nikkei Results',
882         'Chapter 5 Nikkei Results')
883 lab = 'tab:chp6:nik2_summary'
884 filename = '../Tables/chp_6_nik2_summary.tex'
885 inclrnsm=FALSE
886 print_xt(dat,dig,cap,lab,al,filename,inclrnsm)
887
888 # 6. Oz
889 Oz <- total_res[total_res$Mkt == 'AORD',]
890 Oz2 <- Oz[c(11,3,4,7,10)]
891
892 # latex table
893 dat <- Oz2
894 dig <- 2
895 cap = c('Chapter 5 AORD Results',
896         'Chapter 5 AORD Results')
897 lab = 'tab:chp6:aord2_summary'
898 filename = '../Tables/chp_6_aord2_summary.tex'
899 inclrnsm=FALSE
900 print_xt(dat,dig,cap,lab,al,filename,inclrnsm)
901

```

902 # END

RCode/Chapter5.R

## A.2.1 Exponential Smoothing

```

1 es_1 <- function(Mkt, SLoss, MktName){
2   # Trading system using predictions from exponential smoothing models.
3   #
4   #
5   #   Mkt: market data
6   #   SLoss: stop loss
7   #   MktName: market's name for print out
8   # Returns:
9   #   results vector.
10
11   results <- createResultsVector(MktName, SLoss)
12
13   Mkt$pred_d <- ifelse(Mkt$a > Mkt$Close, 'U','D')
14   Mkt$pu <-c( NA, Mkt$pred_d[ - length(Mkt$pred_d) ] )
15
16   # Trade Long
17   Mkt$Long <- ifelse(Mkt$pu == 'U', Mkt$Close - Mkt$Open, NA)
18   results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
19   #Adj for SLoss
20   if (SLoss < 0) {
21     Mkt$Long <- ifelse(Mkt$p > Mkt$p_c,
22                       ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
23                       Mkt$Long)
24     results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
25   }
26
27   # Trade Short
28   Mkt$Short <- ifelse(Mkt$pu == 'D', Mkt$Open - Mkt$Close, NA)
29   results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
30   #Adj for SLoss
31   if (SLoss < 0){
32     Mkt$Short <- ifelse(Mkt$p < Mkt$p_c,
33                       ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
34                       Mkt$Short)
35     results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
36   }
37
38   Stats <- calcStats2(Mkt$Long)
39   results[5:7] <- Stats
40
41   Stats <- calcStats2(Mkt$Short)
42   results[8:10] <- Stats
43
44   return(results)
45 }

```

RCode/es\_1.R

## A.2.2 System 1 Trading Algorithm

```

1 ts_1 <- function(Mkt, SLoss, MktName){
2   # Trading system using predictions from ARIMA models. Uses relative
3   # value of the forecast with the previous close
4   #
5   #   Mkt: market data
6   #   SLoss: stop loss
7   #   MktName: market's name for print out
8   # Returns:
9   #   results vector.
10
11  results <- createResultsVector(MktName, SLoss)
12
13  Mkt$p_c <- c( NA, Mkt$Close[ - length(Mkt$Close) ] ) # prev close
14  Mkt$p_p <- c( NA, Mkt$p[ - length(Mkt$p) ] ) # prev pred
15
16  # Trade Long
17  Mkt$Long <- ifelse(Mkt$p_p > Mkt$p_c, Mkt$Close - Mkt$Open, NA)
18  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
19  #Adj for SLoss
20  if (SLoss < 0) {
21    Mkt$Long <- ifelse(Mkt$p_p > Mkt$p_c,
22                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
23                      Mkt$Long)
24    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
25  }
26
27  # Trade Short
28  Mkt$Short <- ifelse(Mkt$p_p < Mkt$p_c, Mkt$Open - Mkt$Close, NA)
29  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
30  #Adj for SLoss
31  if (SLoss < 0){
32    Mkt$Short <- ifelse(Mkt$p_p < Mkt$p_c,
33                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
34                      Mkt$Short)
35    results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
36  }
37
38  Stats <- calcStats2(Mkt$Long)
39  results[5:7] <- Stats
40
41  Stats <- calcStats2(Mkt$Short)
42  results[8:10] <- Stats
43
44  return(results)
45 }

```

RCode/ts\_1.R

## A.2.3 System 2 Trading Algorithm

```

1 ts_2 <- function(Mkt, SLoss, MktName){

```

```

2  # Trading system using predictions from ARIMA models. Uses
3  # relative value of the forecast and the previous forecast
4  #
5  #   Mkt: market data
6  #   SLoss: stop loss
7  #   MktName: market's name for print out
8  # Returns:
9  #   results vector.
10
11  results <- createResultsVector(MktName, SLoss)
12
13  Mkt$p_p <- c( NA, Mkt$p[ - length(Mkt$p) ] ) # prev prediction
14  Mkt$p_p2 <- c( NA, Mkt$p_p[ - length(Mkt$p_p) ] ) # prev prediction
15
16  # Trade Long
17  Mkt$Long <- ifelse(Mkt$p_p > Mkt$p_p2, Mkt$Close - Mkt$Open, NA)
18  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
19  #Adj for SLoss
20  if (SLoss < 0) {
21    Mkt$Long <- ifelse(Mkt$p_p > Mkt$p_p2,
22                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
23                      Mkt$Long)
24    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
25  }
26
27  # Trade Short
28  Mkt$Short <- ifelse(Mkt$p_p < Mkt$p_p2, Mkt$Open - Mkt$Close, NA)
29  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
30  #Adj for SLoss
31  if (SLoss < 0){
32    Mkt$Short <- ifelse(Mkt$p_p < Mkt$p_p2,
33                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
34                      Mkt$Short)
35    results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
36  }
37
38  Stats <- calcStats2(Mkt$Long)
39  results[5:7] <- Stats
40
41  Stats <- calcStats2(Mkt$Short)
42  results[8:10] <- Stats
43
44  return(results)
45 }

```

RCode/ts.2.R

### A.2.4 Trading System for Categorical Label

```

1  ts_4 <- function(Mkt, SLoss, MktName){
2    #   trading system based on prediction from Hybrid/ARIMA models working with
3    #   categorical
4    #   label with valued U or D

```

```

4   #
5   #   Mkt: market data
6   #   SLoss: stop loss
7   #   MktName: market's name for print out
8   #
9   # Returns:
10  #   results vector.
11
12  results <- createResultsVector(MktName, SLoss)
13  Mkt$p_p <- c( NA, Mkt$pred[ - length(Mkt$pred) ] ) # prev pred
14
15  # Trade Long
16  Mkt$Long <- ifelse(Mkt$p_p == "U", Mkt$Close - Mkt$Open, NA)
17  results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
18  #Adj for SLoss
19  if (SLoss < 0) {
20    Mkt$Long <- ifelse(Mkt$p_p == "U",
21                      ifelse((Mkt$Low-Mkt$Open) < SLoss, SLoss, Mkt$Long),
22                      Mkt$Long)
23    results["LongPL"] <- round(sum(Mkt$Long, na.rm=TRUE))
24  }
25
26  # Trade Short
27  Mkt$Short <- ifelse(Mkt$p_p == "D", Mkt$Open - Mkt$Close, NA)
28  results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
29  #Adj for SLoss
30  if (SLoss < 0){
31    Mkt$Short <- ifelse(Mkt$p_p == "D",
32                      ifelse((Mkt$Open-Mkt$High) < SLoss, SLoss, Mkt$Short),
33                      Mkt$Short)
34    results["ShortPL"] <- round(sum(Mkt$Short, na.rm=TRUE))
35  }
36
37  Stats <- calcStats2(Mkt$Long)
38  results[5:7] <- Stats
39
40  Stats <- calcStats2(Mkt$Short)
41  results[8:10] <- Stats
42
43  return(results)
44 }

```

RCode/ts\_4.R

### A.3 Utility Code

```

1  nm <- c("DAX", "CAC", "FTSE", "Dow", "Nikkei", "AORD")
2
3  createResultsVector <- function(MktName, SLossValue){
4    # Function to create results vector
5    #
6    # Args:

```

```

7   #   SLoss: stop loss value
8   #   MktName: market's name for print out
9   #
10  # Returns:
11  #   results vector.
12
13  results <- rep(0,11)
14  nam <- c("Mkt",          # 1. Name of Mkt
15          "S Loss",       # 1. Name of Mkt
16          "LongPL",       # 1. Name of Mkt
17          "ShortPL",      # 1. Name of Mkt
18          "L Win %",      # 1. Name of Mkt
19          "L Trades",     # 1. Name of Mkt
20          "Av L PL",      # 1. Name of Mkt
21          "S Win %",      # 1. Name of Mkt
22          "S Trades",     # 1. Name of Mkt
23          "Av S PL",
24          "misc")         # 1. Name of Mkt
25  names(results) <- nam
26  results["Mkt"] <- MktName
27  results["S Loss"] <- SLossValue
28  return(results)
29 }
30
31 calcStats <- function(x){
32   # Function to calculate trade stats
33   #
34   # Args:
35   #   x - data set
36   #
37   # Returns:
38   #   results vector.
39
40   results <- 1:3
41   v <- na.omit(x)
42
43   # Win %
44   wins <- length(v[v>0])
45   losses <- length(v[v<0])
46   results[1] <- round(wins/(wins+losses)*100)
47
48   # Num Trades
49   results[2] <- length(v)
50
51   # Av Long PL
52   results[3] <- round(sum(v) / length(v))
53
54   return(results)
55 }
56
57 calcStats2 <- function(x){
58   # Function to calculate trade stats
59   #
60   # Args:
61   #   x - data set

```



```

62 | #
63 | # Returns:
64 | #   results vector.
65 | #browser()
66 | results <- 1:3
67 | #v <- na.omit(x)
68 | v <- x
69 |
70 | # Win %
71 | wins <- sum(v>0,na.rm=T)
72 | losses <- sum(v<0,na.rm=T)
73 | results[1] <- round(wins/(wins+losses)*100)
74 |
75 | # Num Trades
76 | results[2] <- wins+losses
77 |
78 | # Av Long PL
79 | results[3] <- round(sum(v,na.rm=T) / (wins+losses))
80 |
81 | return(results)
82 | }
83 |
84 | calcWinPer <- function(x){
85 |   wins <- length(x[x>0])
86 |   losses <- length(x[x<0])
87 |   return(wins/(wins+losses)*100)
88 | }
89 |
90 | calcAverageWin <- function(x){
91 |   wins <- length(x)
92 |   winpl <- sum(x, na.rm=T)
93 |   return((winpl/wins))
94 | }
95 |
96 | calcNumTrades <- function(x){
97 |   return(length(na.omit(x)))
98 | }
99 |
100 | savepdf <- function(file, width=16, height=10)
101 | {
102 |   fname <- paste("../Figures/",file,".pdf",sep="")
103 |   pdf(fname, width=width/2.54, height=height/2.54,
104 |     pointsize=10)
105 |   par(mgp=c(2.2,0.45,0), tcl=-0.4, mar=c(3.3,3.6,1.1,1.1))
106 | }
107 |
108 |
109 | print_xt <- function(dat,dig,cap,lab,al,filename,inclrnam){
110 |   xt <- xtable(
111 |     dat,
112 |     digits = dig,
113 |     caption = cap,
114 |     label = lab
115 |   )
116 |   al <- c('l','l')

```

```

117   al <- c(al, rep('c',ncol(dat)-1))
118   align(xt) <- al
119   print(xt,
120         file=filename,
121         include.rownames=inclrnam,
122         caption.placement = "top",
123         hline.after=NULL,
124         add.to.row=list(pos=list(-1,0, nrow(xt)),
125                         command=c('\\toprule ', '\\midrule ', '\\bottomrule ')))
126
127 }
128
129
130 # subtract 2 data frames
131 # df2 from df1
132 sub_df <- function(df1, df2){
133
134   nc <- ncol(df1)
135   ln <- nrow(df1)
136   dfres <- df1
137
138   for(i in 1:ln){
139     for(j in 2:nc){
140       dfres[i,j] <- as.numeric(df1[i,j]) - as.numeric(df2[i,j])
141     }
142   }
143   return(dfres)
144 }
145
146 # subtract 2 data frames - rtn fewer cols
147 # df2 from df1
148 sub_df_av_pl <- function(df1, df2){
149
150   nc <- ncol(df1)
151   ln <- nrow(df1)
152   dfres <- df1
153   for(i in 1:ln){
154     for(j in 2:nc){
155       dfres[i,j] <- as.numeric(df1[i,j]) - as.numeric(df2[i,j])
156     }
157   }
158   dfres <- dfres[,c(1,7,10)]
159   colnames(dfres) <- c('Mkt','Diff in Mean Long PL','Diff in Mean Short PL')
160   return(dfres)
161 }
162
163
164 # -----
165 # ----- CHAPTER 4 -----
166 # -----
167
168 # ----- Follow Previous -----
169 run_NaiveReversePrev <- function(fil,Sloss, nm){
170   df10 <- as.data.frame(matrix(seq(11),nrow=1,ncol=11))
171   for(i in 1:length(fil)){

```

```

172     Dax <- read.csv(fil[i],stringsAsFactors=F)
173     a <- NaiveReversePrev(Dax, SLoss, nm[i])
174     df10 <- rbind(df10, a)
175   }
176   df.name <- names(a)
177   names(df10) <- df.name
178   df10 <- df10[-1,]
179   return(df10)
180 }
181
182 # -----
183 # ----- CHAPTER 5 -----
184 # -----
185 # ----- Arima Ann Predicting Up/Dn - Categorical -----
186 # a. Categorical
187 ts_4_fnc_ar <- function(fil,SLoss,nm){
188   for(i in 1:length(fil)){
189     Mkt <- read.csv(fil[i],stringsAsFactors=F)
190     Mkt_p <- Mkt[,c(1,2,3,4,5)]
191     Mkt_p$pred <- Mkt$pred
192     colnames(Mkt_p) <- c("Date", "Open", "High", "Low", "Close", "pred")
193     a <- ts_4(Mkt_p, SLoss, nm[i])
194     df10 <- rbind(df10, a)
195   }
196   df.name <- names(a)
197   names(df10) <- df.name
198   df10 <- df10[-c(1),]
199   return(df10)
200 }

```

## Appendix B

# Technical Indicators

### B.1 Moving Average Convergence Divergence (MACD)

MACD is a widely used technical indicator which attempts to detect the early stage of a market trend. It is calculated by subtracting a long exponential moving average (EMA) from a shorter one. The EMA is calculated as follows:

$$EMA(n)_t = \frac{2}{n+1}(P_t - EMA_{t-1}) + EMA_{t-1}$$

Where  $P_t$  is the closing price of a market on day  $t$  and  $n$  is the number of periods used in calculating the moving average. MACD itself is calculated as:

$$MACD_t = EMA(s)_t - EMA(l)_t$$

where  $EMA(s)_t$  is the short moving average and  $EMA(l)_t$  is the long one. In addition an EMA of the MACD itself is calculated in order to generate trade signals and is often referred to as the “trigger line”. Thus a particular MACD trading rule is often expressed in the form  $MACD(s, l, k)$  where  $s$  is the number of periods of the short EMA,  $l$  the number of periods of the long EMA and  $k$  the period used to average the MACD for the trigger line.

### B.2 Aroon Indicator

The Sanskrit word aroon means ”dawn’s early light” and the Aroon indicator attempts to show when a new market trend is dawning (Chande and Kroll, 1994). The indicator

is made up of two lines (Aroon Up and Aroon Down) that measure how long it has been since the highest high and lowest low has occurred within an  $n$  period range, and an oscillator value that is the difference between the two. Aroon Up (or Down) is the elapsed time, expressed as a percentage, between today and the highest (or lowest) price in the last  $n$  periods. If the current price is a new high (or low) Aroon Up (or Aroon Down) will be 100. Each subsequent period without another new high (or low) causes Aroon up (down) to decrease by  $(1 / n) \times 100$ .

$$AroonUp = 100 * \left( \frac{n - PeriodSinceHighestHigh}{n} \right)$$

$$AroonDown = 100 * \left( \frac{n - PeriodSinceLowestLow}{n} \right)$$

When the Aroon Up is between a value of 70 and 100 it indicates an upward trend. When the Aroon Down is staying between 70 and 100 then it indicates a downward trend. A strong upward trend is indicated when the Aroon Up is above 70 while the Aroon Down is below 30. Likewise, a strong downward trend is indicated when the Aroon Down is above 70 while the Aroon Up is below 30. Also the crossing over of the lines is significant. When the Aroon Down crosses above the Aroon Up, it indicates a weakening of the upward trend (and vice versa).

The Aroon Oscillator signals that an upward trend is occurring when it is above zero and a downward trend is occurring when it falls below zero. The farther away the oscillator is from the zero line, the stronger the trend.

### B.3 Parabolic Stop-and-Reverse (SAR)

The Parabolic Stop-and-Reverse (SAR) is a quite complex indicator developed by Welles Wilder in 1978 (Wilder, 1978). The calculation for SAR in rising and falling markets are different and are usually presented separately.

If the market is rising SAR is calculated as:

$$\text{Current SAR} = \text{Prior SAR} + \text{Prior AF}(\text{Prior EP} - \text{Prior SAR})$$

where:

- Prior SAR is the SAR value for the previous time period, for example the previous day's value.
- Extreme Point (EP) is the highest high of the current trend.
- Acceleration Factor (AF) starts at 0.02, and increases by 0.02 each time the market makes a new high (Extreme Point). The maximum value the AF can reach is 0.20, at which point it is capped.

Note: SAR can never be greater than the value of the previous two periods' lows. Should SAR be above one of those lows, it is set to the lowest of the two.

If the market is falling SAR is calculated as:

$$\text{Current SAR} = \text{Prior SAR} - \text{Prior AF}(\text{Prior SAR} - \text{Prior EP})$$

Note: SAR can never be less than the value of the previous two periods' highs. Should SAR be less than one of those highs, it is set to the lowest of the two.

## B.4 Stochastic

The stochastic oscillator measures where a particular close price is in relation to the highest high and lowest low in the range under study. It is usually drawn on a chart as two lines, one is %K and the other is its moving average usually called %D.

The calculation of the stochastic involves four variables:

1. %K Period - the number of periods used in the calculation (see below).
2. %K Slowing Period - smoothing period applied to %K.
3. %D Period - the number of time periods used in the moving average of %K to generate %D.
4. %D Method - the moving average method used to calculate %D.

%K is calculated as follows:

$$\%K = 100 * \left( \frac{\text{Today's Close} - \text{Lowest Low in n Periods}}{\text{Highest High in n Periods} - \text{Lowest Low in n Periods}} \right)$$

The stochastic is used in a variety of ways. One popular method is to buy when the stochastic falls below a particular level then rises back above that level (and vice versa for a short trade). An alternative technique is to buy when the %K rises above %D and sell when it falls under %K.

## B.5 Rate of Change(ROC)

The Rate of Change or ROC indicator highlights the difference between a particular price (e.g. closing price) and the same price a number of periods previously. This value can be expressed in absolute terms or a percentage rise or fall. The calculation is as follows:

$$ROC = 100 * \left( \frac{\text{Today's Close} - \text{Today's Close n Periods Ago}}{\text{Today's Close n Periods Ago}} \right)$$

The ROC can be calculated from a wide range of time periods, with 12 and 25 days being the most common. The ROC is typically used as an over-bought / over-sold indicator to provide evidence for when a market turn maybe expected.

## Appendix C

# Summary of Results

### C.1 Chapter 4 Results

TABLE C.1: Chapter 4 Dax Results

| Methodology                    | LongPL | ShortPL | Av L PL | Av S PL |
|--------------------------------|--------|---------|---------|---------|
| Naive Long                     | -1714  | 0       | 0       | 0       |
| Naive Long 2                   | 2649   | 0       | 1       | 0       |
| Reverse Prev                   | 947    | 3131    | 1       | 2       |
| Reverse Prev Stop Loss         | 1305   | 6279    | 1       | 3       |
| SMA 5                          | 2113   | 3278    | 1       | 2       |
| SMA 25                         | 1367   | 3427    | 1       | 2       |
| SMA 50                         | 779    | 3447    | 0       | 3       |
| SMA 100                        | 714    | 2339    | 0       | 2       |
| SMA 200                        | 3401   | 4416    | 2       | 4       |
| SMA 100                        | 3652   | 6618    | 2       | 5       |
| SMA 100                        | 1392   | 5272    | 1       | 4       |
| MACD                           | -791   | 1424    | 0       | 1       |
| Aroon                          | 5308   | 5257    | 3       | 4       |
| Aroon Stop Loss                | 5410   | 7465    | 3       | 6       |
| SAR                            | -3856  | -2353   | -2      | -2      |
| MACD Reversal                  | 391    | 407     | 1       | 1       |
| Stoch                          | -28    | 1673    | 0       | 1       |
| Stoch Stop Loss                | 1173   | 3889    | 1       | 2       |
| ROC                            | 1026   | 180     | 2       | 0       |
| Daily Breakout                 | 12225  | 13411   | 7       | 8       |
| 90% Quantile Breakout          | 7841   | 6371    | 6       | 4       |
| Hammer Candlestick             | 594    | 0       | 5       | 0       |
| Engulfing Candlestick          | -920   | -258    | -7      | -2      |
| Engulfing Candlestick in Trend | -874   | -513    | -20     | -7      |
| Doji Candlestick               | -826   | -1132   | -8      | -6      |



TABLE C.2: Chapter 4 CAC Results

| Methodology                    | LongPL | ShortPL | Av L PL | Av S PL |
|--------------------------------|--------|---------|---------|---------|
| Naive Long                     | -6725  | 0       | -2      | 0       |
| Naive Long 2                   | -1667  | 0       | 0       | 0       |
| Reverse Prev                   | 940    | 7810    | 1       | 4       |
| Reverse Prev Stop Loss         | 1335   | 8165    | 1       | 5       |
| SMA 5                          | -3952  | 2338    | -2      | 1       |
| SMA 25                         | -5058  | 1615    | -2      | 1       |
| SMA 50                         | -5323  | 1029    | -3      | 1       |
| SMA 100                        | -2363  | 3188    | -1      | 2       |
| SMA 200                        | -1219  | 3923    | -1      | 3       |
| SMA 100                        | -172   | 5178    | 0       | 4       |
| SMA 100                        | -1822  | 4658    | -1      | 3       |
| MACD                           | -4153  | 2188    | -2      | 1       |
| Aroon                          | -1638  | 4919    | -1      | 4       |
| Aroon Stop Loss                | -1224  | 6086    | -1      | 5       |
| SAR                            | -5584  | 1034    | -3      | 1       |
| MACD Reversal                  | -545   | 2657    | -1      | 5       |
| Stoch                          | -4540  | 1817    | -3      | 1       |
| Stoch Stop Loss                | -3493  | 2730    | -2      | 2       |
| ROC                            | 952    | 956     | 2       | 2       |
| Daily Breakout                 | 3491   | 6955    | 2       | 4       |
| 90% Quantile Breakout          | 2647   | 5085    | 2       | 3       |
| Hammer Candlestick             | -793   | 0       | -5      | 0       |
| Engulfing Candlestick          | -319   | 228     | -2      | 1       |
| Engulfing Candlestick in Trend | -118   | -666    | -3      | -11     |
| Doji Candlestick               | -747   | -326    | -6      | -2      |

TABLE C.3: Chapter 4 FTSE Results

| Methodology                    | LongPL | ShortPL | Av L PL | Av S PL |
|--------------------------------|--------|---------|---------|---------|
| Naive Long                     | 149    | 0       | 0       | 0       |
| Naive Long 2                   | 86     | 0       | 0       | 0       |
| Reverse Prev                   | 4284   | 4115    | 3       | 2       |
| Reverse Prev Stop Loss         | 5537   | 5200    | 3       | 3       |
| SMA 5                          | -4724  | -5331   | -2      | -3      |
| SMA 25                         | -1013  | -1940   | 0       | -1      |
| SMA 50                         | -2226  | -2769   | -1      | -2      |
| SMA 100                        | -889   | -1692   | 0       | -1      |
| SMA 200                        | -158   | -835    | 0       | -1      |
| SMA 100                        | 1114   | 6303    | 1       | 5       |
| SMA 100                        | -885   | 1892    | 0       | 1       |
| MACD                           | 63     | -839    | 0       | 0       |
| Aroon                          | 3042   | 5715    | 2       | 5       |
| Aroon Stop Loss                | 3091   | 8015    | 2       | 7       |
| SAR                            | -1141  | -1663   | -1      | -1      |
| MACD Reversal                  | 2080   | 1649    | 4       | 3       |
| Stoch                          | -73    | -744    | 0       | 0       |
| Stoch Stop Loss                | 1640   | 1424    | 1       | 1       |
| ROC                            | 1147   | 1880    | 2       | 4       |
| Daily Breakout                 | 13189  | 18481   | 7       | 12      |
| 90% Quantile Breakout          | 10758  | 15295   | 7       | 10      |
| Hammer Candlestick             | 834    | 0       | 4       | 0       |
| Engulfing Candlestick          | -1721  | 1185    | -4      | 3       |
| Engulfing Candlestick in Trend | -1217  | -782    | -8      | -3      |
| Doji Candlestick               | -697   | 418     | -8      | 3       |

TABLE C.4: Chapter 4 Dow Results

| Methodology                    | LongPL | ShortPL | Av L PL | Av S PL |
|--------------------------------|--------|---------|---------|---------|
| Naive Long                     | 9816   | 0       | 3       | 0       |
| Naive Long 2                   | 5219   | 0       | 1       | 0       |
| Reverse Prev                   | 15799  | 6047    | 10      | 3       |
| Reverse Prev Stop Loss         | -8571  | -14604  | -5      | -8      |
| SMA 5                          | 408    | -9630   | 0       | -6      |
| SMA 25                         | 1138   | -9204   | 1       | -7      |
| SMA 50                         | 5478   | -5876   | 3       | -4      |
| SMA 100                        | 2576   | -8220   | 1       | -6      |
| SMA 200                        | 6378   | -4567   | 3       | -4      |
| SMA 100                        | -18212 | -8229   | -9      | -6      |
| SMA 100                        | -11771 | -14696  | -6      | -11     |
| MACD                           | 5592   | -5190   | 3       | -3      |
| Aroon                          | 12131  | 3811    | 7       | 3       |
| Aroon Stop Loss                | -5922  | -9341   | -3      | -8      |
| SAR                            | -1301  | -11112  | -1      | -7      |
| MACD Reversal                  | 3882   | -807    | 7       | -2      |
| Stoch                          | 867    | -9414   | 0       | -5      |
| Stoch Stop Loss                | -13969 | -27388  | -8      | -16     |
| ROC                            | 8517   | 3396    | 16      | 6       |
| Daily Breakout                 | -19598 | -28337  | -11     | -17     |
| 90% Quantile Breakout          | -30262 | -34854  | -24     | -28     |
| Hammer Candlestick             | 2097   | 0       | 24      | 0       |
| Engulfing Candlestick          | -770   | -3662   | -4      | -28     |
| Engulfing Candlestick in Trend | 202    | -1154   | 4       | -11     |
| Doji Candlestick               | -763   | -2869   | -5      | -10     |

TABLE C.5: Chapter 4 Nikkei Results

| Methodology                    | LongPL | ShortPL | Av L PL | Av S PL |
|--------------------------------|--------|---------|---------|---------|
| Naive Long                     | -18125 | 0       | -5      | 0       |
| Naive Long 2                   | -2712  | 0       | -1      | 0       |
| Reverse Prev                   | 2324   | 20486   | 1       | 12      |
| Reverse Prev Stop Loss         | 18137  | 27909   | 10      | 17      |
| SMA 5                          | 3078   | 20401   | 2       | 13      |
| SMA 25                         | -7878  | 10770   | -4      | 7       |
| SMA 50                         | -6054  | 11408   | -4      | 7       |
| SMA 100                        | -6235  | 8381    | -4      | 5       |
| SMA 200                        | -5928  | 6836    | -4      | 4       |
| SMA 100                        | 8258   | 33882   | 5       | 20      |
| SMA 100                        | 2550   | 25582   | 2       | 15      |
| MACD                           | -4078  | 14064   | -2      | 8       |
| Aroon                          | -4852  | 12013   | -3      | 10      |
| Aroon Stop Loss                | 3153   | 22177   | 2       | 18      |
| SAR                            | -5767  | 12424   | -3      | 8       |
| MACD Reversal                  | 199    | 2828    | 0       | 6       |
| Stoch                          | -10591 | 7802    | -6      | 5       |
| Stoch Stop Loss                | 1647   | 17977   | 1       | 10      |
| ROC                            | 2971   | 2546    | 6       | 5       |
| Daily Breakout                 | 31988  | 43554   | 19      | 27      |
| 90% Quantile Breakout          | 23606  | 31830   | 16      | 20      |
| Hammer Candlestick             | -2202  | 0       | -15     | 0       |
| Engulfing Candlestick          | -3823  | -1166   | -39     | -11     |
| Engulfing Candlestick in Trend | -1522  | -1733   | -59     | -32     |
| Doji Candlestick               | 1296   | -2944   | 12      | -22     |

TABLE C.6: Chapter 4 AORD Results

| Methodology                    | LongPL | ShortPL | Av L PL | Av S PL |
|--------------------------------|--------|---------|---------|---------|
| Naive Long                     | 972    | 0       | 0       | 0       |
| Naive Long 2                   | 2229   | 0       | 1       | 0       |
| Reverse Prev                   | 1264   | 237     | 1       | 0       |
| Reverse Prev Stop Loss         | 2320   | 1085    | 1       | 1       |
| SMA 5                          | 5009   | 3929    | 3       | 3       |
| SMA 25                         | 3701   | 2674    | 2       | 2       |
| SMA 50                         | 2804   | 1864    | 1       | 1       |
| SMA 100                        | 2688   | 1521    | 1       | 1       |
| SMA 200                        | 2574   | 1616    | 1       | 2       |
| SMA 100                        | 4008   | 3730    | 2       | 3       |
| SMA 100                        | 2881   | 2149    | 1       | 2       |
| MACD                           | 2563   | 1569    | 1       | 1       |
| Aroon                          | 3735   | 3540    | 2       | 3       |
| Aroon Stop Loss                | 3786   | 4159    | 2       | 4       |
| SAR                            | 2071   | 1097    | 1       | 1       |
| MACD Reversal                  | -319   | -584    | -1      | -1      |
| Stoch                          | 2839   | 1780    | 2       | 1       |
| Stoch Stop Loss                | 3028   | 1974    | 2       | 1       |
| ROC                            | 271    | 1325    | 1       | 2       |
| Daily Breakout                 | 17225  | 19184   | 10      | 13      |
| 90% Quantile Breakout          | 16730  | 19357   | 9       | 12      |
| Hammer Candlestick             | -809   | 0       | -3      | 0       |
| Engulfing Candlestick          | -6     | -600    | 0       | -3      |
| Engulfing Candlestick in Trend | -49    | -27     | -1      | 0       |
| Doji Candlestick               | -115   | 195     | -1      | 2       |

## C.2 Chapter 5 Results

TABLE C.7: Chapter 5 DAX Results

| Methodology                       | LongPL | ShortPL | Av L PL | Av S PL |
|-----------------------------------|--------|---------|---------|---------|
| Mean Method                       | -1640  | -1505   | -1      | -1      |
| Drift Method                      | 2310   | 2445    | 1       | 2       |
| Exponential Smoothing             | -2029  | -1894   | -1      | -1      |
| ARIMA - System 1                  | -1285  | -2522   | -5      | -9      |
| ARIMA - System 2                  | 733    | -505    | 3       | -2      |
| ARIMA/ANN Closing Price System 1  | -446   | -645    | -1      | -2      |
| ARIMA/ANN Closing Price System 2  | 3283   | 3110    | 6       | 7       |
| ARIMA/k-NN Closing Price System 1 | 12     | -174    | 0       | 0       |
| ARIMA/k-NN Closing Price System 2 | 489    | 731     | 1       | 2       |
| ARIMA/ANN Up/Down                 | 2321   | 2122    | 6       | 4       |
| ARIMA/k-NN Up/Down                | -1553  | -1752   | -3      | -4      |
| ARIMA/ANN Up/Down Stop Loss       | -430   | -1444   | -1      | -4      |
| ARIMA/SVM Up/Down                 | -123   | -322    | 0       | -1      |

TABLE C.8: Chapter 5 CAC Results

| Methodology                       | LongPL | ShortPL | Av L PL | Av S PL |
|-----------------------------------|--------|---------|---------|---------|
| Mean Method                       | -1086  | 3553    | -1      | 2       |
| Drift Method                      | -2422  | 2217    | -1      | 2       |
| Exponential Smoothing             | -266   | 4048    | 0       | 2       |
| ARIMA - System 1                  | 872    | 167     | 3       | 1       |
| ARIMA - System 2                  | 545    | -80     | 2       | 0       |
| ARIMA/ANN Closing Price System 1  | 532    | 1527    | 2       | 2       |
| ARIMA/ANN Closing Price System 2  | -1832  | -816    | -3      | -2      |
| ARIMA/k-NN Closing Price System 1 | -249   | 747     | 0       | 2       |
| ARIMA/k-NN Closing Price System 2 | -966   | 50      | -2      | 0       |
| ARIMA/ANN Up/Down                 | 102    | 1098    | 0       | 2       |
| ARIMA/k-NN Up/Down                | 270    | 1265    | 1       | 2       |
| ARIMA/ANN Up/Down Stop Loss       | 203    | 1326    | 0       | 2       |
| ARIMA/SVM Up/Down                 | -1607  | -612    | -4      | -1      |

TABLE C.9: Chapter 5 FTSE Results

| Methodology                       | LongPL | ShortPL | Av L PL | Av S PL |
|-----------------------------------|--------|---------|---------|---------|
| Mean Method                       | 1680   | 345     | 1       | 0       |
| Drift Method                      | -518   | -1853   | 0       | -1      |
| Exponential Smoothing             | 3866   | 2531    | 3       | 2       |
| ARIMA - System 1                  | 990    | -249    | 4       | -1      |
| ARIMA - System 2                  | 941    | -383    | 3       | -2      |
| ARIMA/ANN Closing Price System 1  | 625    | -624    | 1       | -2      |
| ARIMA/ANN Closing Price System 2  | 1092   | -182    | 2       | 0       |
| ARIMA/k-NN Closing Price System 1 | 699    | -550    | 1       | -1      |
| ARIMA/k-NN Closing Price System 2 | -388   | -1662   | -1      | -4      |
| ARIMA/ANN Up/Down                 | 1400   | 151     | 2       | 0       |
| ARIMA/k-NN Up/Down                | 1764   | 515     | 3       | 1       |
| ARIMA/ANN Up/Down Stop Loss       | 1919   | 526     | 4       | 1       |
| ARIMA/SVM Up/Down                 | 2115   | 866     | 5       | 1       |

TABLE C.10: Chapter 5 Dow Results

| Methodology                       | LongPL | ShortPL | Av L PL | Av S PL |
|-----------------------------------|--------|---------|---------|---------|
| Mean Method                       | 8356   | -2126   | 7       | -1      |
| Drift Method                      | 5416   | -5066   | 3       | -4      |
| Exponential Smoothing             | 12901  | 2419    | 8       | 2       |
| ARIMA - System 1                  | 1539   | -3356   | 7       | -11     |
| ARIMA - System 2                  | 2598   | -2221   | 9       | -10     |
| ARIMA/ANN Closing Price System 1  | 2846   | -3979   | 5       | -9      |
| ARIMA/ANN Closing Price System 2  | 3829   | -2942   | 7       | -7      |
| ARIMA/k-NN Closing Price System 1 | 4436   | -2389   | 11      | -4      |
| ARIMA/k-NN Closing Price System 2 | 2969   | -3411   | 5       | -9      |
| ARIMA/ANN Up/Down                 | 5218   | -1607   | 6       | -10     |
| ARIMA/k-NN Up/Down                | 3211   | -3614   | 6       | -8      |
| ARIMA/ANN Up/Down Stop Loss       | 5475   | -1922   | 11      | -4      |
| ARIMA/SVM Up/Down                 | 2138   | -4686   | 10      | -6      |

TABLE C.11: Chapter 5 Nikkei Results

| Methodology                       | LongPL | ShortPL | Av L PL | Av S PL |
|-----------------------------------|--------|---------|---------|---------|
| Mean Method                       | -32    | 10646   | 0       | 6       |
| Drift Method                      | -6939  | 3739    | -4      | 3       |
| Exponential Smoothing             | -2741  | 7937    | -2      | 5       |
| ARIMA - System 1                  | 4268   | 3071    | 21      | 13      |
| ARIMA - System 2                  | 179    | -916    | 1       | -4      |
| ARIMA/ANN Closing Price System 1  | 913    | 2039    | 2       | 4       |
| ARIMA/ANN Closing Price System 2  | -4485  | -3229   | -9      | -7      |
| ARIMA/k-NN Closing Price System 1 | -66    | 1060    | 0       | 2       |
| ARIMA/k-NN Closing Price System 2 | -2916  | -1660   | -6      | -4      |
| ARIMA/ANN Up/Down                 | 234    | 1360    | 12      | 1       |
| ARIMA/k-NN Up/Down                | 2707   | 3834    | 6       | 8       |
| ARIMA/ANN Up/Down Stop Loss       | 4021   | 2804    | 9       | 6       |
| ARIMA/SVM Up/Down                 | 9      | 1135    | 0       | 2       |

TABLE C.12: Chapter 5 AORD Results

| Methodology                       | LongPL | ShortPL | Av L PL | Av S PL |
|-----------------------------------|--------|---------|---------|---------|
| Mean Method                       | -1333  | -2149   | -1      | -1      |
| Drift Method                      | 1476   | 660     | 1       | 1       |
| Exponential Smoothing             | 645    | -171    | 0       | 0       |
| ARIMA - System 1                  | 635    | -247    | 2       | -1      |
| ARIMA - System 2                  | 811    | -117    | 3       | 0       |
| ARIMA/ANN Closing Price System 1  | -3036  | -371    | -5      | -1      |
| ARIMA/ANN Closing Price System 2  | -2783  | -137    | -5      | 0       |
| ARIMA/k-NN Closing Price System 1 | 497    | 3162    | 1       | 7       |
| ARIMA/k-NN Closing Price System 2 | -3449  | -804    | -6      | -2      |
| ARIMA/ANN Up/Down                 | -2712  | -47     | -3      | -12     |
| ARIMA/k-NN Up/Down                | 748    | 3413    | 1       | 7       |
| ARIMA/ANN Up/Down Stop Loss       | 570    | 3424    | 1       | 7       |
| ARIMA/SVM Up/Down                 | -2364  | 301     | -4      | 1       |



# Bibliography

- Achelis, S. B. Macd, 2014. URL <http://www.metastock.com/Customer/Resources/TAAZ/default.aspx?c=3&p=66>.
- Aladag, C. H., E. Egrioglu, and C. Kadilar. Forecasting nonlinear time series with a hybrid methodology. *Applied Mathematics Letters*, 22(9):1467 – 1470, 2009.
- Appel, G. *Technical Analysis: Power Tools for Active Investors : new Techniques for Active Trading in the Stock Market!* Financial Times Prentice Hall books. Financial Times/Prentice Hall, 2005. ISBN 9780131479029.
- Appel, G. and E. Dobson. *Understanding Moving Average Convergence-divergence*. Traders Press, 2007. ISBN 9780934380928.
- Atsalakis, G. S. and K. P. Valavanis. Surveying stock market forecasting techniques – part ii: Soft computing methods. *Expert Systems with Applications*, 36(3):5932 – 5941, 2009.
- Bajgrowicz, Pierre and Olivier Scaillet. Technical trading revisited: False discoveries, persistence tests, and transaction costs. *Journal of Financial Economics*, 106(3):473 – 491, 2012.
- Beau, C.L. and D.W. Lucas. *Day Trading Systems and Methods*. Marketplace Books, 1999. ISBN 9781883272272.
- Bigalow, S.W. *Profitable Candlestick Trading: Pinpointing Market Opportunities to Maximize Profits*. Wiley Trading. Wiley, 2011. ISBN 9781118005804.
- Box, G.E.P. and G.M. Jenkins. *Time series analysis: forecasting and control*. Holden-Day, 1970.
- Brock, W., J. Lakonishok, and B. LeBaron. Two simple technical trading rules and the stochastic properties of stock returns. *Journal of Finance*, 47(5):1731–64, 1992.
- Brown, R.G. *Statistical forecasting for inventory control*. McGraw-Hill, 1959.

- Brown, R.G. *Smoothing, forecasting and prediction of discrete time series*. Prentice-Hall, 1963.
- Bulkowski, T.N. *Encyclopedia of Chart Patterns*. Wiley Trading. Wiley, 2011. ISBN 9781118045855.
- Chande, T.S. and S. Kroll. *The new technical trader: boost your profit by plugging into the latest indicators*. Wiley Finance. Wiley, 1994. ISBN 9780471597803.
- Chen, David Y. and Tongzhe Li. Financial crises, asian stock indices, and current accounts: An asian-u.s. comparative study. *Journal of Asian Economics*, 34(0):66 – 78, 2014.
- Chopra, N., J. Lakonishok, and J. Ritter. Measuring abnormal performance do stocks overreact? *Journal of Financial Economics*, 31:235 – 268, 1992.
- Covel, M.W. *Trend Following (Updated Edition): Learn to Make Millions in Up or Down Markets*. Pearson Education, 2009. ISBN 9780135094402.
- De Bondt, W. and R. Thaler. Does the stock market overreact? *Journal of Finance*, 40(0):793 – 805, 1985.
- De Gooijer, J. G. and R. J. Hyndman. 25 years of time series forecasting. *International Journal of Forecasting*, 22(3):443 – 473, 2006.
- Devicic, J. Weighted moving averages: The basics, 2010. URL <http://www.investopedia.com/articles/technical/060401.asp>. [Online; accessed 1-March-2014].
- Dueker, M. and C.J. Neely. Can markov switching rules predict foreign exchange returns? *Journal of Banking and Finance*, 31:297 – 296, 2007.
- Efron, B. Bootstrap methods: Another look at the jackknife. *The Annals of Statistics*, 71:1–26, 1979.
- Faith, C. *Way of the Turtle: The Secret Methods that Turned Ordinary People into Legendary Traders*. McGraw Hill professional. McGraw-Hill Education, 2007. ISBN 9780071509466.
- Fama, Eugene F. and Kenneth R. French. Size, value, and momentum in international stock returns. *Journal of Financial Economics*, 105(3):457 – 472, 2012.
- Fang, Jiali, Ben Jacobsen, and Yafeng Qin. Predictability of the simple technical trading rules: An out-of-sample test. *Review of Financial Economics*, 23(1):30 – 45, 2014.

- Fatima, S. and G Hussain. Statistical models of kse100 index using hybrid financial systems. *Neurocomputing*, 71(13–15):2742 – 2746, 2008.
- Fiess, N. M. and R. MacDonald. Towards the fundamentals of technical analysis: analysing the information content of high, low and close prices. *Economic Modelling*, 19(3):353 – 374, 2002.
- Friesen, G. C., P. A. Weller, and L. M. Dunham. Price trends and patterns in technical analysis - a theoretical and empirical examination. *Journal of Banking and Finance*, 33(6):1089 – 1100, 2009.
- Gutierrez Jr, R. and E. Kelley. The long-lasting momentum in weekly returns. *Journal of Finance*, 63:415 – 447, 2008.
- Han, J., M. Kamber, and J. Pei. *Data Mining: Concepts and Techniques: Concepts and Techniques*. Elsevier Science, 2011. ISBN 9780123814807.
- Holt, C. C. Forecasting seasonals and trends by exponentially weighted moving averages. *International Journal of Forecasting*, 20(1):5 – 10, 2004.
- Hsu, C.M. A hybrid procedure for stock price prediction by integrating self-organizing map and genetic programming. *Expert Systems with Applications*, 38(11):14026 – 14036, 2011.
- Hsu, Po-Hsuan, Yu-Chin Hsu, and Chung-Ming Kuan. Testing the predictive ability of technical analysis using a new stepwise test without data snooping bias. *Journal of Empirical Finance*, 17(3):471 – 484, 2010.
- Huang, W., Y. Nakamori, and S-Y. Wang. Forecasting stock market movement direction with support vector machine. *Computers and Operations Research*, 32(10):2513 – 2522, 2005.
- Hyndman, R. J and K. Yeasmin. Automatic time series forecasting: The forecast package for r. *Journal of Statistical Software*, 2008.
- Jegadeesh, N. Evidence of predictable behavior of security returns. *Journal of Finance*, 45:881 – 898, 1990.
- Jegadeesh, N. and S. Titman. Returns to buying winners and selling losers: Implications for stock market efficiency. *Journal of Finance*, 48:65 – 91, 1993.
- Jegadeesh, N. and S. Titman. Overreaction, delayed reaction and contrarian profits. *Review of Financial Studies*, 8:973 – 993, 1995.
- Kaufman, P.J. *Trading Systems and Methods*. Wiley, 2013. ISBN 9781118222249.

- Khashei, M and M. Bijari. A new class of hybrid models for time series forecasting. *Expert Systems with Applications*, 39(4):4344 – 4357, 2012.
- Khashei, M., M. Bijari, and G. A. R. Ardali. Improvement of auto-regressive integrated moving average models using fuzzy logic and artificial neural networks (anns). *Neurocomputing*, 72(4–6):956 – 967, 2009.
- Kriechbaumer, T., A. Angus, D. Parsons, and M. R. Casado. An improved wavelet–arima approach for forecasting metal prices. *Resources Policy*, 39(0):32 – 41, 2014.
- Kuang, P., M. Schroder, and Q. Wang. Illusory profitability of technical analysis in emerging foreign exchange markets. *International Journal of Forecasting*, 30(2):192 – 205, 2014.
- Lane, G.C. *Using Stochastics, Cycles and R.S.I.* 1986.
- Lehmann, B. Fads, martingales and market efficiency. *Quarterly Journal of Economics*, 105:1 – 28, 1990.
- Levich, R. and L. Thomas. The significance of technical trading rule profits in the foreign exchange market: A bootstrap approach. *Journal of International Money and Finance*, 12:451 – 474, 1993.
- Lu, Tsung-Hsun. The profitability of candlestick charting in the taiwan stock market. *Pacific-Basin Finance Journal*, 26(0):65 – 78, 2014.
- Malkiel, B.G. *A Random Walk Down Wall Street: Including a Life-cycle Guide to Personal Investing*. Norton, 1999. ISBN 9780393047813.
- Marshall, B. R. and R. H. Cahan. Is technical analysis profitable on a stock market which has characteristics that suggest it may be inefficient? *Research in International Business and Finance*, 19(3):384 – 398, 2005.
- Marshall, B. R, M. R. Young, and L. C. Rose. Candlestick technical trading strategies: Can they create value for investors? *Journal of Banking and Finance*, 30(8):2303 – 2323, 2006.
- Marshall, B. R., R. H. Cahan, and J. M. Cahan. Does intraday technical analysis in the u.s. equity market have value? *Journal of Empirical Finance*, 15(2):199 – 210, 2008.
- Matheson, Troy D. Financial conditions indexes for the united states and euro area. *Economics Letters*, 115(3):441 – 446, 2012.
- Menkhoff, L. The use of technical analysis by fund managers: International evidence. *Journal of Banking and Finance*, 34(11):2573 – 2586, 2010.

- Menkhoff, Lukas, Lucio Sarno, Maik Schmeling, and Andreas Schrimpf. Currency momentum strategies. *Journal of Financial Economics*, 106(3):660 – 684, 2012.
- Mills, T. C. *The Foundations of Modern Time Series Analysis*. Palgrave Macmillan, 2011. ISBN 9780230290181.
- Morris, G.L. *Candlestick Charting Explained: Timeless Techniques for Trading stocks and Sutures*. McGraw-Hill Education, 2006. ISBN 9780071632171.
- Moskowitz, Tobias J., Yao Hua Ooi, and Lasse Heje Pedersen. Time series momentum. *Journal of Financial Economics*, 104(2):228 – 250, 2012.
- Murphy, J.J. *Technical Analysis of the Financial Markets: A Comprehensive Guide to Trading Methods and Applications*. Penguin Group US, 1999. ISBN 9781101659199.
- Neely, C. J., P. Weller, and R. Dittmar. Is technical analysis in the foreign exchange market profitable? a genetic programming approach. *Journal of Financial and Quantitative Analysis*, 32:405 – 426, 1997.
- Nison, S. *Japanese Candlestick Charting Techniques: A Contemporary Guide to the Ancient Investment Techniques of the Far East*. New York Institute of Finance, 2001. ISBN 9780735201811.
- Novy-Marx, Robert. Is momentum really momentum? *Journal of Financial Economics*, 103(3):429 – 453, 2012.
- Ord, K. Charles holt’s report on exponentially weighted moving averages: an introduction and appreciation. *International Journal of Forecasting*, 20(1):1 – 3, 2004.
- Pai, P-F. and C-S. Lin. A hybrid arima and support vector machines model in stock price forecasting. *Omega*, 33(6):497 – 505, 2005.
- Qian, G. and X. Zhao. On time series model selection involving many candidate arma models. *Computational Statistics and Data Analysis*, 51(12):6180 – 6196, 2007.
- Reitz, S. On the predictive content of technical analysis. *The North American Journal of Economics and Finance*, 17(2):121 – 137, 2006.
- Rojas, I., O. Valenzuela, F. Rojas, A. Guillen, L.J. Herrera, H. Pomares, L. Marquez, and M. Pasadas. Soft-computing techniques and arma model for time series prediction. *Neurocomputing*, 71(4-6):519 – 537, 2008.
- Rout, M., B. Majhi, R. Majhi, and G. Panda. Forecasting of currency exchange rates using an adaptive arma model with differential evolution based training. *Journal of King Saud University - Computer and Information Sciences*, 26(1):7 – 18, 2014.

- Schulmeister, S. Profitability of technical stock trading: Has it moved from daily to intraday data? *Review of Financial Economics*, 18(4):190 – 201, 2009.
- Schwager, J.D. *Market Wizards: Interviews With Top Traders*. HarperCollins, 1988. ISBN 978-0887306105.
- Schwager, J.D. *The New Market Wizards: Conversations with America's Top Traders*. HarperBusiness, 1994. ISBN 978-0887306679.
- Shumway, R.H. and D.S. Stoffer. *Time Series Analysis and Its Applications: With R Examples*. Springer, 2010. ISBN 9781441978653.
- Shynkevich, A. Performance of technical analysis in growth and small cap segments of the us equity market. *Journal of Banking and Finance*, 36(1):193 – 208, 2012.
- So, M. K. P. and R. S. W. Chung. Dynamic seasonality in time series. *Computational Statistics and Data Analysis*, 70(0):212 – 226, 2014.
- Sweeney, R. Beating the foreign exchange market. *Journal of Finance*, 41:163 – 182, 1986.
- Tan, Z., J. Zhang, J. Wang, and J. Xu. Day-ahead electricity price forecasting using wavelet transform combined with arima and garch models. *Applied Energy*, 87(11): 3606 – 3610, 2010.
- Tanaka-Yamawaki, M. and S. Tokuoka. Adaptive use of technical indicators for the prediction of intra-day stock prices. *Physica A: Statistical Mechanics and its Applications*, 383(1):125 – 133, 2007.
- Taylor, Mark P. and Helen Allen. The use of technical analysis in the foreign exchange market. *Journal of International Money and Finance*, 11(3):304 – 314, 1992.
- Taylor, Nick. The rise and fall of technical trading rule success. *Journal of Banking & Finance*, 40(0):286 – 302, 2014.
- Ulku, N. and E. Prodan. Drivers of technical trend-following rules profitability in world stock markets. *International Review of Financial Analysis*, 30:214 – 229, 2013.
- Wang, J-J., J-Z. Wang, Z-G. Zhang, and S-P. Guo. Stock index forecasting based on a hybrid model. *Omega*, 40(6):758 – 766, 2012.
- Weissman, R.L. *Mechanical Trading Systems: Pairing Trader Psychology with Technical Analysis*. Wiley, 2005. ISBN 9780471654353.
- Wilder, J.W. *New concepts in technical trading systems*. Trend Research, 1978. ISBN 9780894590276.

- Williams, L. *Long-Term Secrets to Short-Term Trading*. Wiley Trading. Wiley, 2011. ISBN 9781118184684.
- Winters, P. R. Forecasting sales by exponentially weighted moving averages. *Management Science*, 6(3):324–342, 1960.
- Zhang, G. P. Time series forecasting using a hybrid arima and neural network model. *Neurocomputing*, 50(0):159 – 175, 2003.