※ AllData软件部署教程


1. 获取源码
2. 数据库初始化
3. 后端
   3.1. 配置项目
      3.1.1. IDEA打开项目
      3.1.2. 配置数据库连接信息
      3.1.3. 配置集群
   3.2. 打包
   3.3. 上传部署包
   3.4. 启动
4. 前端
   4.1. 打包
   4.2. 上传部署包
   4.3. 启动 nginx
5. 访问

1. 获取源码

- github
- gitee

2. 数据库初始化

- 连接MySQL数据库
- 找到源码中的sql文件

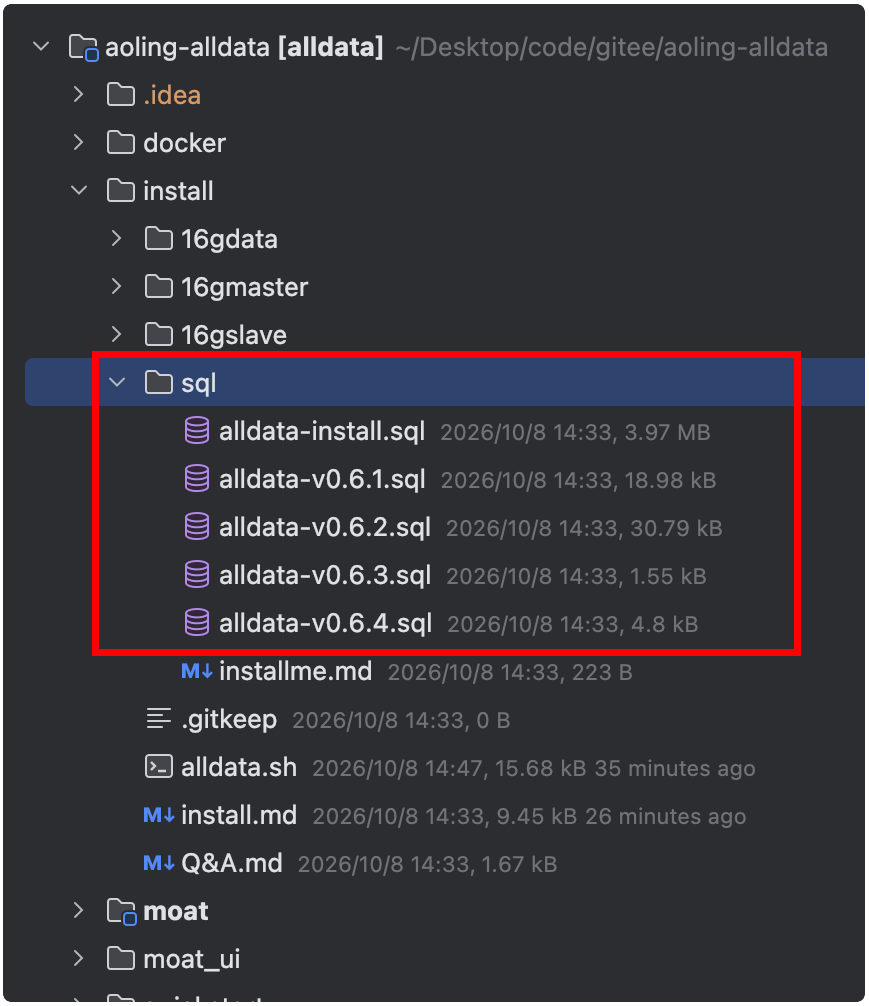

- 在命令行中通过 source 命令初始化

```sql
source alldata-install.sql;

source alldata-0.6.1.sql;

source alldata-0.6.2.sql;


source alldata-0.6.3.sql;

source alldata-0.6.4.sql;
```


3. 后端


3.1. 配置项目

3.1.1. IDEA打开项目

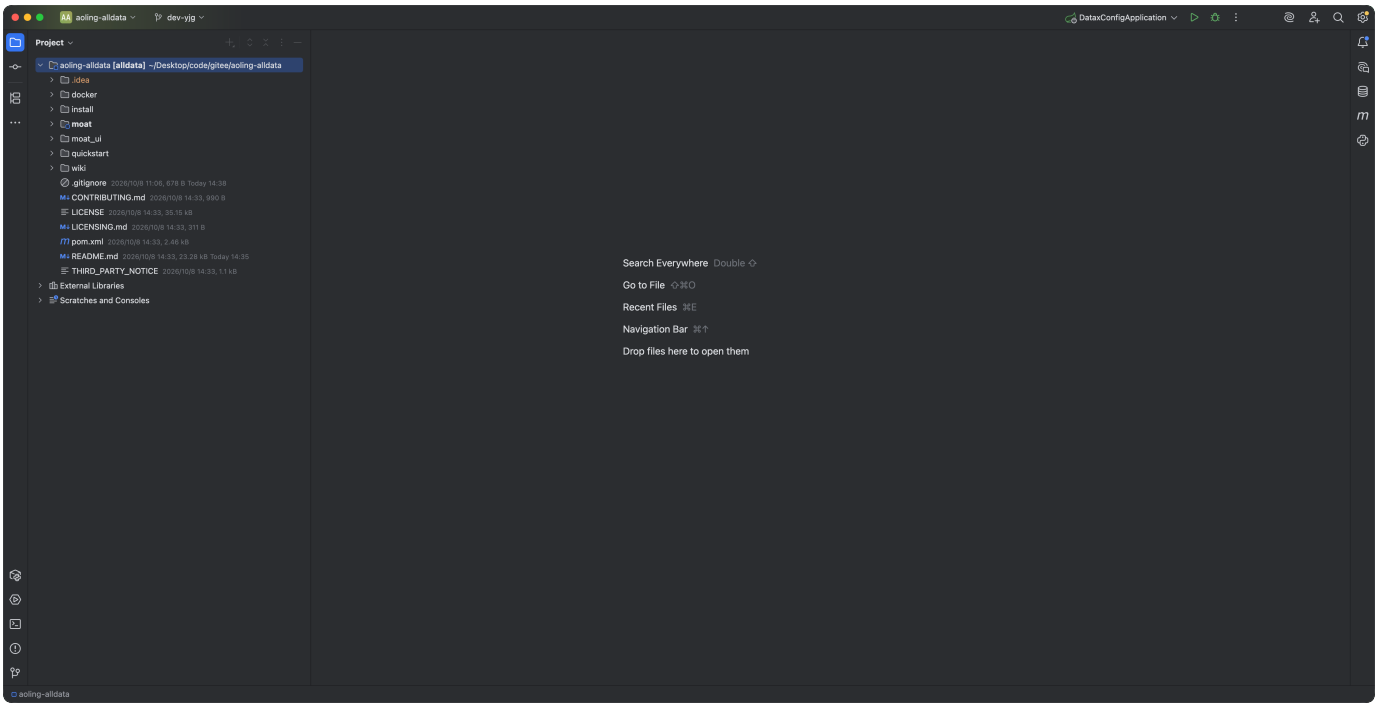

- 选择JDK8以及Maven

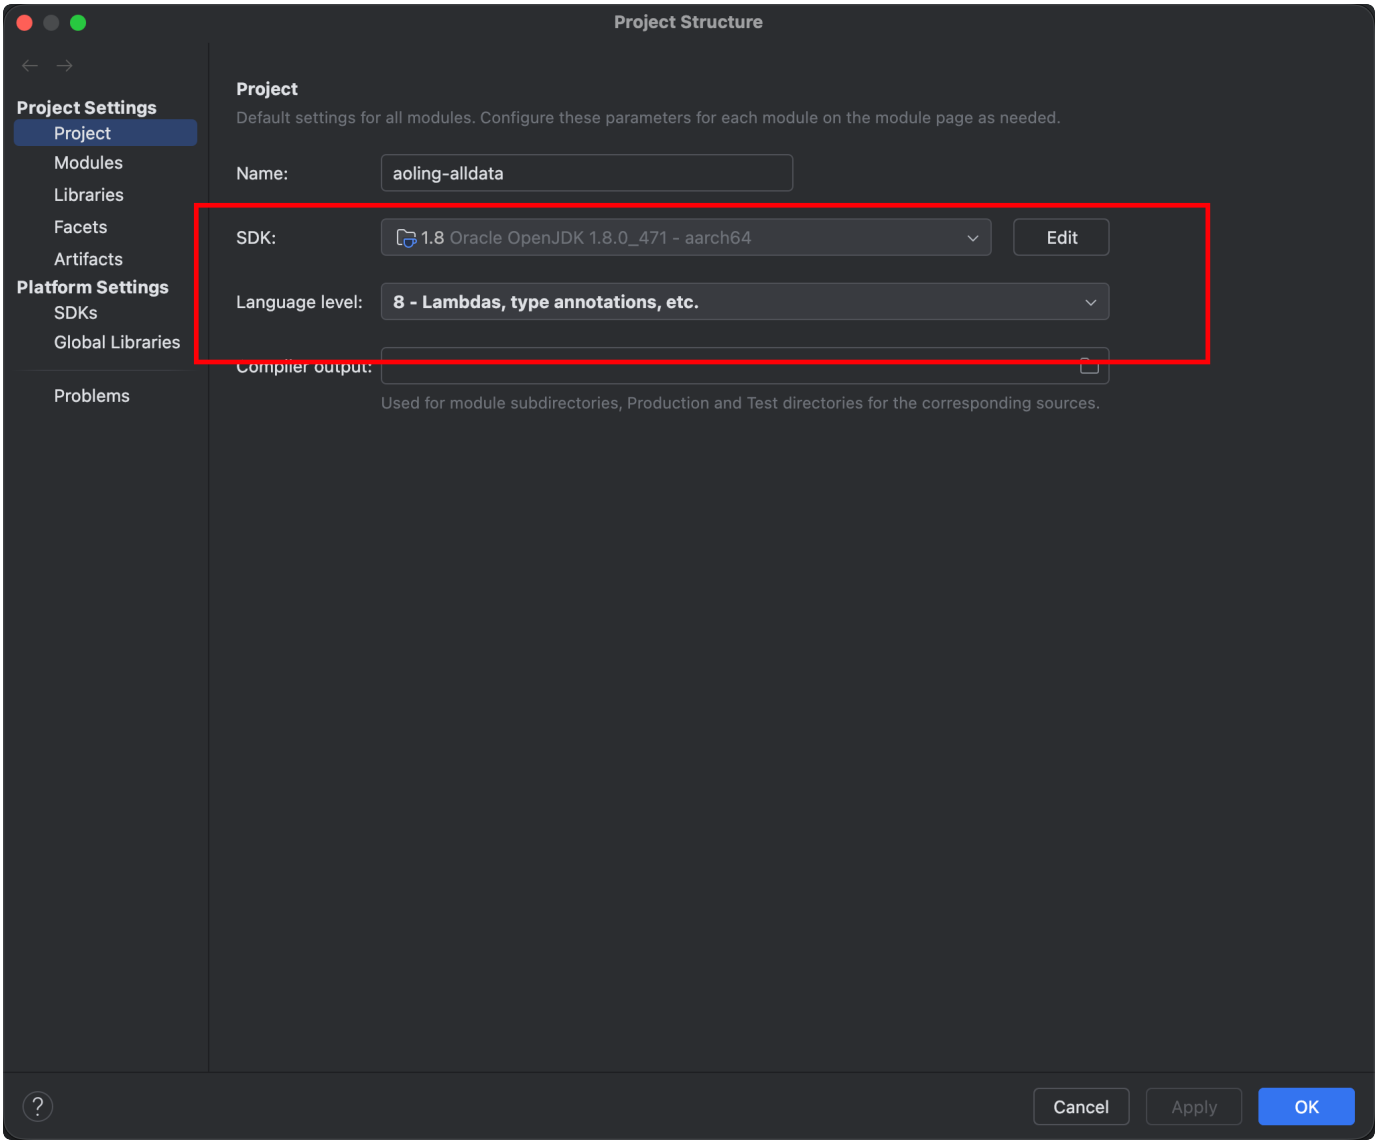

Project Structure
Project Settings
Project
Modules
Libraries
Facets
Artifacts
Platform Settings
SDKs
Global Libraries
Problems
Project
Default settings for all modules. Configure these parameters for each module on the module page as needed.
Name:
aoling-alldata
SDK:
1.8 Oracle OpenJDK 1.8.0_471 - aarch64
Edit
Language level:
8 - Lambdas, type annotations, etc.
Compiler output:
Used for module subdirectories, Production and Test directories for the corresponding sources.
Cancel
Apply
OK

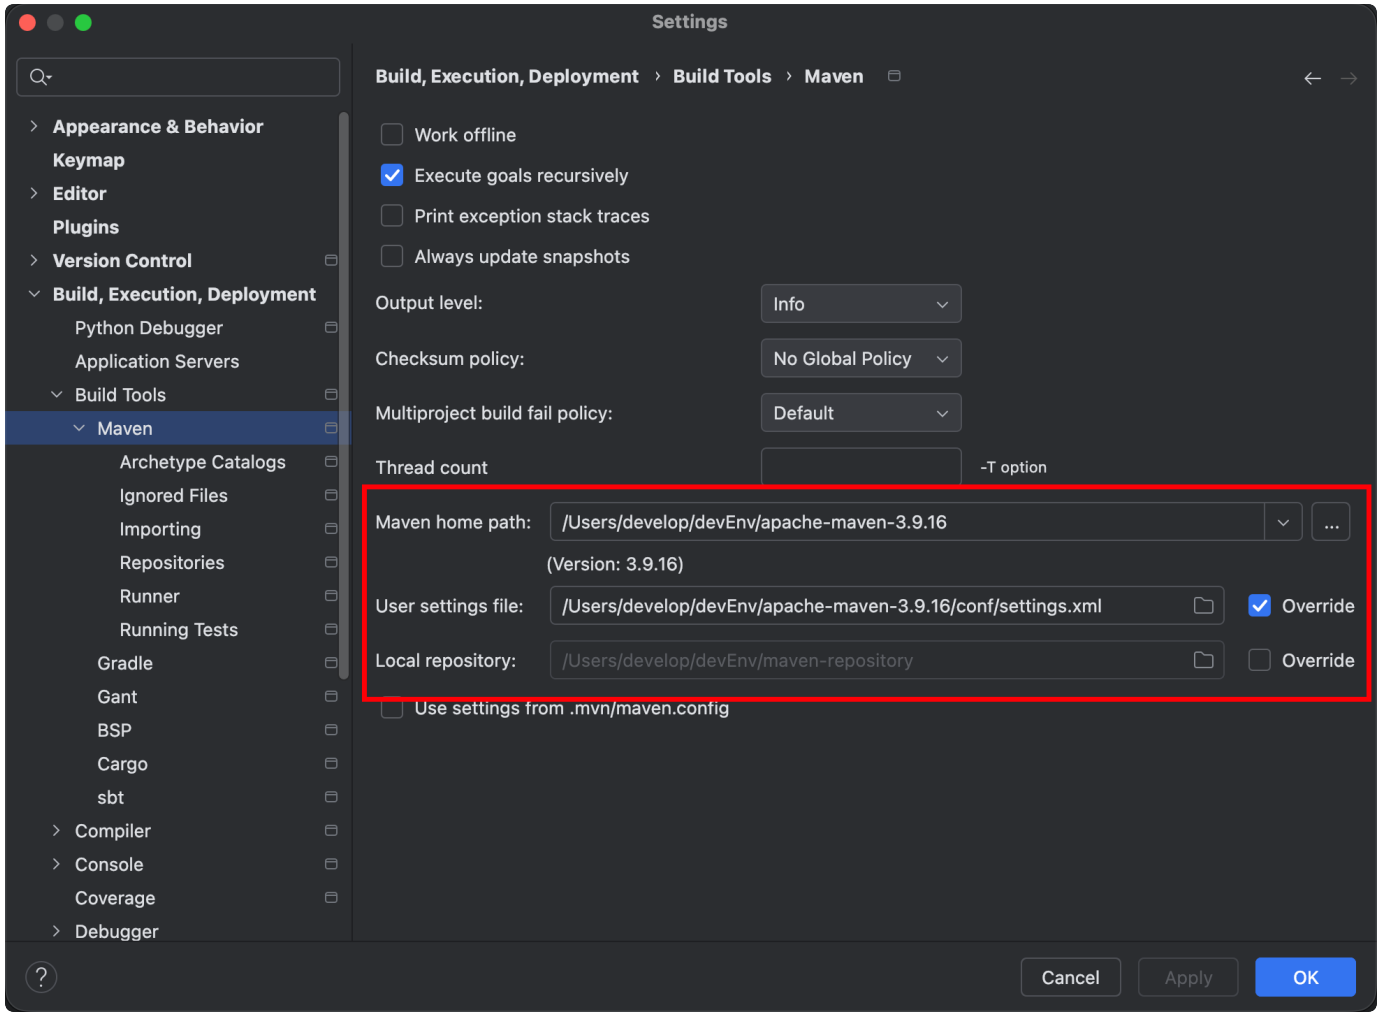

- 选择完成等等项目在后台刷新依赖

3.1.2. 配置数据库连接信息


- 找到 /Users/develop/Desktop/code/gitee/aoling-alldata/moat/config/src/main/resources/config/application-common-dev.yml 文件

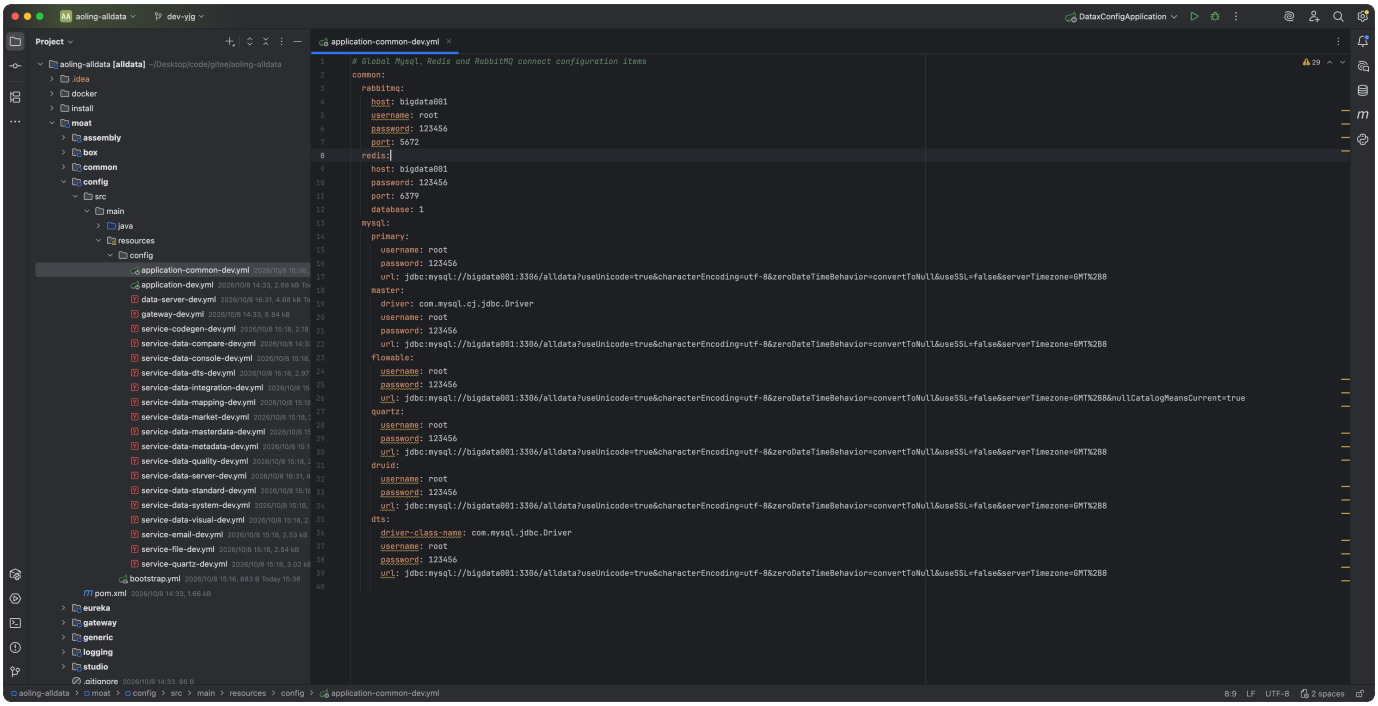

- 根据自身部署情况修改即可

3.1.3. 配置集群

- 用户可以自行修改各个服务部署位置，以eureka为例
- 找到 eureka 模块

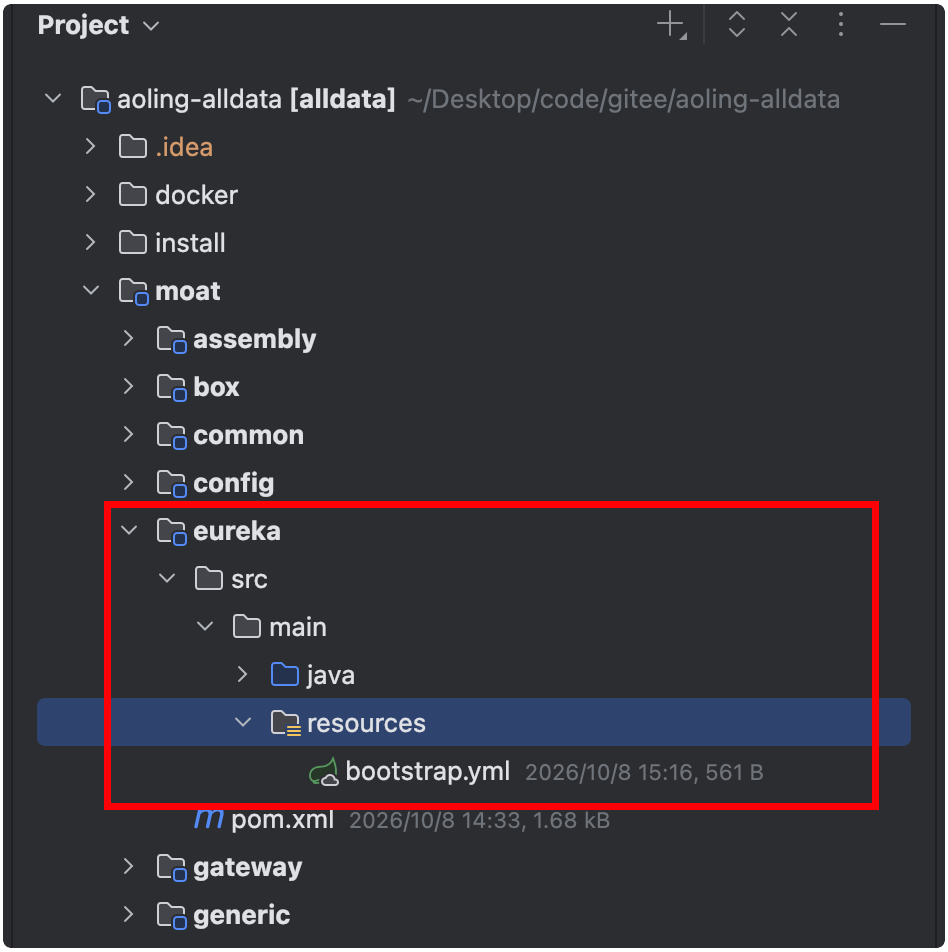

- 修改 `bootstrap.yml` 文件

bootstrap.yml

```yaml
server:
  port: 8610


spring:
  application:
    name: eureka

eureka:
  instance:
    lease-renewal-interval-in-seconds: 20
    lease-expiration-duration-in-seconds: 60
    # 设置使用IP
    prefer-ip-address: true
    # 设置外网IP号
    ip-address: bigdata001
#    ip-address: localhost
  client:
    register-with-eureka: false
    fetch-registry: false
    instance-info-replication-interval-seconds: 30
    service-url:
#      defaultZone: http://bigdata001:8610/eureka/
      defaultZone: http://bigdata001:8610/eureka/
```


- 修改以上红框处内容
- `ip-address` 是eureka部署所在主机
- `defaultZone` 是eureka的连接信息
- 其他服务配置过程类似

3.2. 打包

- 按照下图操作

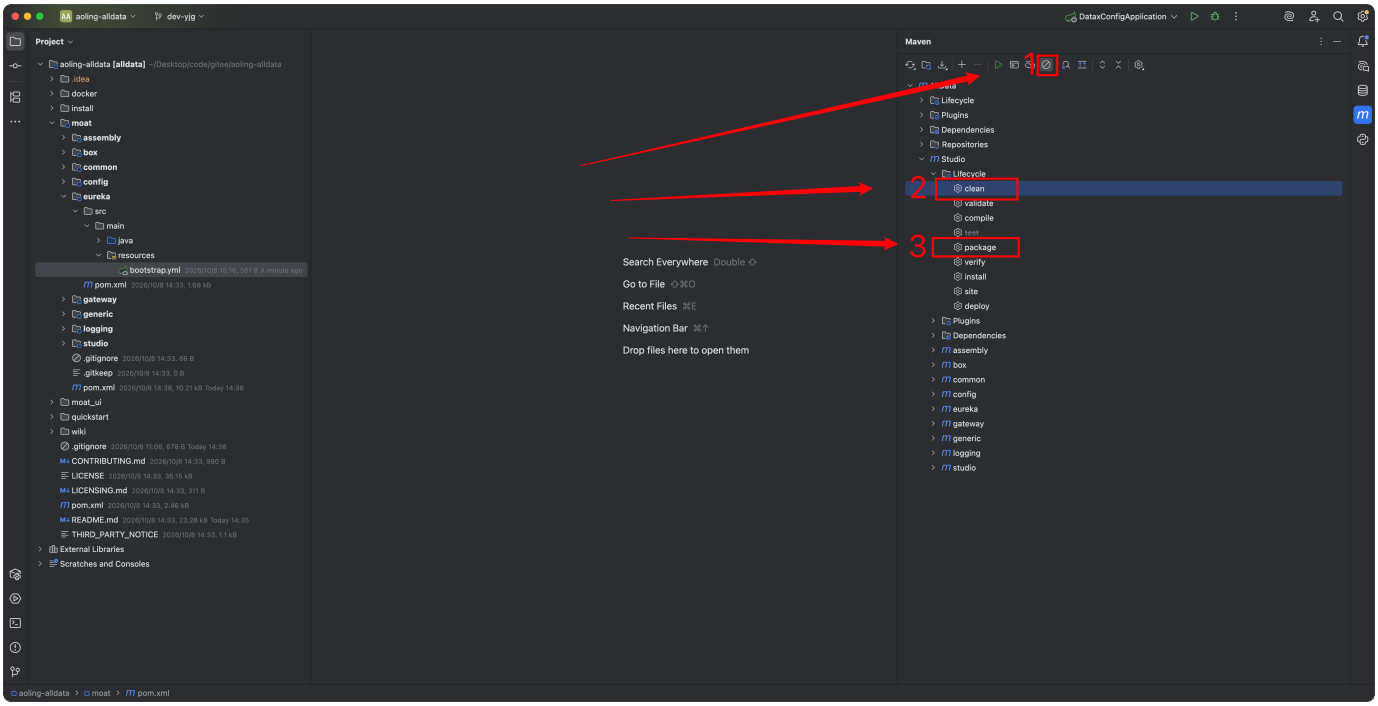

- 打包完成，得到部署包

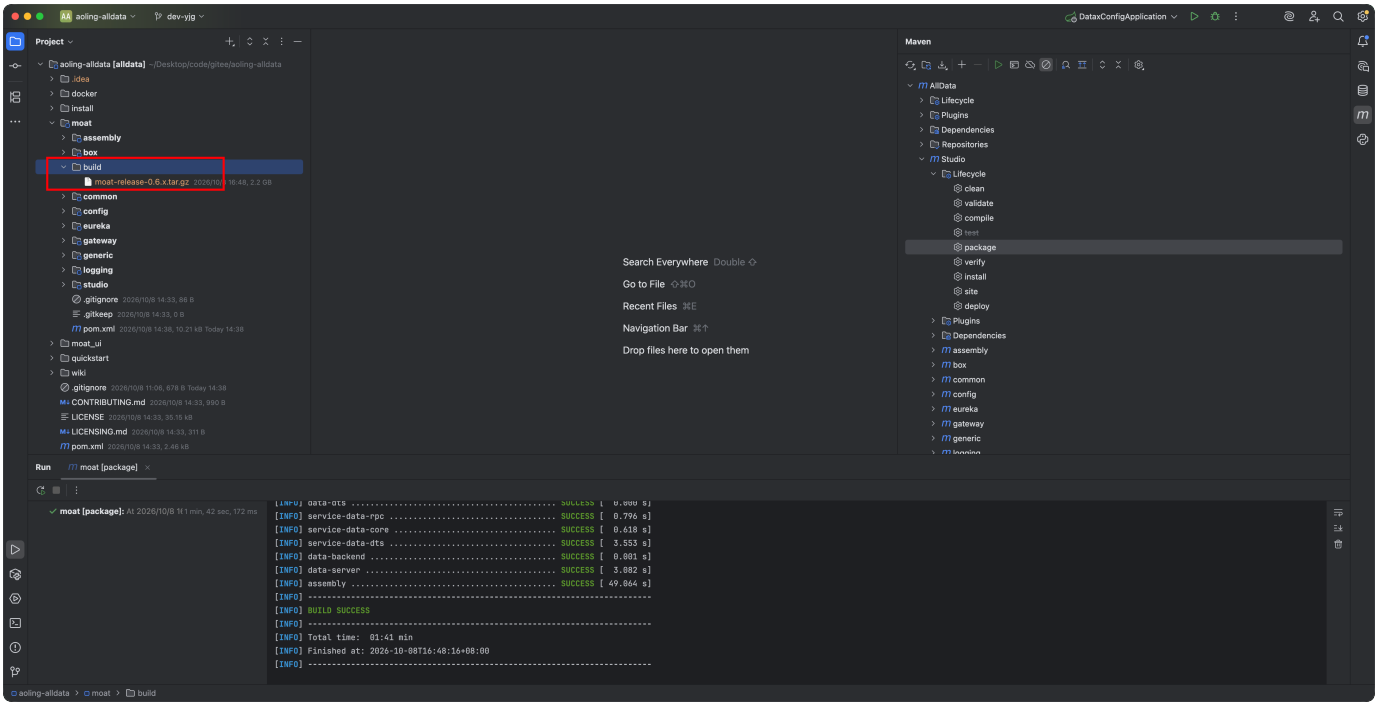

3.3. 上传部署包

```shell
scp moat-release-0.6.x.tar.gz root@bigdata001:/
```

- 解压

```shell
tar -zxvf moat-release-0.6.x.tar.gz
```


```
[root@32g005 alldata-install]# pwd
/aolingdata/alldata-install
[root@32g005 alldata-install]# ll
total 2144632
drwxr-xr-x  8  502 games       4096 Oct  8 16:00 16gdata
drwxr-xr-x 11  502 games       4096 Oct  8 15:26 16gmaster
drwxr-xr-x  7  502 games       4096 Oct  8 15:44 16gslave
-rwxr-xr-x  1  502 games      15677 Oct  8 14:47 alldata.sh
-rw-r--r--  1 root root  2196046627 Oct  8 15:25 moat-release-0.6.x.tar.gz
-rw-r--r--  1  502 games      23282 Oct  8 14:33 README.md
drwxr-xr-x  2  502 games        157 Oct  8 14:33 sql
[root@32g005 alldata-install]#
```

3.4. 启动

```shell
sh alldata.sh start all
```

4. 前端

- 进入命令行窗口

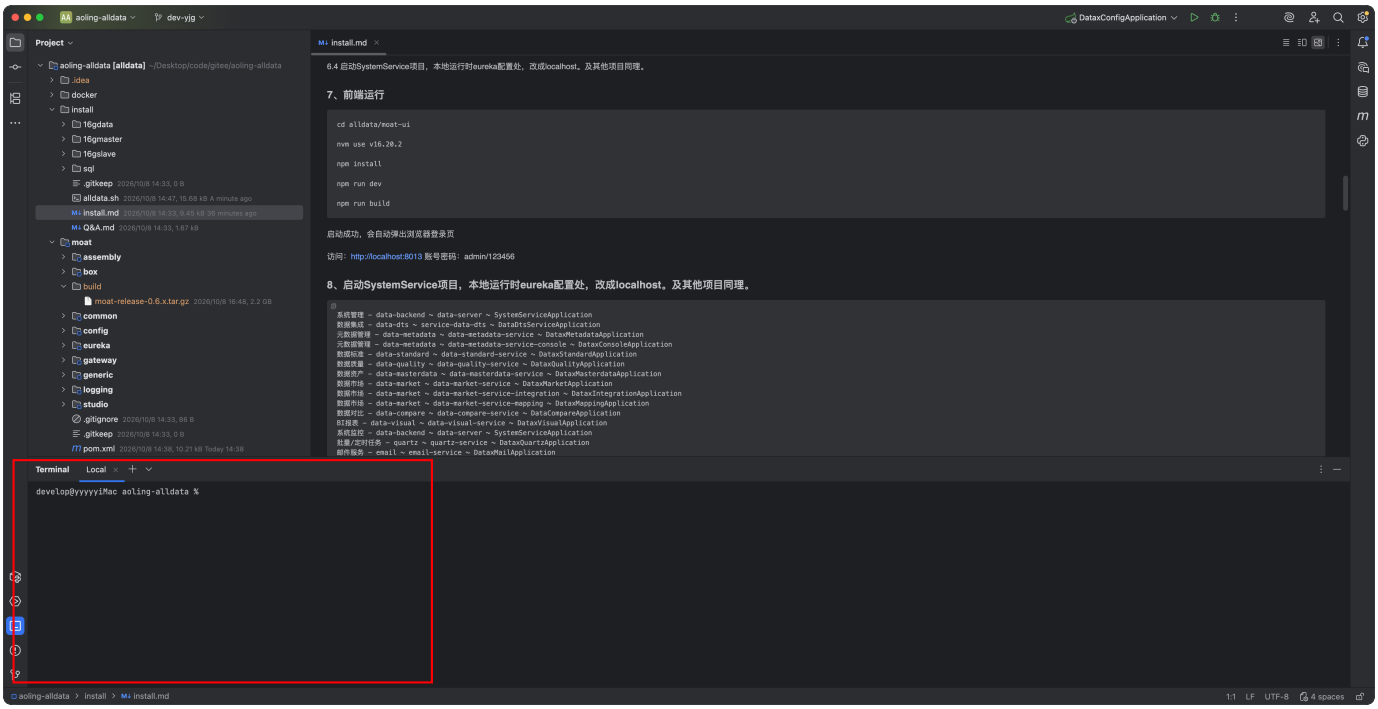

- 进入 alldata/moat-ui 目录

```shell
cd alldata/moat-ui
```

4.1. 打包

```shell
nvm use v16.20.2

npm install

npm run build
```

- 打包完成



- 压缩

```shell
zip -r dist.zip dist
```

4.2. 上传部署包

```shell
scp dist.zip root@bigdata001:/
```

- 服务器创建目录


```shell
mkdir -p /studio/ui
```

- 解压到 /studio/ui 目录

```
[root@32g007 ui]# pwd
/studio/ui
[root@32g007 ui]# ll
total 5728
drwxr-xr-x 3 root root      96 Oct  8 16:26 dist
-rw-r--r-- 1 root root 5864156 Oct  8 16:26 dist.zip
[root@32g007 ui]#
```

4.3. 启动 nginx

- 上传项目中的 `nginx.conf` 配置文件

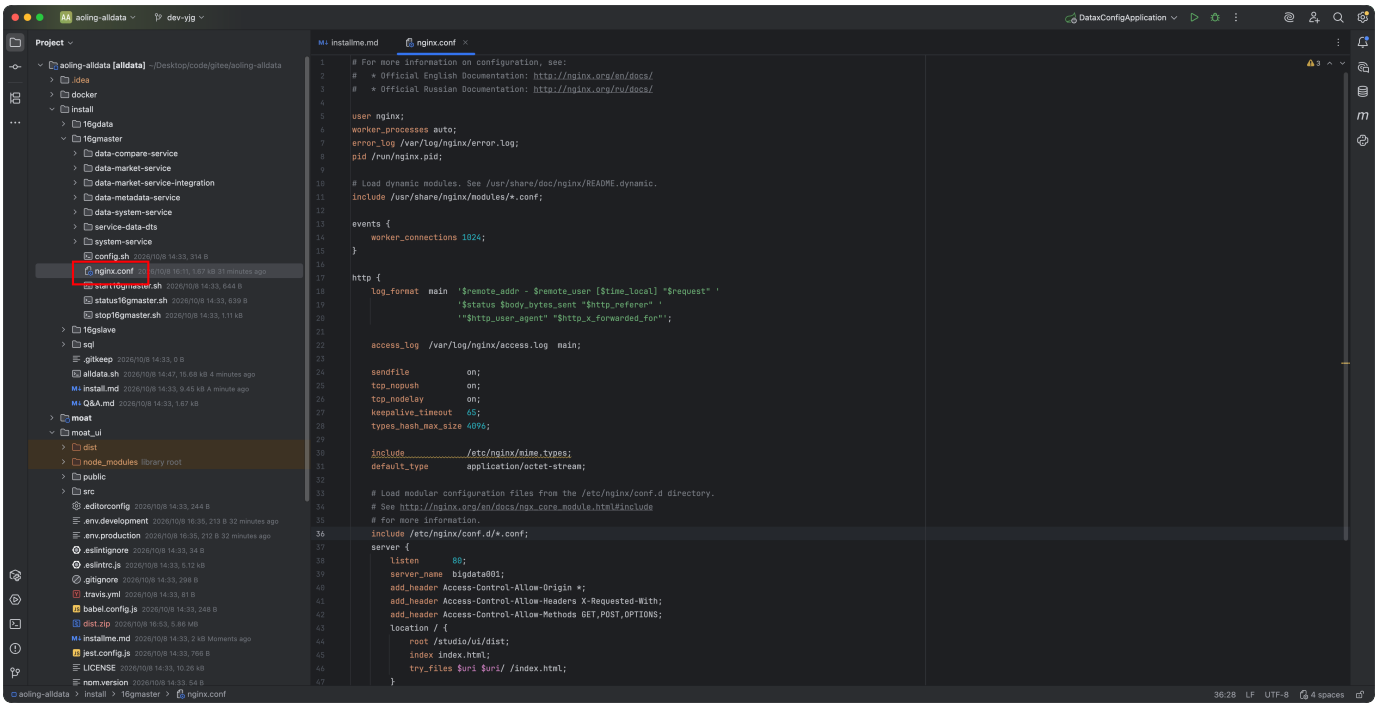


```shell
scp nginx.conf root@bigdata001:/etc/nginx/nginx.conf
```

- 启动

```shell
nginx -c /etc/nginx/nginx.conf
```

5. 访问

- 访问地址：http://bigdata001