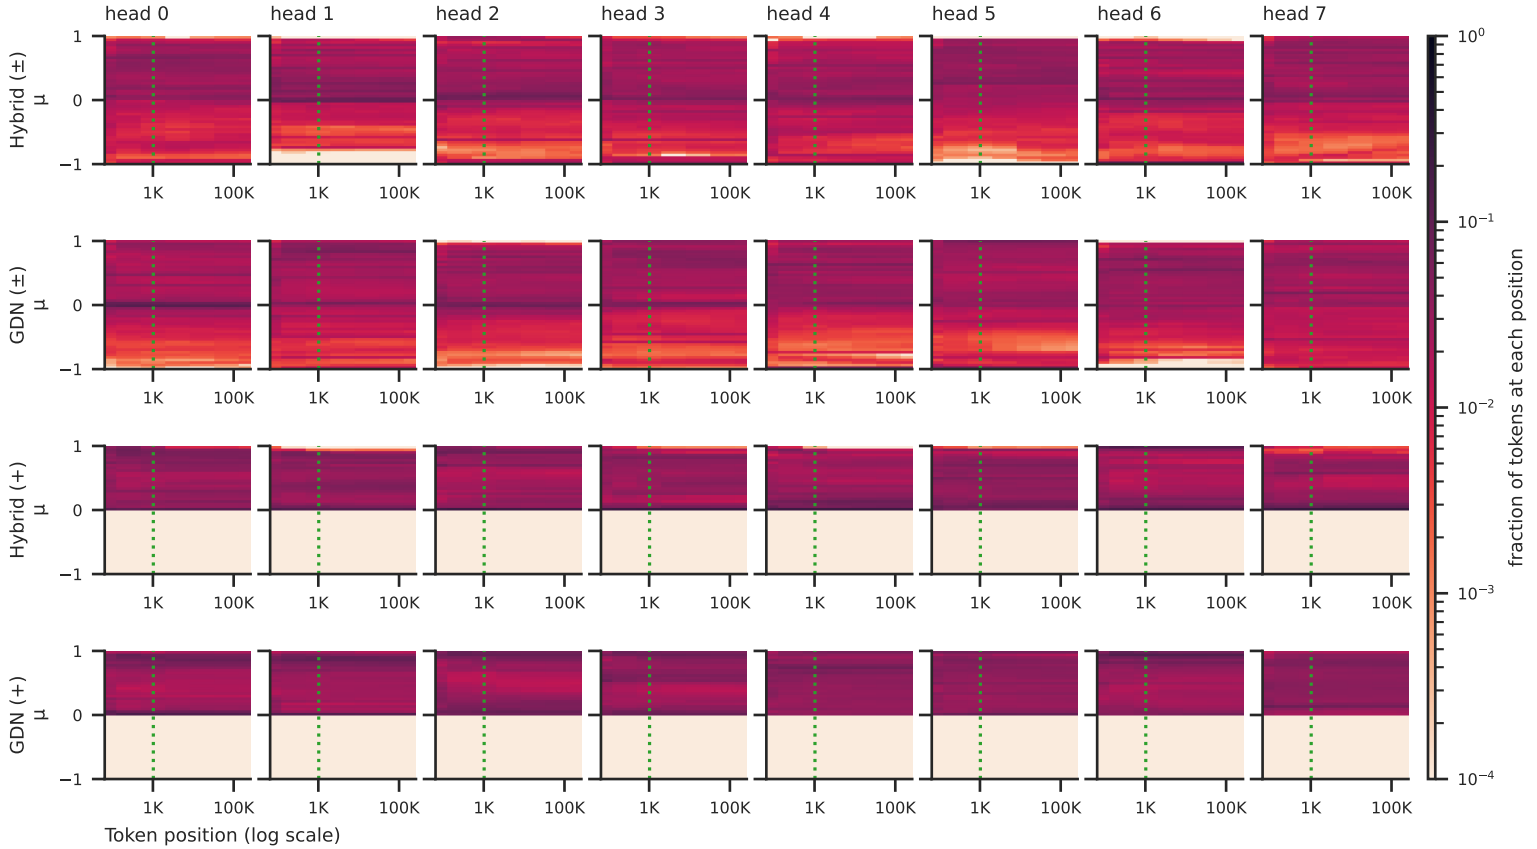

Soluble: per-token μ by head index (all GDN layers pooled; head k is unrelated across layers)
head 0
head 1
head 2
head 3
head 4
head 5
head 6
head 7
Hybrid (±) μ
GDN (±) μ
Hybrid (+) μ
GDN (+) μ
1
0
−1
1K
100K
Token position (log scale)
fraction of tokens at each position
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}