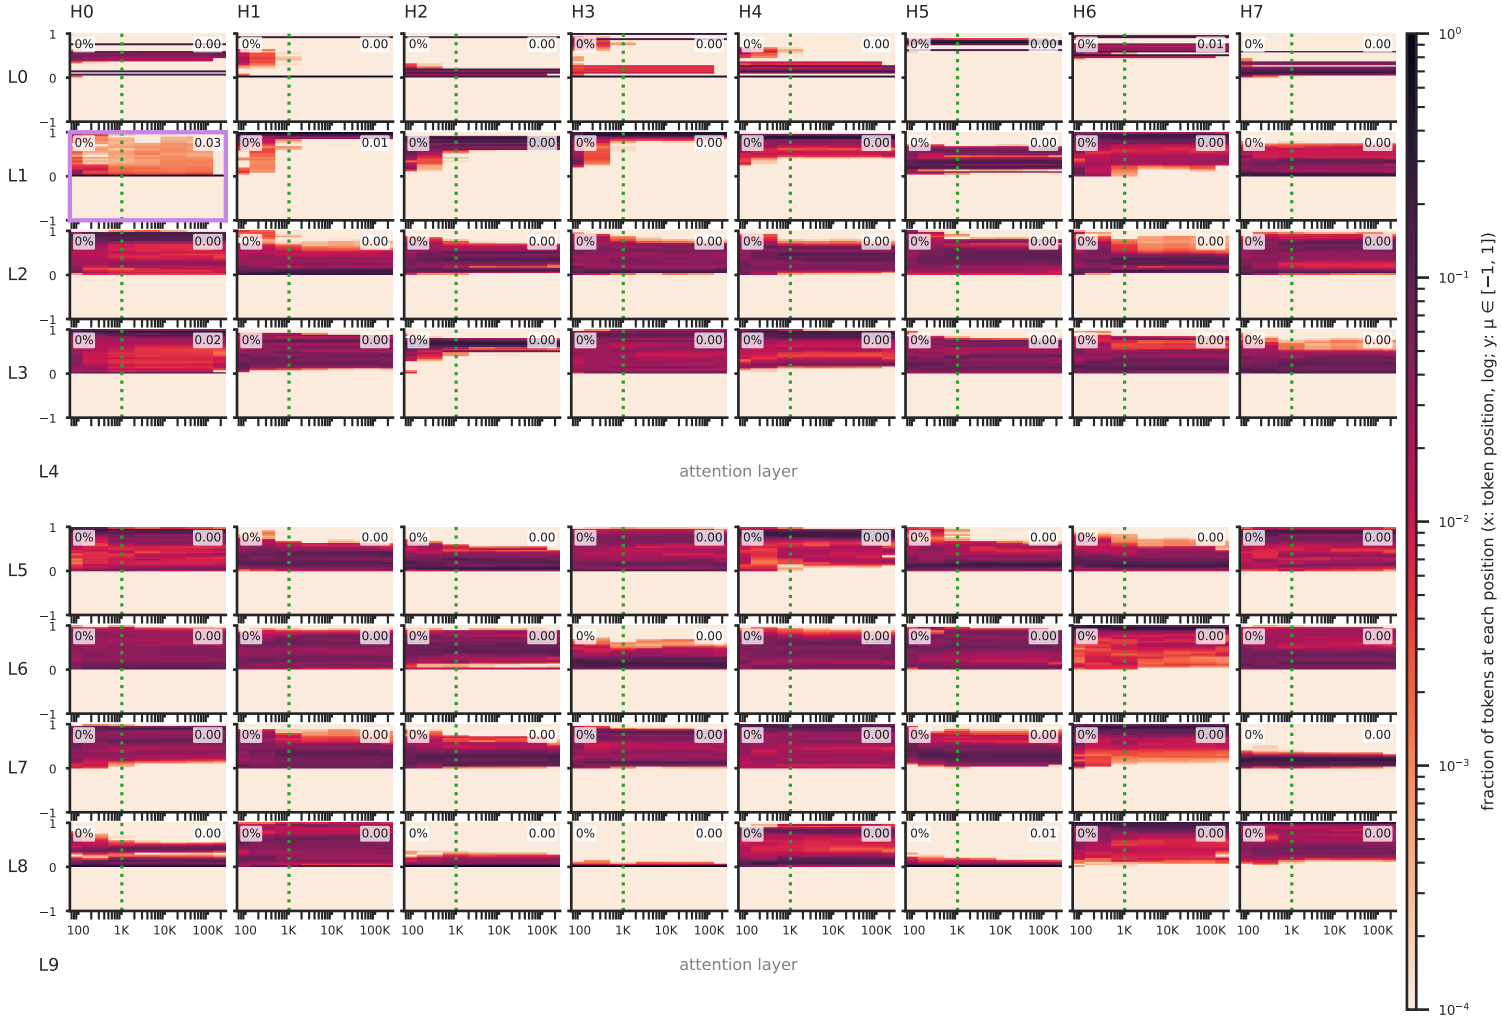

Hybrid (+), General finite: per-token μ = α(1−β) by position, every head
H0
H1
H2
H3
H4
H5
H6
H7
L0
L1
L2
L3
L4
L5
L6
L7
L8
L9
attention layer
attention layer
100
1K
10K
100K
fraction of tokens at each position (x: token position, log; y: μ ∈ [−1, 1])
corner labels: left = reflection mass (μ<−0.5, ≤ 2K tokens); right = write retained at 4K tokens. Framed: memory head.