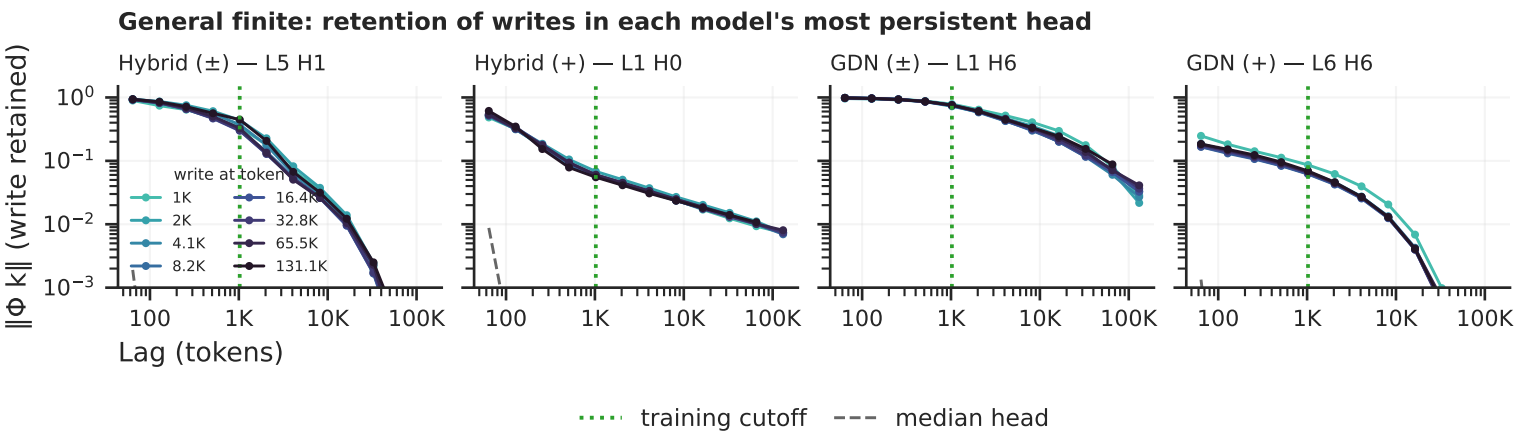
General finite: retention of writes in each model's most persistent head
Hybrid (±) — L5 H1
Hybrid (+) — L1 H0
GDN (±) — L1 H6
GDN (+) — L6 H6
‖Φ k‖ (write retained)
10^{0}
10^{-1}
10^{-2}
10^{-3}
write at token
1K
2K
4.1K
8.2K
16.4K
32.8K
65.5K
131.1K
100
1K
10K
100K
Lag (tokens)
training cutoff
median head