

AllenCompiler

Marissa Allen

Overview:

The AllenCompiler will read the input characters from a plain text file or a String, scan the file using the rules defined in the jflex generated Scanner class of the java code, and output a sequence of tokens for the parser. Every token will consist of the lexeme, or characters in input stream, and the token type. The scanner will distinguish which characters are keywords and which are unexpected tokens. The scanner and its classes are stored in the scanner package.

The recognizer and its classes are stored in the parser package. It will look at the stream of tokens from the scanner, in a particular order, and interpret the token types. It will then compare the current lookahead token to the token type. If it matches all of the expected token types listed in the method and any other methods called; then the method will execute the rule for the non-terminal symbol in the micro pascal grammar.

The symbol table and its classes are stored in the parser package and it interacts with the recognizer in order to help differentiate between the different program, variable, function, or procedure identifiers that are stored in the symbol table. It does this by adding the current lexeme to the symbol table as one of the different identifiers, depending on what kind of identifier that method in the grammar is.

The CompilerMain is the driver class that connects different classes together. When the class reads in a pascal file, the program method in the Recognizer class is called through its constructor. A the symbol table is constructed when information from

the file is stored for each symbol name. A formatted toString() of the symbol table is then written to a file as long as the file that was input exists and is a pascal file.

CompilerMain:

This class connects multiple classes together, namely the Recognizer and SymbolTable classes, in order to generate an output file containing a formatted symbol table when a pascal file is passed in. First, the file length is checked to see if anything was entered or not. If no file is entered then it asks the user to enter a file name, and then exits the file. If the user did pass in a file, the file is read from the args arguments, and passed into the program method in the Recognizer class through its constructor. A symbol table is constructed as information is stored about each symbol name in the pascal file. As long as the file the user entered was a correct pascal program file, a toString() of the symbol table from the pascal program is generated and written to a file.

Scanner:

The scanner program is going to scan through the input file and return a lexeme. The lexeme is going to be the string containing the actual characters that were read in that make up one particular token in the language. The token type is the individual token type descriptor of the keywords, identifiers, and symbols. The keywords and symbols are listed after the design section, anything else is an identifier.

Scanners have a state machine that does pattern matching, a diagram of the state machine can be seen below. As long as the scanner sees characters that are not

spaces, newline characters, or tabs, it will keep adding them to the lexeme. If the scanner does see those, and it already has a lexeme, it's going to push any spaces, newline characters, or tabs back into the input stream and return the lexeme because it's done. If the scanner sees a space, newline characters, or tab, and it doesn't have a lexeme yet it keeps going to find a lexeme and throws the whitespace character away.

This program contains four java files – Token, TokenType, ScannerTest, and Scanner. It also contains one jflex file called AllenScanner. The AllenScanner file contains the instructions on how each Token should be handled. The Token class is a constructor class for a token object. All the tokens will consist of the lexeme, or characters in the input stream, and the token type. The TokenType class consists of all of the different types a token can be. These types are then passed into the scanner class. There is a type for every keyword and symbol as well as two types for ID and number. ScannerTest takes an input file or a string and feeds the characters into the scanner class. As long as the scanner doesn't hit a null token, the scanner prints out any tokens that are not whitespace tokens or null tokens. The Scanner file is the java file that was created when the AllenScanner file was run. The scanner for this class uses the keywords and symbols defined for the token and prints out the tokens that are not whitespace tokens or null tokens along with any errors.

Recognizer:

The beginning of the parser is created by building a recognizer implemented as a top-down recursive descent parser. The recursive descent parser will act as a

recognizer, answering the yes-no question “is the input a pascal program?”. A recognizer is a parser that doesn’t perform any syntax-directed translation. The recognizer will only say whether the input string is from the language described by the grammar or not. In all of the non-terminal methods listed in the grammar, it will do this by looking at a stream of tokens from the scanner in a particular order, interpreting the token types, and comparing the current lookahead token to the token type. If the current lookahead token matches all of the expected token types listed in the method and any other methods called; then the method will execute the rule for the non-terminal symbol in the micro pascal grammar.

Symbol Table:

The symbol table is used to store information about each identifier (symbol name) found in a pascal program. The symbol table is created by implementing a hash map to store an entry into the symbol table by adding a key-value pair. Entries in the symbol table contain information about an identifier such as its character string (or lexeme), its datatype, and its kind. The symbol table interacts with the recognizer in order to help differentiate between the different program, variable, function, or procedure identifiers that are stored in the symbol table. It does this by adding the current lexeme to the symbol table as one of the different identifiers, depending on what kind of identifier it is. For example, in the program method, it has a program identifier so the current lexeme would be added to the symbol table as a program name.

This program contains three java files – KindEnum, SymbolTable, and SymbolTableTest. The KindEnum file contains the different kinds for every symbol table identifier. The SymbolTable file contains methods that allow a symbol to be added to the symbol table; along with methods checking to see if it is either a program, variable, array, function, or procedure identifier. The SymbolTableTest file uses JUnit tests to see whether the methods from the SymbolTable file are able to add a symbol to the symbol table and verify the kind of symbol it is.

Change Log:

02/15/2019	Marissa Allen	Added the Recognizer section of the compiler.
03/9/2019	Marissa Allen	Added the Symbol Table section of the compiler.
03/14/2019	Marissa Allen	Added the CompilerMain section of the compiler.


List of Keywords/Reserved Words:

program
var
array
of
function
procedure

begin
end
if
then
else
while
do
not
or
and
div
mod
integer
real
read
write
return

List of Symbols:

;
,
[
]
:
)
(
+
-
*
=
◇
<
≤
≥
>
/
:=
.

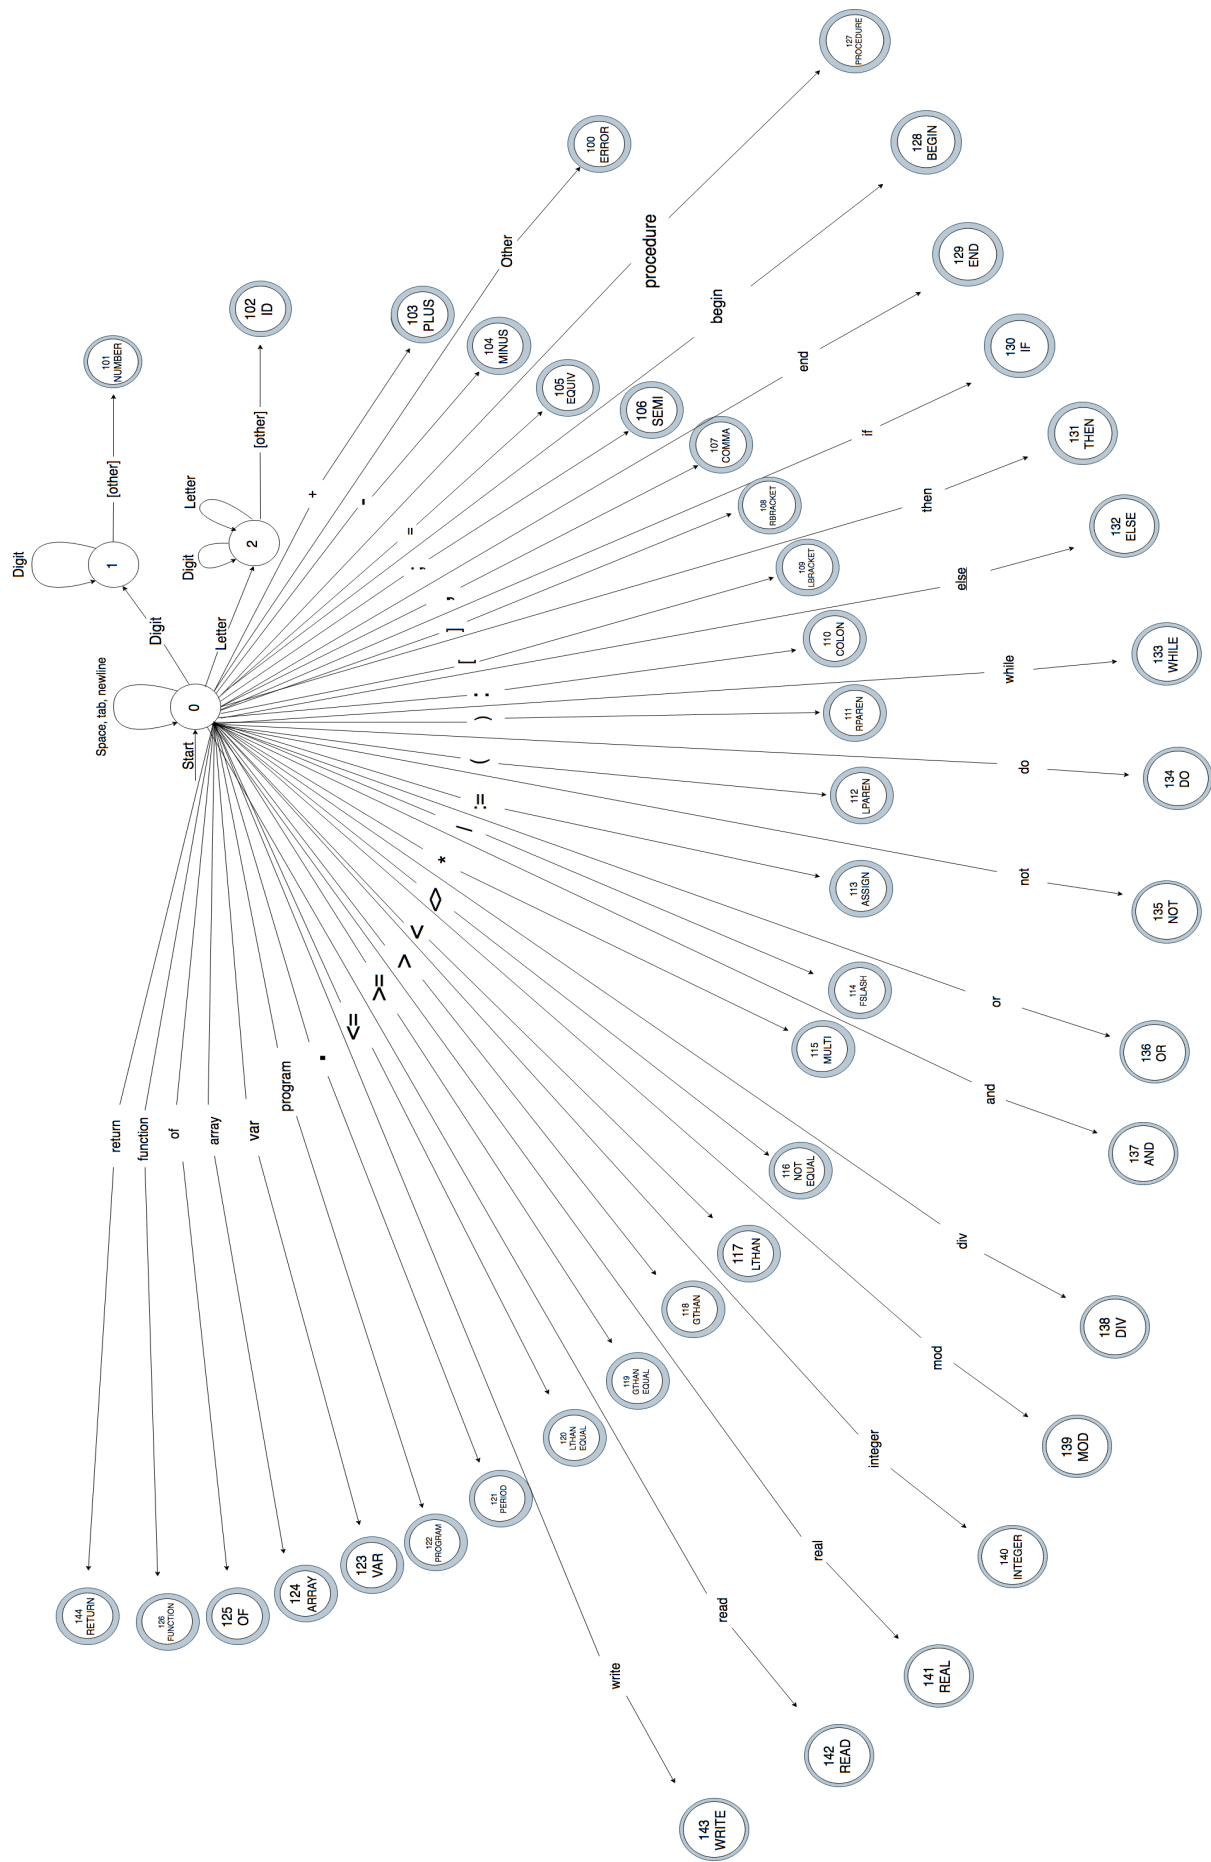

FSM Design: Designed by Marissa Allen and Cohl Dorsey

