

NETWORKING & SYSTEM ADMINISTRATION LAB

Experiment No: 10

Name: ALLEN S PHILIP

Roll No: 20

Batch: RMCA A

Date: 06/05/2022

Aim

1. Create a directory /RMCA2023A/20MCA136 and create 100 files inside this directory with name Movie1.mp4, Movie2.mp4 Movie100.mp4
2. Create a group AJCE_MCA and a user AJCE_Students with Password Ajce@2022
3. Enable password-less ssh login to the user AJCE_Students.
4. The Group ownership of /RMCA2023A/20MCA136 should go to AJCE_MCA and User ownership to AJCE_Students
5. Give read, write and access permission for all the members except other users.
6. Remove all files containing ‘7’ with single-line command. (Movie7.mp4, Movie17.mp4, etc.)
7. Create a tar file named FiveVals.tar with the only files contains the word ‘5’.
8. Copy FiveVals.tar to the home path of AJCE_Students

Output Screenshot

[1, 2]

The screenshot shows a terminal window titled "Parrot Terminal". The session starts with creating a directory structure and files:

```
[allensphilip@SEC-ROG] ~
└─$ mkdir -p /home/allensphilip/MCA/ACN/RMCA2023A/20MCA136
[allensphilip@SEC-ROG] ~
└─$ tree MCA/ACN/
MCA/ACN/
└─ RMCA2023A
  └─ 20MCA136

2 directories, 0 files
```

Then, it lists all mp4 files in the directory:

```
[allensphilip@SEC-ROG] ~
└─$ cd MCA/ACN/RMCA2023A/20MCA136
[allensphilip@SEC-ROG] ~/MCA/ACN/RMCA2023A/20MCA136
└─$ pwd
/home/allensphilip/MCA/ACN/RMCA2023A/20MCA136
└─$ for i in {1..100}; do touch Movie$i.mp4; done
[allensphilip@SEC-ROG] ~/MCA/ACN/RMCA2023A/20MCA136
└─$ ls
Movie100.mp4  Movie21.mp4  Movie33.mp4  Movie45.mp4  Movie57.mp4  Movie69.mp4  Movie80.mp4  Movie92.mp4
Movie10.mp4   Movie22.mp4  Movie34.mp4  Movie46.mp4  Movie58.mp4  Movie81.mp4  Movie93.mp4
Movie11.mp4   Movie23.mp4  Movie35.mp4  Movie47.mp4  Movie59.mp4  Movie82.mp4  Movie94.mp4
Movie12.mp4   Movie24.mp4  Movie36.mp4  Movie48.mp4  Movie5.mp4   Movie71.mp4  Movie83.mp4  Movie95.mp4
Movie13.mp4   Movie25.mp4  Movie37.mp4  Movie49.mp4  Movie60.mp4  Movie72.mp4  Movie84.mp4  Movie96.mp4
Movie14.mp4   Movie26.mp4  Movie38.mp4  Movie40.mp4  Movie61.mp4  Movie73.mp4  Movie85.mp4  Movie97.mp4
Movie15.mp4   Movie27.mp4  Movie39.mp4  Movie50.mp4  Movie62.mp4  Movie74.mp4  Movie86.mp4  Movie98.mp4
Movie16.mp4   Movie28.mp4  Movie30.mp4  Movie51.mp4  Movie63.mp4  Movie75.mp4  Movie87.mp4  Movie99.mp4
Movie17.mp4   Movie29.mp4  Movie40.mp4  Movie52.mp4  Movie64.mp4  Movie76.mp4  Movie88.mp4  Movie90.mp4
Movie18.mp4   Movie30.mp4  Movie41.mp4  Movie53.mp4  Movie65.mp4  Movie77.mp4  Movie89.mp4
Movie19.mp4   Movie31.mp4  Movie42.mp4  Movie54.mp4  Movie66.mp4  Movie78.mp4  Movie80.mp4
Movie20.mp4   Movie32.mp4  Movie43.mp4  Movie55.mp4  Movie67.mp4  Movie79.mp4  Movie90.mp4
Movie21.mp4   Movie33.mp4  Movie44.mp4  Movie56.mp4  Movie68.mp4  Movie70.mp4  Movie91.mp4
[allensphilip@SEC-ROG] ~/MCA/ACN/RMCA2023A/20MCA136
└─$ sudo groupadd AJCE_MCA
[allensphilip@SEC-ROG] ~/MCA/ACN/RMCA2023A/20MCA136
└─$ tail -n 1 /etc/group
AJCE_MCA:x:1014:
[allensphilip@SEC-ROG] ~/MCA/ACN/RMCA2023A/20MCA136
└─$ sudo useradd -m AJCE_Students
[allensphilip@SEC-ROG] ~/MCA/ACN/RMCA2023A/20MCA136
└─$ sudo passwd AJCE_Students
New password:
Retype new password:
passwd: password updated successfully
[allensphilip@SEC-ROG] ~/MCA/ACN/RMCA2023A/20MCA136
└─$
```

[3]

The screenshot shows a terminal window titled "Parrot Terminal". It demonstrates generating an SSH key pair and copying it to another host:

```
[allensphilip@SEC-ROG] ~
└─$ ssh-keygen
Generating public/private rsa key pair.
Enter file in which to save the key (/home/allensphilip/.ssh/id_rsa):
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /home/allensphilip/.ssh/id_rsa
Your public key has been saved in /home/allensphilip/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:gSDrlS5e5VMIKo9SbGM8i+iODG044WW4FFWpmYVz9H4 allensphilip@SEC-ROG
The key's randomart image is:
+---[RSA 3072]---+
| ..=o. o |
| .= 0 .. o . |
| .. X %.+ |
| .oB B.0 . |
| .o+o= =SE |
| o+o . . |
| +o= |
| o= |
| ... |
+---[SHA256]---+
[allensphilip@SEC-ROG] ~
└─$ sudo ssh-copy-id -i .ssh/id_rsa.pub AJCE_Students@192.168.1.7
/usr/bin/ssh-copy-id: INFO: Source of key(s) to be installed: ".ssh/id_rsa.pub"
/usr/bin/ssh-copy-id: INFO: attempting to log in with the new key(s), to filter out any that are already installed
/usr/bin/ssh-copy-id: INFO: 1 key(s) remain to be installed -- if you are prompted now it is to install the new keys
AJCE_Students@192.168.1.7's password:

Number of key(s) added: 1

Now try logging into the machine, with:  "ssh 'AJCE_Students@192.168.1.7'"
and check to make sure that only the key(s) you wanted were added.
```

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

```
Parrot Terminal
File Edit View Search Terminal Help
[allenphilip@SEC-ROG ~] $ sudo su AJCE_Students
$ id
uid=1002(AJCE_Students) gid=1015(AJCE_Students) groups=1015(AJCE_Students)
$ 
```

[4, 5]

```
Parrot Terminal  
File Edit View Search Terminal Help  
[allensphilip@SEC-ROG]~[-/MCA/ACN]  
└─$ sudo chown AJCE_Students:AJCE_MCA RMCA2023A/20MCA136  
[allensphilip@SEC-ROG]~[-/MCA/ACN]  
└─$ ls -lrt RMCA2023A/  
total 0  
drwxr-xr-x 1 AJCE_Students AJCE_MCA 2184 Jun  5 19:41 20MCA136  
[allensphilip@SEC-ROG]~[-/MCA/ACN]  
└─$ sudo chmod 770 RMCA2023A/20MCA136/  
[allensphilip@SEC-ROG]~[-/MCA/ACN]  
└─$ ls -lrt RMCA2023A/  
total 0  
drwxrwx--- 1 AJCE_Students AJCE_MCA 2184 Jun  5 19:41 20MCA136
```

[6, 7]

```
File Edit View Search Terminal Help
[allensphilip@SEC-ROG:~/MCA/ACN]
$ ssh AJCE Students@192.168.1.7
Linux SEC-ROG 5.16.0-12parrot1-amd64 #1 SMP PREEMPT Debian 5.16.12-2parrot1 (2022-03-11) x86_64

[Parrot]@SEC-ROG:~>


The programs included with the Parrot GNU/Linux are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*copyright.

Parrot GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.

$ ls
Desktop Templates
$ cd ..
$ ls
AJCE Students allensphilip
$ cd allensphilip/MCA/ACN/RMCA2023A/20MCA136
$ pwd
/home/allensphilip/MCA/ACN/RMCA2023A/20MCA136
$ ls
Movie100.mp4 Movie17.mp4 Movie24.mp4 Movie31.mp4 Movie39.mp4 Movie46.mp4 Movie53.mp4 Movie60.mp4 Movie68.mp4 Movie75.mp4 Movie82.mp4 Movie89.mp4 Movie97.mp4
Movie10.mp4 Movie18.mp4 Movie25.mp4 Movie32.mp4 Movie3.mp4 Movie47.mp4 Movie54.mp4 Movie61.mp4 Movie69.mp4 Movie76.mp4 Movie83.mp4 Movie90.mp4 Movie98.mp4
Movie11.mp4 Movie19.mp4 Movie26.mp4 Movie37.mp4 Movie40.mp4 Movie48.mp4 Movie55.mp4 Movie62.mp4 Movie65.mp4 Movie77.mp4 Movie84.mp4 Movie91.mp4 Movie99.mp4
Movie12.mp4 Movie1.mp4 Movie27.mp4 Movie34.mp4 Movie41.mp4 Movie49.mp4 Movie56.mp4 Movie63.mp4 Movie70.mp4 Movie78.mp4 Movie85.mp4 Movie92.mp4 Movie93.mp4
Movie13.mp4 Movie20.mp4 Movie28.mp4 Movie35.mp4 Movie42.mp4 Movie44.mp4 Movie57.mp4 Movie64.mp4 Movie71.mp4 Movie79.mp4 Movie86.mp4 Movie93.mp4
Movie14.mp4 Movie21.mp4 Movie29.mp4 Movie36.mp4 Movie43.mp4 Movie45.mp4 Movie58.mp4 Movie65.mp4 Movie72.mp4 Movie87.mp4 Movie94.mp4
Movie15.mp4 Movie22.mp4 Movie32.mp4 Movie37.mp4 Movie44.mp4 Movie51.mp4 Movie59.mp4 Movie66.mp4 Movie73.mp4 Movie88.mp4 Movie98.mp4 Movie95.mp4
Movie16.mp4 Movie23.mp4 Movie38.mp4 Movie45.mp4 Movie52.mp4 Movie55.mp4 Movie67.mp4 Movie74.mp4 Movie81.mp4 Movie89.mp4 Movie96.mp4
$ find . -name "*7*" -exec rm -rf {} \;
$ ls
Movie100.mp4 Movie20.mp4 Movie31.mp4 Movie42.mp4 Movie53.mp4 Movie64.mp4 Movie85.mp4 Movie96.mp4
Movie10.mp4 Movie21.mp4 Movie32.mp4 Movie43.mp4 Movie54.mp4 Movie65.mp4 Movie86.mp4 Movie98.mp4
Movie11.mp4 Movie22.mp4 Movie33.mp4 Movie44.mp4 Movie55.mp4 Movie66.mp4 Movie88.mp4 Movie99.mp4
Movie12.mp4 Movie23.mp4 Movie34.mp4 Movie45.mp4 Movie56.mp4 Movie68.mp4 Movie89.mp4 Movie99.mp4
Movie13.mp4 Movie24.mp4 Movie35.mp4 Movie46.mp4 Movie58.mp4 Movie69.mp4 Movie89.mp4 Movie98.mp4
Movie14.mp4 Movie25.mp4 Movie36.mp4 Movie47.mp4 Movie59.mp4 Movie60.mp4 Movie90.mp4 Movie99.mp4
Movie15.mp4 Movie26.mp4 Movie37.mp4 Movie48.mp4 Movie61.mp4 Movie61.mp4 Movie91.mp4 Movie99.mp4
Movie16.mp4 Movie28.mp4 Movie38.mp4 Movie49.mp4 Movie62.mp4 Movie62.mp4 Movie92.mp4 Movie99.mp4
Movie17.mp4 Movie29.mp4 Movie39.mp4 Movie50.mp4 Movie63.mp4 Movie63.mp4 Movie93.mp4 Movie99.mp4
Movie18.mp4 Movie30.mp4 Movie40.mp4 Movie51.mp4 Movie64.mp4 Movie64.mp4 Movie94.mp4 Movie99.mp4
Movie19.mp4 Movie31.mp4 Movie41.mp4 Movie52.mp4 Movie65.mp4 Movie65.mp4 Movie95.mp4 Movie99.mp4
$ find . -name "*5*" -exec tar -cvf FiveVals.tar {} \;
./Movie5.mp4
./Movie15.mp4
./Movie25.mp4
./Movie35.mp4
./Movie45.mp4
./Movie50.mp4
./Movie51.mp4
./Movie52.mp4
./Movie53.mp4
./Movie54.mp4
./Movie55.mp4
./Movie56.mp4
./Movie58.mp4
./Movie59.mp4
./Movie65.mp4
./Movie85.mp4
./Movie95.mp4
$ 
FiveVals.tar Movie11.mp4 Movie12.mp4 Movie13.mp4 Movie14.mp4 Movie15.mp4 Movie16.mp4 Movie17.mp4 Movie18.mp4 Movie19.mp4 Movie20.mp4 Movie21.mp4 Movie22.mp4 Movie23.mp4 Movie24.mp4 Movie25.mp4 Movie26.mp4 Movie27.mp4 Movie28.mp4 Movie29.mp4 Movie30.mp4 Movie31.mp4 Movie32.mp4 Movie33.mp4 Movie34.mp4 Movie35.mp4 Movie36.mp4 Movie37.mp4 Movie38.mp4 Movie39.mp4 Movie40.mp4 Movie41.mp4 Movie42.mp4 Movie43.mp4 Movie44.mp4 Movie45.mp4 Movie46.mp4 Movie47.mp4 Movie48.mp4 Movie49.mp4 Movie50.mp4 Movie51.mp4 Movie52.mp4 Movie53.mp4 Movie54.mp4 Movie55.mp4 Movie56.mp4 Movie57.mp4 Movie58.mp4 Movie59.mp4 Movie60.mp4 Movie61.mp4 Movie62.mp4 Movie63.mp4 Movie64.mp4 Movie65.mp4 Movie66.mp4 Movie67.mp4 Movie68.mp4 Movie69.mp4 Movie70.mp4 Movie71.mp4 Movie72.mp4 Movie73.mp4 Movie74.mp4 Movie75.mp4 Movie76.mp4 Movie77.mp4 Movie78.mp4 Movie79.mp4 Movie80.mp4 Movie81.mp4 Movie82.mp4 Movie83.mp4 Movie84.mp4 Movie85.mp4 Movie86.mp4 Movie87.mp4 Movie88.mp4 Movie89.mp4 Movie90.mp4 Movie91.mp4 Movie92.mp4 Movie93.mp4 Movie94.mp4 Movie95.mp4 Movie96.mp4 Movie97.mp4 Movie98.mp4 Movie99.mp4
```

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

[8]

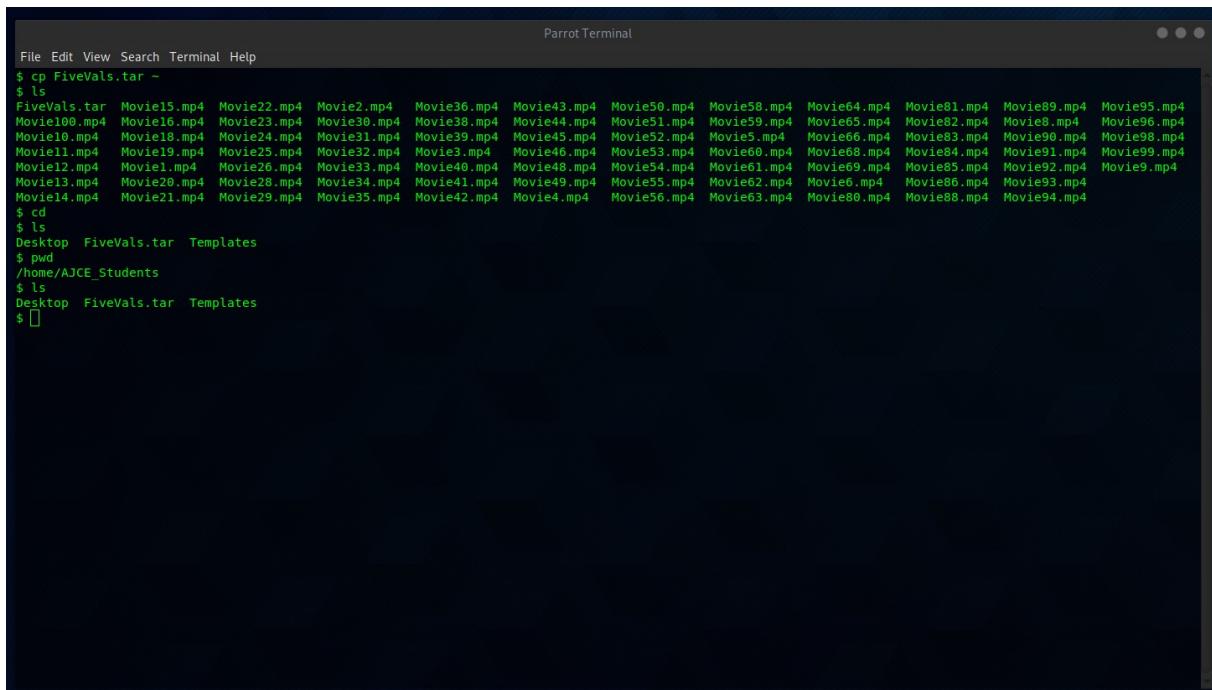

The screenshot shows a terminal window titled "Parrot Terminal". The terminal displays a command-line session. The user has copied a file named "FiveVals.tar" to the current directory (indicated by the command \$ cp FiveVals.tar ~). They then listed all files in the directory (ls) and showed the current working directory (pwd). Finally, they listed the contents of the "Desktop" folder (ls Desktop). The terminal window has a dark background with white text and a standard OS X style interface.

```
File Edit View Search Terminal Help
$ cp FiveVals.tar ~
$ ls
FiveVals.tar Movie15.mp4 Movie22.mp4 Movie2.mp4 Movie36.mp4 Movie43.mp4 Movie50.mp4 Movie58.mp4 Movie64.mp4 Movie81.mp4 Movie89.mp4 Movie95.mp4
Movie100.mp4 Movie16.mp4 Movie23.mp4 Movie30.mp4 Movie38.mp4 Movie44.mp4 Movie51.mp4 Movie59.mp4 Movie65.mp4 Movie82.mp4 Movie88.mp4
Movie10.mp4 Movie18.mp4 Movie24.mp4 Movie31.mp4 Movie39.mp4 Movie45.mp4 Movie52.mp4 Movie5.mp4 Movie66.mp4 Movie83.mp4 Movie90.mp4 Movie98.mp4
Movie11.mp4 Movie19.mp4 Movie25.mp4 Movie32.mp4 Movie3.mp4 Movie46.mp4 Movie53.mp4 Movie60.mp4 Movie68.mp4 Movie84.mp4 Movie91.mp4 Movie99.mp4
Movie12.mp4 Movie1.mp4 Movie26.mp4 Movie33.mp4 Movie40.mp4 Movie48.mp4 Movie54.mp4 Movie61.mp4 Movie69.mp4 Movie85.mp4 Movie92.mp4 Movie9.mp4
Movie13.mp4 Movie20.mp4 Movie28.mp4 Movie34.mp4 Movie41.mp4 Movie49.mp4 Movie55.mp4 Movie62.mp4 Movie68.mp4 Movie86.mp4 Movie93.mp4 Movie94.mp4
Movie14.mp4 Movie21.mp4 Movie29.mp4 Movie35.mp4 Movie42.mp4 Movie4.mp4 Movie56.mp4 Movie63.mp4 Movie80.mp4 Movie88.mp4 Movie94.mp4
$ cd
$ ls
Desktop FiveVals.tar Templates
$ pwd
/home/AJCE_Students
$ ls
Desktop FiveVals.tar Templates
$
```

NETWORKING & SYSTEM ADMINISTRATION LAB

Experiment No: 11

Name: ALLEN S PHILIP

Roll No: 20

Batch: RMCA A

Date: 09/05/2022

Aim

1. Write a script to convert the contents of a given file from uppercase to lowercase and also count the number of lines, words and characters of the resultant file. Also display the resultant file in descending order

2. Write script to perform following basic math operation as

addition

subtraction

multiplication

division

Note: i)take input from keyboard

ii)take input as command line parameter

3. Write shell script to show various system configuration like

Currently logged user and his long name

Current shell

Your home directory

Your operating system type

Your current path setting

Your current working directory

Show all available shells

4. Write a shell script to print the pattern

1

2 2

3 3 3


4 4 4 4

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

5. Write a script to check whether the given string is palindrome or not.
6. Write a shell script that accepts a list of file names as its arguments, counts and reports the occurrence of each word that is present in the first argument file on other argument files.
7. Write a shell script to find factorial of a given integer.
8. Write a shell script that displays a list of all the files in the current directory to which the user has read, write and execute permissions.
9. Write a script to count the number of lines in a file that do not contain vowels
10. Write a script to determine whether given command line argument (\$1) contains “*” symbol or not, if \$1 does not contains “*” symbol add it to \$1, otherwise show message “Symbol is not required”.

Output Screenshot

[1]

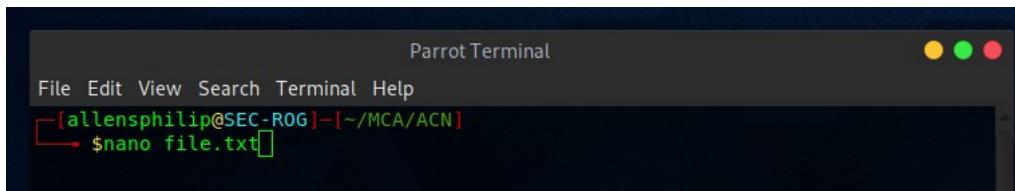


Parrot Terminal

File Edit View Search Terminal Help

[allensphilip@SEC-ROG]~[~/MCA/ACN]

\$ nano file.txt

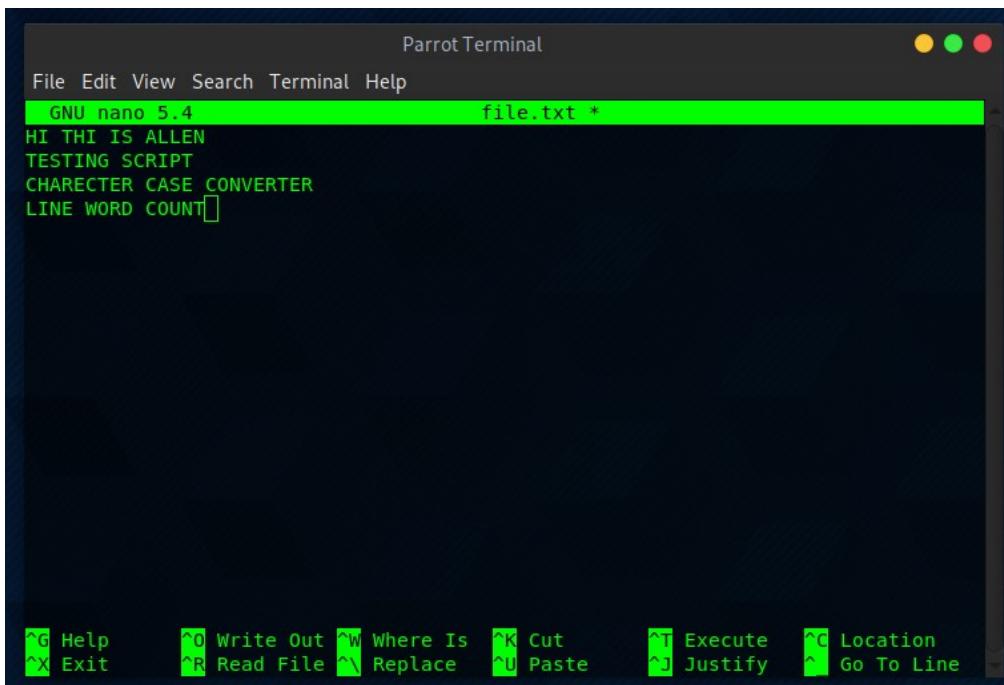


Parrot Terminal

File Edit View Search Terminal Help

GNU nano 5.4 file.txt *

HI THI IS ALLEN
TESTING SCRIPT
CHARACTER CASE CONVERTER
LINE WORD COUNT

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^ ^ Go To Line

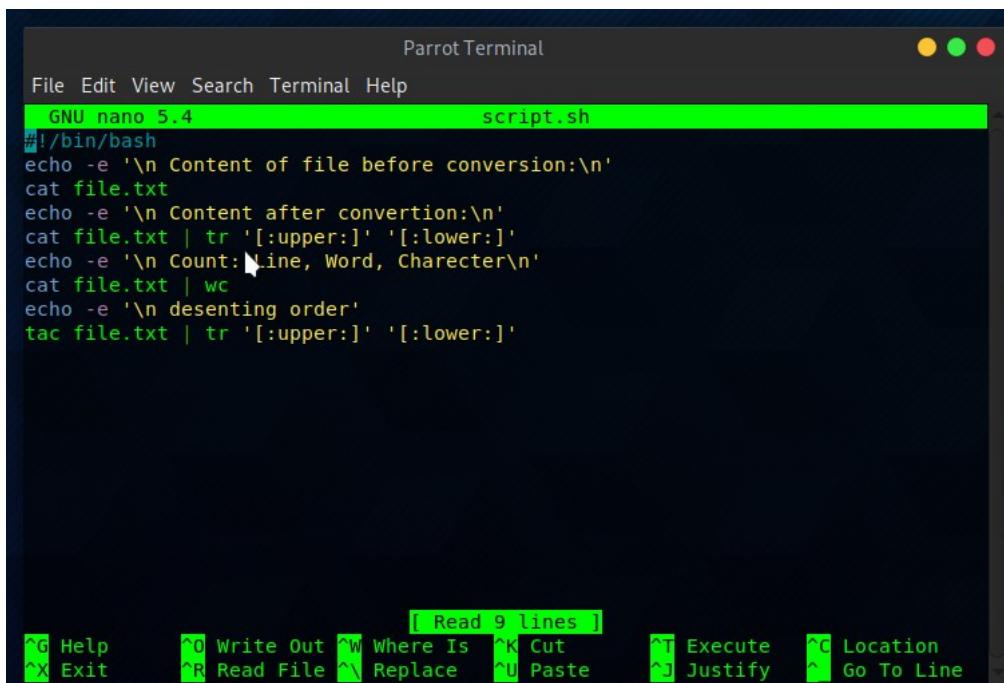

Parrot Terminal

File Edit View Search Terminal Help


GNU nano 5.4 script.sh

```
#!/bin/bash
echo -e '\n Content of file before conversion:\n'
cat file.txt
echo -e '\n Content after conversion:\n'
cat file.txt | tr '[:upper:]' '[:lower:]'
echo -e '\n Count: Nine, Word, Character\n'
cat file.txt | wc
echo -e '\n desenting order'
tac file.txt | tr '[:upper:]' '[:lower:]'
```

[Read 9 lines]

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^ ^ Go To Line

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

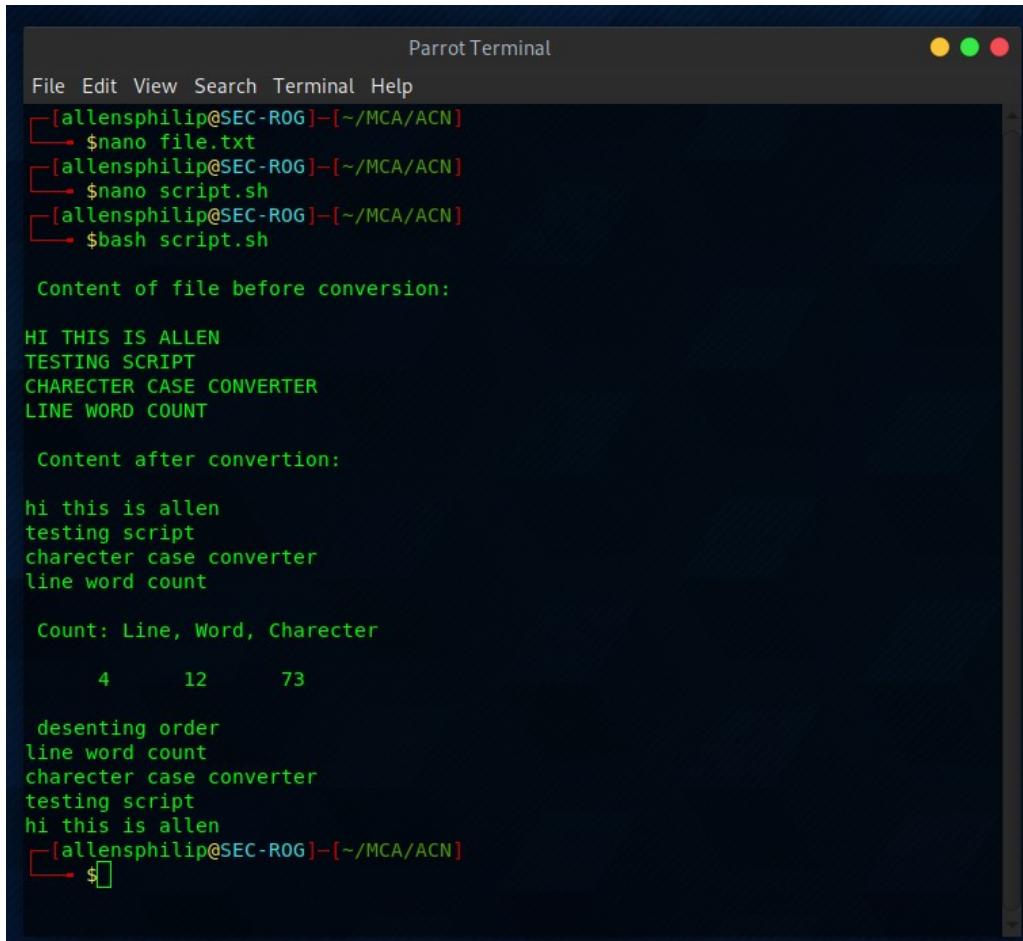

The screenshot shows a terminal window titled "Parrot Terminal". The terminal window has three colored window control buttons (yellow, green, red) at the top right. The terminal's menu bar includes "File", "Edit", "View", "Search", "Terminal", and "Help". The command line shows the user's session:

```
[allensphilip@SEC-ROG] - [/MCA/ACN]
└ $ nano file.txt
[allensphilip@SEC-ROG] - [/MCA/ACN]
└ $ nano script.sh
[allensphilip@SEC-ROG] - [/MCA/ACN]
└ $ bash script.sh
```

Below the command line, the terminal displays the content of the file before conversion:

```
Content of file before conversion:
HI THIS IS ALLEN
TESTING SCRIPT
CHARECTER CASE CONVERTER
LINE WORD COUNT
```

Then it shows the content after conversion:

```
Content after conversion:
hi this is allen
testing script
charecter case converter
line word count
```

Next, it displays the count of lines, words, and characters:

```
Count: Line, Word, Charecter
      4      12      73
```

Finally, it shows the output of the script, which includes the converted text and some additional information:

```
desenting order
line word count
charecter case converter
testing script
hi this is allen
[allensphilip@SEC-ROG] - [/MCA/ACN]
└ $
```

NETWORKING & SYSTEM ADMINISTRATION LAB

Experiment No: 12

Name: ALLEN S PHILIP

Roll No: 20

Batch: RMCA A

Date: 09/05/2022

Aim

Learn about Systemd and init

Procedure

Create a script

```
$ sudo nano /usr/bin/script.sh
```

Write content

```
#!/bin/bash
```

```
while true
```

```
do
```

```
    sleep 10
```

```
done
```

Give the file execute permission

```
$ sudo chmod +x /usr/bin/script.sh
```

Create a systemd file to run the above file as a service

```
$ sudo nano /lib/systemd/system/shellscript.service
```

Write the content:

[Unit]

Description= My shell Script

[Service]

ExecStart=/usr/bin/script.sh

[Install]

WantedBy=multi-user.target

Reload the systemctl daemon

\$ sudo systemctl daemon-reload

Enable and start, stop, restart and disable the service

\$ sudo systemctl enable shellscript.service

\$sudo systemctl start shellscript.service

\$sudo systemctl status shellscript.service

\$sudo systemctl stop shellscript.service

\$sudo systemctl disable shellscript.service

Output Screenshot

Parrot Terminal

```
File Edit View Search Terminal Help
GNU nano 5.4          /usr/bin/script.sh *
#!/bin/bash
while true
do
    sleep 10
done
```

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^N Replace ^U Paste ^J Justify ^_ Go To Line

Parrot Terminal

```
File Edit View Search Terminal Help
GNU nano 5.4          /lib/systemd/system/shellscript.service *
[Unit]
Description= My shell Script

[Service]

ExecStart=/usr/bin/script.sh

[Install]

WantedBy=multi-user.target
```

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^N Replace ^U Paste ^J Justify ^_ Go To Line

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

The screenshot shows a terminal window titled "Parrot Terminal". The user, "allensphilip", is performing the following steps:

- Creates a shell script at `/usr/bin/script.sh`.
- Changes the file mode to executable with `sudo chmod +x /usr/bin/script.sh`.
- Creates a service file at `/lib/systemd/system/shellscript.service`.
- Creates a system-wide alias for the service at `/lib/systemd/system/multi-user.target.wants/shellscript.service`.
- Enables the service with `sudo systemctl enable shellscript.service`.
- Starts the service with `sudo systemctl start shellscript.service`.
- Checks the status of the service with `sudo systemctl status shellscript.service`, which shows it is active (running) since the current date and time.
- Shows detailed information about the service using the `● shellscript.service - My shell Script` command.
- Logs the start of the service with the message "Jun 12 04:02:03 SEC-ROG systemd[1]: Started My shell Script."
- Stops the service with `sudo systemctl stop shellscript.service`.
- Restarts the service with `sudo systemctl restart shellscript.service`.
- Disables the service with `sudo systemctl disable shellscript.service`.
- Removes the system-wide alias with the message "Removed /etc/systemd/system/multi-user.target.wants/shellscript.service."

NETWORKING & SYSTEM ADMINISTRATION LAB

Experiment No: 12

Name: ALLEN S PHILIP

Roll No: 20

Batch: RMCA A

Date: 14/05/2022

Aim

Learn about Cmake[make and Cmake]

Procedure

Create a folder and add all the project files into it

create a text file named as CmakeLists.txt and write all the list of project files to it

keep the format as follow:

```
cmake_minimum_required(VERSION 3.10)
project(MyProject VERSION 0.0.1)
add_executable(hello hello_world.cpp)
```

here hello_word is my project file

Create a build folder and change directory to it

Now build the project:

```
$ cmake ..
```

```
$ cmake --build .
```

and execute the project:

```
./hello //my executable name mentioned in CMakeLists
```

Output Screenshot

Parrot Terminal

File Edit View Search Terminal Help

GNU nano 5.4 hello_world.cpp

```
#include <iostream>
int main(){
    std::cout<<"Hello World";
    return 0;
}
```

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^ Go To Line

Parrot Terminal

File Edit View Search Terminal Help

GNU nano 5.4 CMakeLists.txt

```
cmake_minimum_required(VERSION 3.10)
project(MyProject VERSION 0.0.1)
add_executable(hello hello_world.cpp)
```

Parrot Terminal

File Edit View Search Terminal Help

```
[allensphilip@SEC-ROG] - [~/MCA/ACN/Exp13]
└ $ nano hello_world.cpp
[allensphilip@SEC-ROG] - [~/MCA/ACN/Exp13]
└ $ nano CMakeLists.txt
[allensphilip@SEC-ROG] - [~/MCA/ACN/Exp13]
└ $ mkdir build
[allensphilip@SEC-ROG] - [~/MCA/ACN/Exp13]
└ $ cd build/
[allensphilip@SEC-ROG] - [~/MCA/ACN/Exp13/build]
└ $ cmake ..
-- The C compiler identification is GNU 10.2.1
-- The CXX compiler identification is GNU 10.2.1
-- Detecting C compiler ABI info
-- Detecting C compiler ABI info - done
-- Check for working C compiler: /usr/bin/cc - skipped
-- Detecting C compile features
-- Detecting C compile features - done
-- Detecting CXX compiler ABI info
-- Detecting CXX compiler ABI info - done
-- Check for working CXX compiler: /usr/bin/c++ - skipped
-- Detecting CXX compile features
-- Detecting CXX compile features - done
-- Configuring done
-- Generating done
-- Build files have been written to: /home/allensphilip/MCA/ACN/Exp13/build
[allensphilip@SEC-ROG] - [~/MCA/ACN/Exp13/build]
└ $ cmake --build .
Scanning dependencies of target hello
[ 50%] Building CXX object CMakeFiles/hello.dir/hello_world.cpp.o
[100%] Linking CXX executable hello
[100%] Built target hello
[allensphilip@SEC-ROG] - [~/MCA/ACN/Exp13/build]
└ $ ./hello
Hello World [allensphilip@SEC-ROG] - [~/MCA/ACN/Exp13/build]
└ $
```

NETWORKING & SYSTEM ADMINISTRATION LAB

Experiment No: 14

Name: ALLEN S PHILIP

Roll No: 20

Batch: RMCA A


Date: 23/05/2022

Aim

Instalation LAMPP and wordpress

Output Screenshot



Installation: Apache2, Mysql, Php, Phpmyadmin

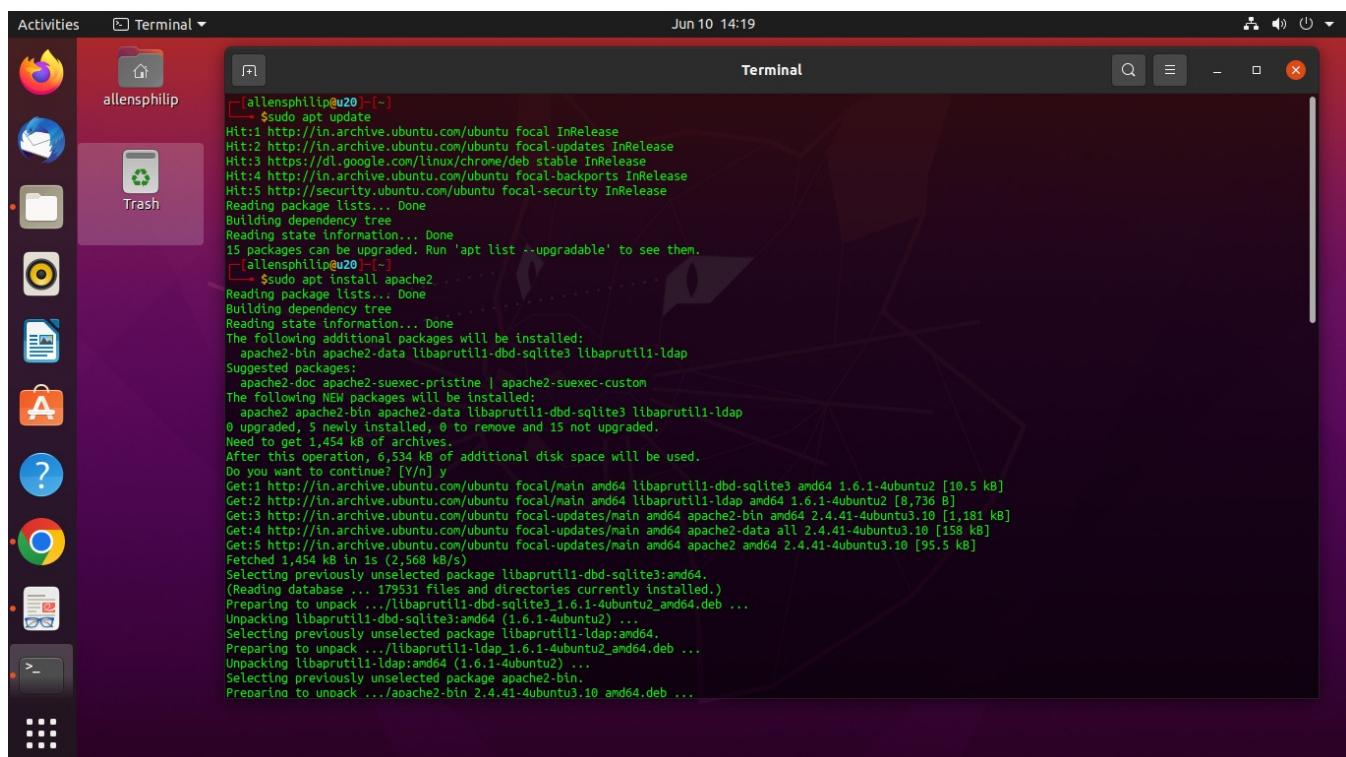

```
Activities Terminal Jun 10 14:19
[allensphilip@u20 ~] $ sudo apt update
Hit:1 http://in.archive.ubuntu.com/ubuntu focal InRelease
Hit:2 http://in.archive.ubuntu.com/ubuntu focal-updates InRelease
Hit:3 https://dl.google.com/linux/chrome/deb stable InRelease
Hit:4 http://in.archive.ubuntu.com/ubuntu focal-backports InRelease
Hit:5 http://security.ubuntu.com/ubuntu focal-security InRelease
Reading package lists... Done
Building dependency tree
Reading state information... Done
15 packages can be upgraded. Run 'apt list --upgradable' to see them.
[allensphilip@u20 ~] $ sudo apt install apache2
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following additional packages will be installed:
  apache2-bin apache2-data libaprutil1-dbd-sqlite3 libaprutil1-ldap
Suggested packages:
  apache2-doc apache2-suexec-pristine | apache2-suexec-custom
The following NEW packages will be installed:
  apache2 apache2-bin apache2-data libaprutil1-dbd-sqlite3 libaprutil1-ldap
0 upgraded, 5 newly installed, 0 to remove and 15 not upgraded.
Need to get 1,454 kB of archives.
After this operation, 6,534 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://in.archive.ubuntu.com/ubuntu/focal/main amd64 libaprutil1-dbd-sqlite3 amd64 1.6.1-4ubuntu2 [10.5 kB]
Get:2 http://in.archive.ubuntu.com/ubuntu/focal/main amd64 libaprutil1-ldap amd64 1.6.1-4ubuntu2 [8,736 B]
Get:3 http://in.archive.ubuntu.com/ubuntu/focal-updates/main amd64 apache2-bin amd64 2.4.41-4ubuntu3.10 [15.181 kB]
Get:4 http://in.archive.ubuntu.com/ubuntu/focal-updates/main amd64 apache2 amd64 2.4.41-4ubuntu3.10 [158 kB]
Get:5 http://in.archive.ubuntu.com/ubuntu/focal-updates/main amd64 apache2-bin 2.4.41-4ubuntu3.10 [95.5 kB]
Fetched 1,454 kB in 1s (2,568 kB/s)
Selecting previously unselected package libaprutil1-dbd-sqlite3:amd64.
(Reading database ... 179531 files and directories currently installed.)
Preparing to unpack .../libaprutil1-dbd-sqlite3_1.6.1-4ubuntu2_amd64.deb ...
Unpacking libaprutil1-dbd-sqlite3:amd64 (1.6.1-4ubuntu2) ...
Selecting previously unselected package libaprutil1-ldap:amd64.
Preparing to unpack .../libaprutil1-ldap_1.6.1-4ubuntu2_amd64.deb ...
Unpacking libaprutil1-ldap:amd64 (1.6.1-4ubuntu2) ...
Selecting previously unselected package apache2-bin.
Preparing to unpack .../apache2-bin_2.4.41-4ubuntu3.10_amd64.deb ...
```


20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB

Dept. of Computer Applications

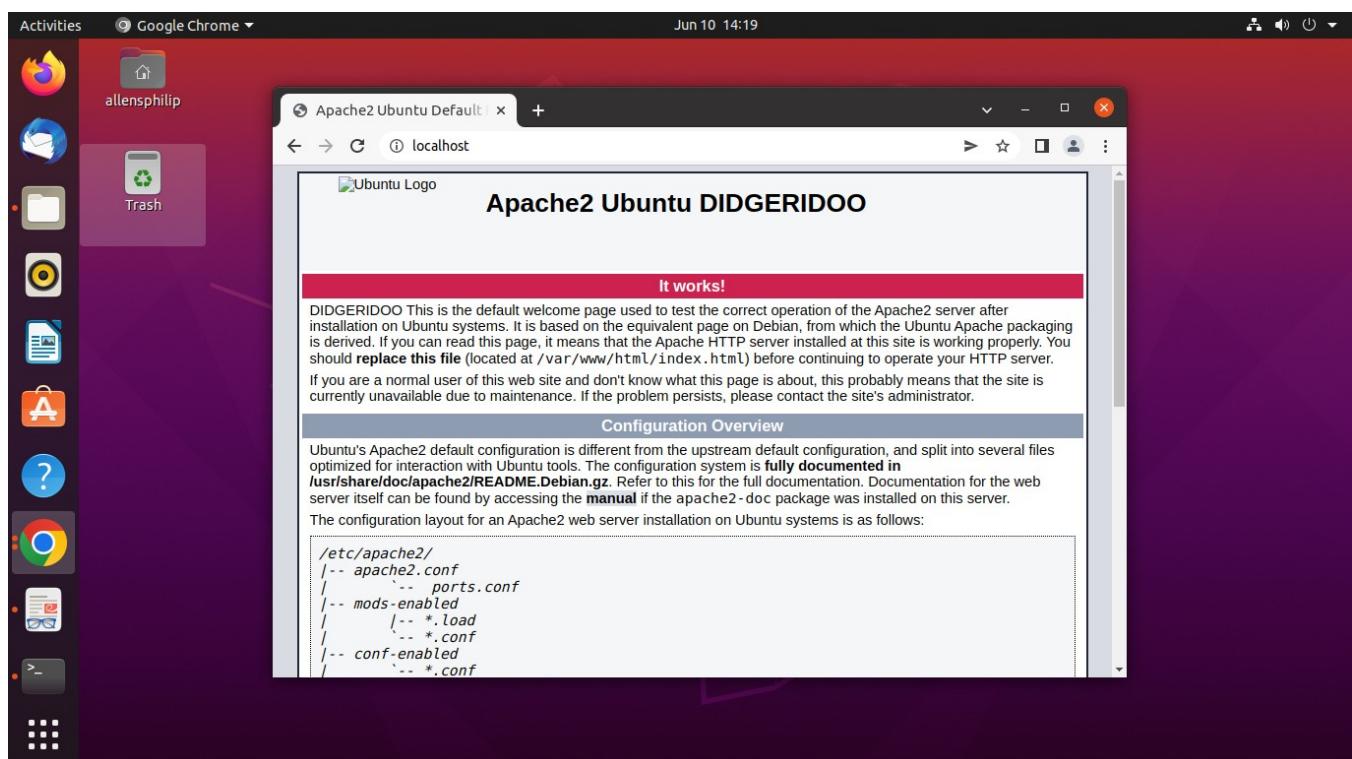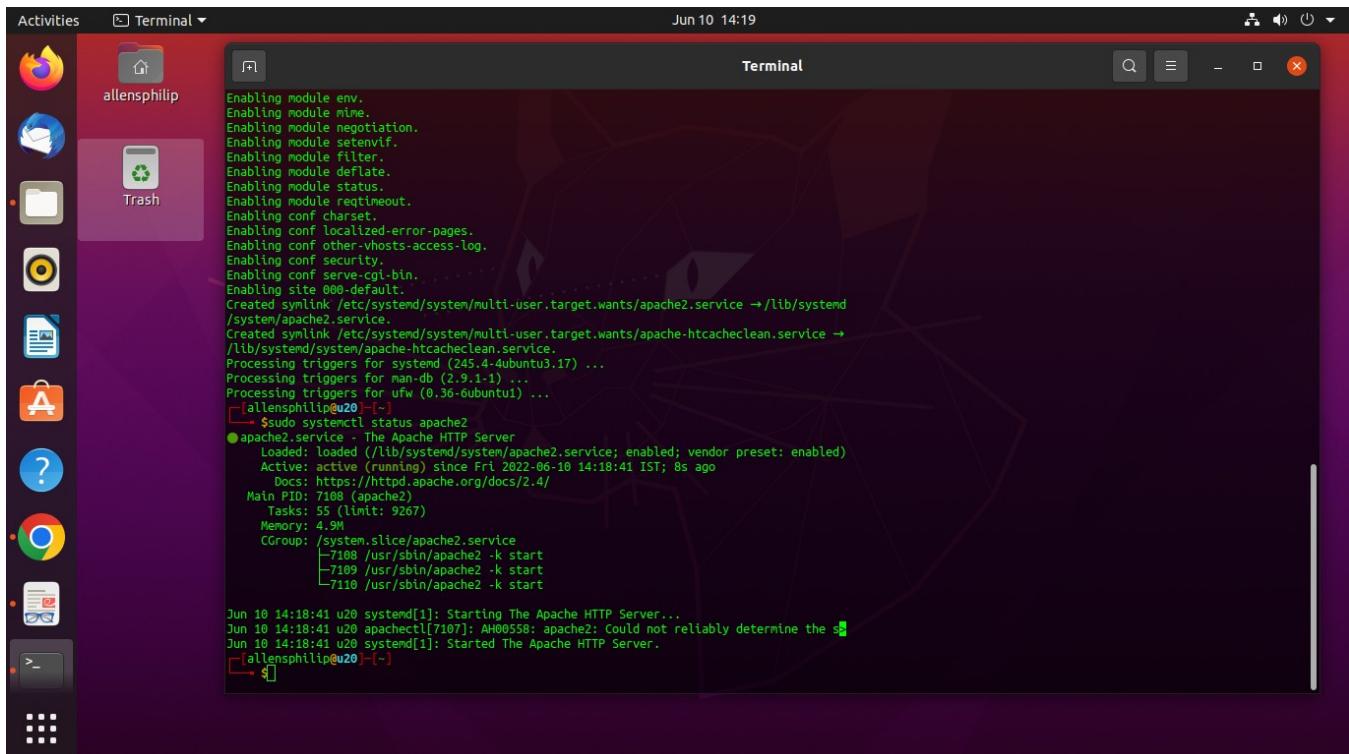


20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB

Dept. of Computer Applications

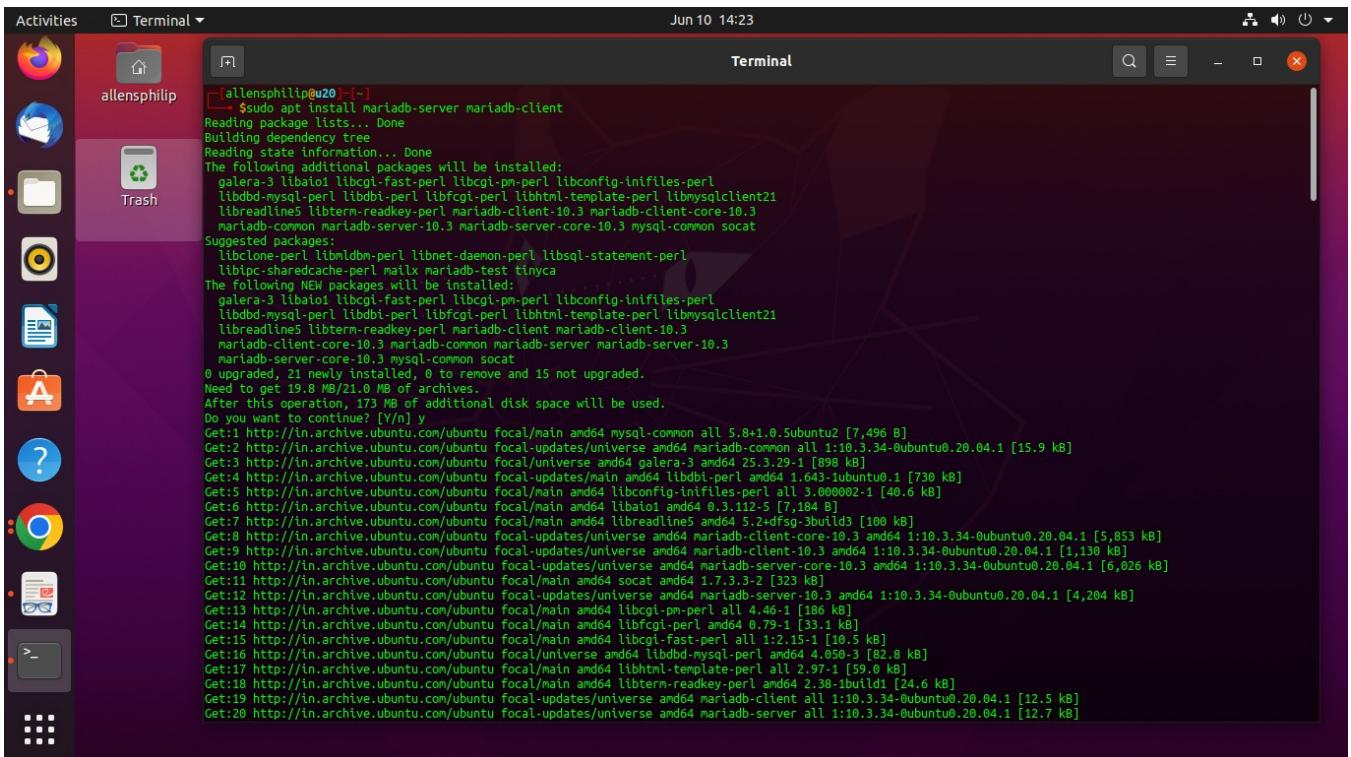

```
allensphilip@u20:~$ sudo apt install mariadb-server mariadb-client
Reading package lists... Done
Building dependency tree...
Reading state information... Done
The following additional packages will be installed:
  galera-3 libaio1 libcgifast-perl libcgipm-perl libconfig-inifiles-perl
  libdbd-mysql-perl libdbi-perl libfcgi-perl libhtml-template-perl libmysqlclient21
  libreadline5 libterm-readkey-perl mariadb-client-10.3 mariadb-client-core-10.3
  mariadb-common mariadb-server-10.3 mariadb-server-core-10.3 mysql-common socat
Suggested packages:
  libclone-perl libldbm-perl libnet-daemon-perl libsql-statement-perl
  libipc-sharedcache-perl mailx mariadb-test tinyca
The following NEW packages will be installed:
  galera-3 libaio1 libcgifast-perl libcgipm-perl libconfig-inifiles-perl
  libdbd-mysql-perl libdbi-perl libfcgi-perl libhtml-template-perl libmysqlclient21
  libreadline5 libterm-readkey-perl mariadb-client mariadb-client-10.3
  mariadb-client-core-10.3 mariadb-common mariadb-server mariadb-server-10.3
  mariadb-server-core-10.3 mysql-common socat
0 upgraded, 21 newly installed, 0 to remove and 15 not upgraded.
Need to get 19.8 MB/21.0 MB of archives.
After this operation, 173 MB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://in.archive.ubuntu.com/ubuntu focal/main amd64 mysql-common all 5.8+1.0.5ubuntu2 [7,496 B]
Get:2 http://in.archive.ubuntu.com/ubuntu focal-updates/universe amd64 mariadb-common all 1:10.3.34-0ubuntu0.20.04.1 [15.9 kB]
Get:3 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 galera-3 amd64 25.3.29-1 [896 kB]
Get:4 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 libdbi-perl amd64 1.643-ubuntu0.1 [730 kB]
Get:5 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libconfig-inifiles-perl all 3.000002-1 [40.6 kB]
Get:6 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libaio1 amd64 0.3.112-5 [7,184 B]
Get:7 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libreadline5 amd64 5.2+dfsg-3ubuntu3 [100 kB]
Get:8 http://in.archive.ubuntu.com/ubuntu focal-updates/universe amd64 mariadb-client-core-10.3 amd64 1:10.3.34-0ubuntu0.20.04.1 [5,853 kB]
Get:9 http://in.archive.ubuntu.com/ubuntu focal-updates/universe amd64 mariadb-client-10.3 amd64 1:10.3.34-0ubuntu0.20.04.1 [1,130 kB]
Get:10 http://in.archive.ubuntu.com/ubuntu focal-updates/universe amd64 libdbd-mysql-perl amd64 4.050-3 [82.8 kB]
Get:11 http://in.archive.ubuntu.com/ubuntu focal/main amd64 socat amd64 1.7.3.3-2 [323 kB]
Get:12 http://in.archive.ubuntu.com/ubuntu focal-updates/universe amd64 mariadb-server-10.3 amd64 1:10.3.34-0ubuntu0.20.04.1 [4,204 kB]
Get:13 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libcgipm-perl amd64 4.46-1 [186 kB]
Get:14 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libfcgi-perl amd64 0.79-1 [33.1 kB]
Get:15 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libcgifast-perl all 1:2.15-1 [10.5 kB]
Get:16 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libdbd-mysql-perl amd64 4.050-3 [82.8 kB]
Get:17 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libhtml-template-perl all 2.97-1 [59.0 kB]
Get:18 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libterm-readkey-perl amd64 2.38-1build1 [24.6 kB]
Get:19 http://in.archive.ubuntu.com/ubuntu focal-updates/universe amd64 mariadb-client all 1:10.3.34-0ubuntu0.20.04.1 [12.5 kB]
Get:20 http://in.archive.ubuntu.com/ubuntu focal-updates/universe amd64 mariadb-server all 1:10.3.34-0ubuntu0.20.04.1 [12.7 kB]
```

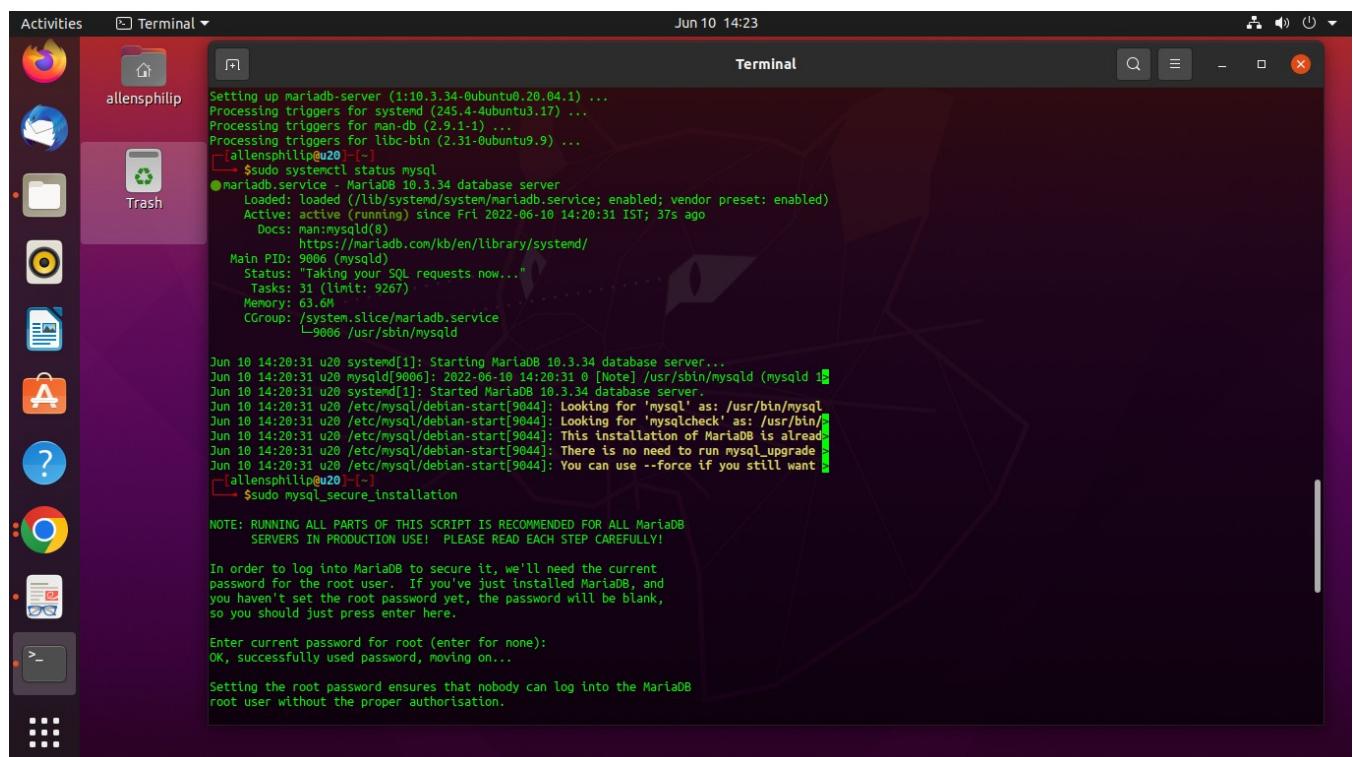

```
Setting up mariadb-server (1:10.3.34-0ubuntu0.20.04.1) ...
Processing triggers for systemd (245.4-4ubuntu3.17) ...
Processing triggers for man-db (2.9.1-1) ...
Processing triggers for libc-bin (2.31-0ubuntu9.9) ...
allensphilip@u20:~$ sudo systemctl status mysql
● mariadb.service - Mariadb 10.3.34 database server
  Loaded: loaded (/lib/systemd/system/mariadb.service; enabled; vendor preset: enabled)
  Active: active (running) since Fri 2022-06-10 14:20:31 IST; 37s ago
    Docs: man:mysqld(8)
          https://mariadb.com/kb/en/library/systemd/
  Main PID: 9006 (mysqld)
    Status: "Taking your SQL requests now..."
      Tasks: 31 (limit: 9267)
     Memory: 63.6M
      CGroup: /system.slice/mariadb.service
              └─ 9006 /usr/sbin/mysqld

Jun 10 14:20:31 u20 systemd[1]: Starting MariaDB 10.3.34 database server...
Jun 10 14:20:31 u20 mysqld[9006]: 2022-06-10 14:20:31 [Note] /usr/sbin/mysqld (mysqld 10.3.34) starting as process 9006 ...
Jun 10 14:20:31 u20 systemd[1]: Started MariaDB 10.3.34 database server.
Jun 10 14:20:31 u20 /etc/mysql/debian-start[9044]: Looking for 'mysql' as: /usr/bin/mysql
Jun 10 14:20:31 u20 /etc/mysql/debian-start[9044]: Looking for 'mysqlcheck' as: /usr/bin/mysqlcheck
Jun 10 14:20:31 u20 /etc/mysql/debian-start[9044]: This installation of MariaDB is already running as process 9006.
Jun 10 14:20:31 u20 /etc/mysql/debian-start[9044]: There is no need to run mysql_upgrade.
Jun 10 14:20:31 u20 /etc/mysql/debian-start[9044]: You can use --force if you still want to run mysql_upgrade.
allensphilip@u20:~$ sudo mysql_secure_installation

NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB
      SERVERS IN PRODUCTION USE! PLEASE READ EACH STEP CAREFULLY!


In order to log into MariaDB to secure it, we'll need the current
password for the root user. If you've just installed MariaDB, and
you haven't set the root password yet, the password will be blank,
so you should just press enter here.

Enter current password for root (enter for none):
OK, successfully used password, moving on...
Setting the root password ensures that nobody can log into the MariaDB
root user without the proper authorisation.
```

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB

Dept. of Computer Applications

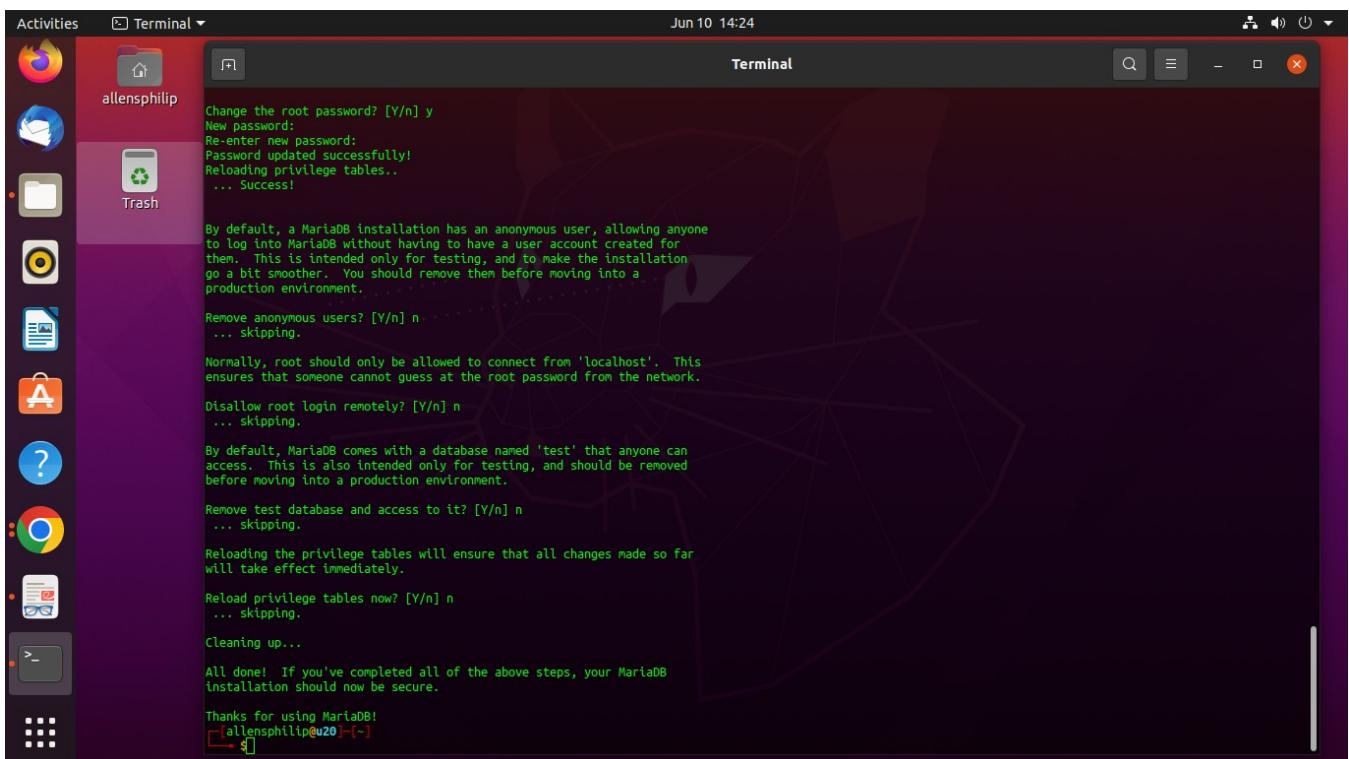

The screenshot shows a terminal window titled "Terminal" on an Ubuntu desktop. The window displays the MySQL setup process:

```
Jun 10 14:24
Terminal
Change the root password? [Y/n] y
New password:
Re-enter new password:
Password updated successfully!
Reloading privilege tables..
... Success!

By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them. This is intended only for testing, and to make the installation
go a bit smoother. You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n] n
... skipping.

Normally, root should only be allowed to connect from 'localhost'. This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] n
... skipping.

By default, MariaDB comes with a database named 'test' that anyone can
access. This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n] n
... skipping.


Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] n
... skipping.

Cleaning up...



All done! If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
[allensphilip@u20:~]$
```

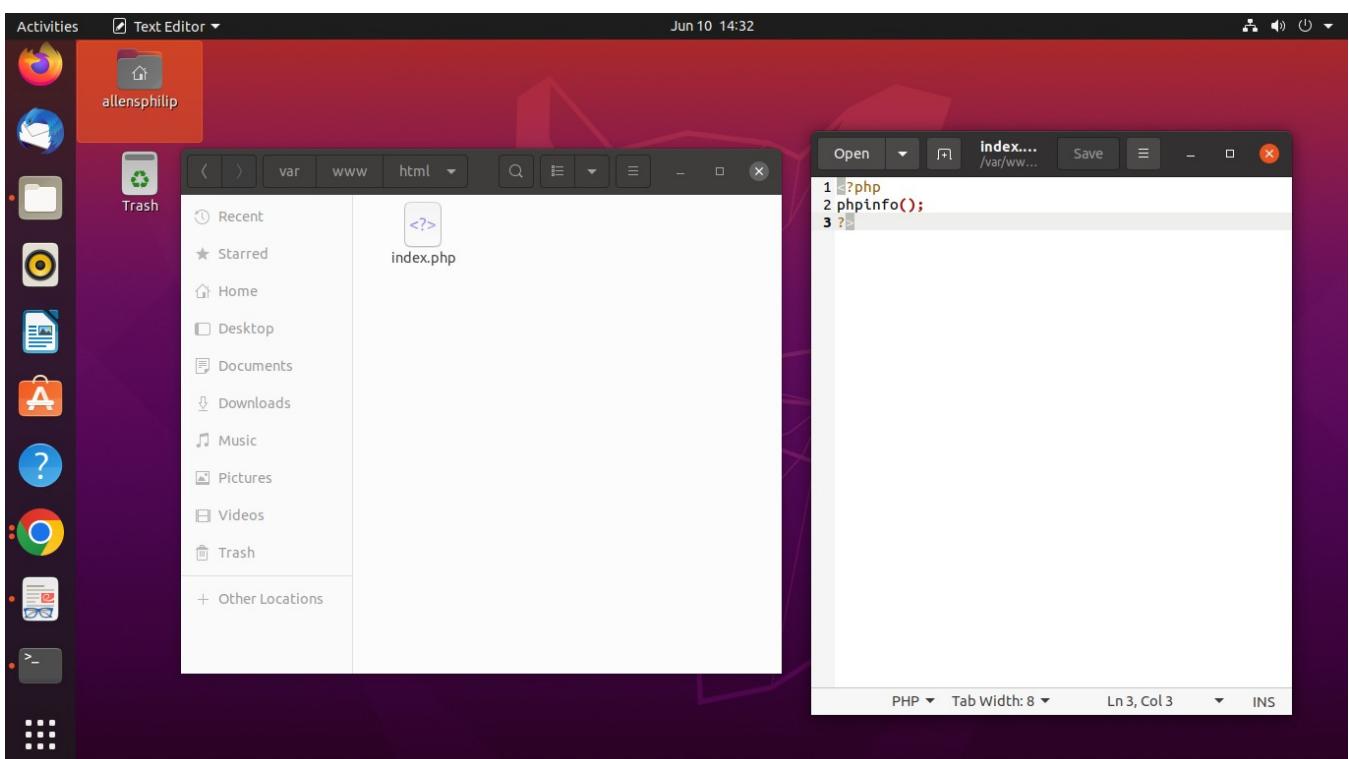


20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB

Dept. of Computer Applications

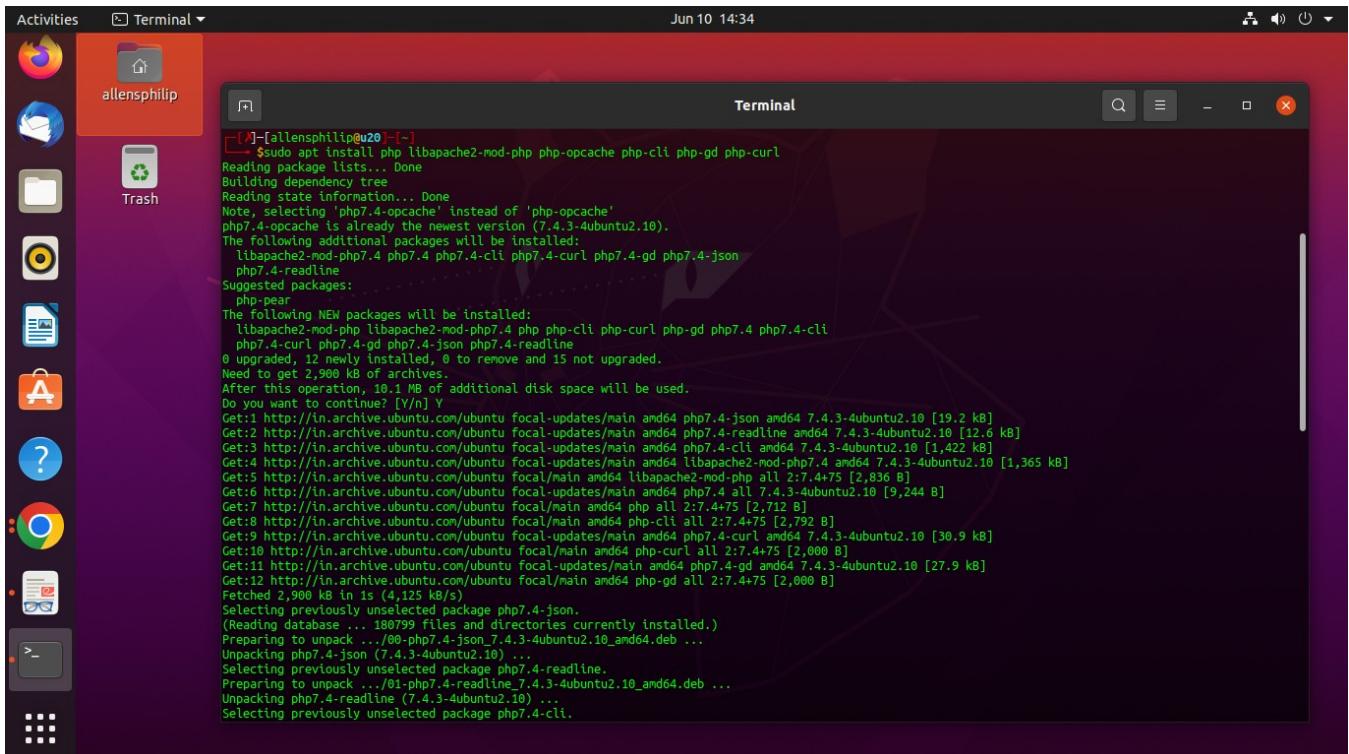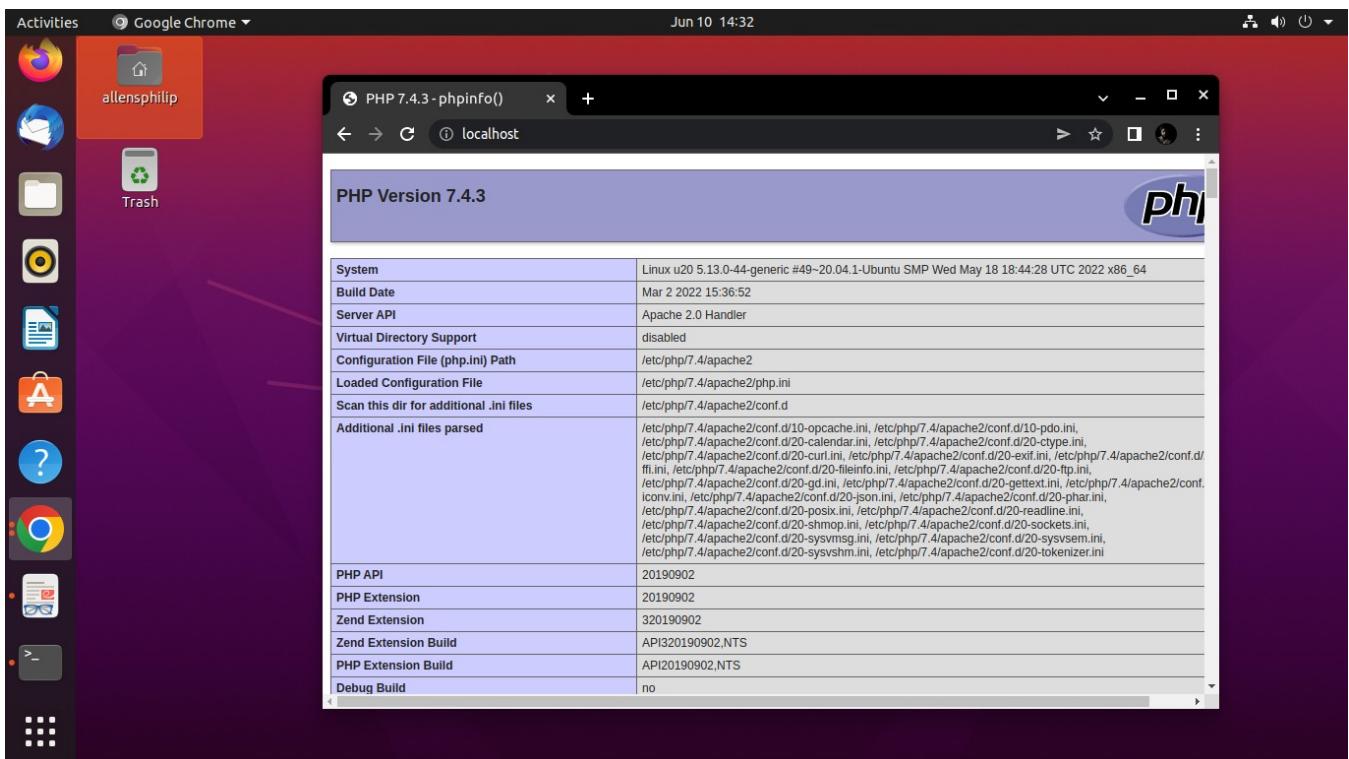


20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB

Dept. of Computer Applications

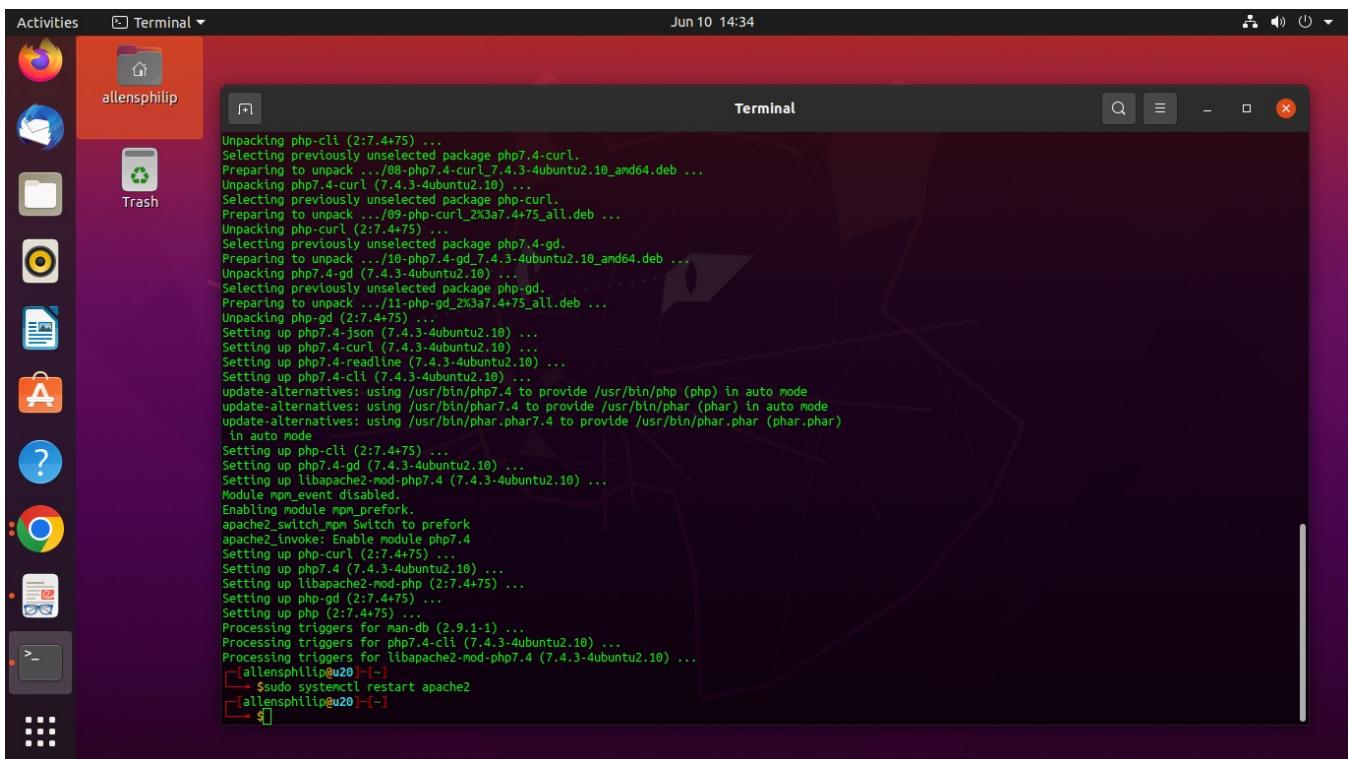

A screenshot of an Ubuntu desktop environment. On the left is a dock with various icons: Home, Dash, Activities, Terminal, Home, Trash, and others. A terminal window titled 'Terminal' is open in the foreground, showing command-line output. The output details the installation of several PHP packages via apt-get:



```
Unpacking php-cli (2:7.4+75) ...
Selecting previously unselected package php7.4-curl.
Preparing to unpack .../08-php7.4-curl_7.4.3-4ubuntu2.10_amd64.deb ...
Unpacking php7.4-curl (7.4.3-4ubuntu2.10) ...
Selecting previously unselected package php-curl.
Preparing to unpack .../09-php-curl_233a7.4475_all.deb ...
Unpacking php-curl (2:7.4+75) ...
Selecting previously unselected package php7.4-gd.
Preparing to unpack .../10-php7.4-gd_7.4.3-4ubuntu2.10_amd64.deb ...
Unpacking php7.4-gd (7.4.3-4ubuntu2.10) ...
Selecting previously unselected package php-gd.
Preparing to unpack .../11-php-gd_233a7.4475_all.deb ...
Unpacking php-gd (2:7.4+75)
Setting up php7.4-json (7.4.3-4ubuntu2.10) ...
Setting up php7.4-curl (7.4.3-4ubuntu2.10) ...
Setting up php7.4-readline (7.4.3-4ubuntu2.10) ...
Setting up php7.4-cli (7.4.3-4ubuntu2.10) ...
update-alternatives: using /usr/bin/php7.4 to provide /usr/bin/php (php) in auto mode
update-alternatives: using /usr/bin/phar7.4 to provide /usr/bin/phar (phar) in auto mode
update-alternatives: using /usr/bin/phar.phar7.4 to provide /usr/bin/phar.phar (phar.phar) in auto mode
Setting up libapache2-mod-php7.4 (7.4.3-4ubuntu2.10) ...
Module mpm_event disabled.
Enabling module mpm_prefork.
apache2_switch_mpm Switch to prefork
apache2_invoke: Enable module php7.4
Setting up php-curl (2:7.4+75) ...
Setting up php7.4 (7.4.3-4ubuntu2.10) ...
Setting up libapache2-mod-php (2:7.4+75) ...
Setting up php-gd (2:7.4+75) ...
Processing triggers for man-db (2.9.1-1) ...
Processing triggers for php7.4-cgi (7.4.3-4ubuntu2.10) ...
Processing triggers for libapache2-mod-php7.4 (7.4.3-4ubuntu2.10) ...
[allensphilip@u20:~]
└─$ sudo systemctl restart apache2
[allensphilip@u20:~]
└─$
```

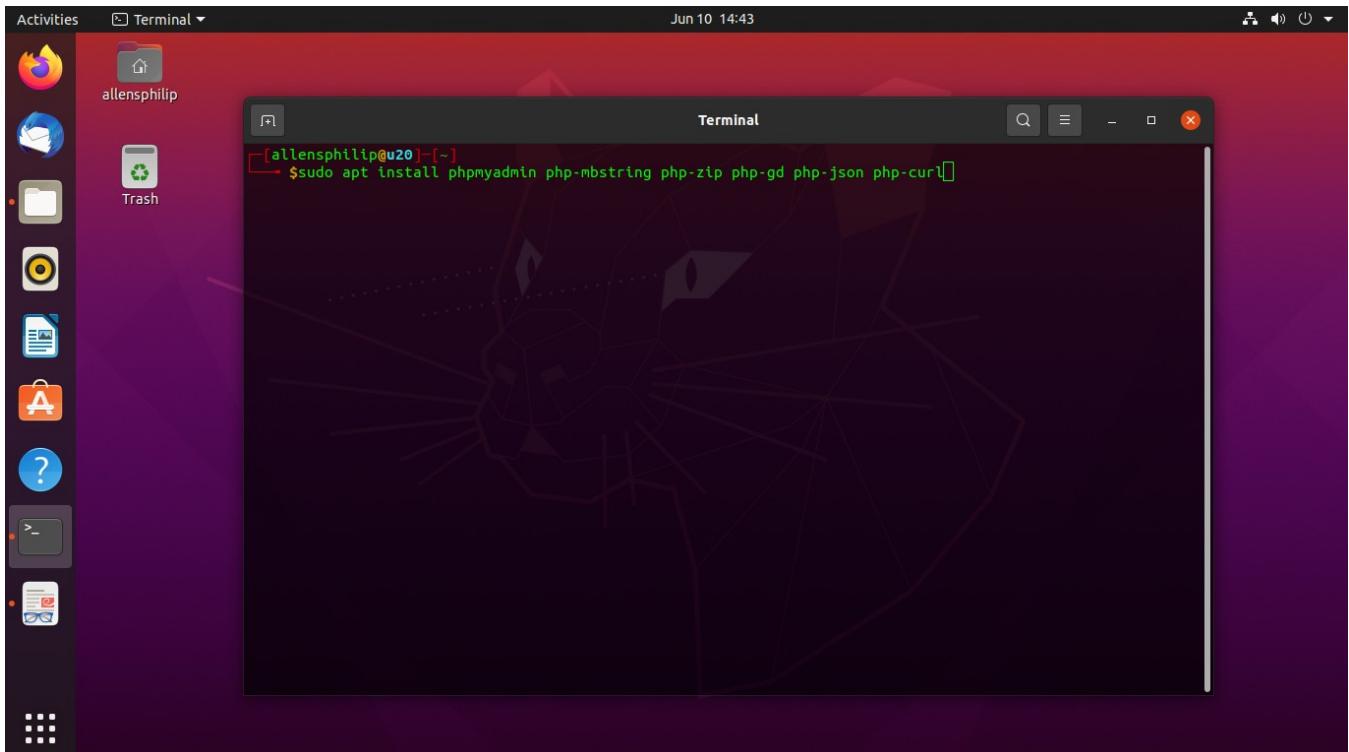



A screenshot of an Ubuntu desktop environment. The interface is identical to the one above, with the dock and terminal window visible. The terminal window shows a single command being typed:

```
[allensphilip@u20:~]
└─$ sudo apt install phpmyadmin php-mbstring php-zip php-gd php-json php-curl
```


20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

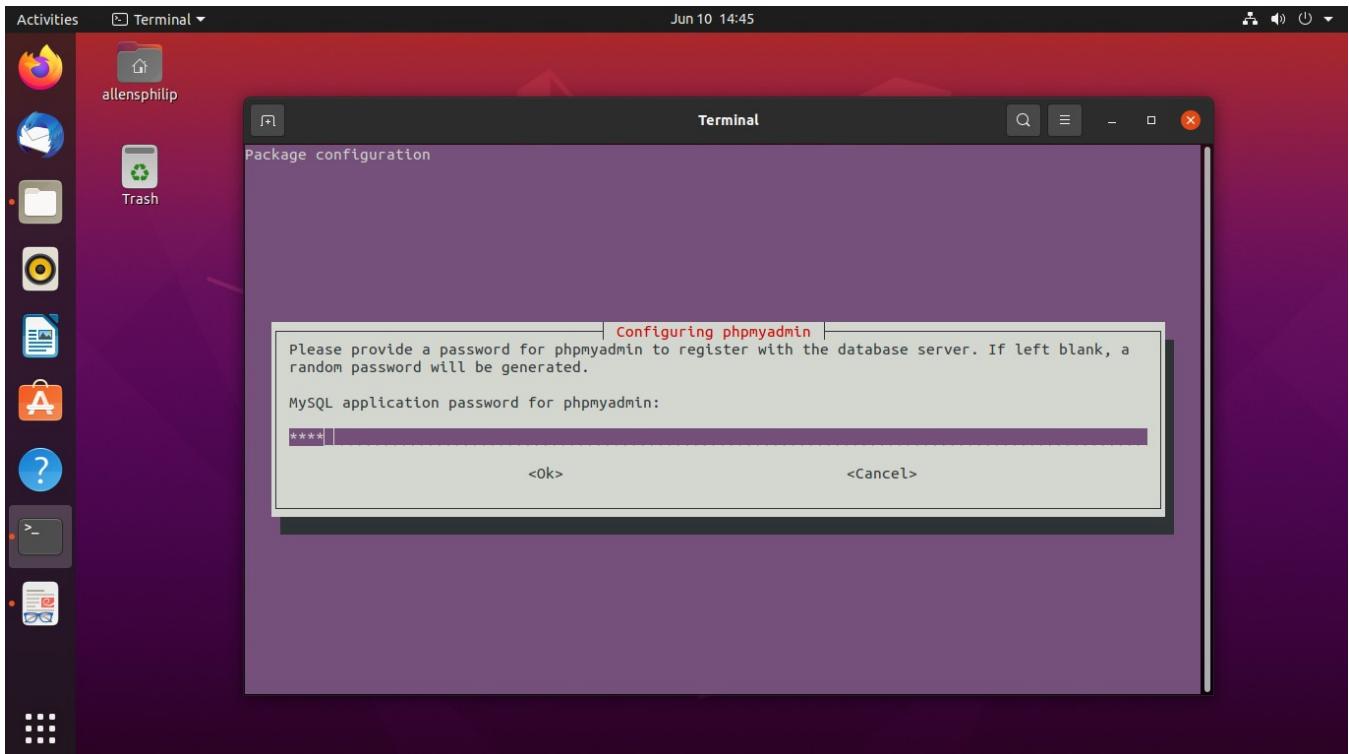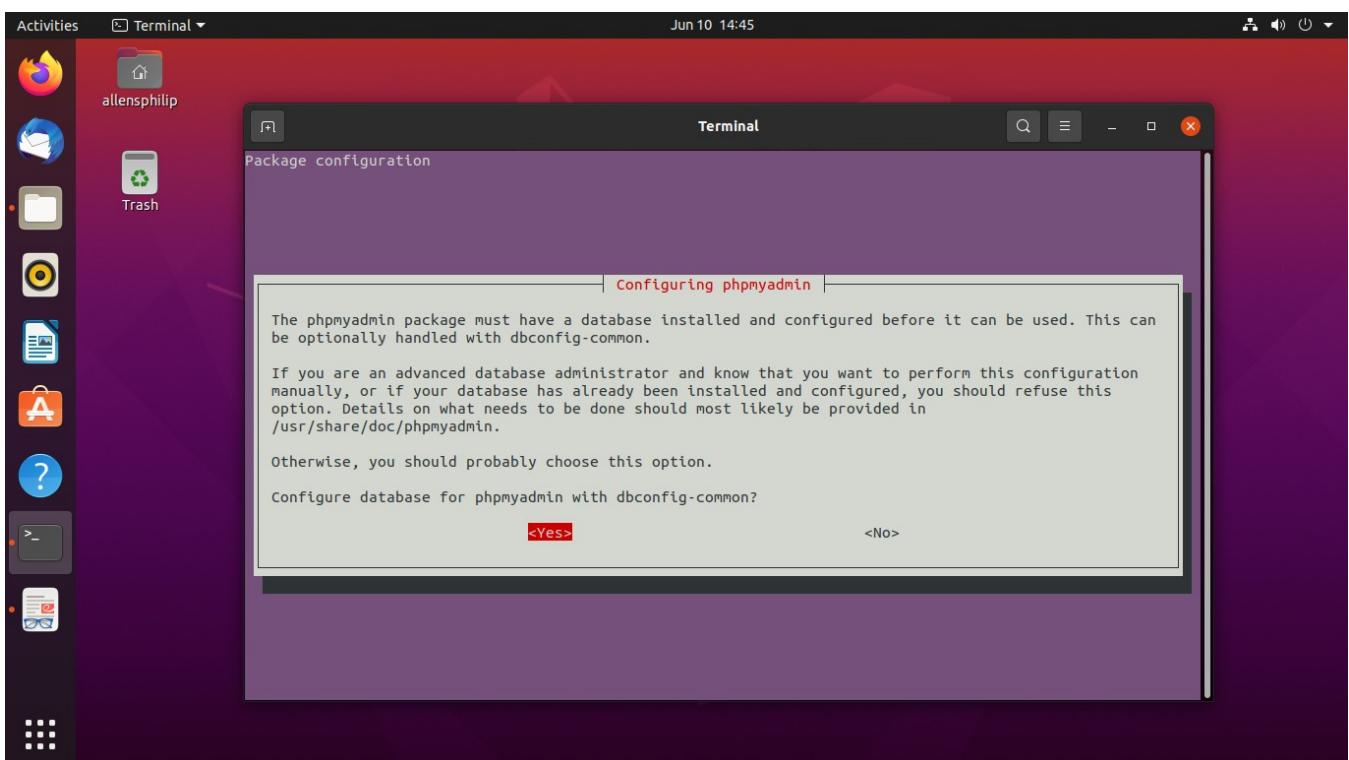

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

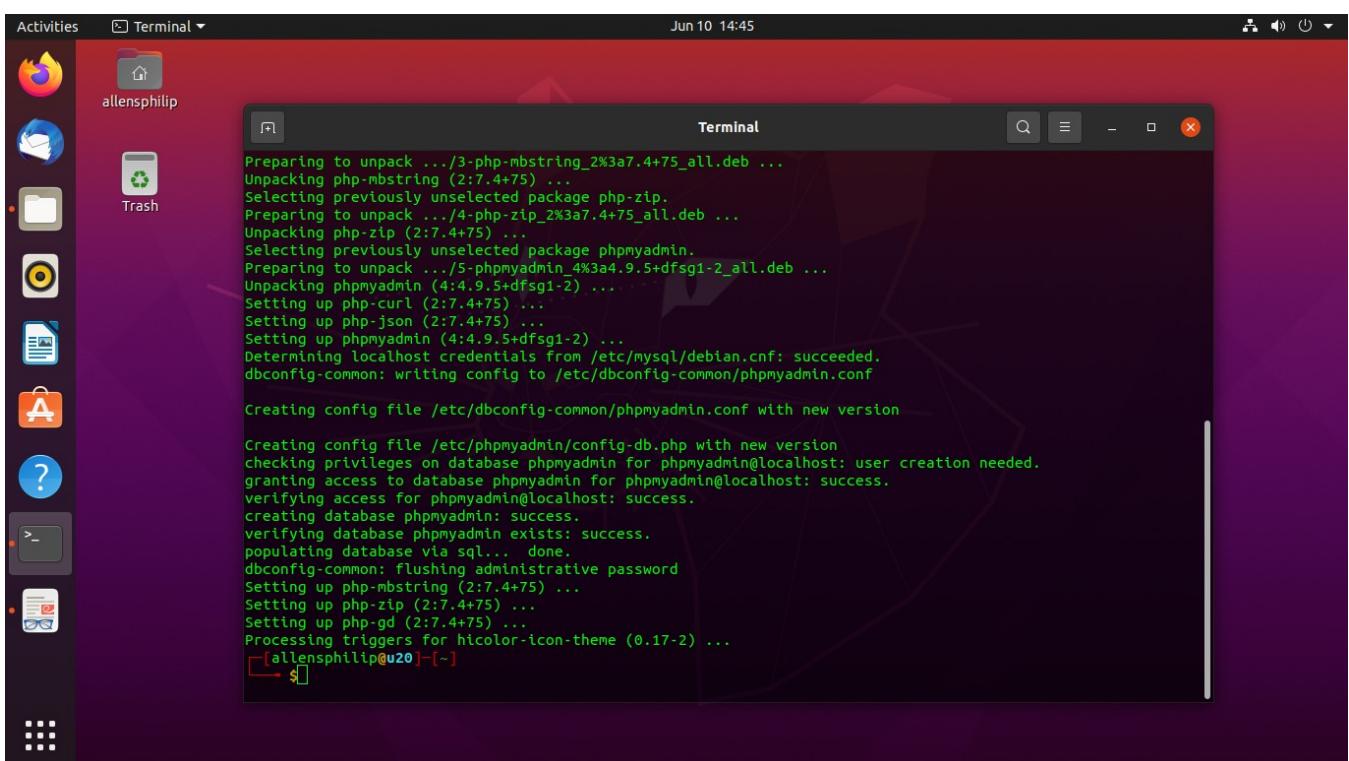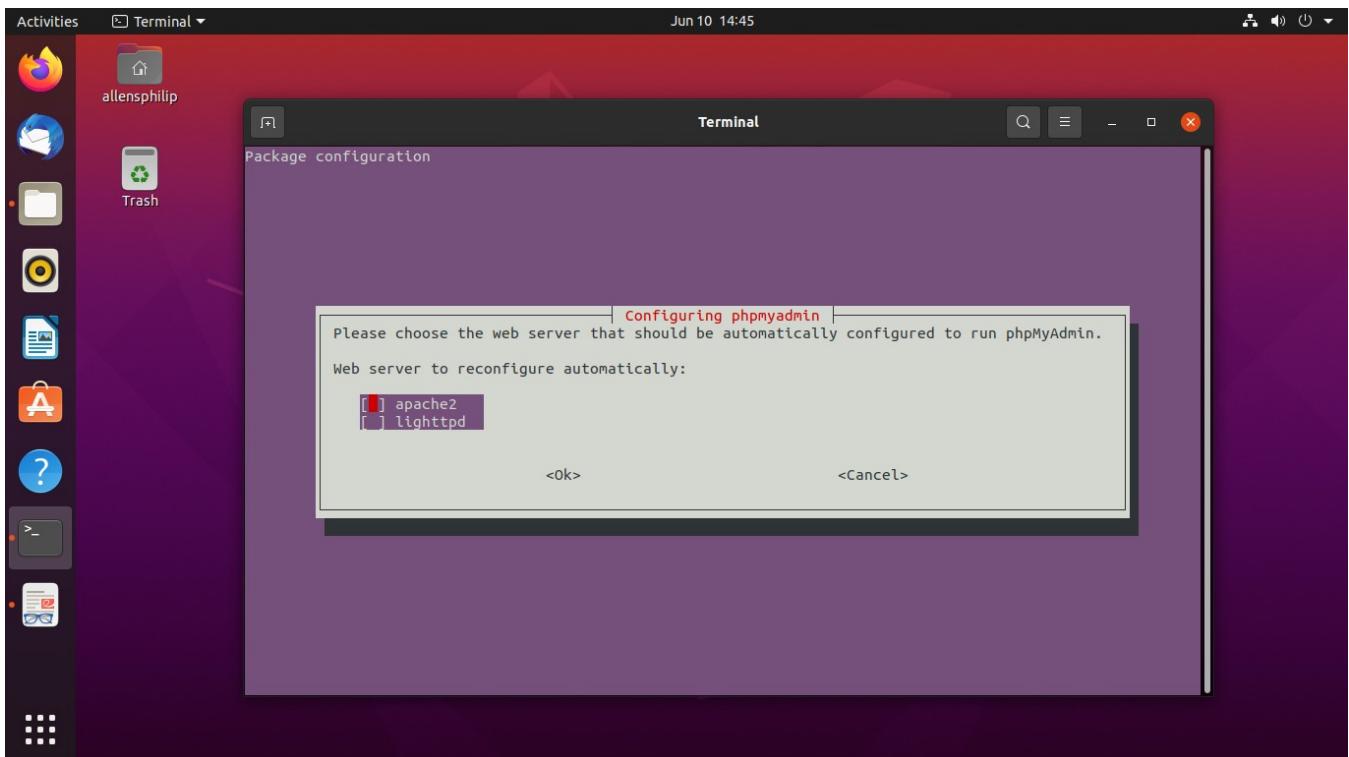

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

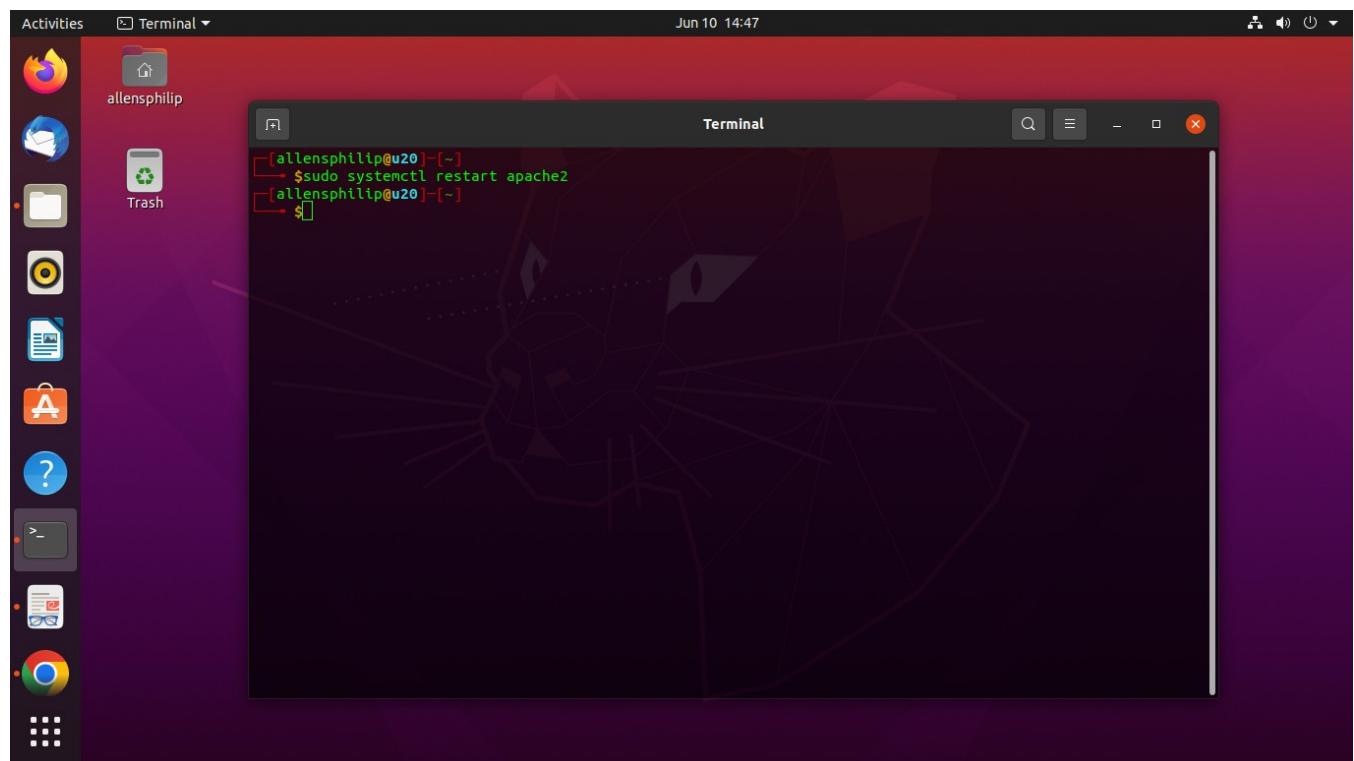

Wordpress Installation

The screenshot shows a terminal window titled "Parrot Terminal". The terminal output is as follows:

```
[allensphilip@SEC-ROG] -[~]
└─$ service apache2 status
● apache2.service - The Apache HTTP Server
  Loaded: loaded (/lib/systemd/system/apache2.service; disabled; vendor pres
  Active: active (running) since Sun 2022-06-12 00:55:05 IST; 3h 58min ago
    Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 13664 (apache2)
     Tasks: 7 (limit: 8720)
    Memory: 14.0M
      CPU: 852ms
     CGroup: /system.slice/apache2.service
             └─13664 /usr/sbin/apache2 -k start
               ├─13666 /usr/sbin/apache2 -k start
               ├─13667 /usr/sbin/apache2 -k start
               ├─13668 /usr/sbin/apache2 -k start
               ├─13669 /usr/sbin/apache2 -k start
               ├─13670 /usr/sbin/apache2 -k start
               └─17763 /usr/sbin/apache2 -k start

Jun 12 00:55:05 SEC-ROG systemd[1]: Starting The Apache HTTP Server...
Jun 12 00:55:05 SEC-ROG apachectl[13663]: AH00558: apache2: Could not reliably
Jun 12 00:55:05 SEC-ROG systemd[1]: Started The Apache HTTP Server.
[allensphilip@SEC-ROG] -[~]
└─$ service mysql status
● mariadb.service - MariaDB 10.5.15 database server
  Loaded: loaded (/lib/systemd/system/mariadb.service; disabled; vendor pres
  Active: active (running) since Sun 2022-06-12 00:53:18 IST; 4h 0min ago
    Docs: man:mariadb(8)
          https://mariadb.com/kb/en/library/systemd/
   Main PID: 6126 (mariadb)
     Status: "Taking your SQL requests now..."
     Tasks: 8 (limit: 8720)
    Memory: 84.1M
      CPU: 4.020s
     CGroup: /system.slice/mariadb.service
             └─6126 /usr/sbin/mariadb

Jun 12 00:53:18 SEC-ROG mariadb[6126]: 2022-06-12 0:53:18 0 [Note] /usr/sbin/>
Jun 12 00:53:18 SEC-ROG mariadb[6126]: Version: '10.5.15-MariaDB-0+deb11u1' s>
Jun 12 00:53:18 SEC-ROG systemd[1]: Started MariaDB 10.5.15 database server.
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: Looking for 'mysql' as: >
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: Looking for 'mysqlcheck'>
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: This installation of Mar>
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: There is no need to run >
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: You can use --force if y>
Jun 12 00:56:33 SEC-ROG mariadb[6126]: 2022-06-12 0:56:33 37 [Warning] Access>
Jun 12 00:56:33 SEC-ROG mariadb[6126]: 2022-06-12 0:56:33 39 [Warning] Access>
[allensphilip@SEC-ROG] -[~]
└─$ wget -c http://wordpress.org/latest.tar.gz
--2022-06-12 04:54:11--  http://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:80... connected.
HTTP request sent, awaiting response... 301 Moved Permanently
```

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

The screenshot shows a terminal window titled "Parrot Terminal" with a dark theme. The terminal displays the following command-line session:

```
Memory: 84.1M
CPU: 4.020s
CGroup: /system.slice/mariadb.service
└─6126 /usr/sbin/mariadb

Jun 12 00:53:18 SEC-ROG mariadb[6126]: 2022-06-12 0:53:18 0 [Note] /usr/sbin/...
Jun 12 00:53:18 SEC-ROG mariadb[6126]: Version: '10.5.15-MariaDB-0+deb11u1' s...
Jun 12 00:53:18 SEC-ROG systemd[1]: Started MariaDB 10.5.15 database server.
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: Looking for 'mysql' as: ...
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: Looking for 'mysqlcheck'>
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: This installation of Mar...
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: There is no need to run >
Jun 12 00:53:18 SEC-ROG /etc/mysql/debian-start[6168]: You can use --force if y...
Jun 12 00:56:33 SEC-ROG mariadb[6126]: 2022-06-12 0:56:33 37 [Warning] Access...
Jun 12 00:56:33 SEC-ROG mariadb[6126]: 2022-06-12 0:56:33 39 [Warning] Access...
[allensphilip@SEC-ROG:~]$

[allensphilip@SEC-ROG:~]$ wget -c http://wordpress.org/latest.tar.gz
--2022-06-12 04:54:11--  http://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:80... connected.
HTTP request sent, awaiting response... 301 Moved Permanently
Location: https://wordpress.org/latest.tar.gz [following]
--2022-06-12 04:54:12--  https://wordpress.org/latest.tar.gz
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 21166276 (20M) [application/octet-stream]
Saving to: 'latest.tar.gz'

latest.tar.gz      100%[=====] 20.19M  2.58MB/s    in 9.8s

2022-06-12 04:54:23 (2.06 MB/s) - 'latest.tar.gz' saved [21166276/21166276]

[allensphilip@SEC-ROG:~]$

[allensphilip@SEC-ROG:~]$ tar -xvzf latest.tar.gz
wordpress/
wordpress/xmlrpc.php
wordpress/wp-blog-header.php
wordpress/readme.html
wordpress/wp-signup.php
wordpress/index.php
wordpress/wp-cron.php
wordpress/wp-config-sample.php
wordpress/wp-login.php
wordpress/wp-settings.php
wordpress/license.txt
wordpress/wp-content/
wordpress/wp-content/themes/
wordpress/wp-content/themes/twentytwentyone/
wordpress/wp-content/themes/twentytwentyone/footer.php
wordpress/wp-content/themes/twentytwentyone/template-parts/
wordpress/wp-content/themes/twentytwentyone/template-parts/content/
wordpress/wp-content/themes/twentytwentyone/template-parts/content/content-excerpt.php
wordpress/wp-content/themes/twentytwentyone/template-parts/content/page.php
```

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

The screenshot shows a terminal window titled "Parrot Terminal" with a dark theme. The terminal displays a series of commands and their outputs, illustrating a penetration testing or exploit development session. The session starts with navigating through a WordPress directory structure, changing ownership and permissions, and then connecting to a MariaDB database as root. It attempts to use the 'CREATE USER' command twice, first successfully creating a user 'wp'@'%' with password 'wppass', and then failing due to syntax error (ERROR 1064) when trying to use 'BY' instead of 'WITH'. The terminal interface includes a menu bar with "File Edit View Search Terminal Help" and a title bar with the window name.

```
File Edit View Search Terminal Help
wordpress/wp-admin/options-reading.php
wordpress/wp-trackback.php
wordpress/wp-comments-post.php
[allensphilip@SEC-ROG] [~]
└─$ sudo mv wordpress/* /var/www/html/
[sudo] password for allensphilip:
[allensphilip@SEC-ROG] [~]
└─$ sudo chown -R www-data:www-data /var/www/html/
[allensphilip@SEC-ROG] [~]
└─$ sudo chmod -R 755 /var/www/html/
[allensphilip@SEC-ROG] [~]
└─$ sudo mysql -u root -p
Enter password:
Welcome to the MariaDB monitor. Commands end with ; or \g.
Your MariaDB connection id is 48
Server version: 10.5.15-MariaDB-0+deb11u1 Debian 11

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> use mysql
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
MariaDB [mysql]> CREATE DATABASE wp;
Query OK, 1 row affected (0.001 sec)

MariaDB [mysql]> CREATE USER 'wp'@'%' IDENTIFIED WITH mysql_native_password BY 'wppass'
    -> Ctrl-C -- exit!
Aborted
[✗] [allensphilip@SEC-ROG] [~]
└─$ sudo mysql -u root -p
Enter password:
Welcome to the MariaDB monitor. Commands end with ; or \g.
Your MariaDB connection id is 49
Server version: 10.5.15-MariaDB-0+deb11u1 Debian 11

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> use mysql
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
MariaDB [mysql]> CREATE USER 'wp'@'%' IDENTIFIED WITH mysql_native_password BY 'wppass';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB server version for the right syntax to use near 'BY 'wppass'' at line 1
```

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB

Dept. of Computer Applications

```
Parrot Terminal
File Edit View Search Terminal Help
permitted if an account is locked (existing connections are
not affected). For example:

CREATE USER 'marijn'@'localhost' ACCOUNT LOCK;

See Account Locking for more details.

URL: https://mariadb.com/kb/en/library/create-user/
MariaDB [mysql]> CREATE USER foo2@test IDENTIFIED BY PASSWORD
-> '*54958E764CE10E50764C2EECB71D01F08549980';
Query OK, 0 rows affected (0.010 sec)

MariaDB [mysql]> CREATE USER 'wp'@'%' IDENTIFIED BY PASSWORD 'wppass';
ERROR 1372 (HY000): Password hash should be a 41-digit hexadecimal number
MariaDB [mysql]> CREATE USER wp@localhost IDENTIFIED BY 'password';
Query OK, 0 rows affected (0.010 sec)

MariaDB [mysql]> CREATE USER 'wp'@'localhost' IDENTIFIED BY 'password';
ERROR 1396 (HY000): Operation CREATE USER failed for 'wp'@'localhost'
MariaDB [mysql]> 
```

```
Parrot Terminal
File Edit View Search Terminal Help
Password Expiry

Besides automatic password expiry, as determined by
default_password_lifetime, password expiry times can be set
on an individual user basis, overriding the global setting,
for example:

CREATE USER 'monty'@'localhost' PASSWORD EXPIRE INTERVAL
120 DAY;

See User Password Expiry for more details.

Account Locking

Account locking permits privileged administrators to
lock/unlock user accounts. No new client connections will be
permitted if an account is locked (existing connections are
not affected). For example:

CREATE USER 'marijn'@'localhost' ACCOUNT LOCK;

See Account Locking for more details.

URL: https://mariadb.com/kb/en/library/create-user/
MariaDB [mysql]> CREATE USER foo2@test IDENTIFIED BY PASSWORD
-> '*54958E764CE10E50764C2EECB71D01F08549980';
Query OK, 0 rows affected (0.010 sec)


MariaDB [mysql]> CREATE USER 'wp'@'%' IDENTIFIED BY PASSWORD 'wppass';
ERROR 1372 (HY000): Password hash should be a 41-digit hexadecimal number
MariaDB [mysql]> CREATE USER wp@localhost IDENTIFIED BY 'password';
Query OK, 0 rows affected (0.010 sec)

MariaDB [mysql]> CREATE USER 'wp'@'localhost' IDENTIFIED BY 'password';
ERROR 1396 (HY000): Operation CREATE USER failed for 'wp'@'localhost'
MariaDB [mysql]> GRANT ALL ON wp.* TO 'wp'@'%';
ERROR 1133 (28000): Can't find any matching row in the user table
MariaDB [mysql]> GRANT ALL ON wp.* TO 'wp'@'localhost';
Query OK, 0 rows affected (0.015 sec)

MariaDB [mysql]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [mysql]> EXIT;
Bye
[allensphilip@SEC-ROG]--
```

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

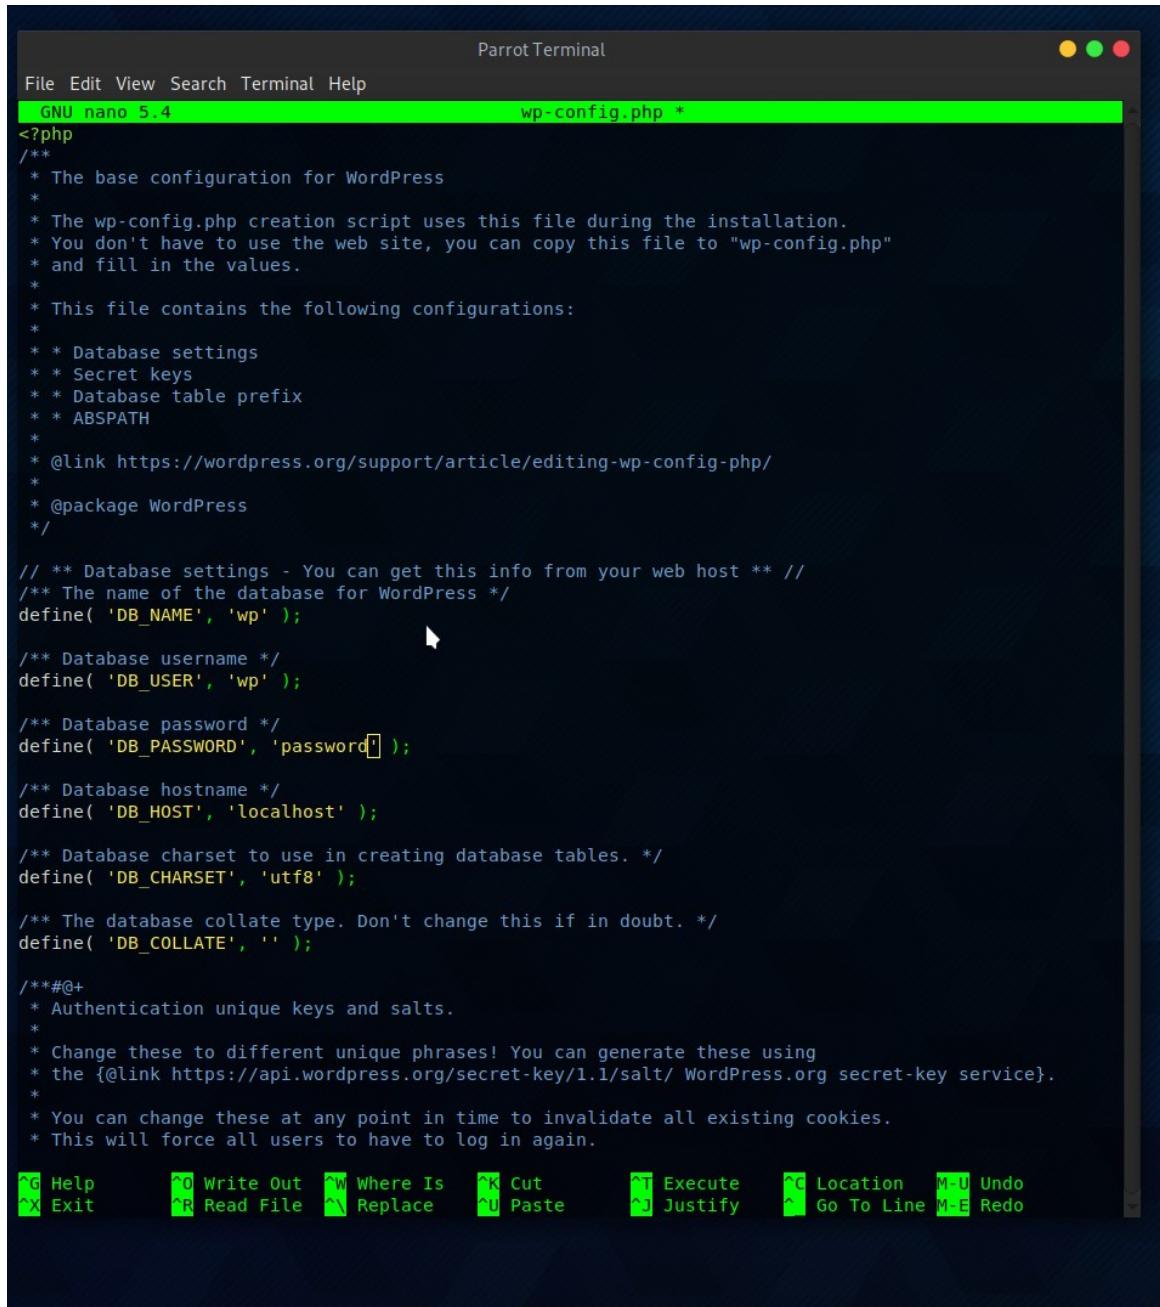

The screenshot shows a terminal window titled "Parrot Terminal" with the file "wp-config.php" open in the nano editor. The code displayed is the configuration file for WordPress, containing database settings, user authentication, and other configuration parameters. The terminal interface includes a menu bar with File, Edit, View, Search, Terminal, and Help, and a toolbar at the bottom with various keyboard shortcuts for file operations like Help, Exit, Write Out, Read File, Where Is, Replace, Cut, Paste, Execute, Justify, Location, Go To Line, Undo, and Redo.

```
<?php
/*
 * The base configuration for WordPress
 *
 * The wp-config.php creation script uses this file during the installation.
 * You don't have to use the web site, you can copy this file to "wp-config.php"
 * and fill in the values.
 *
 * This file contains the following configurations:
 *
 * * Database settings
 * * Secret keys
 * * Database table prefix
 * * ABSPATH
 *
 * @link https://wordpress.org/support/article/editing-wp-config-php/
 *
 * @package WordPress
 */

// ** Database settings - You can get this info from your web host ** //
/** The name of the database for WordPress */
define( 'DB_NAME', 'wp' );

/** Database username */
define( 'DB_USER', 'wp' );

/** Database password */
define( 'DB_PASSWORD', 'password' );

/** Database hostname */
define( 'DB_HOST', 'localhost' );

/** Database charset to use in creating database tables. */
define( 'DB_CHARSET', 'utf8' );



/** The database collate type. Don't change this if in doubt. */
define( 'DB_COLLATE', '' );

/**#@+
 * Authentication unique keys and salts.
 *
 * Change these to different unique phrases! You can generate these using
 * the {@link https://api.wordpress.org/secret-key/1.1/salt/ WordPress.org secret-key service}.
 *
 * You can change these at any point in time to invalidate all existing cookies.
 * This will force all users to have to log in again.
 */

```



20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB

Dept. of Computer Applications

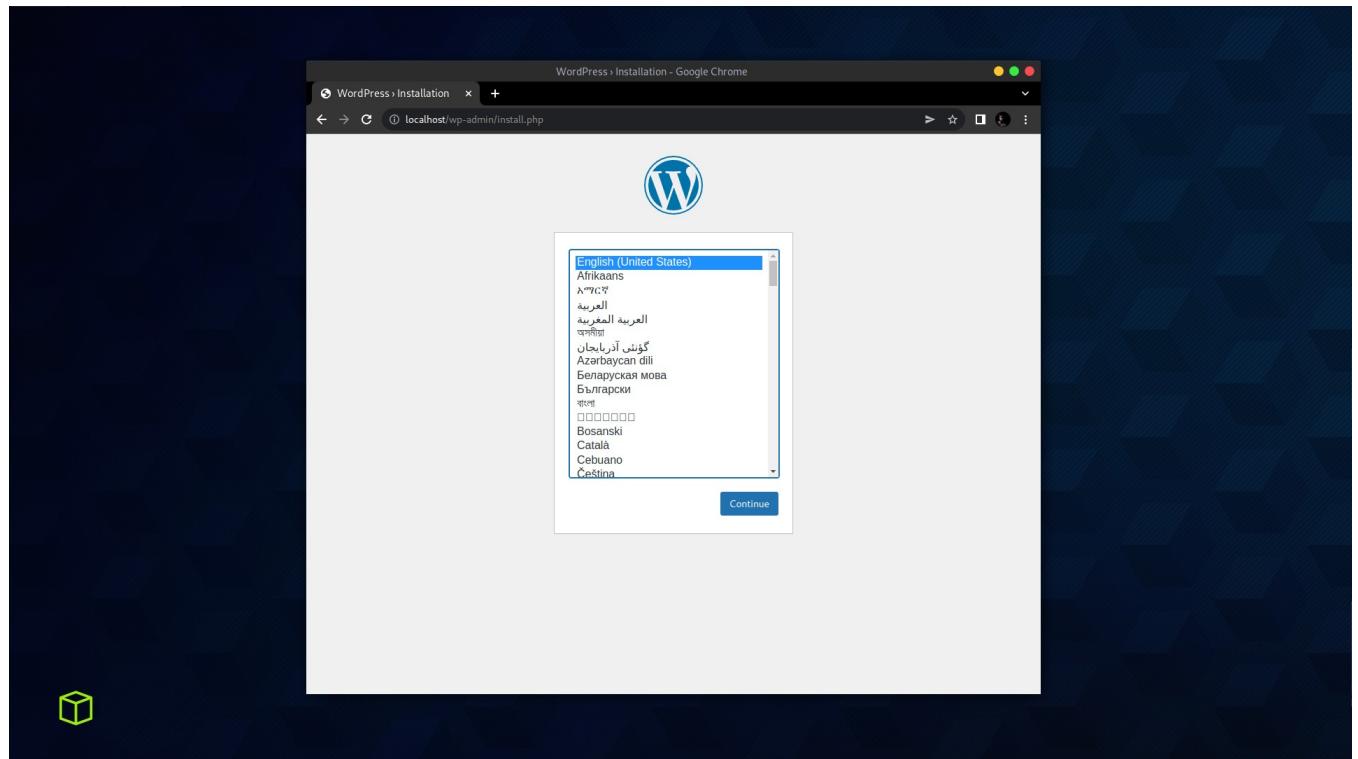
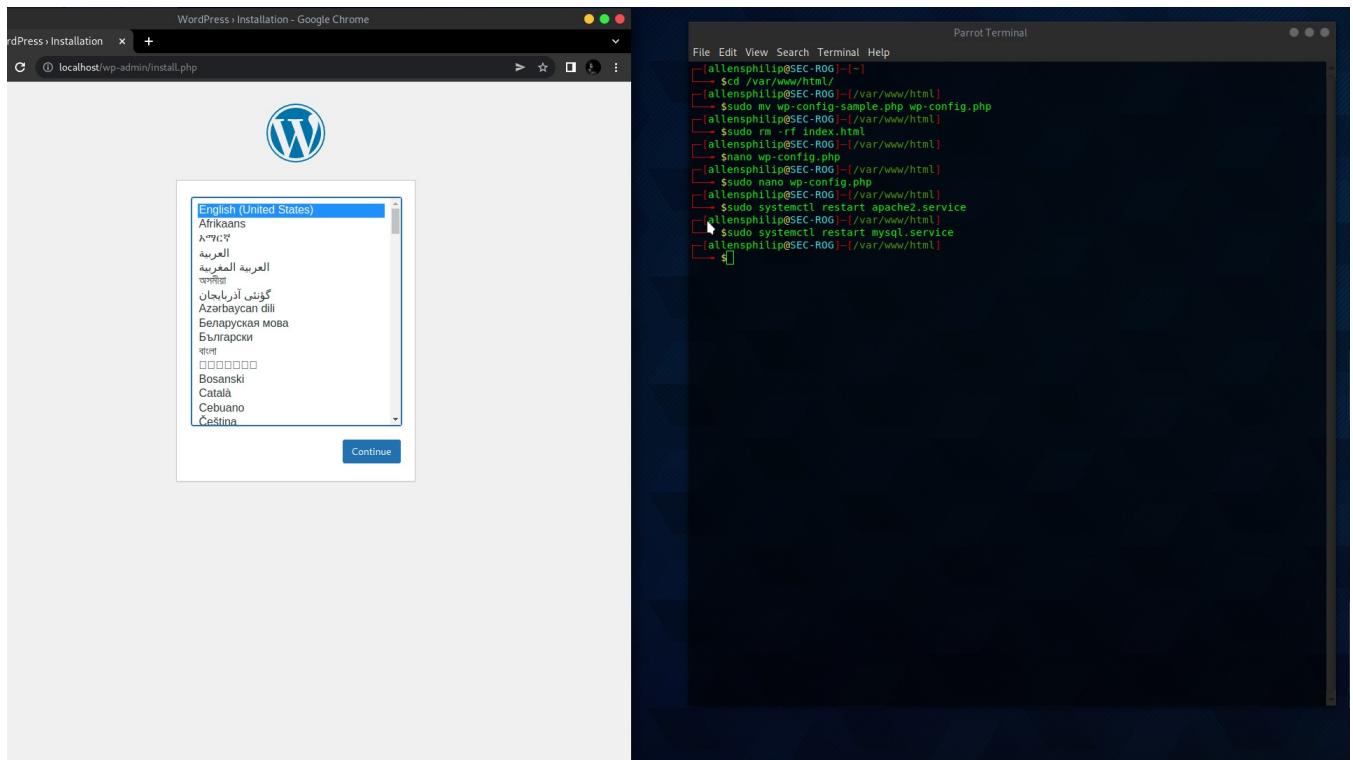


20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB


Dept. of Computer Applications

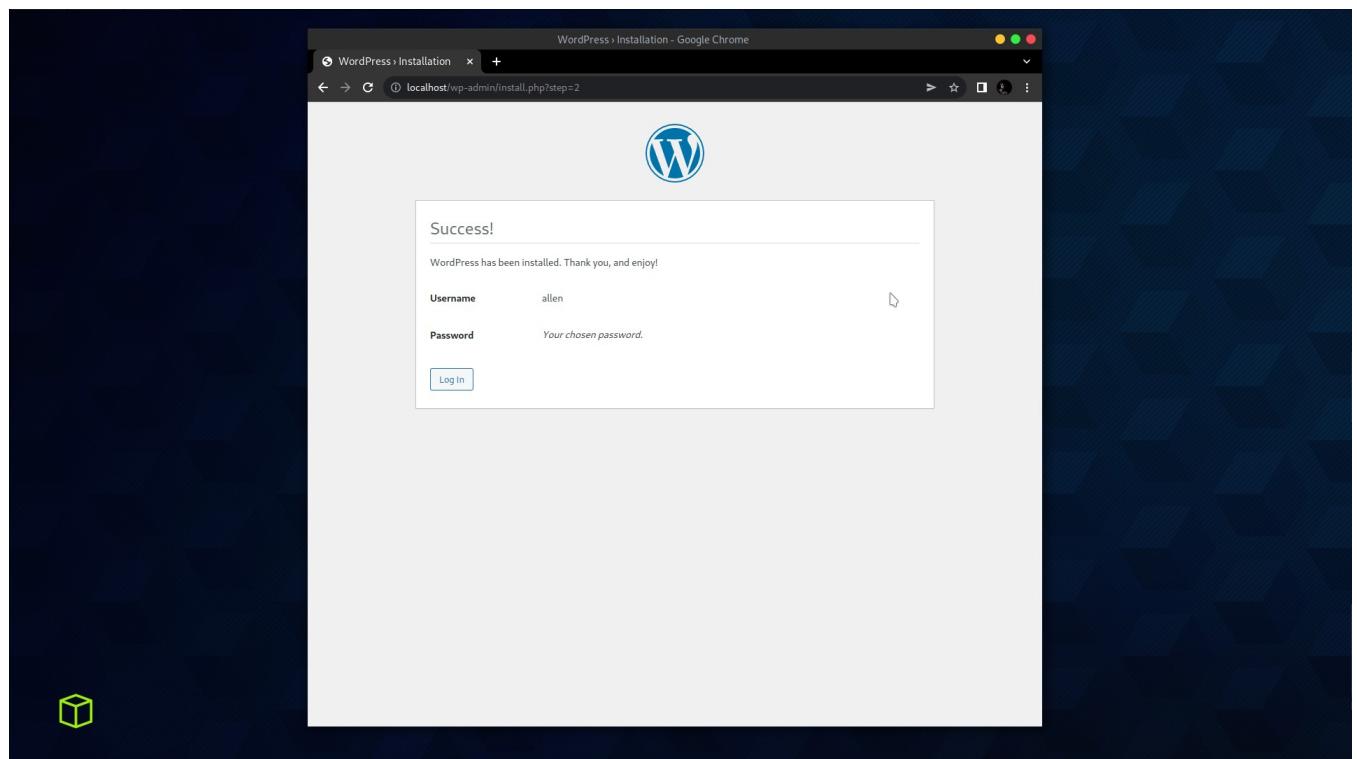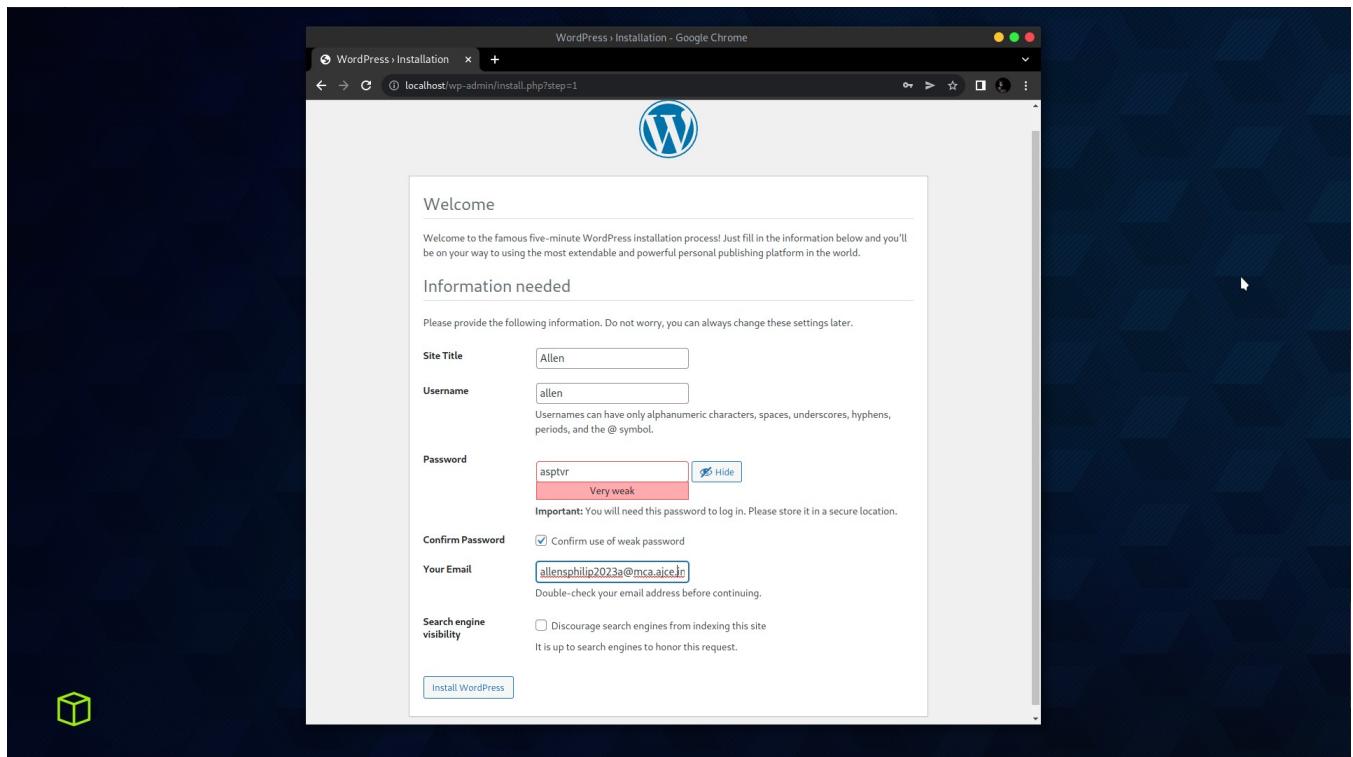

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

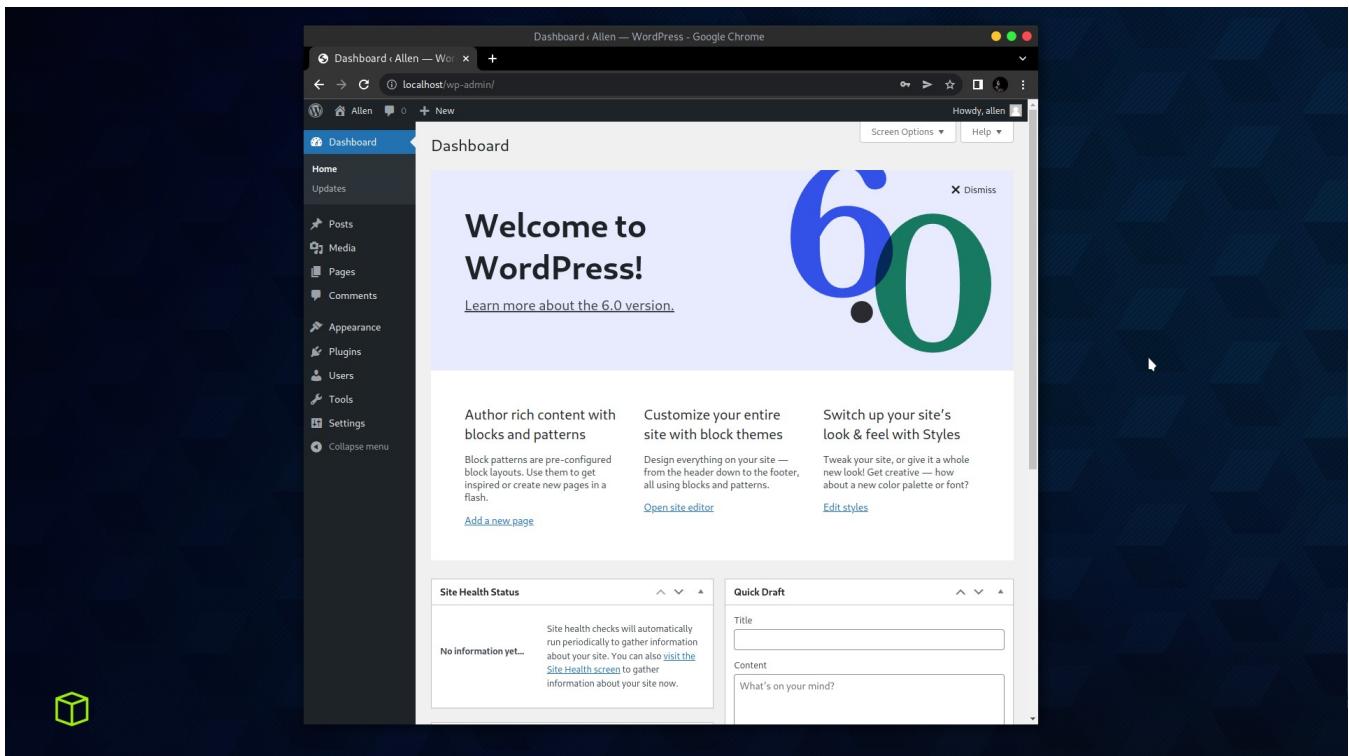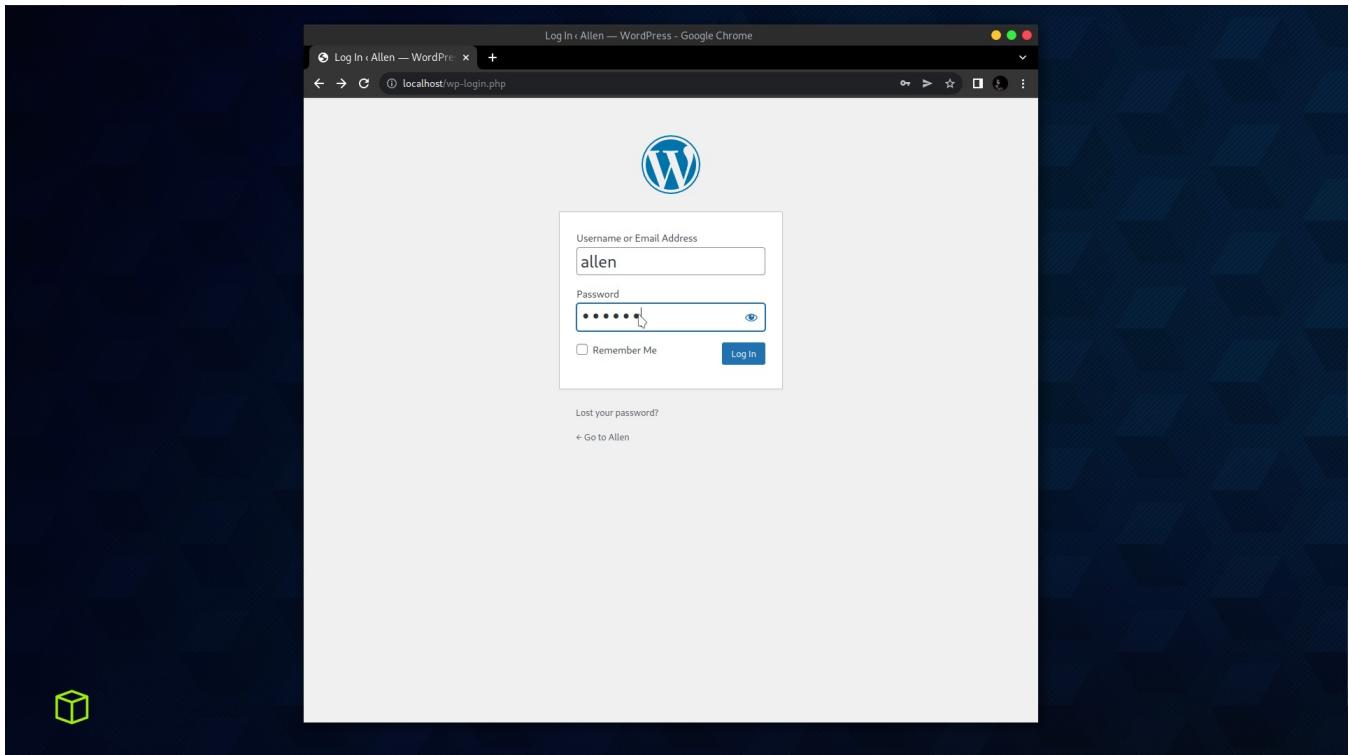

20MCA136 – NETWORKING & SYSTEM ADMINISTRATION LAB
Dept. of Computer Applications

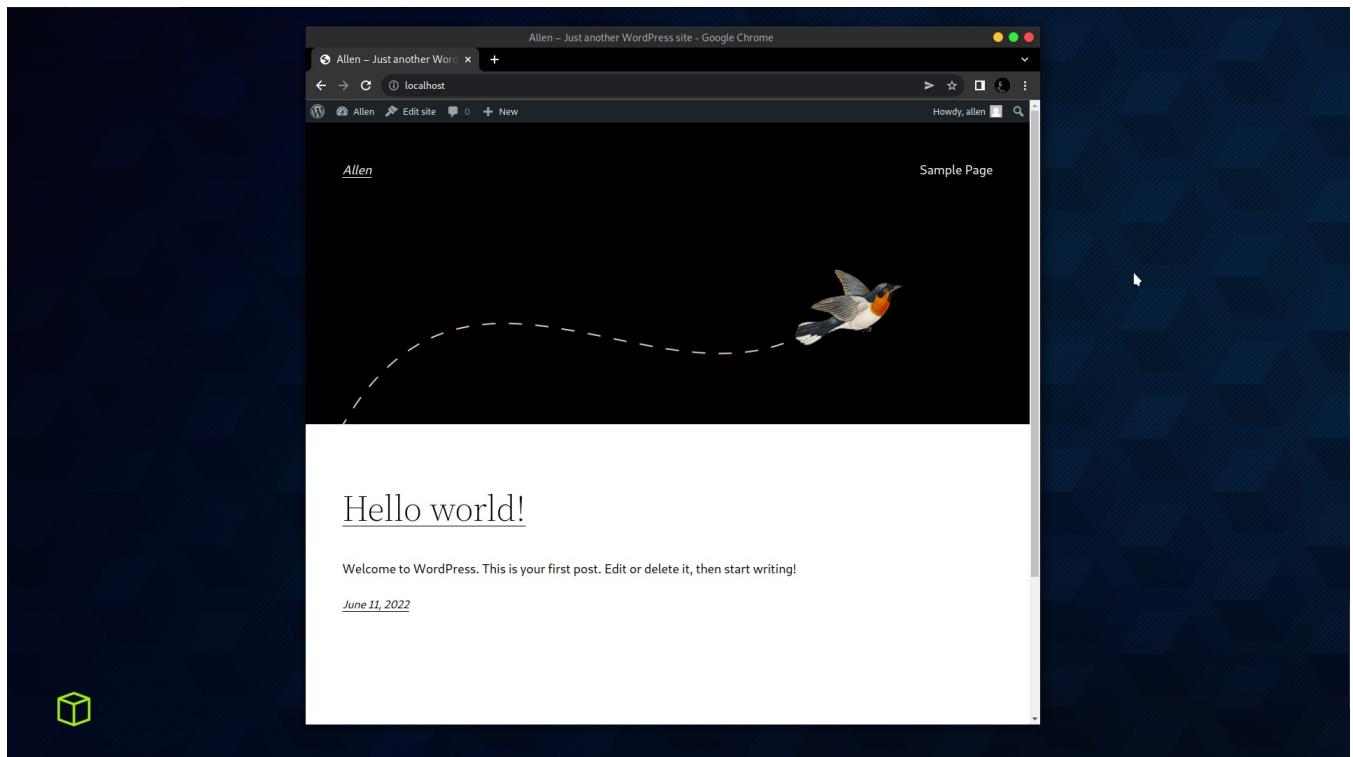

**NETWORKING & SYSTEM
ADMINISTRATION LAB****Experiment No.: 1**

Name: ALLEN S PHILIP
Roll No: 20
Batch: RMCA- A
Date: 03/06/2022

Aim

Analyzing network packets stream using tcpdump, wireshark and netcat.

Procedure**1. Tcpdump**

\$sudo apt install tcpdump :Installation

Packet-Listing

\$sudo tcpdump :To list all packets

\$sudo tcpdump -D : To list network cards(devies)

\$sudo tcpdump -i <device_name> : To list packets from specific device

\$sudo tcpdump -c 5 -i <device_name> : To list first five packets from specified device

Filtering-Options

\$sudo tcpdump -c 5 -i <device_name> port <port_no> : List packets from port 80

\$sudo tcpdump -i <device_name> not <protocol> : To avoid packets from specified protocol.

\$sudo tcpdump -i <device_name> -c 10 -w <file_name>.pcap : Write captured details to file

\$sudo tcpdump -r <file_name>.pcap : Display Captured Details

2. Wireshark

`$sudo apt install wireshark :Installation`

`$sudo usermod -aG wireshark allensphilip : Giving user access permission of wireshark`

`$sudo wireshark : To open wireshark`

3. NetCat

- Known as the swiss knife of network administrators
- In ubuntu nc or netcat both valid

Syntax:

`nc [option] host port`

`$sudo apt-get install netcat : Installation`

`$nc -l -p <port_no> : Opening listener,`
`-l : listening, -p :port`

`$nc <host> <port> : Opening listener`

`$nc -i <interval_count> <host> : send with an interval`

Output Screenshot

Tcpdump- Packet-Listing

```
[A]-[allensphilip@u20]-[~]
└─$ sudo tcpdump
[sudo] password for allensphilip:
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on enp5s0, link-type EN10MB (Ethernet), capture size 262144 bytes
14:12:51.627729 IP 192.168.6.236.64295 > 192.168.6.255.6866: UDP, length 395
14:12:51.629305 IP u20.55828 > dns.google.domain: 46960+ [iau] PTR? 255.6.168.192.in-addr.arpa. (55)
14:12:51.646157 IP dns.google.domain > u20.55828: 46960 NXDomain 0/0/1 (55)
14:12:51.646335 IP u20.55828 > dns.google.domain: 46960+ PTR? 255.6.168.192.in-addr.arpa. (44)
14:12:51.656784 IP 192.168.6.22.49934 > 239.255.255.250.1900: UDP, length 175
14:12:51.663123 IP dns.google.domain > u20.55828: 46960 NXDomain 0/0/0 (44)
14:12:51.664176 IP u20.33384 > dns.google.domain: 49307+ [iau] PTR? 236.6.168.192.in-addr.arpa. (55)
14:12:51.679692 IP dns.google.domain > u20.33384: 49307 NXDomain 0/0/1 (55)
14:12:51.679861 IP u20.33384 > dns.google.domain: 49307+ PTR? 236.6.168.192.in-addr.arpa. (44)
14:12:51.695428 IP dns.google.domain > u20.33384: 49307 NXDomain 0/0/0 (44)
14:12:51.696480 IP u20.56721 > dns.google.domain: 61139+ [iau] PTR? 8.8.8.8.in-addr.arpa. (49)
14:12:51.713461 IP dns.google.domain > u20.56721: 61139 1/0/1 PTR dns.google. (73)
14:12:51.714358 IP u20.40187 > dns.google.domain: 11488+ [iau] PTR? 190.6.168.192.in-addr.arpa. (55)
14:12:51.729665 IP dns.google.domain > u20.40187: 11488 NXDomain 0/0/1 (55)
14:12:51.729857 IP u20.40187 > dns.google.domain: 11488+ PTR? 190.6.168.192.in-addr.arpa. (44)
14:12:51.744813 IP dns.google.domain > u20.40187: 11488 NXDomain 0/0/0 (44)
14:12:51.745986 IP u20.50807 > dns.google.domain: 43278+ [iau] PTR? 250.255.255.239.in-addr.arpa. (57)
14:12:51.763321 IP dns.google.domain > u20.50807: 43278 NXDomain 0/1/1 (114)
14:12:51.763517 IP u20.50807 > dns.google.domain: 43278+ PTR? 250.255.255.239.in-addr.arpa. (46)
14:12:51.780632 IP dns.google.domain > u20.50807: 43278 NXDomain 0/1/0 (103)
14:12:51.781674 IP u20.49253 > dns.google.domain: 45678+ [iau] PTR? 22.6.168.192.in-addr.arpa. (54)
14:12:51.798930 IP dns.google.domain > u20.49253: 45678 NXDomain 0/0/1 (54)
14:12:51.799111 IP u20.49253 > dns.google.domain: 45678+ PTR? 22.6.168.192.in-addr.arpa. (43)
14:12:51.802259 IP 192.168.6.16.61440 > 239.255.255.250.1900: UDP, length 175
14:12:51.816489 IP dns.google.domain > u20.49253: 45678 NXDomain 0/0/0 (43)
14:12:51.817796 IP u20.52639 > dns.google.domain: 34779+ [iau] PTR? 16.6.168.192.in-addr.arpa. (54)
```

```
[A]-[allensphilip@u20]-[~]
└─$ sudo tcpdump -D
1.enp5s0 [Up, Running]
2.lo [Up, Running, Loopback]
3.any (Pseudo-device that captures on all interfaces) [Up, Running]
4.bluetooth-monitor (Bluetooth Linux Monitor) [none]
5.nflog (Linux netfilter log (NFLOG) interface) [none]
6.nfqueue (Linux netfilter queue (NFQUEUE) interface) [none]
[allensphilip@u20]-[~]
└─$ sudo tcpdump -i enp5s0
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on enp5s0, link-type EN10MB (Ethernet), capture size 262144 bytes
14:18:56.377980 IP 192.168.6.30.53091 > 239.255.255.250.1900: UDP, length 175
14:18:56.379483 IP u20.56999 > dns.google.domain: 51164+ [iau] PTR? 250.255.255.239.in-addr.arpa. (57)
14:18:56.402636 IP 169.254.80.208.bootpc > 255.255.255.255.bootps: BOOTP/DHCP, Request from 78:48:59:b4:50:d1 (oui Unknown), length 334
14:18:56.425496 IP dns.google.domain > u20.56999: 51164 NXDomain 0/1/1 (114)
14:18:56.425702 IP u20.56999 > dns.google.domain: 51164+ PTR? 250.255.255.239.in-addr.arpa. (46)
14:18:56.442369 IP dns.google.domain > u20.56999: 51164 NXDomain 0/1/0 (103)
14:18:56.443436 IP u20.48956 > dns.google.domain: 25054+ [iau] PTR? 30.6.168.192.in-addr.arpa. (54)
14:18:56.458156 IP dns.google.domain > u20.48956: 25054 NXDomain 0/0/1 (54)
14:18:56.458334 IP u20.48956 > dns.google.domain: 25054+ PTR? 30.6.168.192.in-addr.arpa. (43)
14:18:56.473106 IP dns.google.domain > u20.48956: 25054 NXDomain 0/0/0 (43)
14:18:56.473788 IP fe80::e173:11c5:5cf9:f910 > ff02::1:ff04:dc74: ICMP6, neighbor solicitation, who has f80::2cd9:e8c8:d204:dc74, length 32
14:18:56.474745 IP u20.42267 > dns.google.domain: 6564+ [iau] PTR? 190.6.168.192.in-addr.arpa. (55)
14:18:56.484641 ARP, Request who-has 192.168.90.1 tell 192.168.90.60, length 46
14:18:56.490575 IP dns.google.domain > u20.42267: 6564 NXDomain 0/0/1 (55)
14:18:56.490750 IP u20.42267 > dns.google.domain: 6564+ PTR? 190.6.168.192.in-addr.arpa. (44)
14:18:56.505705 IP6 fe80::dc0a:f03:af9b:4b95.mdns > ff02::fb.mdns: 0 PTR (QM)? 208.80.254.169.in-addr.arpa
```


Tcpdump- Filtering-Options

```
[~] [allensphilip@u20] [-]
$ sudo tcpdump -c 5 -i enp5s0 port 80
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on enp5s0, link-type EN10MB (Ethernet), capture size 262144 bytes
14:32:50.991769 IP u20.33730 > 123.35.104.34.bc.googleusercontent.com.http: Flags [.], ack 2425886322, win 20715, options [nop,nop,TS val 2891893819 ecr 1352542831], length 0
14:33:36.047698 IP u20.33730 > 123.35.104.34.bc.googleusercontent.com.http: Flags [R.], seq 1, ack 1, win 20715, options [nop,nop,TS val 2891938875 ecr 1352542831], length 0
14:34:02.856849 IP u20.40402 > 84.170.224.35.bc.googleusercontent.com.http: Flags [S.], seq 1375417419, win 64240, options [mss 1460,sackOK,TS val 2113141148 ecr 0,no
p,wscale 7], length 0
14:34:03.099727 IP 84.170.224.35.bc.googleusercontent.com.http > u20.40402: Flags [S.], seq 490299192, ack 1375417420, win 64768, options [mss 1420,sackOK,TS val 108
938164 ecr 2113141148,nop,wscale 7], length 0
14:34:03.099778 IP u20.40402 > 84.170.224.35.bc.googleusercontent.com.http: Flags [.], ack 1, win 502, options [nop,nop,TS val 2113141391 ecr 1089381164], length 0
5 packets captured
6 packets received by filter
0 packets dropped by kernel
1 packet dropped by interface
[allensphilip@u20] [-]
```

```
[allensphilip@u20:~] -> $ sudo tcpdump -i enp5s0 -c 10 -w icmp.pcap
tcpdump: listening on enp5s0, link-type EN10MB (Ethernet), capture size 262144 bytes
10 packets captured
21 packets received by filter
0 packets dropped by kernel
[allensphilip@u20:~] -> $ sudo tcpdump -r icmp.pcap
reading from file icmp.pcap, link-type EN10MB (Ethernet)
14:43:05.137755 IP u20.54283 > maa03s46-in-f10.1e100.net.443: UDP, length 33
14:43:05.157552 IP maa03s46-in-f10.1e100.net.443 > u20.54283: UDP, length 25
14:43:05.182979 IP 169.254.88.208.bootpc > 255.255.255.255.bootps: BOOTP/DHCP, Request from 78:48:59:b4:50:d1 (oui Unknown), length 334
14:43:05.200601 IP 192.168.6.6.57680 > 239.255.255.250.1900: UDP, length 174
14:43:05.239999 IP 192.168.6.54.49816 > 239.255.255.250.1900: UDP, length 174
14:43:05.325570 IP 192.168.6.88.netbios-ns > 192.168.6.255.netbios-ns: UDP, length 50
14:43:05.330955 ARP, Request who has 192.168.1.1 tell 192.168.1.1, length 46
14:43:05.333044 ARP, Reply 192.168.1.1 is-at d8:94:03:83:40 (oui Unknown), length 46
14:43:05.352289 IP 192.168.6.92.netbios-ns > 192.168.6.255.netbios-ns: UDP, length 58
14:43:05.373844 IP 192.168.6.3.61848 > 239.255.255.250.1900: UDP, length 174
[allensphilip@u20:~] ->
```



Wireshark



```
[+]\_ allenphillip@u20:~[-]$ sudo apt install wireshark  
Reading package lists... Done  
Building dependency tree  
Reading state information... Done  
The following additional packages will be installed:  
 liblbc-ares2 libdouble-conversion3 libpcre2-16-0 libqt5core5a libqt5dbus5 libqt5gui5 libqt5multimedia5 libqt5multimedia5-plugins libqt5multimediasstools5  
 libqt5multimediawidgets5 libqt5network5 libqt5opengl5 libqt5printsupport5 libqt5svg5 libqt5widgetset5 libsmi2l0 libsnappy1v5 libspandsp2 libssh-gcrypt-4  
 libwireshark-data libwireshark13 libwireshark10 libwsutil111 libxcb-xinerama0 libxcb-xinput0 qt5-gtk-platformtheme qttranslations5-l10n wireshark-common  
 wireshark-qt  
Suggested packages:  
 qt5-image-formats-plugins qtwayland5 snmp-mibs-downloader geoipupdate geoip-database geoip-database-extra libqjs-leaflet libqjs-leaflet.markercluster wireshark-doc  
The following NEW packages will be installed:  
 liblbc-ares2 libdouble-conversion3 libpcre2-16-0 libqt5core5a libqt5dbus5 libqt5gui5 libqt5multimedia5 libqt5multimedia5-plugins libqt5multimediasstools5  
 libqt5multimediawidgets5 libqt5network5 libqt5opengl5 libqt5printsupport5 libqt5svg5 libqt5widgetset5 libsmi2l0 libsnappy1v5 libspandsp2 libssh-gcrypt-4  
 libwireshark-data libwireshark13 libwireshark10 libwsutil111 libxcb-xinerama0 libxcb-xinput0 qt5-gtk-platformtheme qttranslations5-l10n wireshark wireshark-common  
 wireshark-qt  
0 upgraded, 30 newly installed, 0 to remove and 0 not upgraded.  
Need to get 32.8 MB of archives.  
After this operation, 163 MB of additional disk space will be used.  
Do you want to continue? [Y/n] [
```

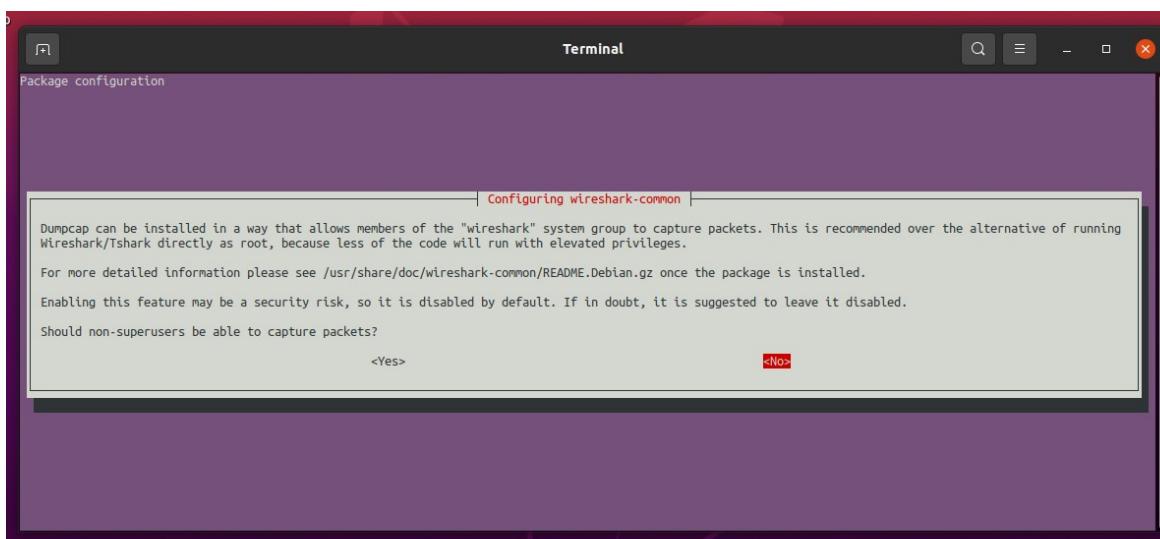

```
Setting up libwiredtap10:amd64 (3.2.3-1) ...
Setting up libxcb-xinerama0:amd64 (1.14-2) ...
Setting up qttranslations5-l10n (5.12.8-0ubuntu1) ...
Setting up libqt5core5a:amd64 (5.12.8+dfsg-0ubuntu2.1) ...
Setting up libwireshark-data (3.2.3-1) ...
Setting up libqt5dbus5:amd64 (5.12.8+dfsg-0ubuntu2.1) ...
Setting up libwireshark13:amd64 (3.2.3-1) ...
Setting up libqt5networks5:amd64 (5.12.8+dfsg-0ubuntu2.1) ...
Setting up wireshark-common (3.2.3-1) ...
Setting up libqt5guis5:amd64 (5.12.8+dfsg-0ubuntu2.1) ...
Setting up libqt5widgets5:amd64 (5.12.8+dfsg-0ubuntu2.1) ...
Setting up qt5-gtk-platformtheme:amd64 (5.12.8+dfsg-0ubuntu2.1) ...
Setting up libqt5multimedia5:amd64 (5.12.8-0ubuntu1) ...
Setting up libqt5printsupport5:amd64 (5.12.8+dfsg-0ubuntu2.1) ...
Setting up wireshark-qts (3.2.3-1) ...
Setting up libqt5opengl5:amd64 (5.12.8+dfsg-0ubuntu2.1) ...
Setting up wireshark (3.2.3-1) ...
Setting up libqt5sayv5:amd64 (5.12.8-0ubuntu1) ...
Setting up libqt5multimedialidgets5:amd64 (5.12.8-0ubuntu1) ...
Setting up libqt5multimedadiagstools5:amd64 (5.12.8-0ubuntu1) ...
Setting up libqt5multimedias-plugins:amd64 (5.12.8-0ubuntu1) ...
Processing triggers for mime-support (3.64ubuntu1) ...
Processing triggers for hicolor-icon-theme (0.17-2) ...
Processing triggers for gnome-menu (3.36.0-1ubuntu1) ...
Processing triggers for libgbm (2.31-0ubuntu9.9) ...
Processing triggers for man-db (2.9.1-1) ...
Processing triggers for shared-mime-info (1.15-1) ...
Processing triggers for desktop-file-utils (0.24-1ubuntu3) ...
[allensphilip@u20:~]
```

```
[allensphilip@u20:~]
$ sudo usermod -aG wireshark allensphilip
[allensphilip@u20:~]
$
```

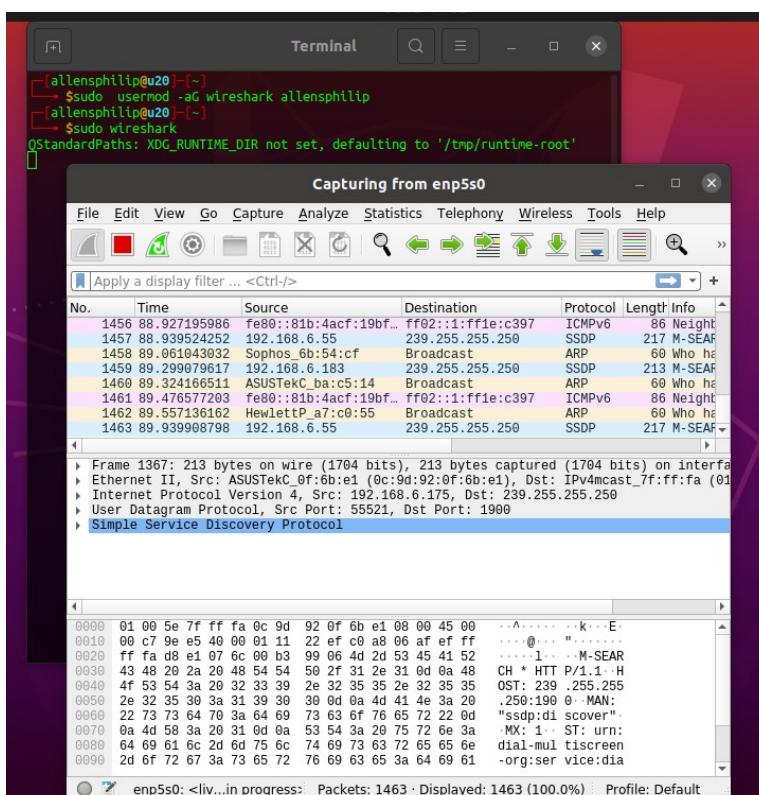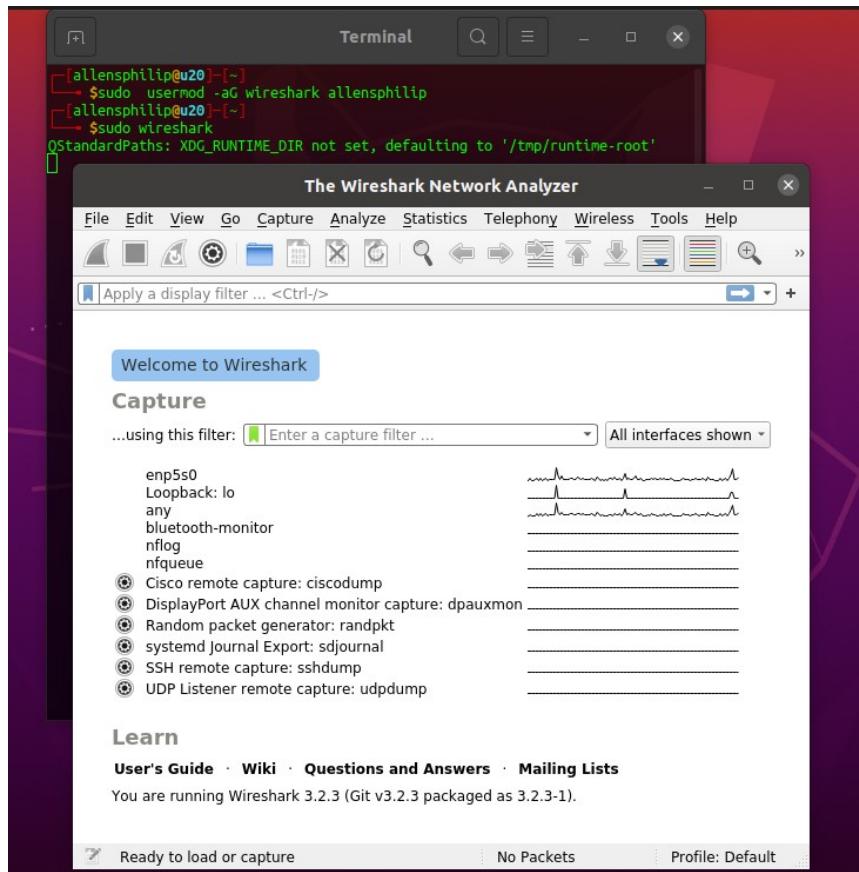

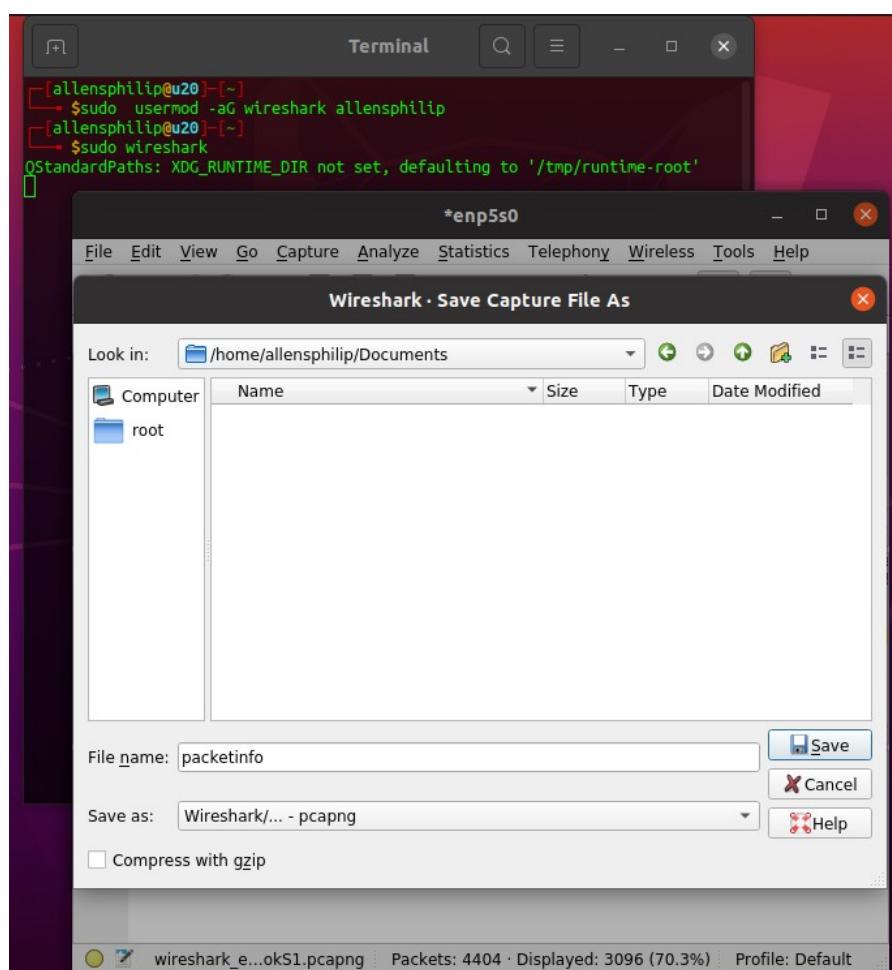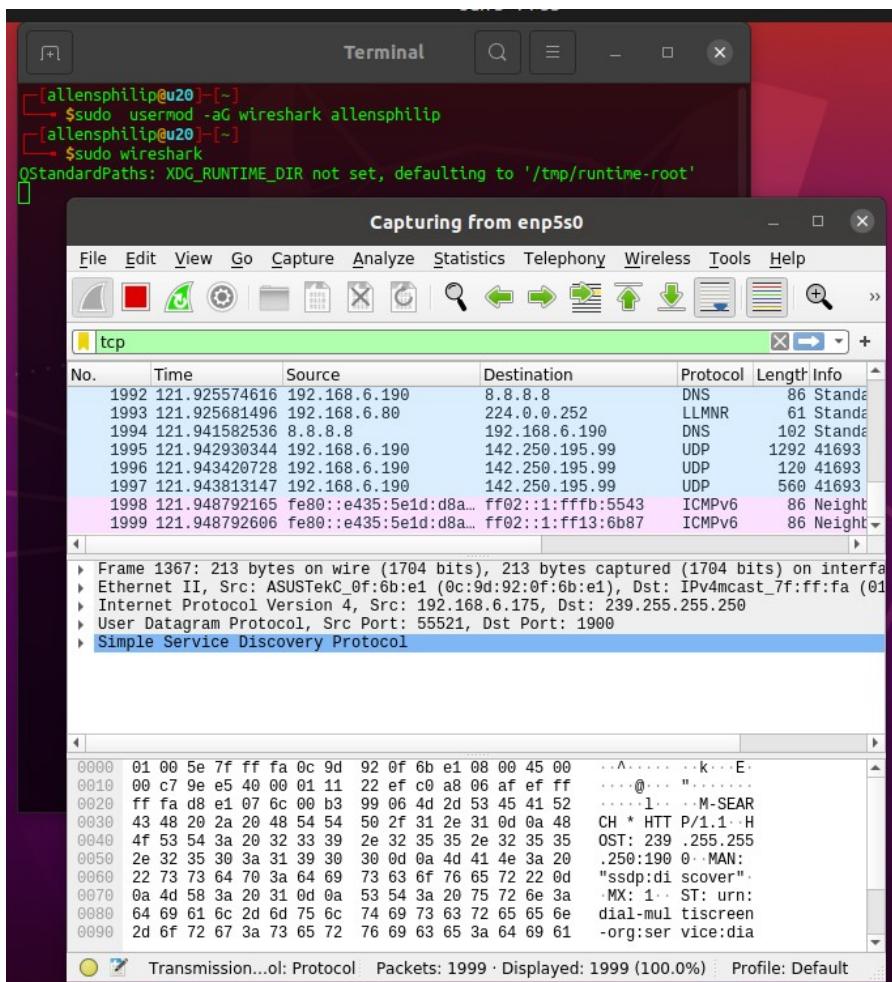

NetCat

The image shows two terminal windows side-by-side. Both windows have a dark background with a faint network diagram watermark. The left window shows a user named 'allenphilip' at a terminal prompt, running the command '\$nc -l -p 1234'. The right window shows another user, also named 'allenphilip', running '\$nc 127.0.0.1 1234' to connect to the listening port. Both users send the message 'Hi, I am allen at netcat sending msg'.

The image shows two terminal windows. The left window shows a user named 'allenphilip' at a terminal prompt, running '\$nc -l -p 1234'. The right window shows the same user running '\$nc 127.0.0.1 1234' to connect to the listening port. Both users send the message 'Hi, I am allen at netcat sending msg'. In the right window, the user has run '\$nc -h' to view the help menu, which includes:

```
32
[allenphilip@u20] [-]
$ nc 127.0.0.1 1234
Hi, I am allen at netcat sending msg
^C
[~]-[allenphilip@u20]-[~]
$ nc -l -p 1235
f
f
q
[~]

32
[allenphilip@u20] [-]
$ nc 127.0.0.1 1234
Army knife of network administration
Hi, I am allen at netcat sending msg
^C
38 syntax:
[~]-[allenphilip@u20]-[~]
$ nc -l -p 1235
f
f
g
h
h
[~]

40 64 Ubuntu nc or netcat both valid
41
42 sudo apt-get install netcat
43
44 ex:
45 nc -l -p 1234 // -l=listening, -p=port
46
47 nc 127.0.0.1 1234// act as sender
48
49
50
51 nc -i 5 127.0.0.1 1235// [-i 5 ]- send with an interval
52
53
54
55
56
57
58
```


NETWORKING & SYSTEM ADMINISTRATION LAB

Experiment No: 16

Name: ALLEN S PHILIP
Roll No: 20
Batch: RMCA-A
Date: 09/06/2022

Aim

Networking commands and utilities

Procedure

\$ifconfig - To list the network interfaces and its ip, net mask and other details
[options]

-s – To list interface with mtu ,flag,etc

\$ip addr show- To list network devices ip with numbered list

\$ping <ip> - To test connection

[option]

-D - with timestamp

-i - wait optional seconds between sending each packet

-I - to check the connection through an interface

Traceroute

\$sudo apt install traceroute - Installation

\$traceroute <ip> - To trace route.

[option]

-T – list route packets using tcp protocol

-I - list packet route using icmp protocol

-i – route packets through specified interface

syn: traceroute -i <interface_name>

-r - Bypass normal routing tables


ex: traceroute 8.8.8.8

\$netstat -tnlp - network statistics

\$ss (socket statistics) - info about sockets

\$nslookup <domain> - show information from name servers

Output Screenshot

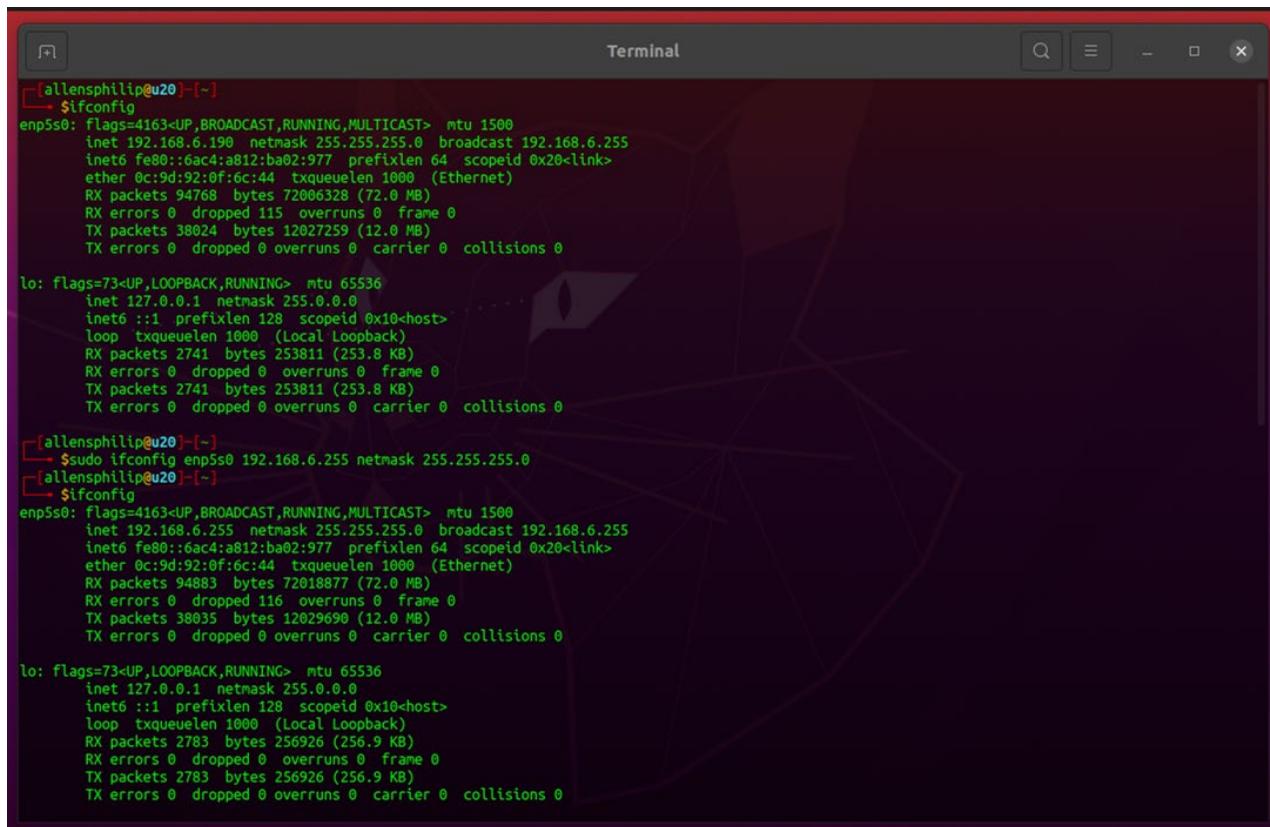

The screenshot shows a terminal window titled "Terminal" with a dark background. The terminal displays the following command-line session:

```
[allenphilip@u20:~] $ ifconfig  
enp5s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500  
inet 192.168.6.190 netmask 255.255.255.0 broadcast 192.168.6.255  
inet6 fe80::6ac4:a812:ba02:977 prefixlen 64 scopeid 0x20<link>  
ether 0c:9d:92:0f:6c:44 txqueuelen 1000 (Ethernet)  
RX packets 94768 bytes 72006328 (72.0 MB)  
RX errors 0 dropped 115 overruns 0 frame 0  
TX packets 38024 bytes 12027259 (12.0 MB)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0  
  
lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536  
inet 127.0.0.1 netmask 255.0.0.0  
inet6 ::1 prefixlen 128 scopeid 0x10<host>  
loop txqueuelen 1000 (Local Loopback)  
RX packets 2741 bytes 253811 (253.8 KB)  
RX errors 0 dropped 0 overruns 0 frame 0  
TX packets 2741 bytes 253811 (253.8 KB)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0  
  
[allenphilip@u20:~] $ sudo ifconfig enp5s0 192.168.6.255 netmask 255.255.255.0  
[allenphilip@u20:~] $ ifconfig  
enp5s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500  
inet 192.168.6.255 netmask 255.255.255.0 broadcast 192.168.6.255  
inet6 fe80::6ac4:a812:ba02:977 prefixlen 64 scopeid 0x20<link>  
ether 0c:9d:92:0f:6c:44 txqueuelen 1000 (Ethernet)  
RX packets 94883 bytes 72018877 (72.0 MB)  
RX errors 0 dropped 116 overruns 0 frame 0  
TX packets 38035 bytes 12029690 (12.0 MB)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0  
  
lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536  
inet 127.0.0.1 netmask 255.0.0.0  
inet6 ::1 prefixlen 128 scopeid 0x10<host>  
loop txqueuelen 1000 (Local Loopback)  
RX packets 2783 bytes 256926 (256.9 KB)  
RX errors 0 dropped 0 overruns 0 frame 0  
TX packets 2783 bytes 256926 (256.9 KB)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```


```
[allensphilip@u20] ~
$ ifconfig -a
enp5s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.6.255 netmask 255.255.255.0 broadcast 192.168.6.255
        inet6 fe80::6ac4:a812:ba02:977 prefixlen 64 scopeid 0x20<link>
            ether 0c:9d:92:0f:6c:44 txqueuelen 1000 (Ethernet)
                RX packets 95341 bytes 72064373 (72.0 MB)
                RX errors 0 dropped 117 overruns 0 frame 0
                TX packets 38047 bytes 12031442 (12.0 MB)
                TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
        inet6 ::1 prefixlen 128 scopeid 0x10<host>
            loop txqueuelen 1000 (Local Loopback)
                RX packets 2876 bytes 263949 (263.9 KB)
                RX errors 0 dropped 0 overruns 0 frame 0
                TX packets 2876 bytes 263949 (263.9 KB)
                TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0


[allensphilip@u20] ~
$ ifconfig -s
Iface      MTU     RX-OK RX-ERR RX-DRP RX-OVR   TX-OK TX-ERR TX-DRP TX-OVR Flg
enp5s0    1500    95403     0 117 0    38047     0     0     0 BMRU
lo       65536     2898     0  0 0    2898     0     0     0 LRU
[allensphilip@u20] ~
$ ifconfig -v
enp5s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.6.255 netmask 255.255.255.0 broadcast 192.168.6.255
        inet6 fe80::6ac4:a812:ba02:977 prefixlen 64 scopeid 0x20<link>
            ether 0c:9d:92:0f:6c:44 txqueuelen 1000 (Ethernet)
                RX packets 95466 bytes 72077302 (72.0 MB)
                RX errors 0 dropped 117 overruns 0 frame 0
                TX packets 38047 bytes 12031442 (12.0 MB)
                TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
        inet6 ::1 prefixlen 128 scopeid 0x10<host>
            loop txqueuelen 1000 (Local Loopback)
                RX packets 2911 bytes 266625 (266.6 KB)
                RX errors 0 dropped 0 overruns 0 frame 0
                TX packets 2911 bytes 266625 (266.6 KB)
                TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
[allensphilip@u20] ~
$ ip addr show
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host lo
        valid_lft forever preferred_lft forever
2: enp5s0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 0c:9d:92:0f:6c:44 brd ff:ff:ff:ff:ff:ff
    inet 192.168.6.198/24 brd 192.168.6.255 scope global noprefixroute enp5s0
        valid_lft forever preferred_lft forever
        inet6 fe80::6ac4:a812:ba02:977/64 scope link noprefixroute
            valid_lft forever preferred_lft forever
[allensphilip@u20] ~
$ ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=119 time=16.2 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=119 time=16.1 ms
^C
... 8.8.8.8 ping statistics ...
5 packets transmitted, 5 received, 0% packet loss, time 4005ms
rtt min/avg/max/mdev = 16.073/16.108/16.172/0.034 ms
[allensphilip@u20] ~
$ ping -c 5 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=119 time=16.1 ms
... 8.8.8.8 ping statistics ...
5 packets transmitted, 5 received, 0% packet loss, time 4005ms
rtt min/avg/max/mdev = 16.050/16.075/16.137/0.031 ms
```

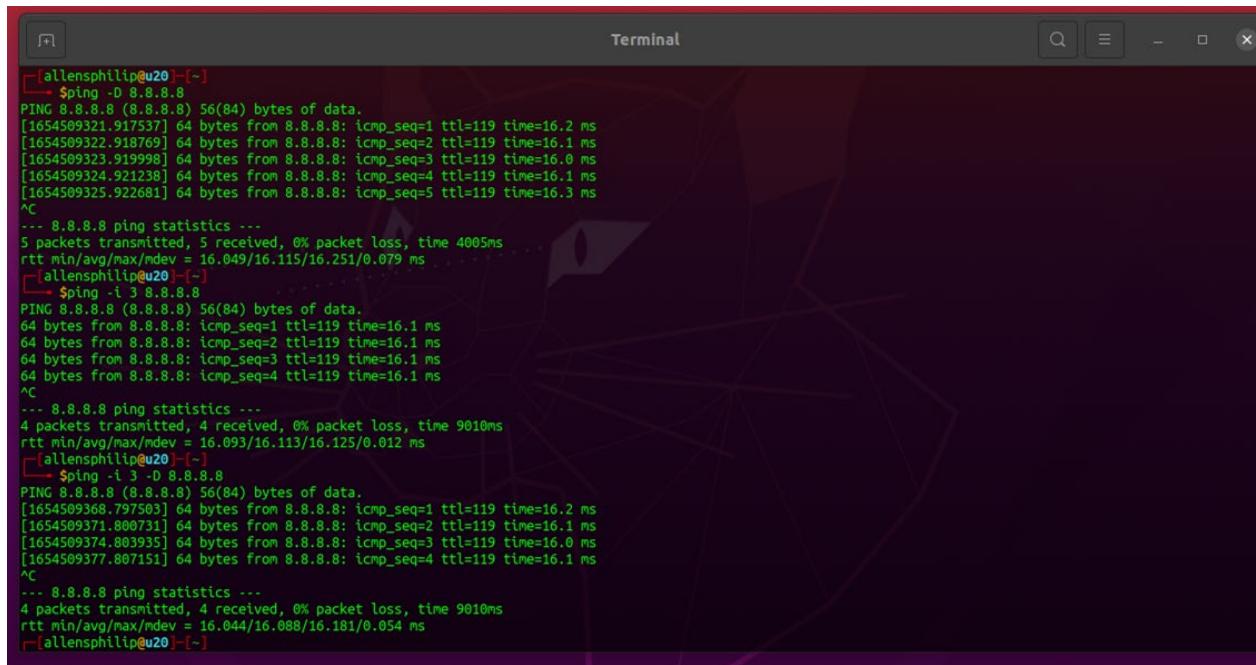

```
[allensphilip@u20:~]
$ ping -D 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
[1654509321.917537] 64 bytes from 8.8.8.8: icmp_seq=1 ttl=119 time=16.2 ms
[1654509322.918769] 64 bytes from 8.8.8.8: icmp_seq=2 ttl=119 time=16.1 ms
[1654509323.919998] 64 bytes from 8.8.8.8: icmp_seq=3 ttl=119 time=16.0 ms
[1654509324.921238] 64 bytes from 8.8.8.8: icmp_seq=4 ttl=119 time=16.1 ms
[1654509325.922681] 64 bytes from 8.8.8.8: icmp_seq=5 ttl=119 time=16.3 ms
^C
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4005ms
rtt min/avg/max/mdev = 16.049/16.115/16.251/0.079 ms
[allensphilip@u20:~]
$ ping -I 3 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=119 time=16.1 ms
^C
--- 8.8.8.8 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 9010ms
rtt min/avg/max/mdev = 16.093/16.113/16.125/0.012 ms
[allensphilip@u20:~]
$ ping -I 3 -D 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
[1654509368.797503] 64 bytes from 8.8.8.8: icmp_seq=1 ttl=119 time=16.2 ms
[1654509371.800731] 64 bytes from 8.8.8.8: icmp_seq=2 ttl=119 time=16.1 ms
[1654509374.803935] 64 bytes from 8.8.8.8: icmp_seq=3 ttl=119 time=16.0 ms
[1654509377.807151] 64 bytes from 8.8.8.8: icmp_seq=4 ttl=119 time=16.1 ms
^C
--- 8.8.8.8 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 9010ms
rtt min/avg/max/mdev = 16.044/16.088/16.181/0.054 ms
[allensphilip@u20:~]
```

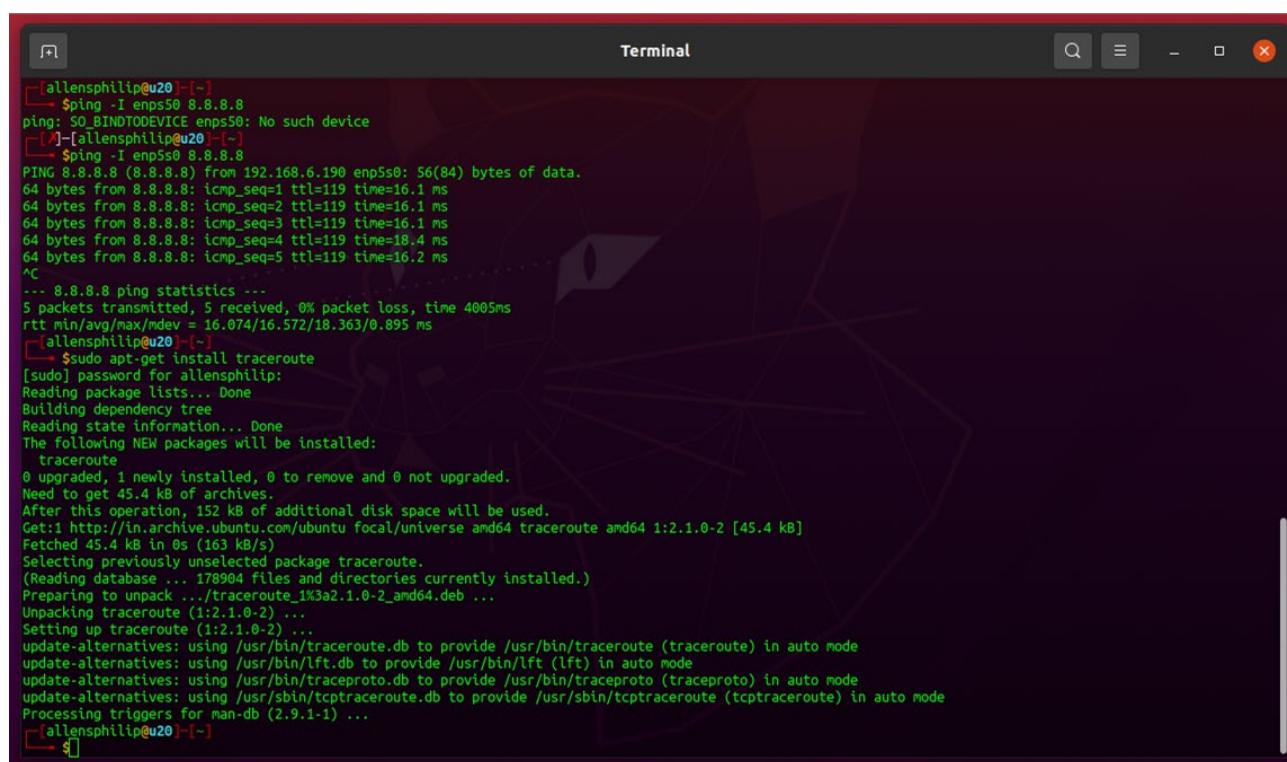

```
[allensphilip@u20:~]
$ ping -I enps50 8.8.8.8
ping: SO_BINDTODEVICE enps50: No such device
[allensphilip@u20:~]
$ ping -I enp5s0 8.8.8.8
PING 8.8.8.8 (8.8.8.8) from 192.168.6.190 enp5s0: 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=119 time=16.1 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=119 time=18.4 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=119 time=16.2 ms
^C
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4005ms
rtt min/avg/max/mdev = 16.074/16.572/18.363/0.895 ms
[allensphilip@u20:~]
$ sudo apt-get install traceroute
[sudo] password for allensphilip:
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following NEW packages will be installed:
traceroute
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 45.4 kB of archives.
After this operation, 152 kB of additional disk space will be used.
Get:1 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 traceroute amd64 1:2.1.0-2 [45.4 kB]
Fetched 45.4 kB in 0s (163 kB/s)
Selecting previously unselected package traceroute.
(Reading database ... 178904 files and directories currently installed.)
Preparing to unpack .../traceroute_1%3a2.1.0-2_amd64.deb ...
Unpacking traceroute (1:2.1.0-2) ...
Setting up traceroute (1:2.1.0-2) ...
update-alternatives: using /usr/bin/traceroute.db to provide /usr/bin/traceroute (traceroute) in auto mode
update-alternatives: using /usr/bin/lft.db to provide /usr/bin/lft (lft) in auto mode
update-alternatives: using /usr/bin/traceproto.db to provide /usr/bin/traceproto (traceproto) in auto mode
update-alternatives: using /usr/sbin/tcptraceroute.db to provide /usr/sbin/tcptraceroute (tcptraceroute) in auto mode
Processing triggers for man-db (2.9.1-1) ...
[allensphilip@u20:~]
$
```

```
[allenphilip@u20] ~
└→ $traceroute 8.8.8.8
traceroute to 8.8.8.8 (8.8.8.8), 30 hops max, 60 byte packets
1 _gateway (192.168.6.100) 0.523 ms 0.493 ms 0.472 ms
2 136.232.57.109.static.jio.com (136.232.57.109) 2.547 ms 2.039 ms 2.765 ms
3 172.20.97.57 (172.20.97.57) 14.609 ms 15.281 ms 15.026 ms
4 172.27.9.126 (172.27.9.126) 15.580 ms 15.382 ms 15.350 ms
5 172.27.9.125 (172.27.9.125) 19.848 ms 19.563 ms 19.193 ms
6 172.27.109.51 (172.27.109.51) 15.497 ms 15.437 ms 15.392 ms
7 172.16.5.90 (172.16.5.90) 15.225 ms 15.163 ms 15.233 ms
8 216.239.56.71 (216.239.56.71) 16.612 ms 142.251.55.207 (142.251.55.207) 16.568 ms dns.google (8.8.8.8) 16.253 ms

[allenphilip@u20] ~
└→ $traceroute -T 8.8.8.8
You do not have enough privileges to use this traceroute method.
socket: Operation not permitted

[allenphilip@u20] ~
└→ $sudo traceroute -T 8.8.8.8
traceroute to 8.8.8.8 (8.8.8.8), 30 hops max, 60 byte packets
1 _gateway (192.168.6.100) 0.187 ms 0.177 ms 0.173 ms
2 136.232.57.109.static.jio.com (136.232.57.109) 1.811 ms 1.622 ms 2.025 ms
3 172.20.97.57 (172.20.97.57) 15.210 ms 14.952 ms 14.507 ms
4 172.27.9.126 (172.27.9.126) 16.052 ms 16.048 ms 16.178 ms
5 172.27.9.125 (172.27.9.125) 15.769 ms 16.562 ms 16.163 ms
6 172.27.109.51 (172.27.109.51) 15.753 ms 15.613 ms 16.037 ms
7 172.16.5.90 (172.16.5.90) 15.398 ms 15.170 ms 15.233 ms
8 * *
9 * *
10 * *
11 * *
12 * *
13 * *
14 * *
15 * *
16 * *
17 * *
18 * *
19 * *
20 * *
21 * *
22 * *

[allenphilip@u20] ~
```

```
17 * *
18 * *
19 * *
20 * *
21 * *
22 * *
23 * * *^C

[allenphilip@u20] ~
└→ $sudo traceroute -I 8.8.8.8
traceroute to 8.8.8.8 (8.8.8.8), 30 hops max, 60 byte packets
1 _gateway (192.168.6.100) 0.180 ms 0.173 ms 0.187 ms
2 136.232.57.109.static.jio.com (136.232.57.109) 1.272 ms *
3 172.20.97.57 (172.20.97.57) 14.377 ms 14.514 ms 14.511 ms
4 172.27.9.126 (172.27.9.126) 15.552 ms 15.757 ms 16.108 ms
5 172.27.9.125 (172.27.9.125) 15.545 ms 16.011 ms 16.262 ms
6 172.17.97.221 (172.17.97.221) 14.679 ms 14.544 ms 14.522 ms
7 172.16.5.90 (172.16.5.90) 15.133 ms 15.410 ms 15.386 ms
8 142.251.55.241 (142.251.55.241) 16.651 ms 16.742 ms 16.834 ms
9 dns.google (8.8.8.8) 16.118 ms 16.109 ms 16.098 ms

[allenphilip@u20] ~
└→ $sudo traceroute -i enp5s0 8.8.8.8
traceroute to 8.8.8.8 (8.8.8.8), 30 hops max, 60 byte packets
1 _gateway (192.168.6.100) 0.149 ms 0.140 ms 0.135 ms
2 136.232.57.109.static.jio.com (136.232.57.109) 1.743 ms 1.735 ms 1.757 ms
3 172.20.97.57 (172.20.97.57) 14.310 ms 14.496 ms 14.590 ms
4 172.27.9.126 (172.27.9.126) 16.427 ms 15.671 ms 16.194 ms
5 172.27.9.125 (172.27.9.125) 16.406 ms 17.060 ms 17.424 ms
6 172.27.109.51 (172.27.109.51) 15.578 ms 15.390 ms 15.477 ms
7 172.16.5.90 (172.16.5.90) 15.354 ms 15.347 ms 15.340 ms
8 dns.google (8.8.8.8) 16.871 ms 17.067 ms 16.804 ms

[allenphilip@u20] ~
└→ $sudo traceroute -r 8.8.8.8
traceroute to 8.8.8.8 (8.8.8.8), 30 hops max, 60 byte packets
connect: Network is unreachable

[allenphilip@u20] ~
└→ $sudo traceroute -r 8.8.8.8
traceroute to 8.8.8.8 (8.8.8.8), 30 hops max, 60 byte packets
connect: Network is unreachable

[allenphilip@u20] ~
└→ $
```

```
[allenphilip@u20] ->
[allenphilip@u20] -> $netstat -nlp
(Not all processes could be identified, non-owned process info
 will not be shown, you would have to be root to see it all.)
Active Internet connections (only servers)
Proto Recv-Q Send-Q Local Address           Foreign Address         State      PID/Program name
tcp     0      0 127.0.0.53:53            0.0.0.0:*              LISTEN
tcp     0      0 127.0.0.1:631           0.0.0.0:*              LISTEN
tcp6    0      0 ::1:80                 ::*                  LISTEN
tcp6    0      0 ::1:631                ::*                  LISTEN
[allenphilip@u20] ->
[allenphilip@u20] -> $ss
Netid State   Recv-Q Send-Q Local Address:Port          Peer Address:Port          Process
u_seq ESTAB  0      0      00000d 57060               * 57061
u_seq ESTAB  0      0      00000e 57061               * 57060
u_seq ESTAB  0      0      00000f 55795               * 55794
u_seq ESTAB  0      0      00000c 55794               * 55795
u_seq ESTAB  0      0      000011 55802               * 55803
u_seq ESTAB  0      0      000010 55800               * 55801
u_str ESTAB  0      0      /run/dbus/system_bus_socket 60553          * 57122
u_str ESTAB  0      0      /run/user/1001/bus 55940          * 60552
u_str ESTAB  0      0      * 61452                * 61453
u_str ESTAB  0      0      * 55955                * 55954
u_str ESTAB  0      0      * 59158                * 59159
u_str ESTAB  0      0      /run/user/1001/pulse/native 44845          * 48287
u_str ESTAB  0      0      * 43401                * 44551
```

```
[allenphilip@u20] ->
[allenphilip@u20] -> $nslookup www.google.com
Server:  127.0.0.53
Address: 127.0.0.53#53

Non-authoritative answer:
Name: www.google.com
Address: 142.250.195.164
Name: www.google.com
Address: 2404:6800:4007:826::2004

[allenphilip@u20] ->
[allenphilip@u20] -> $nslookup www.aesajce.in
Server:  127.0.0.53
Address: 127.0.0.53#53

Non-authoritative answer:
www.aesajce.in canonical name = aesajce.in.
Name: aesajce.in
Address: 103.148.156.198

[allenphilip@u20] ->
[allenphilip@u20] -> $
```

Experiment: Docker

Docker and Container : Installation & Deployment

Aim:

1. Installation of Docker and Container
2. Deployment of Apache and MySQL in the container.
3. Research & find out how can host your own simple website with it.

Name: ALLEN S PHILIP


Roll No: 20

Batch: RMCA-A

Date: 24/05/2022

PROCEDURE:

1. Installation of Docker and Container

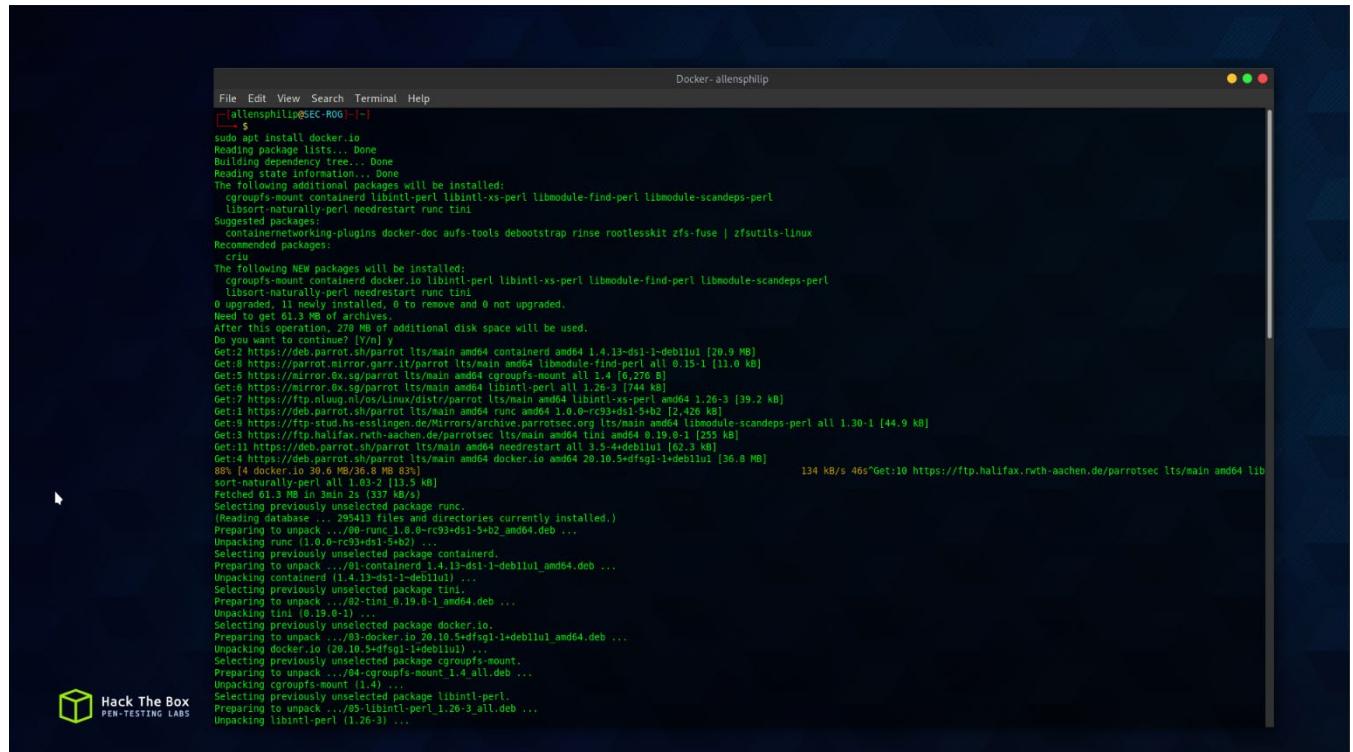

```

Docker - allenphilip
File Edit View Search Terminal Help
allenphilip@SEC-ROG:~$ sudo apt install docker.io
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  cgroups-mount containerd docker liblinit-perl liblinit-xs-perl libmodule-find-perl libmodule-scandeps-perl
  libsopt-mutually-persistent-perl runc tini
  supervisor
  container-networking-plugins docker-doc aufs-tools debootstrap rinse rootlesskit zfs-fuse | zfsutils-linux
Recommended packages:
  criu
The following NEW packages will be installed:
  cgroups-mount containerd docker liblinit-perl liblinit-xs-perl libmodule-find-perl libmodule-scandeps-perl
  libsopt-mutually-persistent-perl runc tini
  supervisor
  container-networking-plugins docker-doc aufs-tools debootstrap rinse rootlesskit zfs-fuse | zfsutils-linux
0 upgraded, 11 newly installed, 0 to remove and 0 not upgraded.
Need to get 0.3 MB of archives.
After this operation, 274 MB of additional disk space will be used.
Do you want to continue [Y/n] y
Get:1 https://deb.parrot.sh/parrot/lts/main amd64 containerd amd64 1.4.13-ds1-1-deb11u1 [20.9 MB]
Get:2 https://parrotsecirror.gw.parrot.lt/ci/parrot/lts/main amd64 liblinit-perl liblinit-xs-perl libmodule-scandeps-perl
  libsopt-mutually-persistent-perl runc tini supervisor all 1.4 [6.276 kB]
Get:3 https://deb.parrot.sh/parrot/lts/main amd64 cgroups-mount all 1.4 [6.276 kB]
Get:4 https://mirror.ox.sq/parrot/lts/main amd64 liblinit-perl all 1.26.3 [744 kB]
Get:5 https://ftp.nluug.nl/os/linux/distr/parrot/lts/main amd64 liblinit-xs-perl amd64 1.26.3 [39.2 kB]
Get:6 https://deb.parrot.sh/parrot/lts/main amd64 runc amd64 1.0.0-rc93+ds1+5+02 [2.426 kB]
Get:7 https://ftp.nluug.nl/os/linux/distr/parrot/lts/main amd64 liblinit-xs-perl amd64 1.26.3 [39.2 kB]
Get:8 https://deb.parrot.sh/parrot/lts/main amd64 docker amd64 1.0.0-rc93+ds1+5+02 [2.426 kB]
Get:9 https://ftp.stud.hs-esslingen.de/Mirrors/archive.parrotsec.org/lts/main amd64 libmodule-scandeps-perl all 1.30-1 [44.9 kB]
Get:10 https://ftp.halifax.rwth-aachen.de/parrotsec/lts/main amd64 liblinit-perl liblinit-xs-perl libmodule-scandeps-perl
  libsopt-mutually-persistent-perl runc tini supervisor all 1.4 [13.5 kB]
Get:11 https://deb.parrot.sh/parrot/lts/main amd64 needrestart all 3.5-4+deb11u1 [62.3 kB]
Get:12 https://deb.parrot.sh/parrot/lts/main amd64 docker.io 20.10.5-dfsg1-1-deb11u1 [36.8 MB]
88% [4 docker.io 30.6 MB/36.8 MB] 83%
sort-naturally-perl all 1.03-2 [12.5 kB]
Fetched 0.13 MB in 3min 2s (337 kB/s)
Selecting previously unselected package runc.
(Reading database ... 295413 files and directories currently installed.)
Preparing to unpack .../01-containerd_1.4.13-ds1-1-deb11u1_amd64.deb ...
Unpacking containerd (1.4.13-ds1-1-deb11u1) ...
Selecting previously unselected package tini.
Preparing to unpack .../02-tini_0.19.0-1_amd64.deb ...
Unpacking tini (0.19.0-1)
Selecting previously unselected package docker.
Preparing to unpack .../03-docker.io_20.10.5-dfsg1-1-deb11u1_amd64.deb ...
Unpacking docker.io (20.10.5-dfsg1-1-deb11u1) ...
Selecting previously unselected package cgroups-mount.
Preparing to unpack .../04-cgroups-mount_1_4_all.deb ...
Unpacking cgroups-mount (1_4) ...
Selecting previously unselected package liblinit-perl.
Preparing to unpack .../05-liblinit-perl_1.26-3_all.deb ...
Unpacking liblinit-perl (1.26-3) ...

```

The screenshot shows a terminal window titled "Docker - allensphilip". The terminal displays the following command-line session:

```
File Edit View Search Terminal Help
Created symlink /etc/systemd/system/.target.wants/docker.socket → /lib/systemd/system/docker.socket.
Setting up liblibtls-libs-perl (1.26-3) ...
Processing triggers for man-db (2.10.1-1-bpo11+1) ...
Synchronizing state of snapd-launchers ...
Removing duplicate launchers or broken launchers
Launchers are updated
[allensphilip@SEC-ROG ~]
└─$ sudo snap install docker
2022-05-23T01:16:59+00:00 INFO Waiting for automatic snapd restart...
dockersnap_20_12_1_amd64.snap installed
[allensphilip@SEC-ROG ~]
└─$ sudo docker run hello-world
Unable to find image 'hello-world:latest' locally
latest: Pulling from library/hello-world
2db29710123e: Pull complete
Digest: sha256:80f91d1a1c70312ba29dd5000ffdf797dd78acfbb870e677f390d5acb9741b17
Status: Downloaded newer image for hello-world:latest

Hello from Docker!
This message shows that your installation appears to be working correctly.

To generate this message, Docker took the following steps:
1. The Docker client contacted the Docker daemon.
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.
   (amd64)
3. The Docker daemon created a new container from that image which runs the
   executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it
   to your terminal.

To try something more ambitious, you can run an Ubuntu container with:
$ docker run -it ubuntu bash

Share images, automate workflows, and more with a free Docker ID:
https://hub.docker.com/get-started/

For more examples and ideas, visit:
https://docs.docker.com/get-started/
[allensphilip@SEC-ROG ~]
└─$ sudo docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              PORTS               NAMES
[allensphilip@SEC-ROG ~]
└─$ sudo docker ps -a
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              PORTS               NAMES
c1770b908963        "hello"            "hello"           23 seconds ago   Exited (0) 22 seconds ago          jovial_galois
[allensphilip@SEC-ROG ~]
└─$ sudo docker images
REPOSITORY          IMAGE ID            CREATED            SIZE
hello-world         feb599feada5    8 months ago      13.3kB
[allensphilip@SEC-ROG ~]
```

In the bottom left corner of the terminal window, there is a small logo for "Hack The Box" with the text "PEN-TESTING LABS".

2. Deployment of Apache and MySQL in the container

```

File Edit View Search Terminal Help
[allensphilip@SEC-ROG ~]-
$ sudo docker pull mysql
Using default tag: latest
latest: Pulling from library/mysql
c32ce6d54453: Pull complete
41500ee0318: Pull complete
7a38fecc2542f: Pull complete
352081ee0fe9: Pull complete
b6e20da291b6: Pull complete
66c2a6acc1999: Pull complete
d1a3a6e49878: Pull complete
e33a48832bec: Pull complete
410b942b0b28: Pull complete
d53239d2d05: Pull complete
0fb8320c65f1: Pull complete
bd2a54f30bfc: Pull complete
Digest: sha256:844132a773021fc62303ba1de52f15758fbdd1201bf7b1c3e09cf6293a4ff53
Status: Downloaded newer image for mysql:latest
docker.io/library/mysql:latest
[allensphilip@SEC-ROG ~]-
$ docker images
Got permission denied while trying to connect to the Docker daemon socket at unix:///var/run/docker.sock: Get "http://<host>/v1.24/images/json": dial unix /var/run/docker.sock: connect: permission denied
[allensphilip@SEC-ROG ~]-
$ sudo docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
mysql latest 0f0e720743f6 2 days ago 524MB
hello-world latest feb5d9fea6a5 8 months ago 13.3kB
[allensphilip@SEC-ROG ~]-
$ sudo docker run --name=mysql -d -p 80:80 mysql
8182c7db5fa952f05fe69599abb05353b03fa0265014be1259579ac1bc18116
[allensphilip@SEC-ROG ~]-

```

```

File Edit View Search Terminal Help
[allensphilip@SEC-ROG ~]-
$ sudo docker run -it --name sli mysql /bin/bash
root@1bcc205cc98:/# exit
exit
[allensphilip@SEC-ROG ~]-
$ sudo docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
mysql latest 0f0e720743f6 2 days ago 524MB
hello-world latest feb5d9fea6a5 8 months ago 13.3kB
[allensphilip@SEC-ROG ~]-
$ sudo docker start sli
sli
[allensphilip@SEC-ROG ~]-
$ sudo docker ps
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
[allensphilip@SEC-ROG ~]-
$ sudo docker ps -a
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
1bcc205cc98 mysql "docker-entrypoint.s..." 55 seconds ago Exited (0) 50 seconds ago
a7724c97fc14 mysql "docker-entrypoint.s..." 2 minutes ago Exited (1) 20 seconds ago
8182c7db5fa9 mysql "docker-entrypoint.s..." 3 minutes ago Exited (1) 3 minutes ago
cf7f09989863 hello-world "/hello" 15 minutes ago Exited (0) 15 minutes ago jovial_galois
[allensphilip@SEC-ROG ~]-
$ sudo docker stop sli
sli
[allensphilip@SEC-ROG ~]-
$ sudo docker stop sli sql jovial_galois
sli
sql
jovial_galois
[allensphilip@SEC-ROG ~]-

```

```

File Edit View Search Terminal Help
[allensphilip@SEC-ROG ~]-
$ sudo docker container rm sli sl sql jovial_galois
sli
sl
sql
jovial_galois
[allensphilip@SEC-ROG ~]-
$ sudo docker container ls -a
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
[allensphilip@SEC-ROG ~]-
$ docker image ls -a
Got permission denied while trying to connect to the Docker daemon socket at unix:///var/run/docker.sock: Get "http://<host>/v1.24/images/json?all=1": dial unix /var/run/docker.sock: connect: permission denied
[allensphilip@SEC-ROG ~]-
$ sudo docker image ls -a
REPOSITORY TAG IMAGE ID CREATED SIZE
mysql latest 0f0e720743f6 2 days ago 524MB
hello-world latest feb5d9fea6a5 8 months ago 13.3kB
[allensphilip@SEC-ROG ~]-
$ sudo docker rmi hello-world:latest mysql:latest
Untagged: hello-world:latest
Untagged: hello-world@sha256:80f31d1ac7b1312ba29d65880fdff797dd76acf8b70e677f390d5acba9741b17
Deleted: sha256:feb5d9fea6a5e9606aa995e8794862b825965ba49de054cab5ef356dcb63412
Deleted: sha256:e07ee1baac5fae6a26f30cabfe54a3d03402f96afda318fe0a96cec4ca393359
Untagged: mysql:latest
Untagged: mysql@sha256:844132a773021fc62303ba1de52f15758fbdd1201bf7b1c3e09cf6293a4ff53
Deleted: sha256:0f0e720743f68888787a2bf2838db95880e672e59b46078e918f123754ed45bea
Deleted: sha256:205702b4044fb0b9a9a7619cd4a06ff0767f19ff0708fe2597a93c2a67b1
Deleted: sha256:448640a154e6525ebf791d322af1172412cabb68710e0307f0929b75804
Deleted: sha256:823d0ab824627eb50c7c69964c16914ff1061422ce9abc494be166a96
Deleted: sha256:ac856325eacbchafecefef589df92498eeef1f7741a283faend9603ed01cc27e1
Deleted: sha256:f9774446a196c2284a829612h48526ff64027257258cb536ce891afda4c5239
Deleted: sha256:dcf540992968909743867501a12d96118389e9d3caaa29825d9e6d563f73e62
Deleted: sha256:60be3170bc434f17a27650732eaeed244caca00a1ce26061f34b2cha2f929
Deleted: sha256:8dfeaacada966ced14045a88d9c35ad50f55707c2514443c8259b84f7b0
Deleted: sha256:b2bef0948a7a9e226ac5e5b353969b59ac69e1bbf193c49a3b20bc494d
Deleted: sha256:b4bab32bc9a5248316c93f5e503d052b99:202fa8743399fc6343cd6bb12fe
Deleted: sha256:9bd0f848c2881cd90012b2b033086dc94d7683bd55bc4ea9a7beb9a96efafab
Deleted: sha256:b6e0f1x2d3fie115203b6adab2ce1014fb9a9f16fb2af3a3143397063603d3
[allensphilip@SEC-ROG ~]-
$ sudo docker image ls -a
REPOSITORY TAG IMAGE ID CREATED SIZE
[allensphilip@SEC-ROG ~]-
$ 

```

```

File Edit View Search Terminal Help
[allensphilip@SEC-ROG:~] $ sudo docker pull httpd
Using default tag: latest
latest: Pulling from library/httpd
214ca5fb9032: Pull complete
7cf31a2eeecb: Pull complete
bf666e57b9f2: Pull complete
c15a4e94ae0b: Pull complete
dc25474c7f97: Pull complete
Digest: sha256:2d1f8839d6127e400ac5f65481d8a0f17ac46a3b91de40b01e649c9a0324dea0
Status: Downloaded newer image for httpd:latest
docker.io/library/httpd:latest
[allensphilip@SEC-ROG:~] $ docker images
allensphilip@SEC-ROG:~] $ docker run -d -name apache-server -p 80:80 httpd
docker: Got permission denied while trying to connect to the Docker daemon socket at unix:///var/run/docker.sock: Post "http://<IPv4>:2375/v1.24/images/create?name=apache-server": dial unix /var/run/docker.sock: connect: permission denied
See 'docker run --help'.
[allensphilip@SEC-ROG:~] $ sudo docker run -d -name apache-server -p 80:80 httpd
Se5198b4b0875aca38377a595b136a8a46cb98ea768369109f1d158591296b0
[allensphilip@SEC-ROG:~] $ sudo docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
httpd latest c58ef9bfbb57 11 days ago 144MB
[allensphilip@SEC-ROG:~] $ sudo docker container ls
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
Se5198b4b087 httpd "httpd-foreground" 28 seconds ago Up 27 seconds 0.0.0.0:80->80/tcp, :::80->80/tcp apache-server
[allensphilip@SEC-ROG:~] $ 

```


Hack The Box

```


File Edit View Search Terminal Help
[x]-[allensphilip@SEC-ROG:~] $ sudo docker stop apache-server
apache-server
[allensphilip@SEC-ROG:~] $ sudo docker container rm apache-server
[allensphilip@SEC-ROG:~] $ sudo docker container ls -a
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
[allensphilip@SEC-ROG:~] $ sudo docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
httpd latest c58ef9bfbb57 11 days ago 144MB
[allensphilip@SEC-ROG:~] $ sudo docker rm httpd
Error: No such container: apache-server
[x]-[allensphilip@SEC-ROG:~] $ sudo docker rmi httpd:latest
Untagged: httpd:latest
Deleted: httpd@sha256:2d1f8839d6127e400ac5f65481d8a0f17ac46a3b91de40b01e649c9a0324dea0
Deleted: sha256:58ef9bfbb5789a9882cee610ba778b1368d21b513d6caf32e3075542e13fe81
Deleted: sha256:312672a18b7ce4fbbaa36a0e87a4a1cef47e334b150cb3a0c5a805457347c10
Deleted: sha256:067e07af5fbad035b2603029110722ed2af07c5ae52e7410663c2d09cfbcc90e2c
Deleted: sha256:e38082c45692bc0a2e14adecce601e2673d35f9ee5d047f496d0077d17a3bf68
Deleted: sha256:c21e2c36645f68249254b6d72c2ae0af51ba110a92d7b7b05c67ee4705cea49
Deleted: sha256:fdf95118ade99a75b949f634a0994e0f0732ff18c2573fabdfc8d4f95b092f0e
[allensphilip@SEC-ROG:~] $ 

```

3. host your own simple website

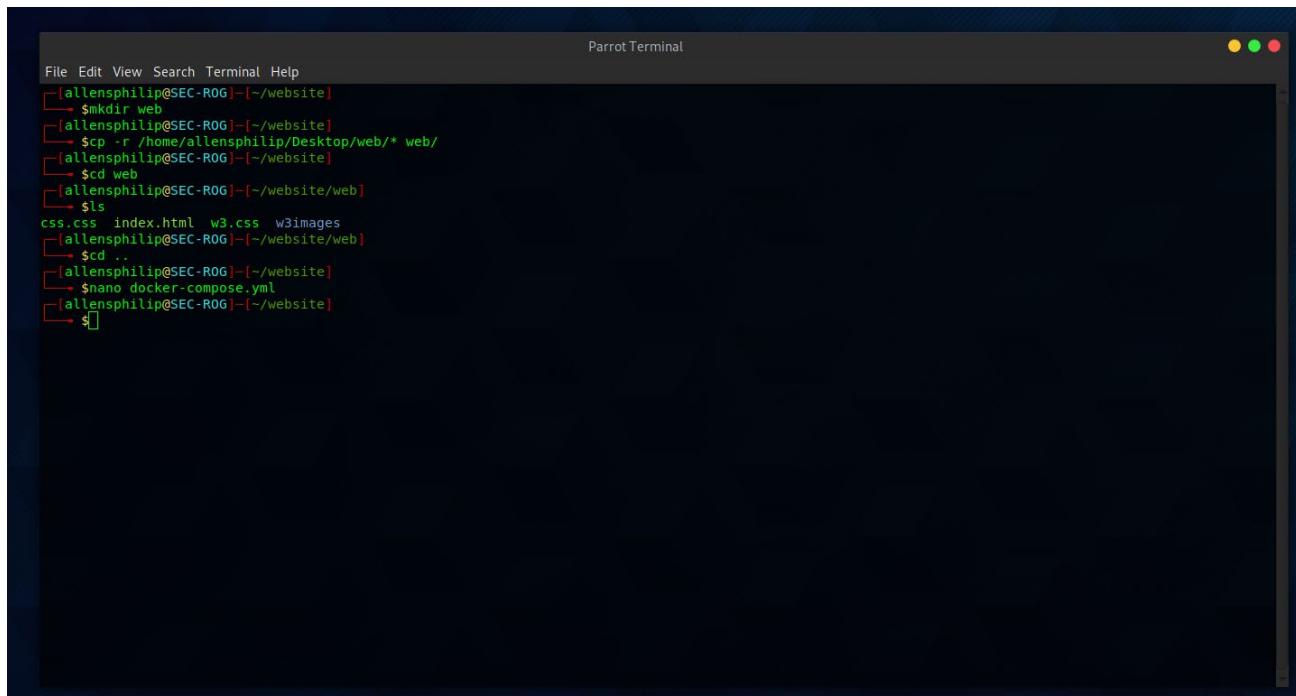

```
Parrot Terminal
File Edit View Search Terminal Help
[allensphilip@SEC-ROG -| ~/website]
└── $mkdir web
[allensphilip@SEC-ROG -| ~/website]
└── $cp -r /home/allensphilip/Desktop/web/* web/
[allensphilip@SEC-ROG -| ~/website]
└── $cd web
[allensphilip@SEC-ROG -| ~/website/web]
└── $ls
css.css index.html w3.css w3images
[allensphilip@SEC-ROG -| ~/website/web]
└── $cd ..
[allensphilip@SEC-ROG -| ~/website]
└── $nano docker-compose.yml
[allensphilip@SEC-ROG -| ~/website]
└── $
```

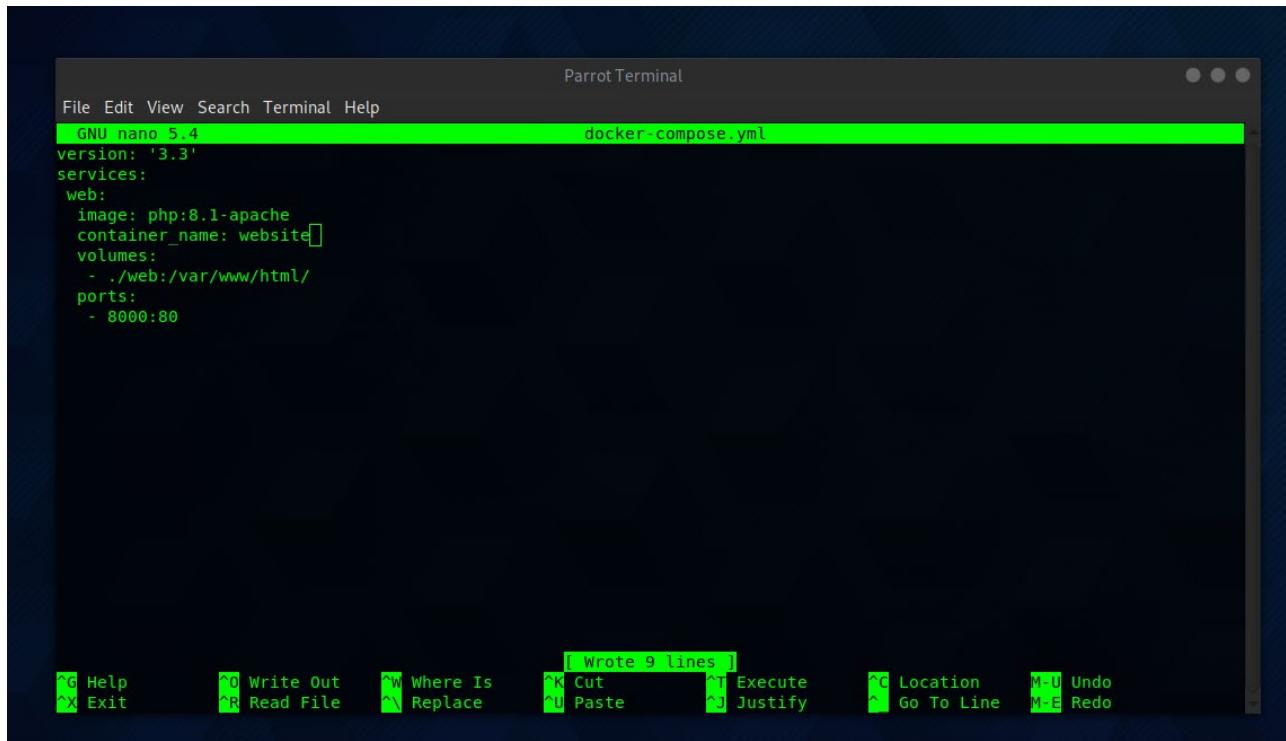

```
Parrot Terminal
File Edit View Search Terminal Help
GNU nano 5.4                                            docker-compose.yml
version: '3.3'
services:
  web:
    image: php:8.1-apache
    container_name: website
    volumes:
      - ./web:/var/www/html/
    ports:
      - 8000:80
```

[Wrote 9 lines]

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location M-U Undo
^X Exit ^R Read File ^N Replace ^U Paste ^J Justify ^L Go To Line M-E Redo

```

File Edit View Search Terminal Help
[+] alenphillip@SEC-ROG:~/website]
ls -a
ls: docker images
REPOSITORY          TAG      IMAGE ID   CREATED      SIZE
allenphillip@SEC-ROG  /~website]
ls -a
CONTAINER ID        IMAGE       COMMAND    CREATED      STATUS      PORTS      NAMES
allenphillip@SEC-ROG  /~website]
slimghost@SEC-ROG:~/website]
ls -a
Creating network "website default" with the default driver
Pulling web (php:8.1-apache)...
8.1-apache: Pulling from library/php
2:43:19.0.1 - [24/May/2022:05:43:19 +0000] GET /favicon.ico HTTP/1.1 200 400 "Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/101.0.4951.64 Safari/537.36"
cd8f13a1b2c0: Pull complete
63cf7f74573d: Pull complete
54c27146d1e6: Pull complete
0797a2a2335a: Pull complete
5f1a5a355bc4: Pull complete
fdcc797c7cbea: Pull complete
bde015a34ddc: Pull complete
4e05f510d80f: Pull complete
7ec2a2a2335a: Pull complete
2d7b621c5979: Pull complete
3bd5d580dcde: Pull complete
76dfe76d1c15: Pull complete
0939a2a2335a: Pull complete
Status: Downloaded newer image for php:8.1-apache
Creating website ... done
Attaching to website
website  | [Tue May 24 05:41:11.409668 2022] [core:notice] [pid 1] AH0004: Command line: 'apache2 -D FOREGROUND'
website | Could not reliably determine the server's fully qualified domain name, using 172.19.0.2. Set the 'ServerName' directive globally to suppress this message
website | AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using 172.19.0.2. Set the 'ServerName' directive globally to suppress this message
website | [Tue May 24 05:41:11.409634 2022] [mpm_prefork:notice] [pid 1] AH00063: Apache/2.4.53 (Debian) PHP/8.1.6 configured -- resuming normal operations
website | [Tue May 24 05:41:11.409668 2022] [core:notice] [pid 1] AH0004: Command line: 'apache2 -D FOREGROUND'
website | 172.19.0.1 - - [24/May/2022:05:43:09 +0000] "GET / HTTP/1.1" 200 22084 "Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/101.0.4951.64 Safari/537.36"
website | 172.19.0.1 - - [24/May/2022:05:43:09 +0000] "GET /w/images/wind.jpg HTTP/1.1" 200 10540 "http://localhost:8000/" "Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/101.0.4951.64 Safari/537.36"
website | 172.19.0.1 - - [24/May/2022:05:43:09 +0000] "GET /w/images/gondol.jpg HTTP/1.1" 200 10540 "http://localhost:8000/" "Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/101.0.4951.64 Safari/537.36"
website | 172.19.0.1 - - [24/May/2022:05:43:09 +0000] "GET /w/images/avatar_o.jpg HTTP/1.1" 200 11172 "http://localhost:8000/" "Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/101.0.4951.64 Safari/537.36"
website | 172.19.0.1 - - [24/May/2022:05:43:09 +0000] "GET /w/images/rock.jpg HTTP/1.1" 200 14458 "http://localhost:8000/" "Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/101.0.4951.64 Safari/537.36"
website | 172.19.0.1 - - [24/May/2022:05:43:09 +0000] "GET /w/images/skies.jpg HTTP/1.1" 200 6355 "http://localhost:8000/" "Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/101.0.4951.64 Safari/537.36"
website | 127.0.0.1 - - [24/May/2022:05:43:09 +0000] "GET /index.html HTTP/1.0" 200 126 "-" "Apache/2.4.53 (Debian) PHP/8.1.6 (internal dummy connection)"
website | 172.19.0.1 - - [24/May/2022:05:43:17 +0000] "GET /favicon.ico HTTP/1.1" 404 400 "http://localhost:8000/" "Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/101.0.4951.64 Safari/537.36"

```

W3.CSS Template - Google Chrome

Welcome to the blog of [unknown](#)

TITLE HEADING

Title description, April 7, 2014

READ MORE >

Comments 0

