

Testing, and Debugging

Some reflections from TAs in office hours regarding struggling students:

- “I feel like they get stuck trying to figure it out by looking at their code instead of trying to get proactive and poke at their code”
- “They're checking that their code makes sense; sometimes they can't see the bug until it's being run.”

In lab 2, we talked about how debugging should be a scientific process.

- Reading and re-reading your code is very very slow. It's like trying to chop down a tree with a nail file. Yes, you'll eventually succeed, but there are much better tools.

Using the debugger (especially with tests!) is **incredibly important**.


Drop Deadline

Reminder: The drop deadline for L&S is Wednesday.

- If you're taking the class for a letter grade and you're not done with project 1A by the end of today (3 days after the deadline), consider emailing your mentor GSI about meeting for advice on whether you should drop the course and try again next semester.
 - While your skill will grow, the assignments in the class only get harder to match.



CS61B, 2019

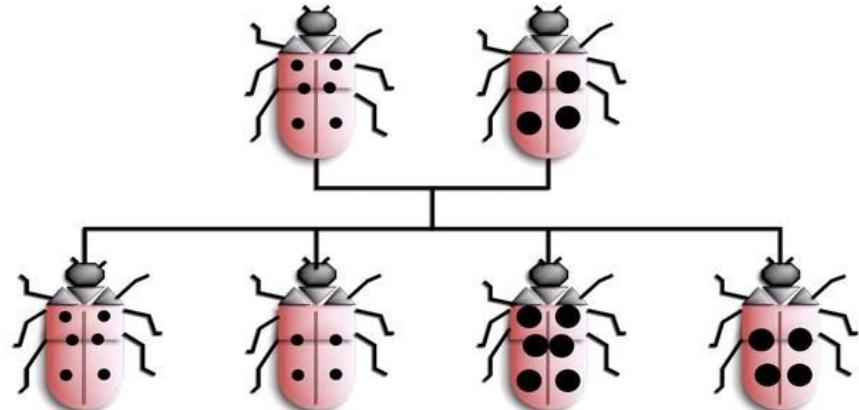

Lecture 9: More Inheritance!

- Implementation Inheritance: Extends
- Encapsulation
- Casting
- Higher Order Functions in Java

Implementation Inheritance: Extends



The Extends Keyword

When a class is a hyponym of an interface, we used **implements**.

- Example: `SLLList<Blorp> implements List61B<Blorp>`

instead of an interface


If you want one class to be a hyponym of another *class*, you use **extends**.

We'd like to build `RotatingSLLList` that can perform any `SLLList` operation as well as:

- `rotateRight()`: Moves back item the front.

Example: Suppose we have [5, 9, 15, 22].

- After `rotateRight()`: [22, 5, 9, 15]

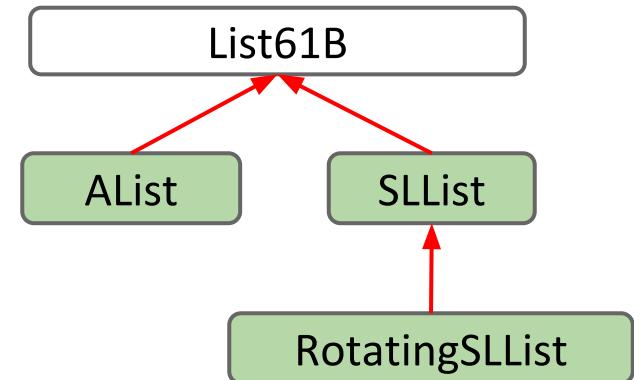

RotatingSLList

```
public class RotatingSLList<Blorp> extends SLList<Blorp>{
    public void rotateRight() {
        Blorp oldBack = removeLast();
        addFirst(oldBack);
    }
}
```

Because of **extends**, RotatingSLList inherits all members of SLList:

- All instance and static variables.
- All methods.
- All nested classes.

... but members may be private and thus inaccessible! More after midterm.

Constructors are not inherited.

Another Example: VengefulSLLList

Suppose we want to build an SLLList that:

- Remembers all Items that have been destroyed by `removeLast`.
- Has an additional method `printLostItems()`, which prints all deleted items.

```
public static void main(String[] args) {
    VengefulSLLList<Integer> vs1 = new VengefulSLLList<Integer>();
    vs1.addLast(1);
    vs1.addLast(5);
    vs1.addLast(10);
    vs1.addLast(13);      /* [1, 5, 10, 13] */
    vs1.removeLast();     /* 13 gets deleted. */
    vs1.removeLast();     /* 10 gets deleted. */
    System.out.print("The fallen are: ");
    vs1.printLostItems(); /* Should print 10 and 13. */
}
```

Another Example: VengefulSLLList

```
public class VengefulSLLList<Item> extends SLLList<Item> {  
    private SLLList<Item> deletedItems;  
    public VengefulSLLList() {  
        deletedItems = new SLLList<Item>();  
    }  
  
    @Override  
    public Item removeLast() {  
        Item oldBack = super.removeLast();  
        deletedItems.addLast(oldBack);  
        return oldBack;  
    }  
  
    public void printLostItems() {  
        deletedItems.print();  
    }  
}
```

calls
Superclass's
version of
removeLast()

Note: Java syntax
disallows
super.super. For a
nice description of
why, see [this link](#).

Constructor Behavior Is Slightly Weird

Constructors are not inherited. However, the rules of Java say that **all constructors must start with a call to one of the super class's constructors** [[Link](#)].

- Idea: If every VengefulSLList is-an SLList, every VengefulSLList must be set up like an SLList.
 - If you didn't call SLList constructor, sentinel would be null. Very bad.
- You can explicitly call the constructor with the keyword `super` (no dot).
- If you don't explicitly call the constructor, Java will automatically do it for you.

```
public VengefulSLList() {  
    deletedItems = new SLList<Item>();  
}
```

These constructors are exactly equivalent.

```
public VengefulSLList() {  
    super(); ← must come first!  
    deletedItems = new SLList<Item>();  
}
```



Calling Other Constructors

If you want to use a super constructor other than the no-argument constructor, can give parameters to super.

```
public VengefulSLLList(Item x) {  
    super(x); ← calls SLLList(Item x)  
    deletedItems = new SLLList<Item>();  
}
```


Not equivalent! Code to the right makes
implicit call to super(), not super(x).

```
public VengefulSLLList(Item x) {  
    deletedItems = new SLLList<Item>();  
}
```

The Object Class

As it happens, every type in Java is a descendant of the Object class.

- VengefulSLLList extends SLLList.
- SLLList extends Object (implicitly).

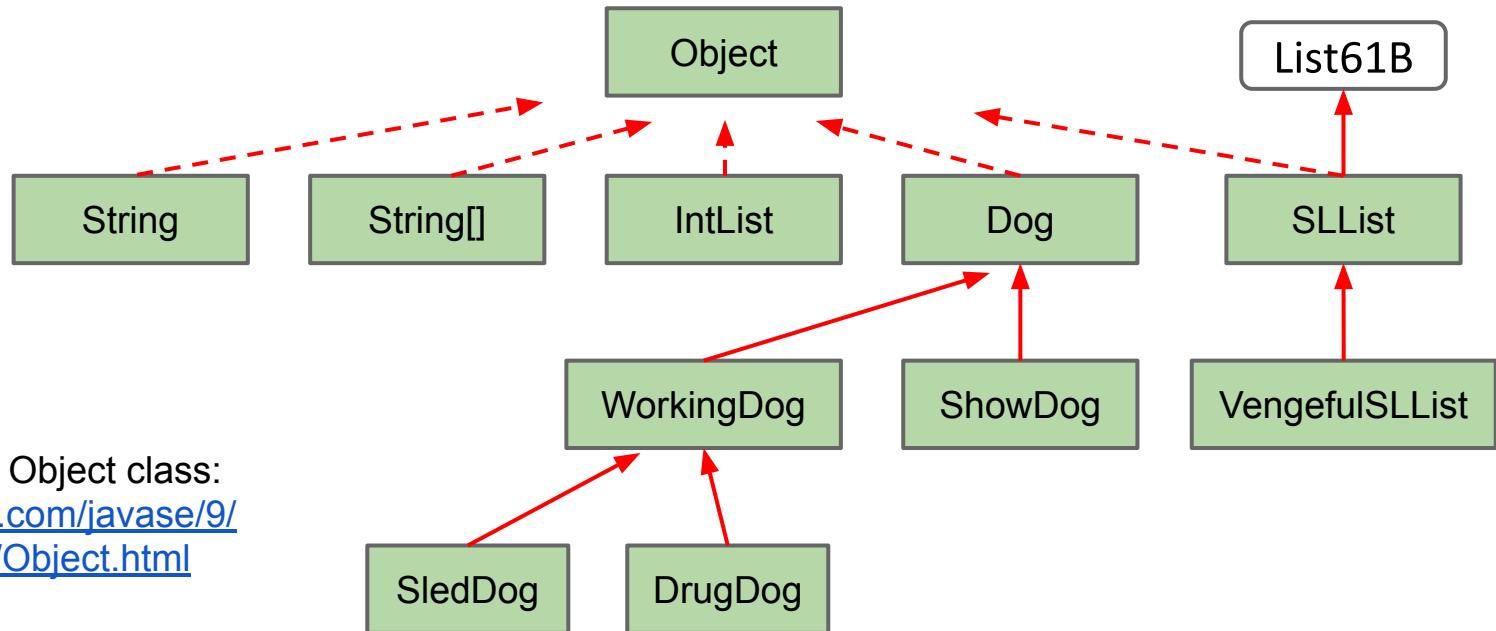

Documentation for Object class:
<https://docs.oracle.com/javase/9/docs/api/java/lang/Object.html>


Interfaces don't extend Object:
<http://docs.oracle.com/javase/specs/jls/se7/html/jls-9.html#jls-9.2>

Is-a vs. Has-A

Important Note: extends should only be used for **is-a** (hypernymic) relationships!

Common mistake is to use it for “**has-a**” relationships. (a.k.a. meronymic).

- Possible to subclass SLList to build a Set, but conceptually weird, e.g. get(i) doesn’t make sense, because sets are not ordered.

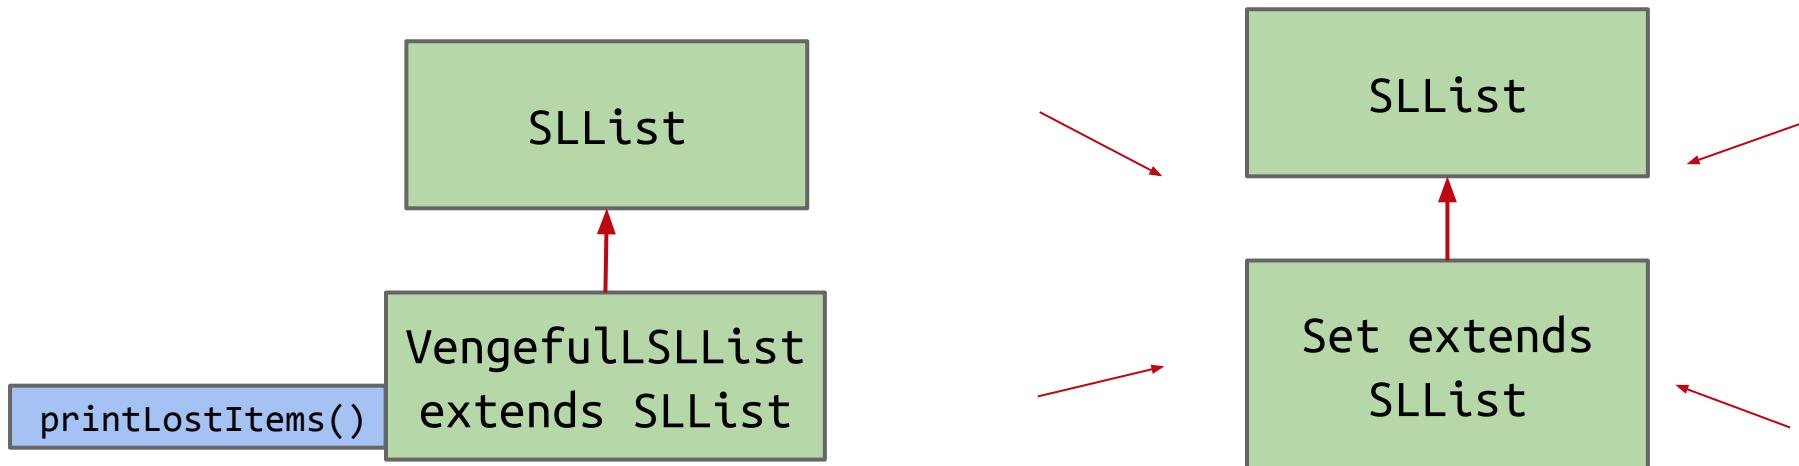

This is an abomination.

Encapsulation



Complexity: The Enemy

When building large programs, our enemy is complexity.

Some tools for managing complexity:



- Hierarchical abstraction.
 - Create **layers of abstraction**, with clear abstraction barriers!
- “Design for change” (D. Parnas)
 - Organize program around objects.
 - Let objects decide how things are done.
 - **Hide information** others don’t need.

Managing complexity supremely important for large projects (e.g. project 2).

Modules and Encapsulation [Shewchuk]

Module: A set of methods that work together as a whole to perform some task or set of related tasks.

A module is said to be **encapsulated** if its implementation is completely hidden, and it can be accessed only through a documented interface.

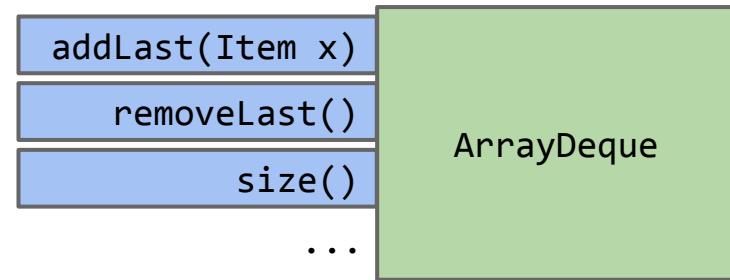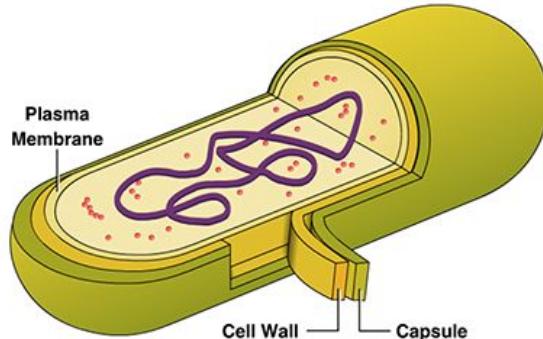

A Cautionary Tale

Interesting Piazza questions from [proj1gold](#) from a few years ago.

How can we check the length of StudentArrayDeque?

I am trying to find a bug about resizing method, but i don't know how to see the length of the studentArrayDeque.

StudentArrayDeque.length() nor StudentArrayDeque.length is not working..... so i don't know how to check whether the Array can expend to double of its capacity or not.

Private access in given classes

I wanted to test whether the resizing and downsizing is working properly, but when I try to call array.items.length, the compiler yells at me, saying items is a private variable. Is there any way around this, or should we just not test this?


Can we assume these things about studentarraydeque?

Can we assume the studentarraydeque implementation uses nextfront = 4 nextlast =5, and starting size array 8?

Abstraction Barriers


As the user of an ArrayDeque, you cannot observe its internals.

- Even when writing tests, you don't (usually) want to peer inside.

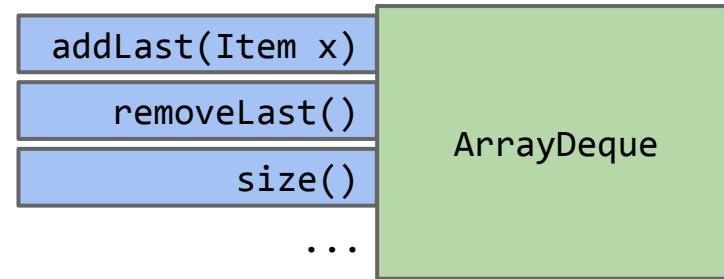

Java is a great language for enforcing abstraction barriers with syntax.

{5, 3, 1, 7, 22}


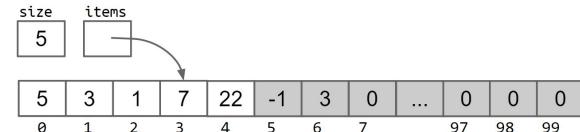


Modules and Encapsulation [Shewchuk]

Module: A set of methods that work together as a whole to perform some task or set of related tasks.


A module is said to be **encapsulated** if its implementation is completely hidden, and it can be accessed only through a documented interface.

- Instance variables private. Methods like `resize` private.
- As we'll see: Implementation inheritance (e.g. extends) breaks encapsulation!

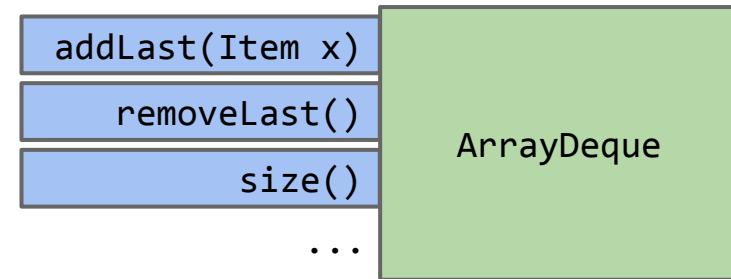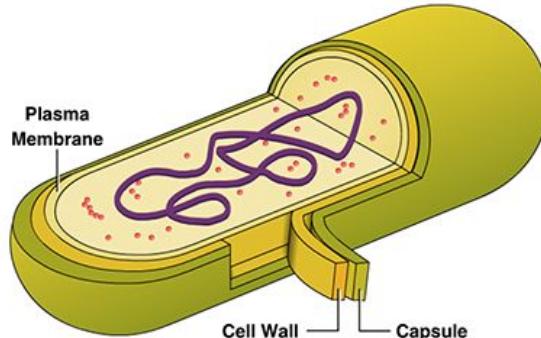

Implementation Inheritance Breaks Encapsulation

Suppose we have a Dog class with the two methods shown.

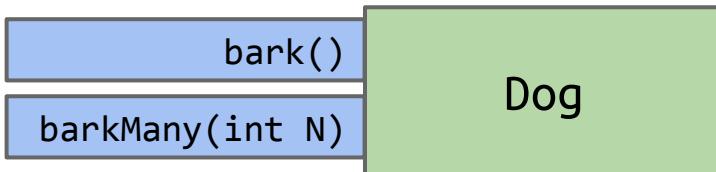


```
public void bark() {  
    System.out.println("bark");  
}  
  
public void barkMany(int N) {  
    for (int i = 0; i < N; i += 1) {  
        bark();  
    }  
}
```

Dog.java

Implementation Inheritance Breaks Encapsulation

We could just as easily have implemented methods as shown below.

- From the outside, functionality is exactly the same, it's just a question of aesthetics.

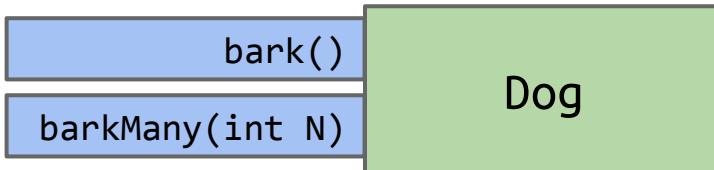

```
public void bark() {  
    barkMany(1);  
}  
  
public void barkMany(int N) {  
    for (int i = 0; i < N; i += 1) {  
        System.out.println("bark");  
    }  
}
```


Dog.java

<http://yellkey.com/point>

What would vd.barkMany(3) output?

- a. As a dog, I say: bark bark bark
- b. bark bark bark
- c. Something else.

(assuming vd is a Verbose Dog)

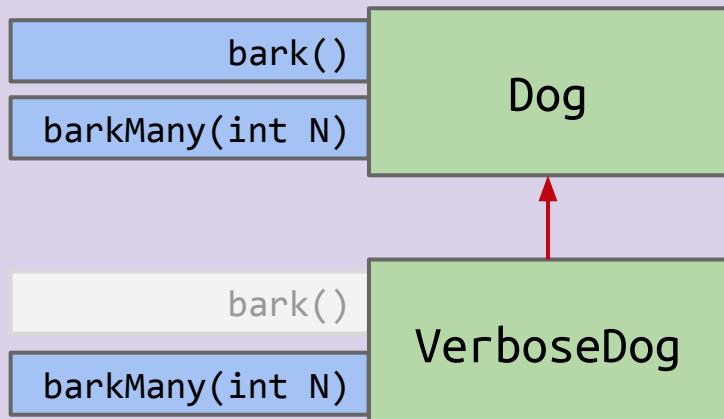

```
public void bark() {
    System.out.println("bark");
}

public void barkMany(int N) {
    for (int i = 0; i < N; i += 1) {
        bark();
    }
}
```

Dog.java

```
@Override
public void barkMany(int N) {
    System.out.println("As a dog, I say: ");
    for (int i = 0; i < N; i += 1) {
        bark(); ← calls inherited bark method
    }
}
```


VerboseDog.java

Implementation Inheritance Breaks Encapsulation

What would vd.barkMany(3) output?

- a. As a dog, I say: bark bark bark
- b. bark bark bark
- c. Something else.

(assuming vd is a Verbose Dog)

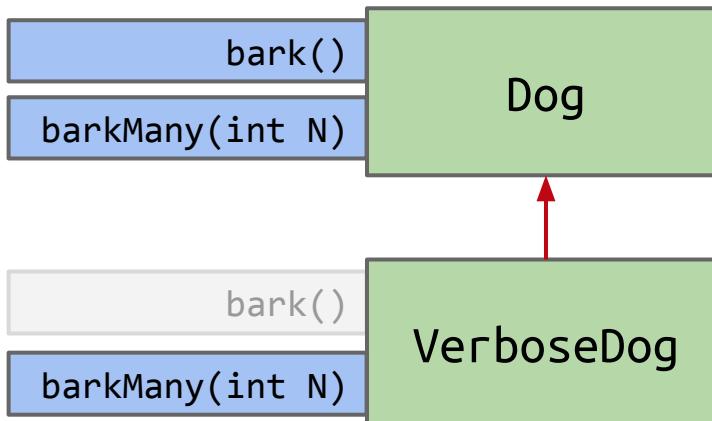

```
public void bark() {
    System.out.println("bark");
}

public void barkMany(int N) {
    for (int i = 0; i < N; i += 1) {
        bark();
    }
}
```

Dog.java

```
@Override
public void barkMany(int N) {
    System.out.println("As a dog, I say: ");
    for (int i = 0; i < N; i += 1) {
        bark(); ← calls inherited bark method
    }
}
```


VerboseDog.java

<http://yellkey.com/soon>

What would vd.barkMany(3) output?

- a. As a dog, I say: bark bark bark
- b. bark bark bark
- c. Something else.

(assuming vd is a Verbose Dog)

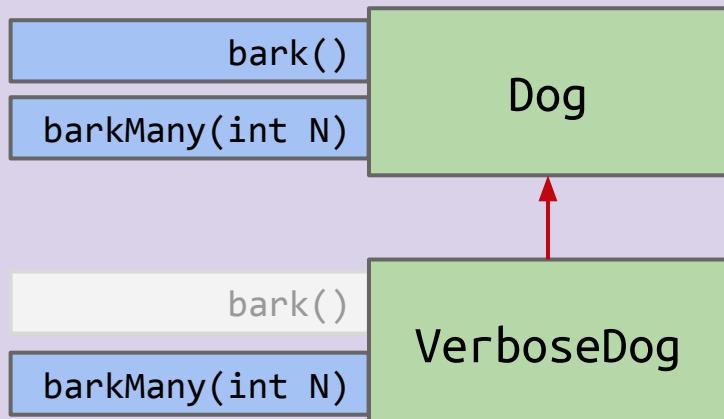

```
public void bark() {
    barkMany(1);
}

public void barkMany(int N) {
    for (int i = 0; i < N; i += 1) {
        System.out.println("bark");
    }
}
```

Dog.java

```
@Override
public void barkMany(int N) {
    System.out.println("As a dog, I say: ");
    for (int i = 0; i < N; i += 1) {
        bark(); ← calls inherited bark method
    }
}
```

VerboseDog.java


Implementation Inheritance Breaks Encapsulation

What would vd.barkMany(3) output?

c. Something else.

- Gets caught in an infinite loop!

(assuming vd is a Verbose Dog)

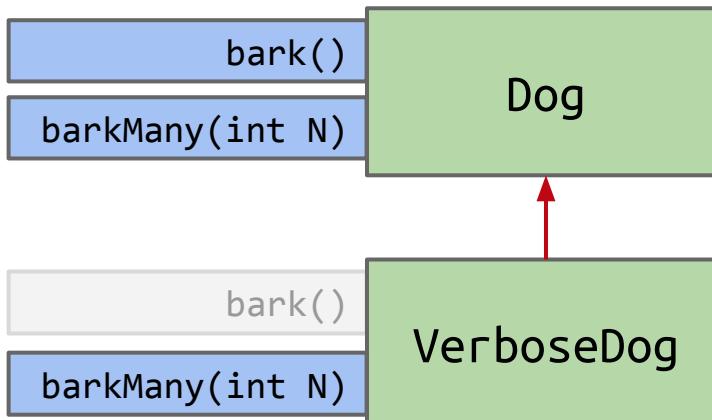

```
public void bark() {  
    barkMany(1);  
}  
public void barkMany(int N) {  
    for (int i = 0; i < N; i += 1) {  
        System.out.println("bark");  
    }  
}
```

Dog.java

```
@Override  
public void barkMany(int N) {  
    System.out.println("As a dog, I say: ");  
    for (int i = 0; i < N; i += 1) {  
        bark(); ← calls inherited bark method  
    }  
}
```

VerboseDog.java


Type Checking and Casting



Dynamic Method Selection and Type Checking Puzzle

For each line of code, determine:

- Does that line cause a compilation error?
- Which method does dynamic method selection use?

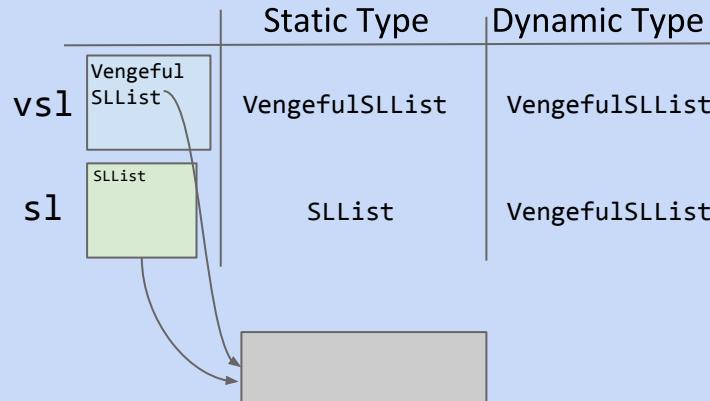

Reminder: VengefulSLList overrides
removeLast and provides a new method called
printLostItems.


```
public static void main(String[] args) {  
    VengefulSLList<Integer> vsl =  
        new VengefulSLList<Integer>(9);  
    SLList<Integer> sl = vsl;  
  
    sl.addLast(50);  
    sl.removeLast();  
  
    sl.printLostItems();  
    VengefulSLList<Integer> vsl2 = sl;  
}
```

Reminder: Dynamic Method Selection

Also called
dynamic type.

If overridden, decide which method to call based on **run-time** type of variable.

- sl's runtime type: VengefulSLList.

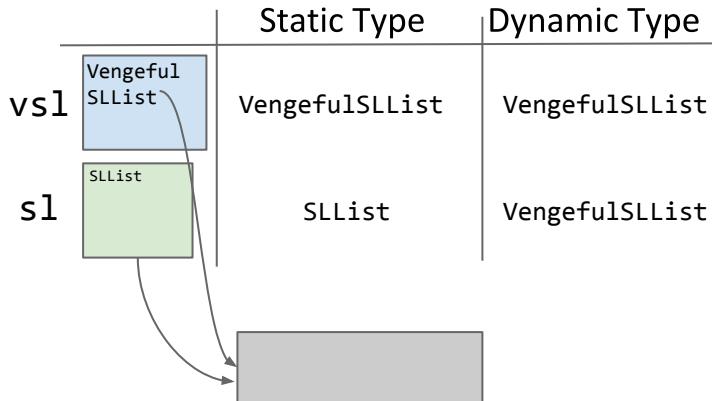

```
public static void main(String[] args) {  
    VengefulSLList<Integer> vsl =  
        new VengefulSLList<Integer>(9);  
    SLList<Integer> sl = vsl;  
  
    sl.addLast(50); ← VengefulSLList  
    sl.removeLast(); ← doesn't override,  
                      uses SLList's.  
}
```

Uses VengefulSLList's.


Reminder: VengefulSLList overrides
removeLast and provides a new method called
printLostItems.

Compile-Time Type Checking

Also called
static type.

Compiler allows method calls based on **compile-time** type of variable.

- sl's runtime type: VengefulSLList.
- But cannot call printLostItems.

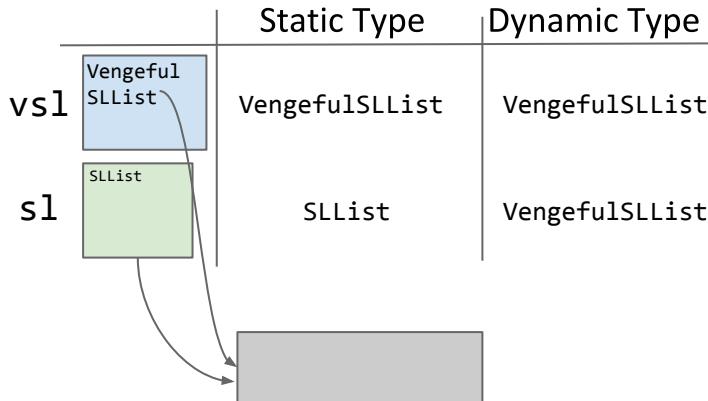

```
public static void main(String[] args) {  
    VengefulSLList<Integer> vsl =  
        new VengefulSLList<Integer>(9);  
    SLList<Integer> sl = vsl;  
  
    sl.addLast(50);  
    sl.removeLast();  
  
    sl.printLostItems();  
}
```

Compilation
error!


Reminder: VengefulSLList overrides
removeLast and provides a new method called
printLostItems.

Compile-Time Type Checking

Also called
static type.

Compiler allows method calls based on **compile-time** type of variable.

- sl's runtime type: VengefulSLList.
- But cannot call printLostItems.

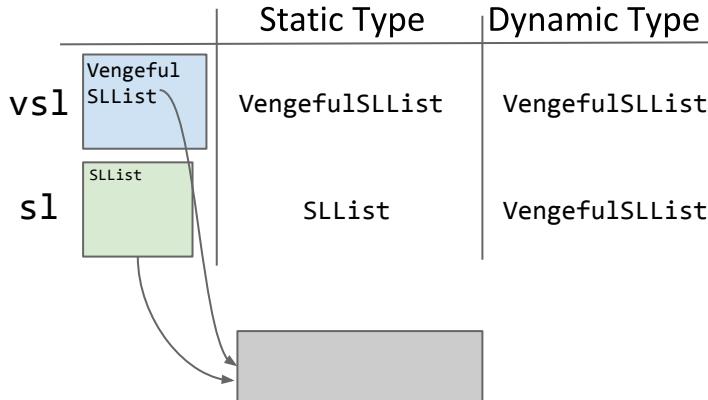

```
public static void main(String[] args) {  
    VengefulSLList<Integer> vsl =  
        new VengefulSLList<Integer>(9);  
    SLList<Integer> sl = vsl;  
  
    sl.addLast(50);  
    sl.removeLast();  
  
    sl.printLostItems();  
    VengefulSLList<Integer> vsl2 = sl;  
}
```

Compilation errors!

Compiler also allows assignments based on compile-time types.

- Even though sl's runtime-type is VengefulSLList, cannot assign to vsl2.
- Compiler plays it as safe as possible with type checking.

Compile-Time Types and Expressions

Expressions have compile-time types:

- An expression using the new keyword has the specified compile-time type.

```
SLList<Integer> sl = new VengefulSLList<Integer>();
```

- Compile-time type of right hand side (RHS) expression is VengefulSLList.
- A VengefulSLList is-an SLList, so assignment is allowed.

```
VengefulSLList<Integer> vsl = new SLList<Integer>();
```

- Compile-time type of RHS expression is SLList.
- An SLList is not necessarily a VengefulSLList, so compilation error results.

Compilation error!

Compile-Time Types and Expressions

Expressions have compile-time types:

- Method calls have compile-time type equal to their declared type.

```
public static Dog maxDog(Dog d1, Dog d2) { ... }
```

- Any call to `maxDog` will have compile-time type `Dog`!

Example:

```
Poodle frank = new Poodle("Frank", 5);
Poodle frankJr = new Poodle("Frank Jr.", 15);

Dog largerDog = maxDog(frank, frankJr);
Poodle largerPoodle = maxDog(frank, frankJr);
```

Compilation error!

RHS has
compile-time type
Dog.

Casting

Java has a special syntax for specifying the compile-time type of any expression.

- Put desired type in parenthesis before the expression.
- Examples:

- Compile-time type Dog:

```
maxDog(frank, frankJr);
```

- Compile-time type Poodle:

```
(Poodle) maxDog(frank, frankJr);
```

Tells compiler to pretend it sees a particular type.

Compilation OK!
RHS has compile-time type Poodle.

```
Poodle frank = new Poodle("Frank", 5);
Poodle frankJr = new Poodle("Frank Jr.", 15);
Dog largerDog = maxDog(frank, frankJr);
Poodle largerPoodle = (Poodle) maxDog(frank, frankJr);
```

Casting

Casting is a powerful but dangerous tool.

- Tells Java to treat an expression as having a different compile-time type.
- In example below, effectively tells the compiler to ignore its type checking duties.
- Does not actually change anything: sunglasses don't make the world dark.

```
Poodle frank = new Poodle("Frank", 5);
Malamute frankSr = new Malamute("Frank Sr.", 100);

Poodle largerPoodle = (Poodle) maxDog(frank, frankSr);
```

If we run the code above, we get a `ClassCastException` at runtime.

- So much for `.class` files being verifiably type checked...

Dynamic Method Selection and Casting Puzzle



Is it Overriding? Overloading?

```
public class Bird {  
    public void gulgate(Bird b) {  
        System.out.println("BiGulBi"); }}
```

```
public class Falcon extends Bird {  
    public void gulgate(Falcon f) {  
        System.out.println("FaGulFa"); }}
```

```
Bird bird = new Falcon();  
Falcon falcon = (Falcon) bird;  
bird.gulgate(falcon);  
falcon.gulgate(falcon);
```

What gets printed?

- a. BiGulBi BiGulBi
- b. BiGulBi FaGulFa
- c. FaGulFa BiGulBi
- d. FaGulFa FaGulFa

Is it Overriding? Overloading?

```
public class Bird {  
    public void gulgate(Bird b) {  
        System.out.println("BiGulBi"); }}
```

Casting causes no change to the bird variable, nor to the object the bird variable points at!

```
public class Falcon extends Bird {  
    public void gulgate(Falcon f) {  
        System.out.println("FaGulFa"); }}
```

```
Bird bird = new Falcon();  
Falcon falcon = (Falcon) bird;  
bird.gulgate(falcon); ←  
falcon.gulgate(falcon); ←
```

What gets printed?

b. BiGulBi FaGulFa

Why does BiGulBi get printed first?

```
public class Bird {  
    public void gulgate(Bird b) {  
        System.out.println("BiGulBi"); } }
```

```
public class Falcon extends Bird {  
    public void gulgate(Falcon f) {  
        System.out.println("FaGulFa"); }}
```

```
Bird bird = new Falcon();  
Falcon falcon = (Falcon) bird;  
bird.gulgate(falcon);
```

Remember: The compiler chooses the most specific matching method signature from the static type of the invoking class.

- Falcon is overloading the gulgate method, not overriding.
- Compiler basically thinks “does Bird class have a gulgate method? Yes! I’ll use that”. Since there is no overloading, no dynamic method selection occurs.

Higher Order Functions (A First Look)



Higher Order Functions

Higher Order Function: A function that treats another function as data.

- e.g. takes a function as input.

Example in Python:

```
def tenX(x):
    return 10*x

def do_twice(f, x):
    return f(f(x))

print(do_twice(tenX, 2))
```


200

Higher Order Functions in Java 7

Old School (Java 7 and earlier)

- Fundamental issue: Memory boxes (variables) cannot contain pointers to functions.

Can use an interface instead. Let's try it out.

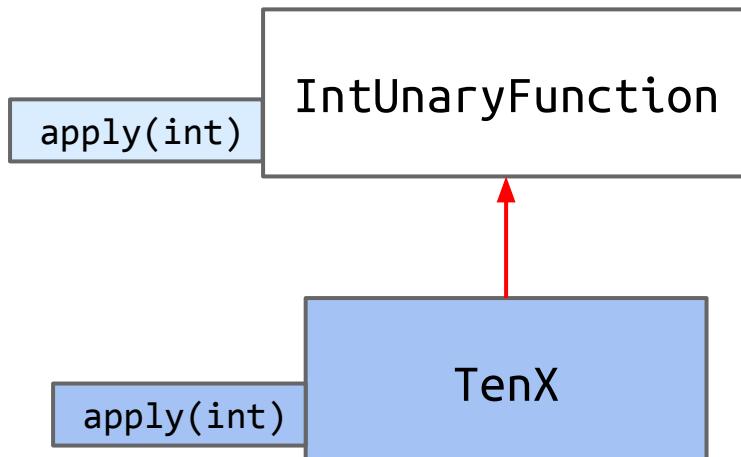

```
{  
    def tenX(x):  
        return 10*x  
  
    def do_twice(f, x):  
        return f(f(x))  
  
    print(do_twice(tenX, 2))
```

Higher Order Functions in Java 7

Old School (Java 7 and earlier)

- Fundamental issue: Memory boxes (variables) cannot contain pointers to functions.

Can use an interface instead: Java code below is equivalent to given python code.

```
public interface IntUnaryFunction {  
    int apply(int x);  
}
```

```
public class TenX implements IntUnaryFunction {  
    public int apply(int x) {  
        return 10 * x;  
    }  
}
```

```
def tenX(x):  
    return 10*x
```

Example: Higher Order Functions Using Interfaces in Java

```
public interface IntUnaryFunction {  
    int apply(int x);  
}
```

```
public class TenX implements IntUnaryFunction {  
    public int apply(int x) {  
        return 10 * x;  
    }  
}
```

```
public class HoFDemo {  
    public static int do_twice(IntUnaryFunction f, int x) {  
        return f.apply(f.apply(x));  
    }  
    public static void main(String[] args) {  
        System.out.println(do_twice(new TenX(), 2));  
    }  
}
```

```
def tenX(x):  
    return 10*x  
  
def do_twice(f, x):  
    return f(f(x))  
  
print(do_twice(tenX, 2))
```

Example: Higher Order Functions in Java 8 or Later

In Java 8, new types were introduced: now can can hold references to methods.

- You're welcome to use these features, but we won't teach them.
- Why? The old way is still widely used, e.g. Comparators (see next lecture).

```
public class Java8HoFDemo {  
    public static int tenX(int x) {  
        return 10*x;  
    }  
    public static int doTwice(Function<Integer, Integer> f, int x) {  
        return f.apply(f.apply(x));  
    }  
    public static void main(String[] args) {  
        int result = doTwice(Java8HoFDemo::tenX, 2);  
        System.out.println(result);  
    }  
}
```

Implementation Inheritance Cheatsheet

VengefulSLList extends SLList means a VengefulSLList is-an SLList. Inherits all members!

- Variables, methods, nested classes.
- Not constructors.
- Subclass constructor must invoke superclass constructor first.
- Use super to invoke overridden superclass methods and constructors.

Invocation of overridden methods follows two simple rules:

- Compiler plays it safe and only lets us do things allowed by ***static*** type.
- Compiler chooses 2
- For overridden methods the actual method invoked is based on ***dynamic*** type of invoking expression, e.g. Dog.maxDog(d1, d2).bark();
- Can use casting to overrule compiler type checking.

Does not apply to
overloaded methods!



Extra Problem Just For Fun



Type Checking Quiz!

```
ShowDog dogC = new ShowDog("Franklin", "Malamute", 180, 6);
ShowDog dogD = new ShowDog("Gargamel", "Corgi", 44, 12);

Dog.maxDog(dogC, dogD);
```

1. What is the static type of Dog.maxDog(dogC, dog D)?

2. Which (if any), will compile:

```
Dog md = Dog.maxDog(dogC, dogD);
ShowDog msd = Dog.maxDog(dogC, dogD);
```

3. How many memory boxes are there in the code below? What are the dynamic types of their contents?

```
Object o = new Dog("Hammy", "Beagle", 15);
Dog d = new Dog("Ammo", "Labrador", 54);
Object stuff[] = new Object[5];
stuff[0] = o;
stuff[1] = d;
stuff[2] = null;
```

Citations

<https://wikids-life.wikispaces.com/file/view/LadybirdInheritance.jpg/160451153/604x297/LadybirdInheritance.jpg>

Actual truth:

