



Observables

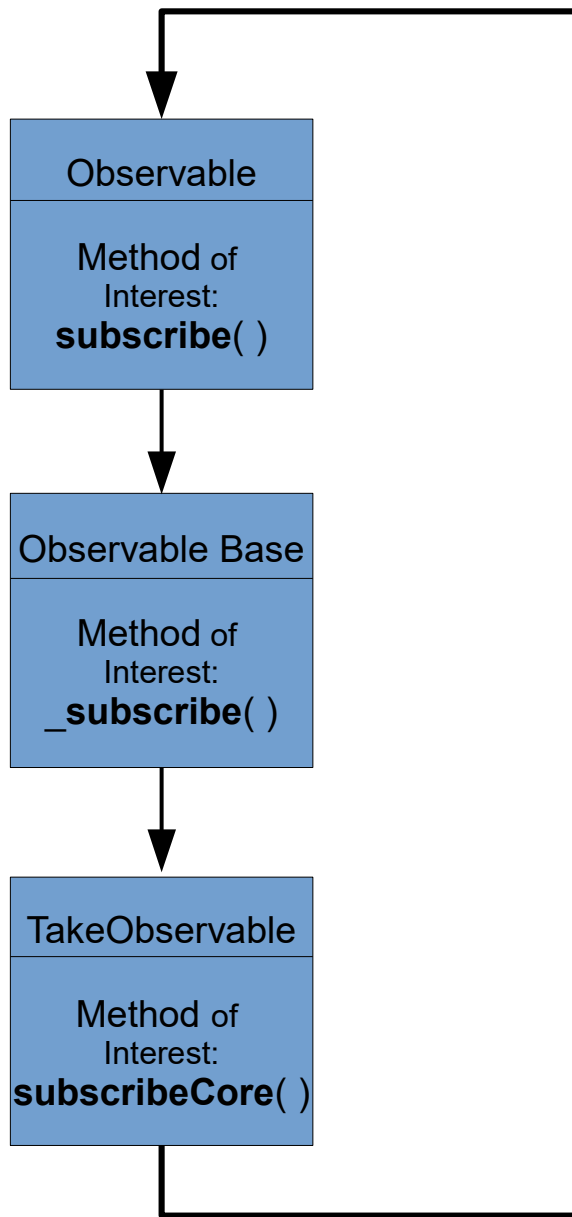

subscribeCore() function of the TakeObservable, calls the subscribe of its source and designates a TakeObserver to receive values from the source.

Observers

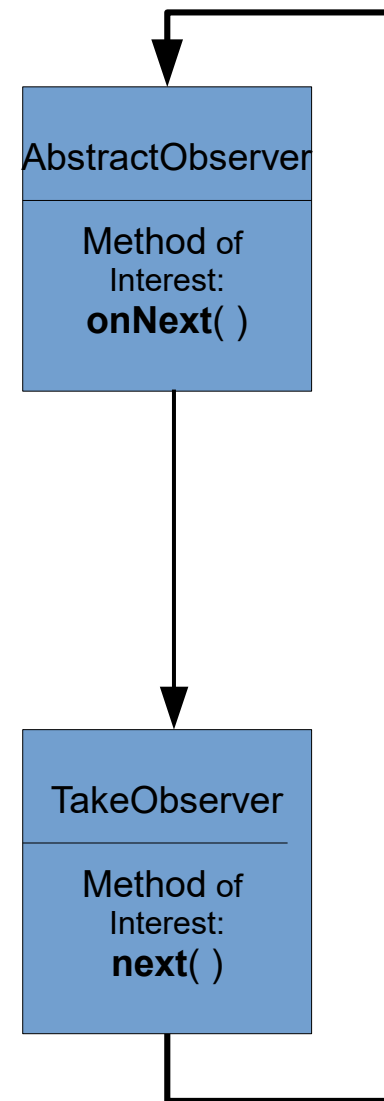

The next() function from TakeObserver invokes the onNext() function of the observer it has been updated with during its creation thereby invoking the onNext() of the common parent which is the onNext() function in AbstractObserver.