## Class 17: Analyze Sequence from Cloud

Allen (A16897142)

## Table of contents

```
library(tximport)

folders <- dir(pattern="SRR21568*")
samples <- sub("_quant", "", folders)
files <- file.path( folders, "abundance.h5" )
names(files) <- samples

txi.kallisto <- tximport(files, type = "kallisto", txOut = TRUE)</pre>
```

1 2 3 4

```
head(txi.kallisto$counts)
```

|                 | SRR2156848 | SRR2156849 | SRR2156850 | SRR2156851 |
|-----------------|------------|------------|------------|------------|
| ENST00000539570 | 0          | 0          | 0.00000    | 0          |
| ENST00000576455 | 0          | 0          | 2.62037    | 0          |
| ENST00000510508 | 0          | 0          | 0.00000    | 0          |
| ENST00000474471 | 0          | 1          | 1.00000    | 0          |
| ENST00000381700 | 0          | 0          | 0.00000    | 0          |
| ENST00000445946 | 0          | 0          | 0.00000    | 0          |

```
colSums(txi.kallisto$counts)
```

```
SRR2156848 SRR2156849 SRR2156850 SRR2156851
2563611 2600800 2372309 2111474
```


```
to.keep <- rowSums(txi.kallisto$counts) > 0
kset.nonzero <- txi.kallisto$counts[to.keep,]</pre>
```

```
keep2 <- apply(kset.nonzero,1,sd)>0
x <- kset.nonzero[keep2,]</pre>
```

```
pca <- prcomp(t(x), scale=TRUE)
summary(pca)</pre>
```

## Importance of components:

PC1 PC2 PC3 PC4
Standard deviation 183.6379 177.3605 171.3020 1e+00
Proportion of Variance 0.3568 0.3328 0.3104 1e-05
Cumulative Proportion 0.3568 0.6895 1.0000 1e+00

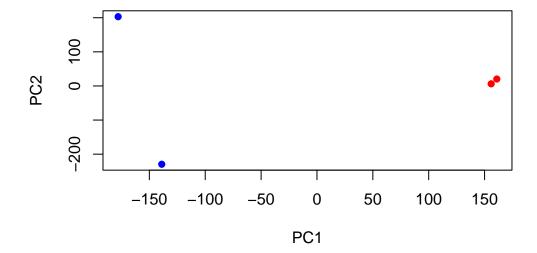


```
library (ggplot2)
library(ggrepel)

colData <- data.frame(condition = factor(rep(c("control", "treatment"), each = 2)))
rownames(colData) <- colnames(txi.kallisto$counts)

y <- as.data.frame(pca$x)
y$Condition <- as.factor(colData$condition)

ggplot(y) +
   aes(PC1, PC2, col=Condition) +
   geom_point() +
   geom_text_repel(label=rownames(y)) +
   theme_bw()</pre>
```

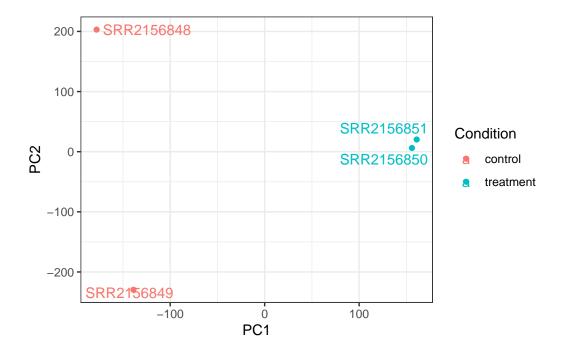


```
library (ggplot2)
library(ggrepel)

colData <- data.frame(condition = factor(rep(c("control", "treatment"), each = 2)))
rownames(colData) <- colnames(txi.kallisto$counts)

y <- as.data.frame(pca$x)</pre>
```

```
y$Condition <- as.factor(colData$condition)

ggplot(y) +
  aes(PC1, PC3, col=Condition) +
  geom_point() +
  geom_text_repel(label=rownames(y)) +
  theme_bw()</pre>
```

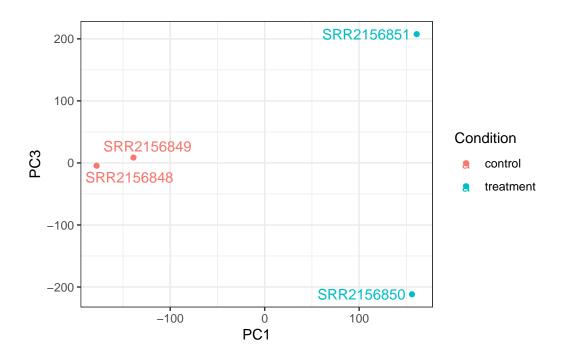

```
library (ggplot2)
library(ggrepel)

colData <- data.frame(condition = factor(rep(c("control", "treatment"), each = 2)))
rownames(colData) <- colnames(txi.kallisto$counts)

y <- as.data.frame(pca$x)
y$Condition <- as.factor(colData$condition)

ggplot(y) +
   aes(PC2, PC3, col=Condition) +
   geom_point() +
   geom_text_repel(label=rownames(y)) +
   theme_bw()</pre>
```

