Domača naloga 4 – Ibrahim Čaušević

Naloga 1:

Ustvarjanje mape in podmap

```
MINGW64:/c/Users/pc/Desktop/git/causevic_ibrahim

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git
$ mkdir causevic_ibrahim

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git
$ cd causevic_ibrahim

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim
$ git init
Initialized empty Git repository in C:/Users/pc/Desktop/git/causevic_ibrahim/.gi
t/

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ mkdir srecanje1

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ mkdir srecanje2

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ mkdir srecanje3

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ mkdir srecanje4

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git add .
warning: in the working copy of 'srecanje2/almamaterkey.ppk', LF will be replaced by CRLF the next time Gi
t touches it
warning: in the working copy of 'srecanje3/almaKeyECtest.ppk', LF will be replaced by CRLF the next time G
it touches it

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git commit -m "Ibrahim"
Author identity unknown

*** Please tell me who you are.

Run

  git config --global user.email "you@example.com"
  git config --global user.name "Your Name"

to set your account's default identity.
Omit --global to set the identity only in this repository.

fatal: unable to auto-detect email address (got 'pc@DESKTOP-OGSGIQ2.(none)')

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git config --global user.email "ibrahimcausevic.pro@gmail.com"

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git config --global user.name "Ibrahim Čaušević"

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git status
On branch master

No commits yet
```

Napolnjene lokalne mape z datotekami.

MINGW64:/c/Users/pc/Desktop/git/causevic_ibrahim

```
pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git commit -m "Domaca4"
[master (root-commit) 5b45a68] Domaca4
 66 files changed, 60 insertions(+)
 create mode 100644 "srecanje1/Vaja1 - Ibrahim \304\214au\305\241evi\304\207.docx"
 create mode 100644 "srecanje1/Vaja1 - Ibrahim \304\214au\305\241evi\304\207.pdf"
 create mode 100644 srecanje1/apt_install apache2.PNG
 create mode 100644 srecanje1/apt_update.PNG
 create mode 100644 srecanje1/hostname.PNG
 create mode 100644 srecanje1/konec.PNG
 create mode 100644 srecanje1/login.PNG
 create mode 100644 srecanje1/powershell scp.PNG
 create mode 100644 srecanje1/premaknjena_spletna.PNG
 create mode 100644 srecanje1/spletna_Stran.PNG
 create mode 100644 srecanje1/spletna_vm.PNG
 create mode 100644 srecanje1/status apache.PNG
 create mode 100644 srecanje1/stopped_apache.PNG
 create mode 100644 srecanje1/streznik.PNG
 create mode 100644 srecanje1/vmes.PNG
 create mode 100644 srecanje2/5.PNG
 create mode 100644 "srecanje2/Domaca naloga 2 - Ibrahim \304\214au\305\241evi\304\207.pdf"
 create mode 100644 srecanje2/Domaca naloga 2.docx
 create mode 100644 srecanje2/New folder/apache_aktiven_ne_dela.PNG
 create mode 100644 srecanje2/New folder/aws-notworking.PNG
 create mode 100644 srecanje2/New folder/aws_apache2.PNG
 create mode 100644 srecanje2/New folder/aws_brezapache.PNG
 create mode 100644 srecanje2/New folder/aws_ssh.PNG
 create mode 100644 srecanje2/New folder/cmd_posiljanje.PNG
 create mode 100644 srecanje2/New folder/cmd_posiljanjeeeee.PNG
 create mode 100644 srecanje2/New folder/dela_stran_aws.PNG
 create mode 100644 srecanje2/New folder/instance_aws.PNG
 create mode 100644 srecanje2/New folder/instancee.PNG
 create mode 100644 srecanje2/New folder/iz aws1 u aws2.PNG
 create mode 100644 srecanje2/New folder/kopiranje v varwwwhtml.PNG
 create mode 100644 srecanje2/New folder/kopiranje_v_var_www.PNG
 create mode 100644 srecanje2/New folder/puttyaws.PNG
 create mode 100644 srecanje2/New folder/security group.PNG
 create mode 100644 srecanje2/New folder/spletna_na_aws2.PNG
 create mode 100644 srecanje2/almamaterkey.ppk
 create mode 100644 srecanje2/apache2_status2.PNG
 create mode 100644 srecanje2/apachestatus.PNG
 create mode 100644 srecanje2/brskalnik2.PNG
 create mode 100644 srecanje2/brskalnik_bridged.PNG
 create mode 100644 srecanje2/delaaaaaaaaa.PNG
 create mode 100644 srecanje2/dodatno.PNG
 create mode 100644 srecanje2/namescen_apache2.PNG
 create mode 100644 srecanje2/nova_masina.PNG
 create mode 100644 srecanje2/omg/1.PNG
 create mode 100644 srecanje2/omg/2.PNG
 create mode 100644 srecanje2/omg/Capture.PNG
 create mode 100644 srecanje2/premaknjena_spletna na vm2.PNG
 create mode 100644 srecanje2/preverjanje_ip2.PNG
 create mode 100644 srecanje2/prijava1.PNG
 create mode 100644 srecanje2/primerjanje_ip4.PNG
 create mode 100644 srecanje2/putty22.PNG
 create mode 100644 srecanje2/putty_bridged.PNG
 create mode 100644 srecanje2/putty_nat.PNG
 create mode 100644 srecanje2/spletna_na_drugem.PNG
 create mode 100644 srecanje3/Capture.PNG
 create mode 100644 "srecanje3/Doma\304\215a naloga 3 - Ibrahim \304\214au\305\241evi\304\207.pdf"
 create mode 100644 srecanje3/almaKeyECtest.ppk
 create mode 100644 srecanje3/capt 3.PNG
 create mode 100644 srecanje3/capture 1.PNG
 create mode 100644 srecanje3/capture 2.PNG
 create mode 100644 srecanje3/ibrahimEC2full_accessKeys.csv
 create mode 100644 srecanje3/setup.sh
 create mode 100644 srecanje4/Capture.PNG
 create mode 100644 srecanje4/capt 3.PNG
 create mode 100644 srecanje4/capture 1.PNG
 create mode 100644 srecanje4/capture 2.PNG

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
```

```
pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git remote add origin https://github.com/almaCausevic2026/alma2026causevicDelo.git

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git branch -M master
```

Prenašanje (push) datotek na GitHub:

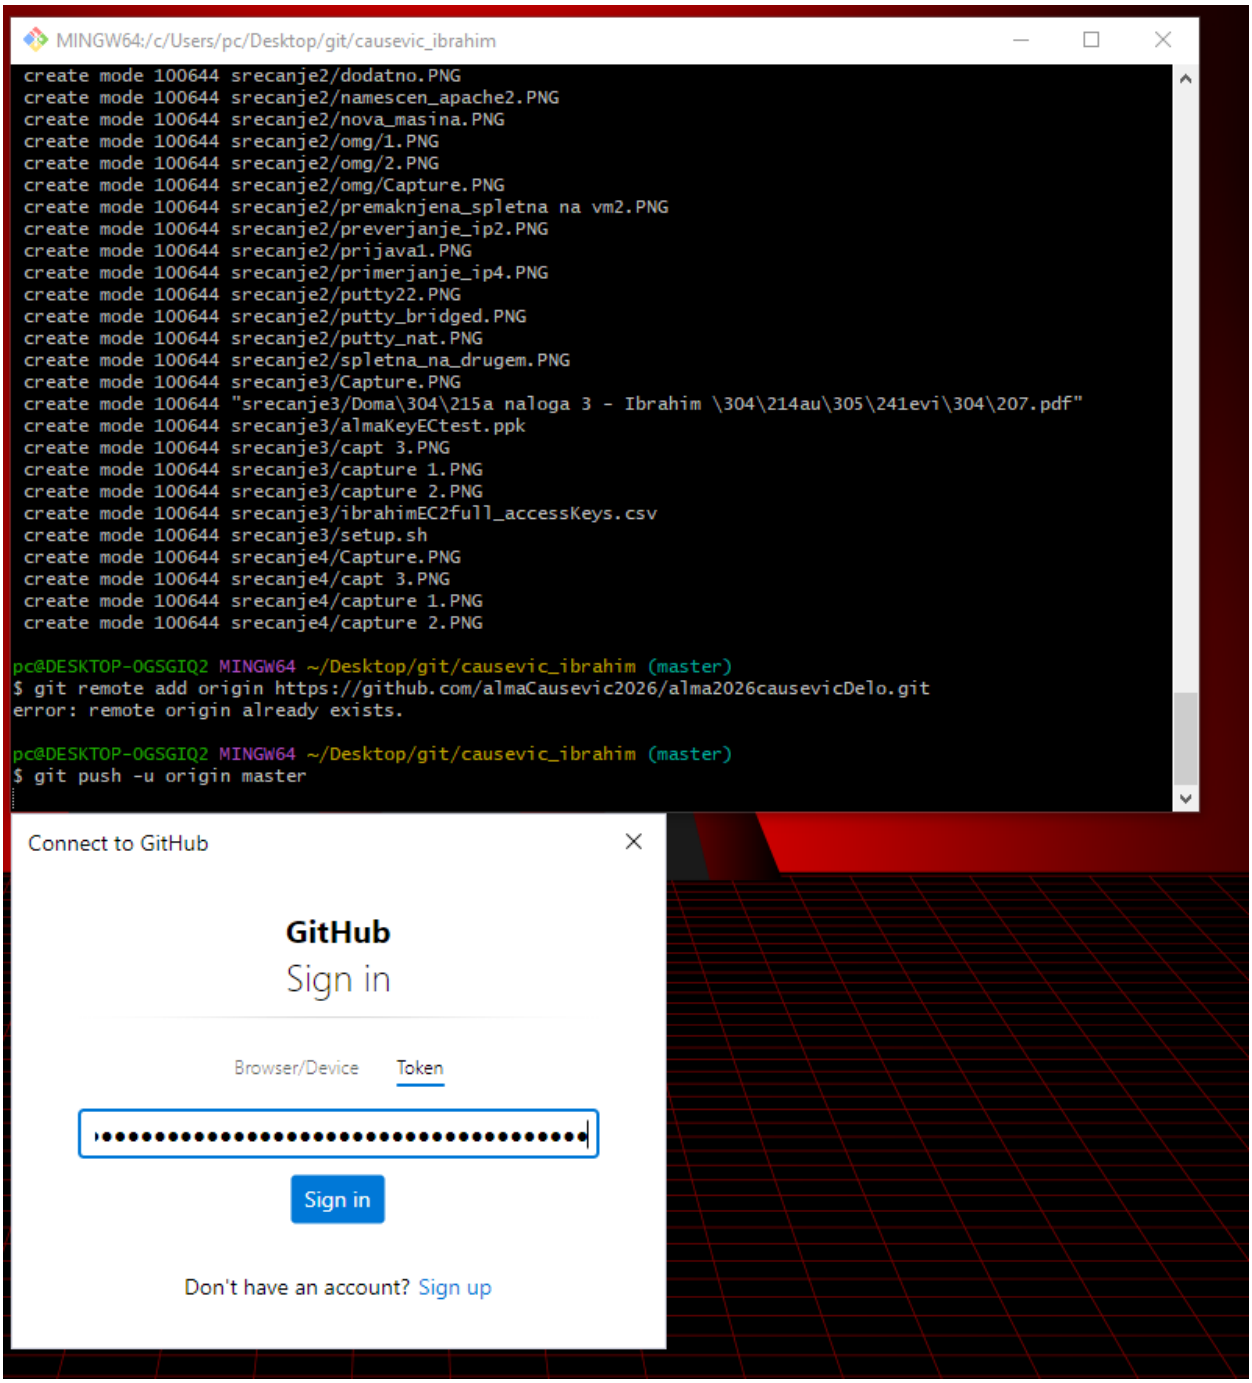

Dodajanje novih datotek in push sprememb:

```
pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git add .

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git commit -m "Domaca4-2"
[master 73939ae] Domaca4-2
 4 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 srecanje4/naloga1-2.PNG
 create mode 100644 srecanje4/naloga1-3.PNG
 create mode 100644 srecanje4/naloga1.PNG
 create mode 100644 srecanje4/token push.PNG

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ git push
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 4 threads
Compressing objects: 100% (7/7), done.
Writing objects: 100% (7/7), 225.17 KiB | 10.72 MiB/s, done.
Total 7 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/almaCausevic2026/alma2026causevicDelo.git
   e124299..73939ae  master -> master

pc@DESKTOP-OGSGIQ2 MINGW64 ~/Desktop/git/causevic_ibrahim (master)
$ |
```

GitHub:

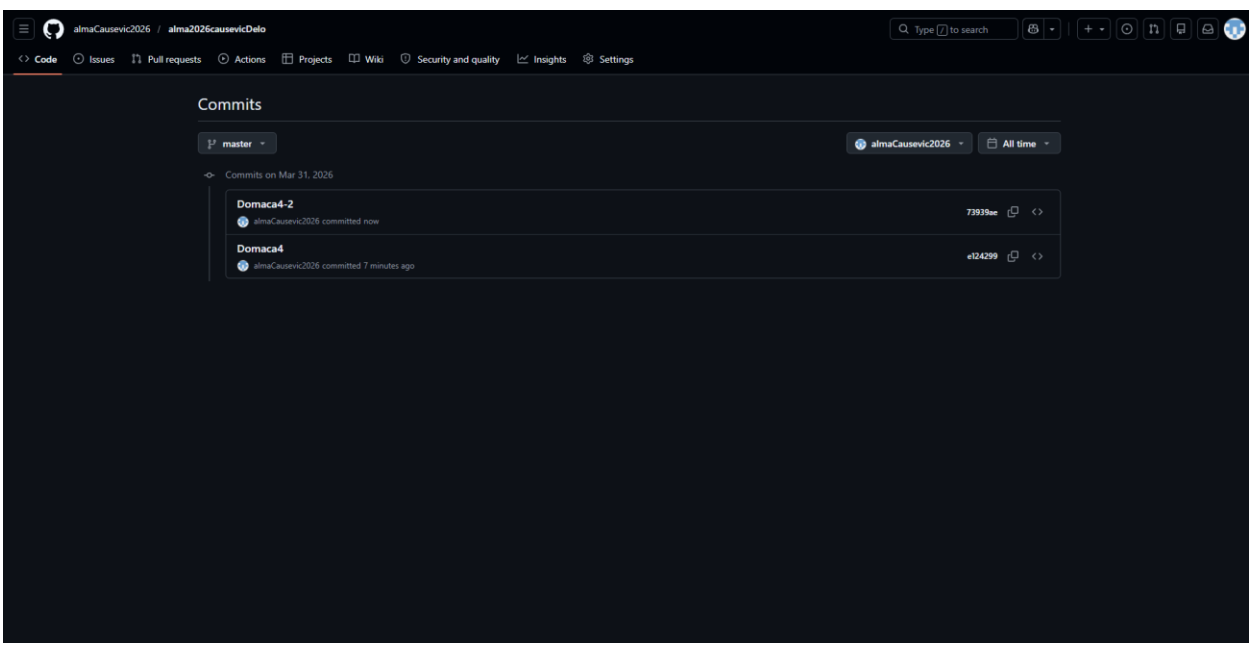

2. Branje dokumenta

Vprašanja:

1. Zakaj je private cloud dražji kot public cloud?
2. Na kateri način je hybrid kombinacija private in public clouda?

3. Kako to, da je cloud lahko bolj poceni če ima toliko veliko opreme?
4. Bolj enostavna razlaga SaaS, PaaS in IaaS(mogoče na primeru)
5. V oblaku za celo infrastrukturo skrbi ponudnik, za kaj je potem uporabnik odgovoren?

Odgovori:

1. Zato ker v private cloudu mora podjetje samo poskrbeti za strojno opremo in vzdrževanje in je to veliko stroškov na začetku pa tudi sproti. Pri public cloudu pa za to skrbi ponudnik.
2. Na ta način , da je en del storitev recimo v podjetju v private cloudu, drugi del pa je v public. Potem sta oba dela povezana prek omrežja in je to potem ena rešitev, hybrid. Uporabno je na primer za varnostne kopije in obnovo podatkov.
3. Cloud je lahko cenejši ker se ista struktura deli med več uporabnikov in posameznik plača samo tisto, kar dejansko uporablja.
4. Bolj enostavno: SaaS-dobiš ze pripravljeno aplikacijo, PaaS-dobiš okolje za razvoj aplikacij, IaaS-dobiš infrastukturo da jo lahko sam nastaviš in urejaš
5. Ponudnik skrbi za infrastrukturo, delovanje, vzdrževanje… Uporabnik pa je odgovoren za svoje virtualno omrežje, da je varno nastavljeno in da poskrbi da je pravilno zasnovano.

Vprašanja iz dokumenta

Kateri model oblačne storitve (Cloud Service Model) uporabljata naslednji storitvi?

•EC2

•GitHub

EC2 uporablja IaaS. GitHub uporablja SaaS.

Pri EC2 si sami naredimo nove instance, izbiramo operacijske sisteme, security groups, protokole…

Pri GitHub pa dobimo že pripravljeno aplikacijo, ne upravljamo z infrastrukturo GitHuba, ampak ga uporabljamo kot storitev, ki je že strukturirana.

Kaj pa virtualni računalnik, ki smo ga namestili na prvem srečanju?

- **Ali ga lahko štejemo za oblačno storitev?**

- **Če ne, zakaj ne?**

Virtualni računalnik, ki smo ga namestili na prvem srečanju ne štejemo za oblačno storitev, ker je bil nameščen na našem lokalnem računalniku in je uporabljal naše omrežje.

Dokument omenja različne vire (resources), ki jih uporabljajo oblačne storitve.

Za storitvi EC2 in GitHub določite, v katero kategorijo virov sodita, na primer:

- **compute**
- **storage**
- **database**
- **network**
- **artificial intelligence**
- **machine learning**

EC2 sodi v compute, ker poganja instance oziroma podaja jim moč, pomnilnik..

GitHub sodi pa v storage, ker se uporablja kot storage, da shranimo repozitorije in datoteke.

Storitvi EC2 in GitHub uvrstite med modele oblačnih storitev (Cloud Service Models):

- **IaaS**
- **PaaS**
- **SaaS**

EC2 uporablja IaaS. GitHub uporablja SaaS.

Pri EC2 si sami naredimo nove instance, izbiramo operacijske sisteme, security groups, protokole…

Pri GitHub pa dobimo že pripravljeno aplikacijo, ne upravljamo z infrastrukturo GitHuba, ampak ga uporabljamo kot storitev, ki je že strukturirana.

Za katere primere uporabe (use cases) bi lahko uporabili storitvi:

- **EC2**
- **GitHub**

GitHub že uporabljam, in sicer uporabljam ga ker sodelujem s prijateljem v projektu, skupaj razvijava aplikacijo in imava kodo deljeno in shranjeno na GitHubu.

EC2 pa bi lahko uporabili za spletno aplikacijo, oziroma za gostovanje aplikacije, ali pa ga lahko uporabimo kot pri tem predmetu, za testiranje.