Domača naloga 7 – Ibrahim Čaušević

V tej nalogi sem naredil novi VPC, 3 subneta in 3 EC2 instance. Na koncu sem odgovoril na vprašanja, ki sem jih oddal v mapo Vaja7 pod imenom odgovori_ibrahim.txt.

Izdelava subnetov:

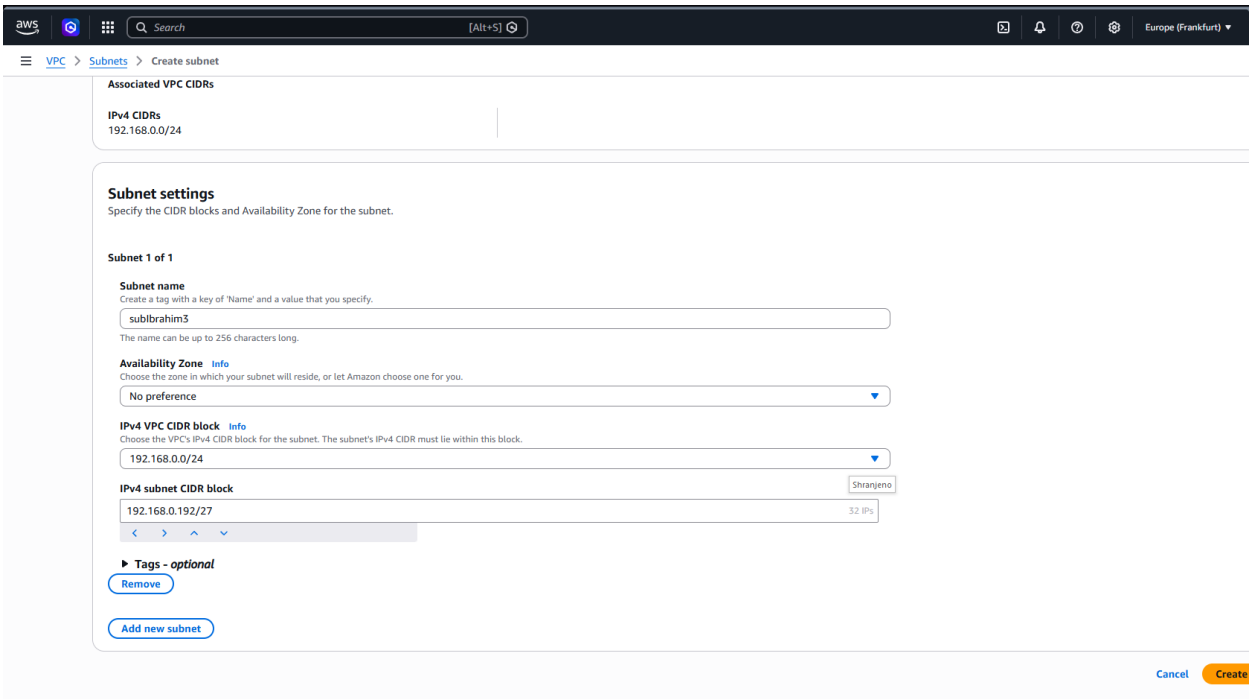

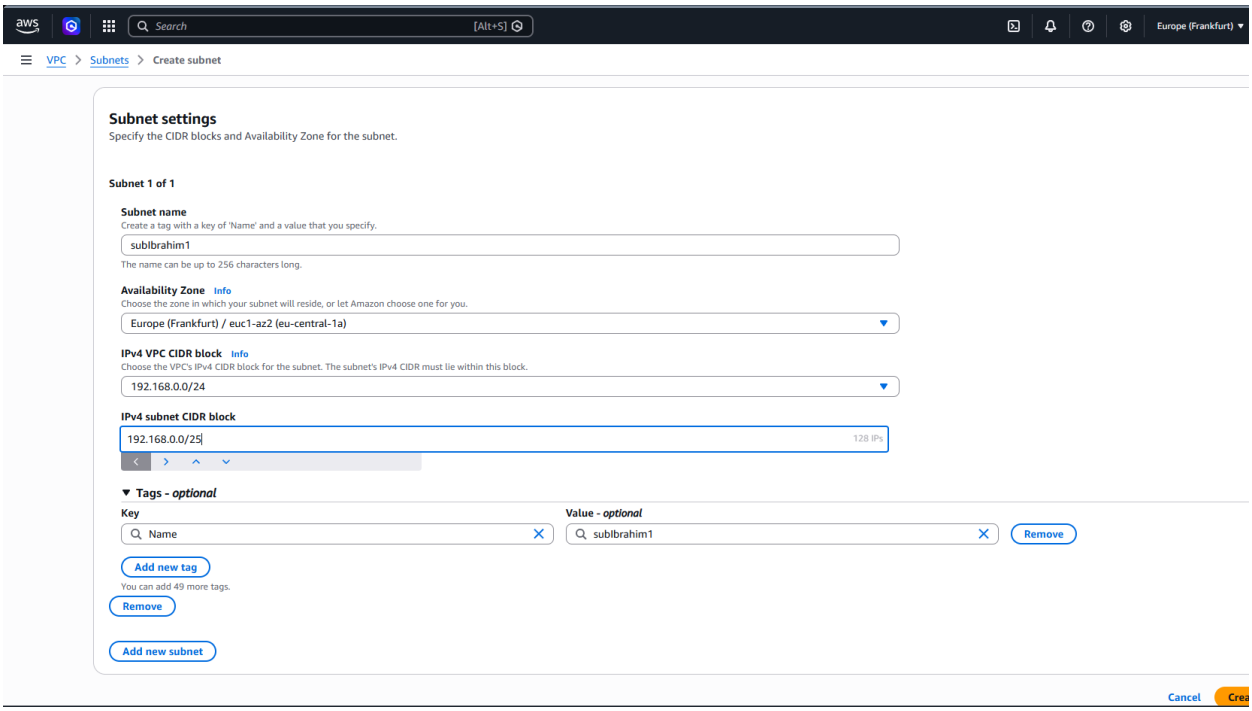

Dodajanje security groups in ostalih nastavitev:

☐	–	sg-0b22e8901ec38fcda	securitySpletni	vpc-0d52f202b2cffa925	za spletni streznik	033313104891
☐	–	sg-00f7035470c221e09	securityPodatkovni	vpc-0d52f202b2cffa925	za podatkovni streznik	033313104891

Delovanje spletnega strežnika:

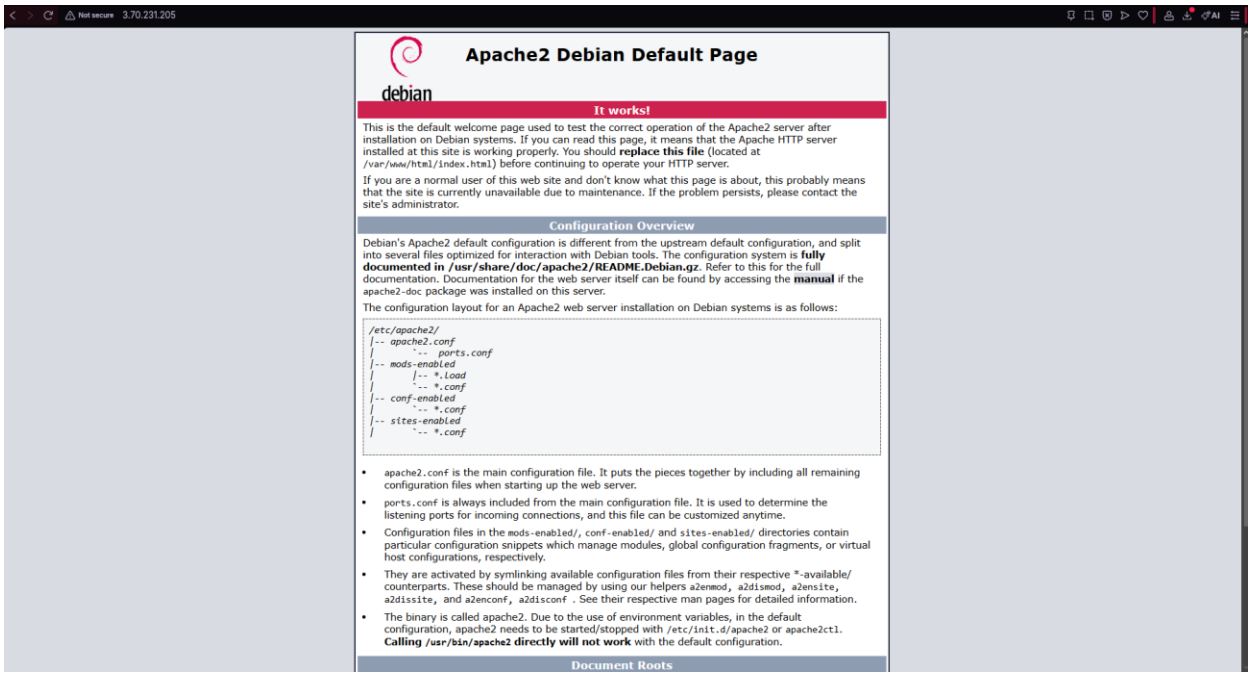

Delovanje html spletne strani:

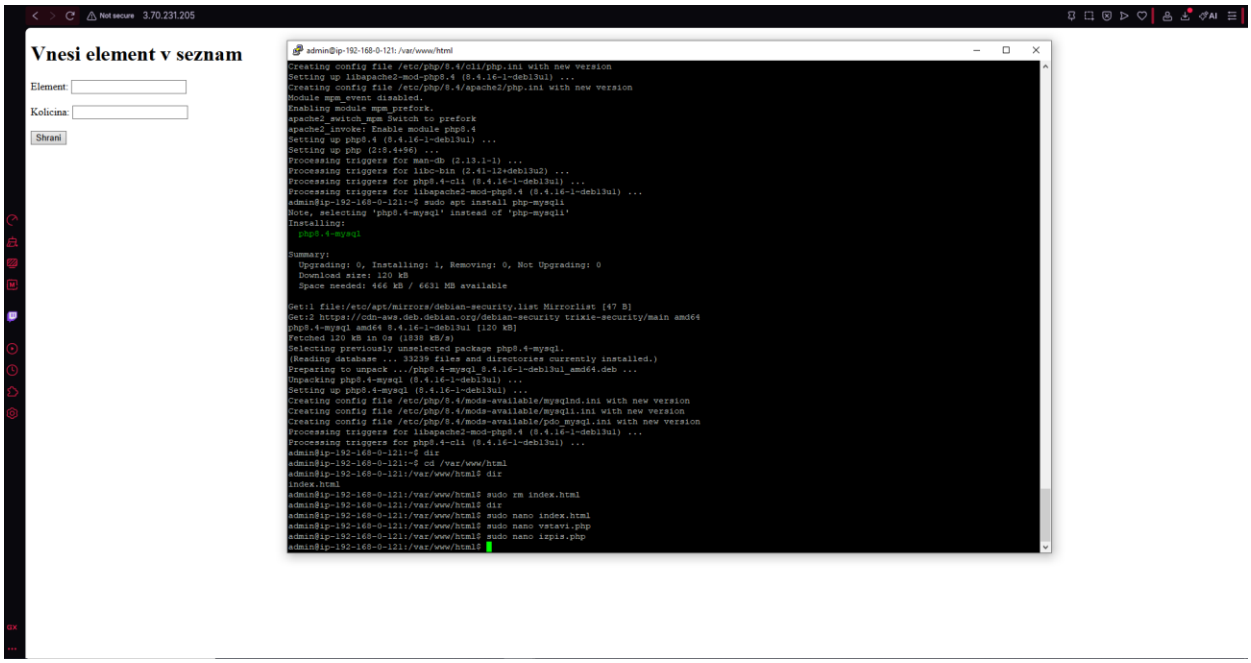

Instalacija MariaDB:

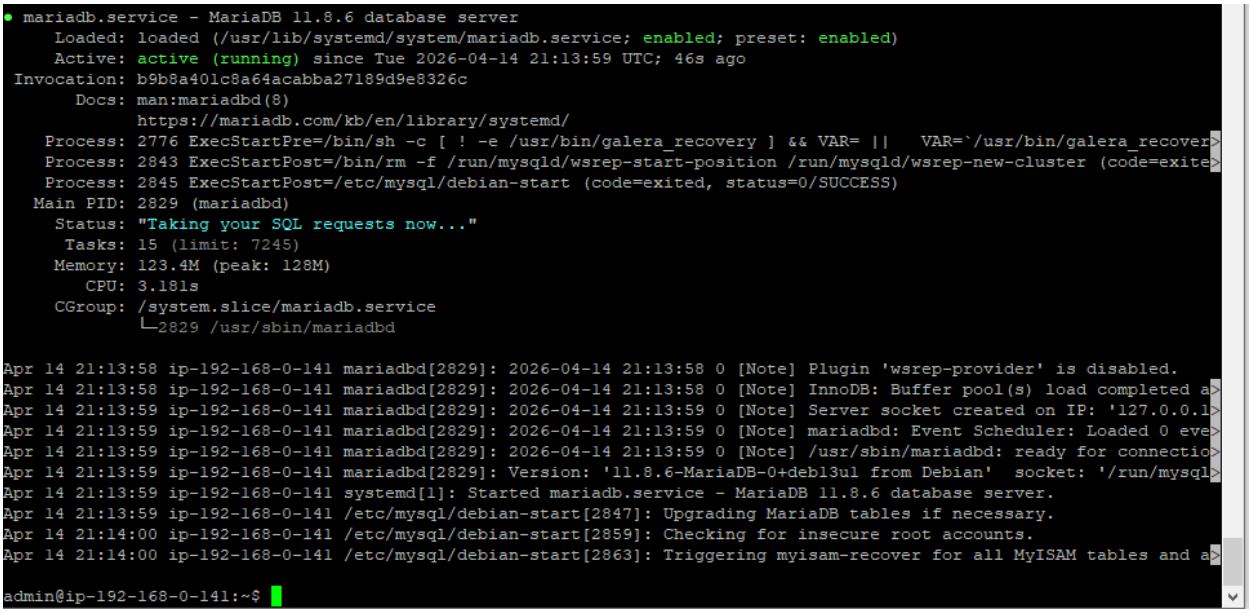

admin@ip-192-168-0-141: ~

```
admin@ip-192-168-0-141:~$ sudo mariadb-secure-installation

NOTE: MariaDB is secure by default in Debian. Running this script is
      useless at best, and misleading at worst. This script will be
      removed in a future MariaDB release in Debian. Please read
      /usr/share/doc/mariadb-server/README.Debian.gz for details.

Enter root user password or leave blank:

Enter current password for root (enter for none):
OK, successfully used password, moving on...

Setting the root password or using the unix_socket ensures that nobody
can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

Switch to unix_socket authentication [Y/n]
Enabled successfully (or at least no errors was emitted)!
Reloading privilege tables..
 ... Success!


You already have your root account protected, so you can safely answer 'n'.

Change the root password? [Y/n] y
New password:
Re-enter new password:
Password updated successfully!
Reloading privilege tables..
 ... Success!


By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them.  This is intended only for testing, and to make the installation
go a bit smoother.  You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n]
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Normally, root should only be allowed to connect from 'localhost'.  This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n]
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

By default, MariaDB comes with a database named 'test' that anyone can
access.  This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n]
 - Dropping test database...
SQL executed without errors!
The operation might have been successful, or it might have not done anything.
 - Removing privileges on test database...
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Reloading the privilege tables will ensure that all changes made so far
```

Izdelava PB, tabele in novega user-ja

```
admin@ip-192-168-0-141: ~
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
4 rows in set (0.001 sec)

MariaDB [(none)]> CREATE DATABASE nakup;
Query OK, 1 row affected (0.000 sec)

MariaDB [(none)]> SHOW DATABASES;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| nakup              |
| performance_schema |
| sys                |
+--------------------+
5 rows in set (0.000 sec)

MariaDB [(none)]> USE nakup;
Database changed
MariaDB [nakup]> CREATE TABLE nakup (
    ->     id INT AUTO_INCREMENT PRIMARY KEY,
    ->     element VARCHAR(100) NOT NULL,
    ->     kolicina INT NOT NULL
    -> );
Query OK, 0 rows affected (0.014 sec)

MariaDB [nakup]> CREATE USER 'ibrahim'@'%' IDENTIFIED BY 'ibrahim';
Query OK, 0 rows affected (0.002 sec)

MariaDB [nakup]> GRANT ALL ON *.* TO 'ibrahim'@'%';
Query OK, 0 rows affected (0.001 sec)

MariaDB [nakup]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [nakup]> INSERT INTO nakup(element,kolicina) VALUES('Sok', 2);
Query OK, 1 row affected (0.002 sec)

MariaDB [nakup]> INSERT INTO nakup(element,kolicina) VALUES('Jogurt', 1);
Query OK, 1 row affected (0.001 sec)

MariaDB [nakup]> SELECT * FROM nakup;
+----+---------+----------+
| id | element | kolicina |
+----+---------+----------+
|  1 | Sok     |        2 |
|  2 | Jogurt  |        1 |
+----+---------+----------+
2 rows in set (0.000 sec)

MariaDB [nakup]> exit
Bye
admin@ip-192-168-0-141:~$ sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf
admin@ip-192-168-0-141:~$ sudo systemctl restart mariadb
admin@ip-192-168-0-141:~$
```

Prikaz datotek na spletnem strežniku:

```
admin@ip-192-168-0-121:/var/www/html$ dir
index.html  izpis.php  vstavi.php
admin@ip-192-168-0-121:/var/www/html$ php -m | grep mysqli
mysqli
```

Delujoč izpis.php:

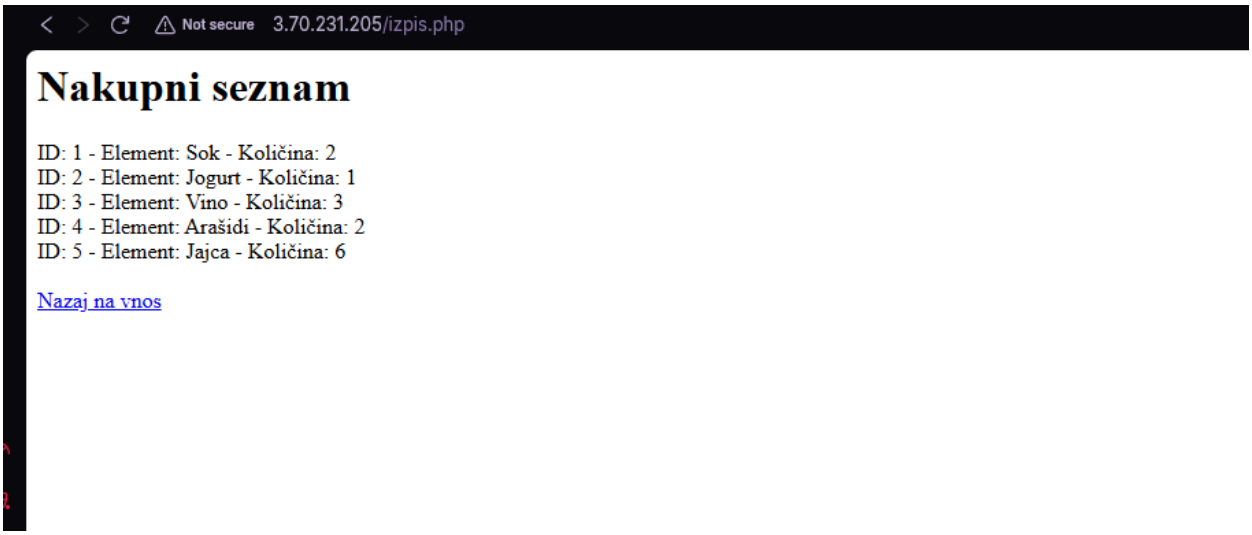
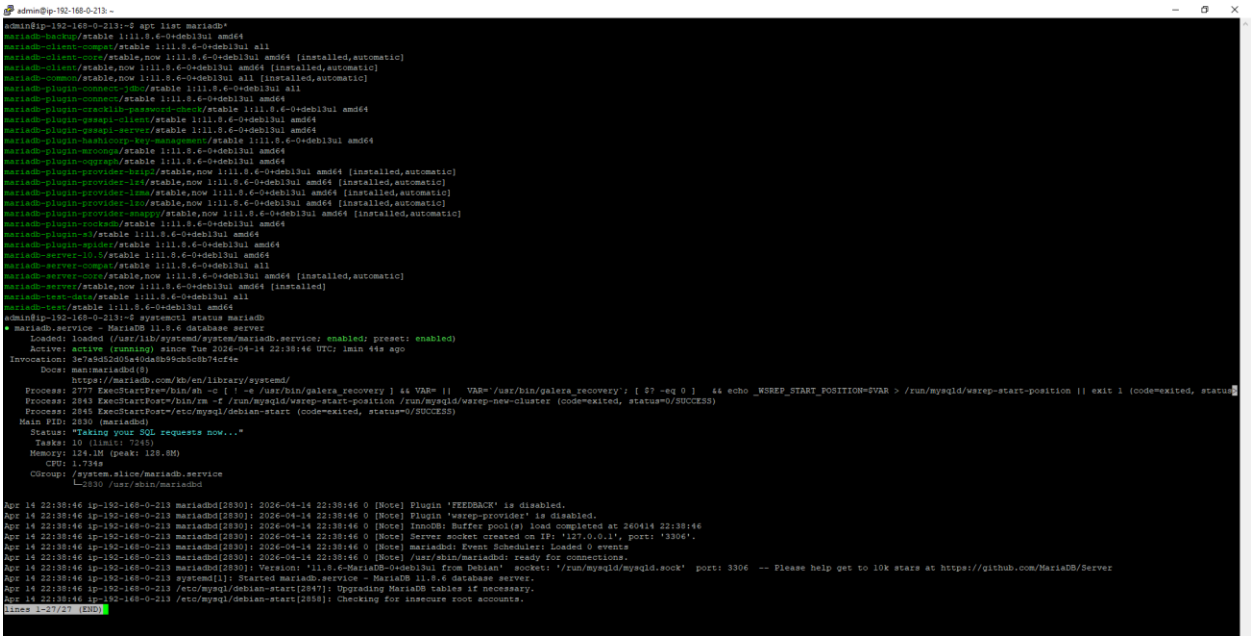
EC2-3 Aktiven in nameščen strežnik