Retrieve the token to use in the bearer

```
curl -k -X POST "<DOMAIN>/nuxeo/oauth2/token?
grant_type=client_credentials&client_id=<CLIENT_ID>&client_secret=
<CLIENT_SECRET>"
```

The client id and secret will be supplied by us.

Get the given documentation

```
curl -k -H "Authorization: Bearer <TOKEN>" -H "Properties: *" -X
GET "<DOMAIN>/nuxeo/api/v1/id/<DOC_ID>"
```

Get the documents depending on the query

```
curl -k -H "Authorization: Bearer <TOKEN>" -H "Properties: *" -X
GET "<DOMAIN>/nuxeo/api/v1/search/lang/NXQL/execute?query=<QUERY>"
```

The query has to be written using NXQL language then URL-encoded. For more information check the NXQL documentation: https://doc.nuxeo.com/nxdoc/nxql/


For example :

“select * from Document where ecm:uuid = '08cb0c3f-3bb4-44cf-92ba-c1879b2be6b9'” will become “select+%2A+from+Document+where+ecm%3Auuid+%3D+%2708cb0c3f-3bb4-44cf-92ba-c1879b2be6b9%27”

Create a document

```
curl -k -H "Authorization: Bearer <TOKEN>" -H "Content-Type:
application/json" -d '<DOCUMENT_JSON>' -X POST
"<DOMAIN>/nuxeo/api/v1/id/<ID_FOLDER>"
```

The JSON has to contain all the mandatory information for the process linked to it to work properly. To see which metadata has a document you can export it in XML clicking here :

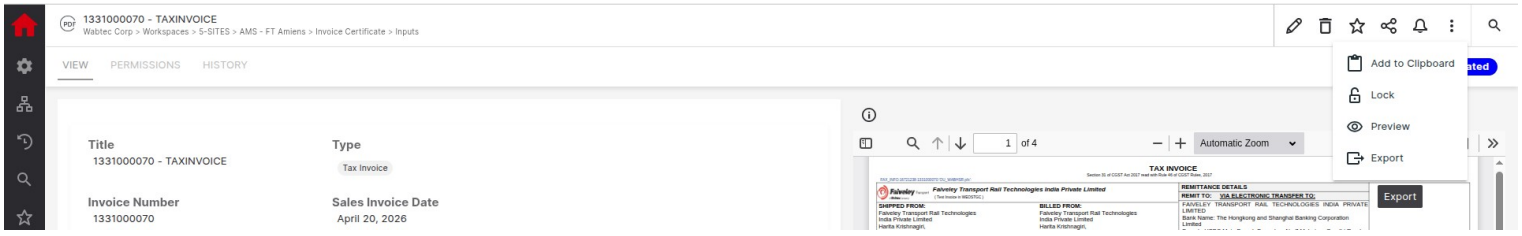

Example of JSON :

```
{
     "entity-type":"document",
     "name":"DocExampleAirWayBill",
     "type":"InvoiceCertificate",
     "properties":{
          "dc:title":"DocExampleAirWayBill",
          "InvoiceCertificateSchema:invoiceNumber":"TestInvoiceNumb
er",
          "InvoiceCertificateSchema:type":"airWayBill"
     }
}
```

Download a document’s attachment

```
curl -k -H "Authorization: Bearer <TOKEN>" -X GET
"<DOMAIN>/nuxeo/api/v1/repo/default/id/<DOC_ID>/@blob/blobholder:0
" –output test.pdf
```

Create a document with a file attached

Open the batch uploader

```
curl -k -H "Authorization: Bearer <TOKEN>" -X POST
"<DOMAIN>/nuxeo/api/v1/upload"
```

That will give a batchId to use for the following queries.

Open the batch uploader

```
curl -k -H "Authorization: Bearer <TOKEN>" -H "X-File-
Name:<FILENAME_IN_ECM>" -H "X-File-Type:application/pdf" -T
"<FILE_TO_UPLOAD>" -X POST
"<DOMAIN>/nuxeo/api/v1/upload/<BATCH_ID>/<UPLOAD_ID>"
```

The UPLOAD_ID will have to be different if multiple files are getting uploaded in the same batch. It is important to know which file correspond to which ID.

Create a document with a file

```
curl -k -H "Authorization: Bearer <TOKEN>" -H "Content-Type:
application/json" -d '<DOCUMENT_JSON>' -X POST
"<DOMAIN>/nuxeo/api/v1/id/<ID_FOLDER>"
```

It is the same as the normal creation, with just the new metadata in the body « file:content ».

Example JSON :

```
{
     "entity-type":"document",
     "name":"DocExampleAirWayBill",
     "type":"InvoiceCertificate",
     "properties":{
          "dc:title":"DocExampleAirWayBill",
          "InvoiceCertificateSchema:invoiceNumber":"TestInvoiceNumb
er",
          "InvoiceCertificateSchema:type":"airWayBill"
          "file:content": {
               "upload-batch":"<BATCH_ID>",
               "upload-fileId":"<UPLOAD_ID>"
          }
     }
}
```

For more information, check the official API documentation: https://doc.nuxeo.com/nxdoc/rest-api-endpoints/.