
(a) Teleportation

```
 3 q = QuantumRegister(3, "q")
 4 c = ClassicalRegister(2, "c")
 5 qc = QuantumCircuit(q, c)
 6
 7 qc.ry(0.9, 0)
 8 qc.h(1)
 9 qc.cx(1, 2)
10 qc.cx(0, 1)
11 qc.h(0)
12 qc.measure(0, 0)
13 qc.measure(1, 1)
14 with qc.if_test((c[1], 1)):
15     qc.x(2)
16 with qc.if_test((c[0], 1)):
17     qc.z(2)
```

(b) Classical PDG

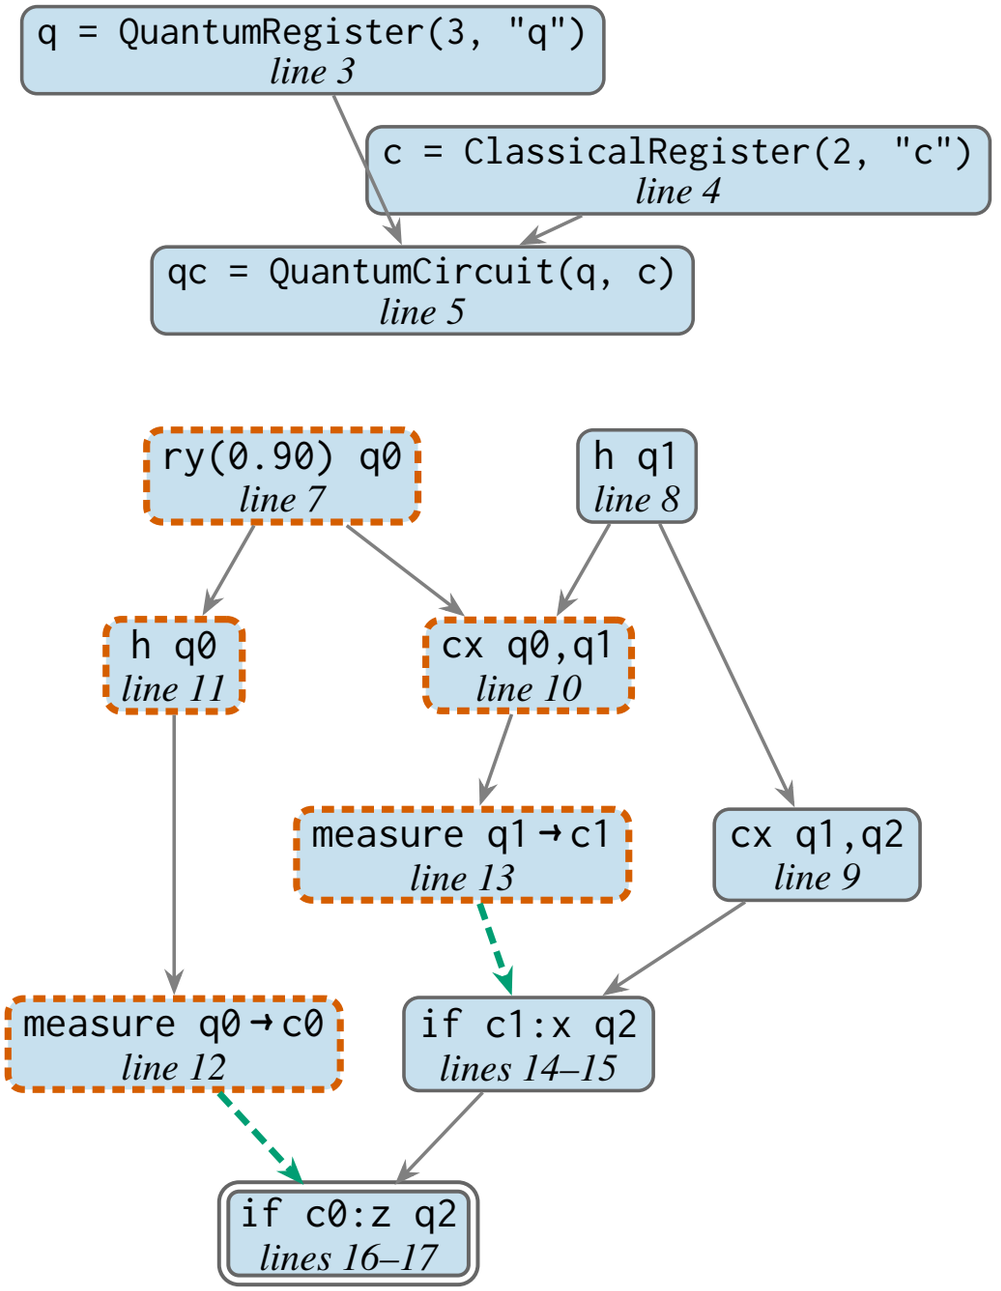

slice of q_2: 9 of 9, $F = 1.00$
def-use: 4 of 9, $F = 0.50$

data — control (measured bit or loop) — in the slice

in the slice, missed by def-use — last write to the criterion

classical statement (shaded if in the slice)