
(a) Buggy program (Bugs4Q, Stack Overflow)

```
4 circuit = QuantumCircuit(2)
5 circuit.h(0)
6 circuit.h(1)  ← fix: circuit.x(1)
7 circuit.cx(0,1)
8 circuit.measure_all()
```


(b) Measured outcomes ($q_1 q_0$, exact probabilities)

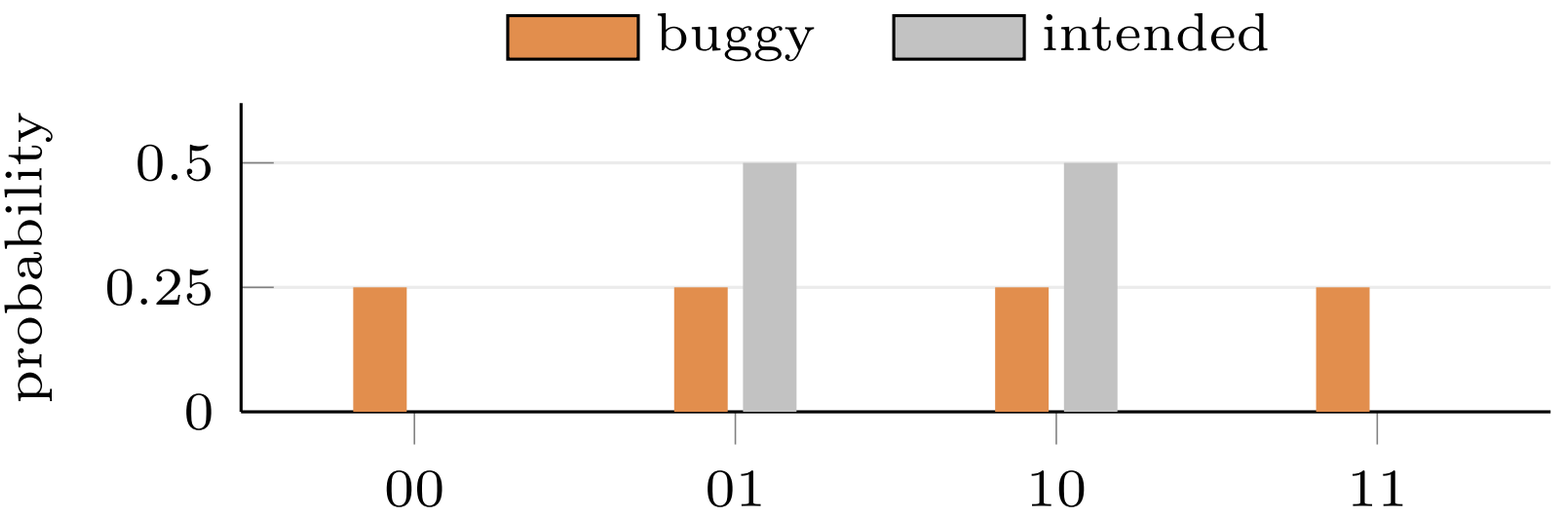

each qubit alone reads 1 with probability 0.5 in both versions

(c) Slices of q_0 in the buggy program

Classical PDG: line 5

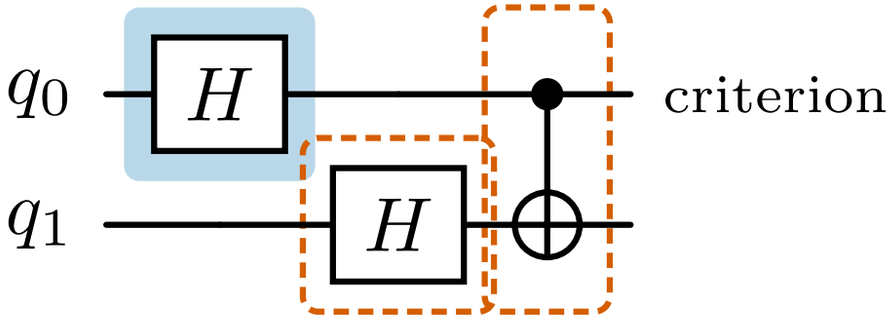

Wire rule: lines 5, 6, 7

