The privacy gate: what leaves in Privacy Mode

The catalog keeps every identifier as imported; the gate decides at the moment of sending. Nothing identifying reaches the browser.

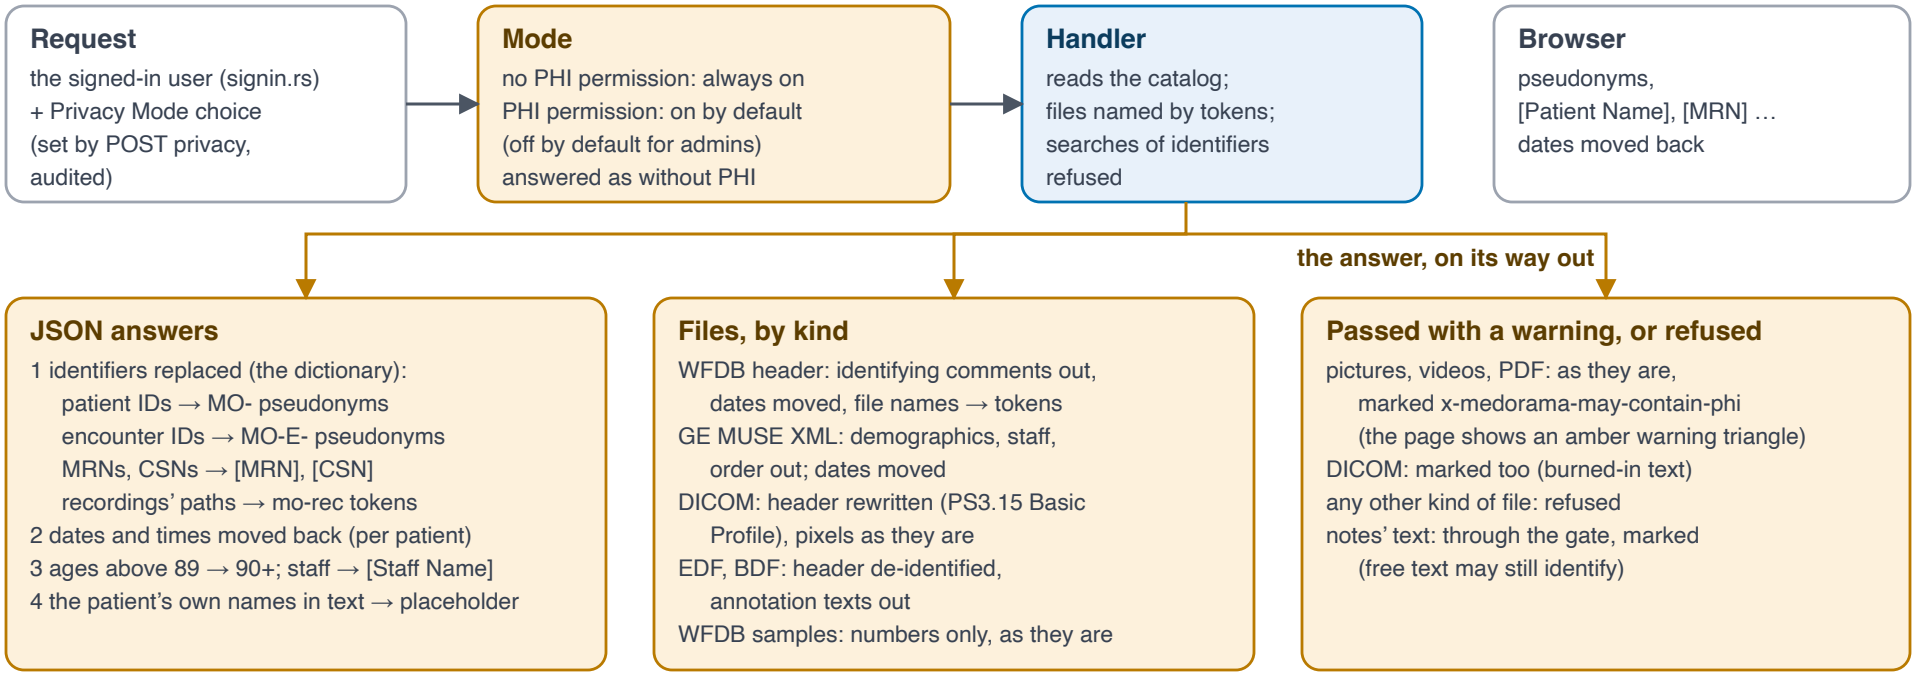

Last layer: fail closed

every answer of a Privacy Mode session passes server.rs privacy: JSON through the gate; a file only if the gate cleared it;
any other answer carrying data is refused and logged. A new endpoint that forgets the gate cannot leak: its answer is refused.
Proof: tests/privacy.rs seeds identifiers in every format and checks no byte of any page, file or export holds them.